METRIC
MIL-PRF-62550/3A(AT)
30 May 1997
SUPERSEDING
MIL-H-62550/3(AT)
12 December 1991

PERFORMANCE SPECIFICATION SHEET

HEATER ASSEMBLY, COMBUSTION VEHICULAR COMPARTMENT, 8.8 kW, SINGLE AIR TYPE (METRIC)

This specification is approved for use by the U.S. Army Tank-automotive and Armaments Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-PRF-62550D(AT) listed in that issue of the Department of Defense Index of specifications and standards (DoDISS) specified in the solicitation.

REQUIREMENTS:

Construction

Heater assembly shall be constructed to the interface and envelope dimensions of the following figure:

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:48Z
Check the source to verify that this is the current version before use.

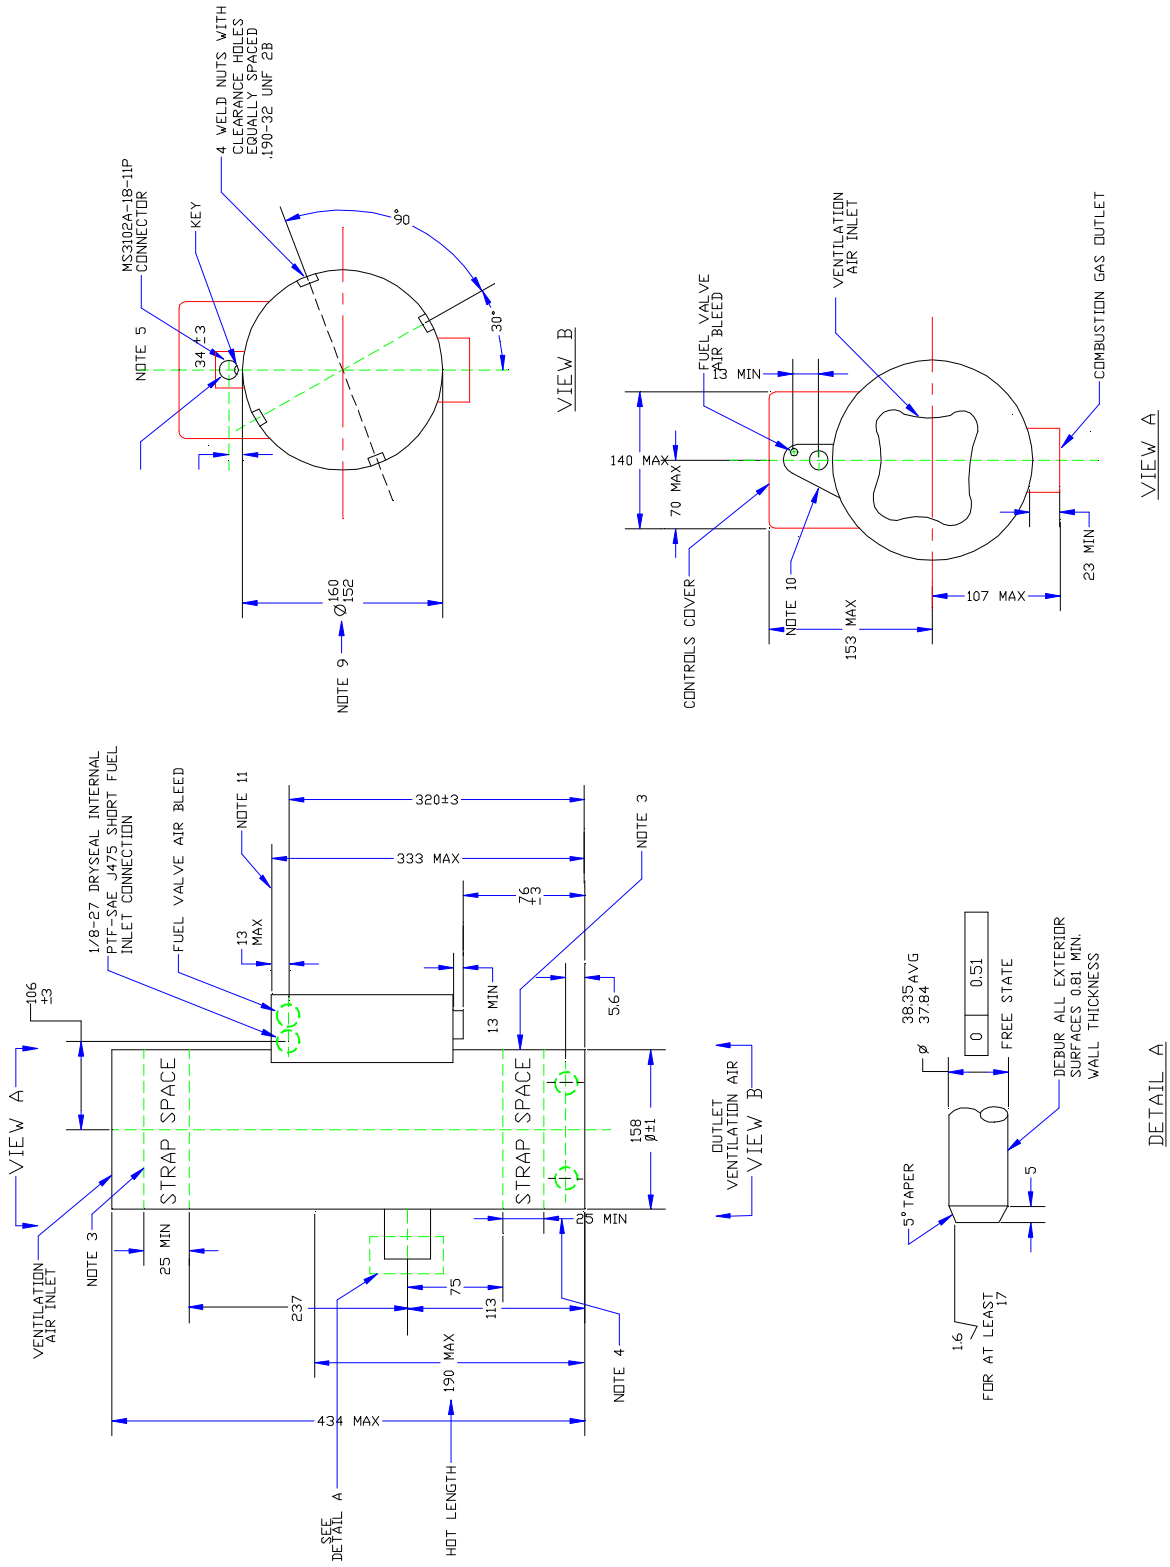

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:48Z
Check the source to verify that this is the current version before use.

NOTES:

1. Personnel heater must be in accordance with performance specification MIL-PRF-62550, Type I, Class I.
2. Unless otherwise specified, dimensions are in millimeters (mm). Tolerances are $\pm$ 1.50 on decimals, and $\pm$ 1° on angular dimensions.
3. No fasteners or raised sharp edges are allowed in the strap space areas. The diameter for these areas shall be 160 mm.
4. A diameter of 158 $\pm$ 1 mm shall be maintained for 18 mm min starting from the heater outlet.
5. The connector 13 mm center may be within 32 mm to the controls cover centerline. If it is perpendicular distance from the heater's shell remains at 33 mm.
6. Referenced documents shall be of the issue in effect on date of invitations for bid.
7. Interpret according to ANSI Y14.5-1982.
8. This is a critical item.
9. Diameter excluding areas specified by Notes 3 and 4.
10. Opening in controls cover must be at least 25 mm wide and allow not less than 13 mm access space about the centers of the fuel inlet and air bleed.
11. As long as the remaining drawing requirements are met, fuel inlet and air bleed valve are not required to be within the controls cover.

Custodian:
Army - AT

Preparing Activity:
Army - AT

(Project 2540-A042-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:48Z
Check the source to verify that this is the current version before use.