MILITARY SPECIFICATION

PRESSURE CARTRIDGE PARTS FOR AND LOADING, ASSEMBLING AND PACKING

This Amendment forms a part of Military Specification MIL-P-63315 (AR), DATED 24 July 1979, and is approved for use by Army Armament Research and Development Command, and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 2

2.1: Add “PRODUCT DRAWINGS” above P/N 9292613 - Pressure Cartridge.

Add “INSPECTION EQUIPMENT DRAWINGS and under it 9344011 - Pressure Test Fixture”.

PAGE 3

3.4, “550 PSIG" was “450 PSIGS";
"Pressure test fixture” was “T Bomb";
"0.122 ± 1%” was “0.049”;
“25 MS” was “50 MS”;
"2100 PSIG" was “2400 PSIG".

Line 8: Add ‘The 9292663 disk closure shall be retained in the 9292661 case after the cartridge has fired.”.

PAGE 6

Table I. First Article Inspection,
Insulation Resistance, Thermal Shock, Vibration, Function:
Delete “ (AQL) 0-1"
No Fire: Delete " (AQL) 0-1”.
Cold : “(-40°F)” was (-35°F)”; “50 (b)” was "100 (b)”;
delete “0-1”.
Hot: “50 (b)" was "100 (b)”; delete “0-1”.
Add: “Ambient (70°F ± 10°F); 100, 3.4, 4.5, 8.3”.

PAGE 16

4.4.2.9: “Add 102, Moisture content of intermediate charge, 3.3, 4.5.1”.

FSC: 1345

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:38Z
Check the source to verify that this is the current version before use.

PAGE 17

4.4.2.10, 103: “Electrodes” was "lead wires”.

110: "180" was “200”.

111: Delete in its entirety.

112: Cold temperature “(-4O°F)” was “(-35°F)”; “60 was "80";
Hot temperature: “60” was “80”;
Add, Ambient (70°F ± 10°F), 60(a) (b), 3.4, 4.5.8.3”.

113: Add ‘Length of electrodes, min, 0.40%, 3.2, Gage”.
Notes: a. “Samples for the output test. ..” was “Samples for the test. ..’
b. “60-0-1”, “60-1-2” was “80-0-2”, “80-1-2”.

PAGE 19

4.5.1: correct “calcium”.

PAGE 20

4.5.5.h: Change " ., ..4,5.6 and 4.5.7" to “.. ..4.5.6 and 4.5.8.3".

PAGE 21

4.5.7; Delete.

4.5.8.1, change: "minus 35°F” to "minus 40°F".

Delete in first sentence: “fixture with the configuration of Fig 2 which simulates the volume of the sensor system as....”. And substitute: “pressure test fixture (Dwg 9344011 or equivalent) with an internal volume. . , .“

Delete starting on 12th line: “The fixture shall be cleaned after each shot or as required”.

And substitute: “Equipment, calibration, test and cleaning for internal volume maintainability procedures shall be in accordance with Dwg 9344011”.

Add “4.5.8.3 Ambient temperature (70°F ± 10°F). The pressure cartridge shall be tested using the procedure specified in 4.5.8.1 except no conditioning temperature shall be made for compliance with the requirements specified in 3.4. If any pressure cartridge fails to function or more than one (1) pressure-time failure occur6, the lot shall be rejected. (Destruc-

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:38Z
Check the source to verify that this is the current version before use.

tive test). A record of each firing shall be kept. See 6.7.".

PAGE 22

6.1. a: change "XM74" to "M74".

6.4: change "DRDAR-QAA-Q" to "DRDAR-QAT-M".

PAGE 23

6.5.1: change "DRDAR-QAA-Q" to DRDAR-QAT-M".

6.7: change "DRDAR-QAA-Q" to "DRDAR-QAT-M".

PAGE 24

Delete "Fig. 1" and substitute 'Revised Fig 1", see "Page 4".

PAGE 25

Delete "Fig. 2 - Pressure Test Setup (Suggested)".

The margins of this amendment are marked with an asterisk to indicate where changes {additions, modifications, corrections, deletions) from the previous amendment were made. This was done as a convenience only and the Goverment assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Custodian:
Army-AR

Preparing Activity:
Army-AR

(Project 1345 -A200)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:38Z
Check the source to verify that this is the current version before use.

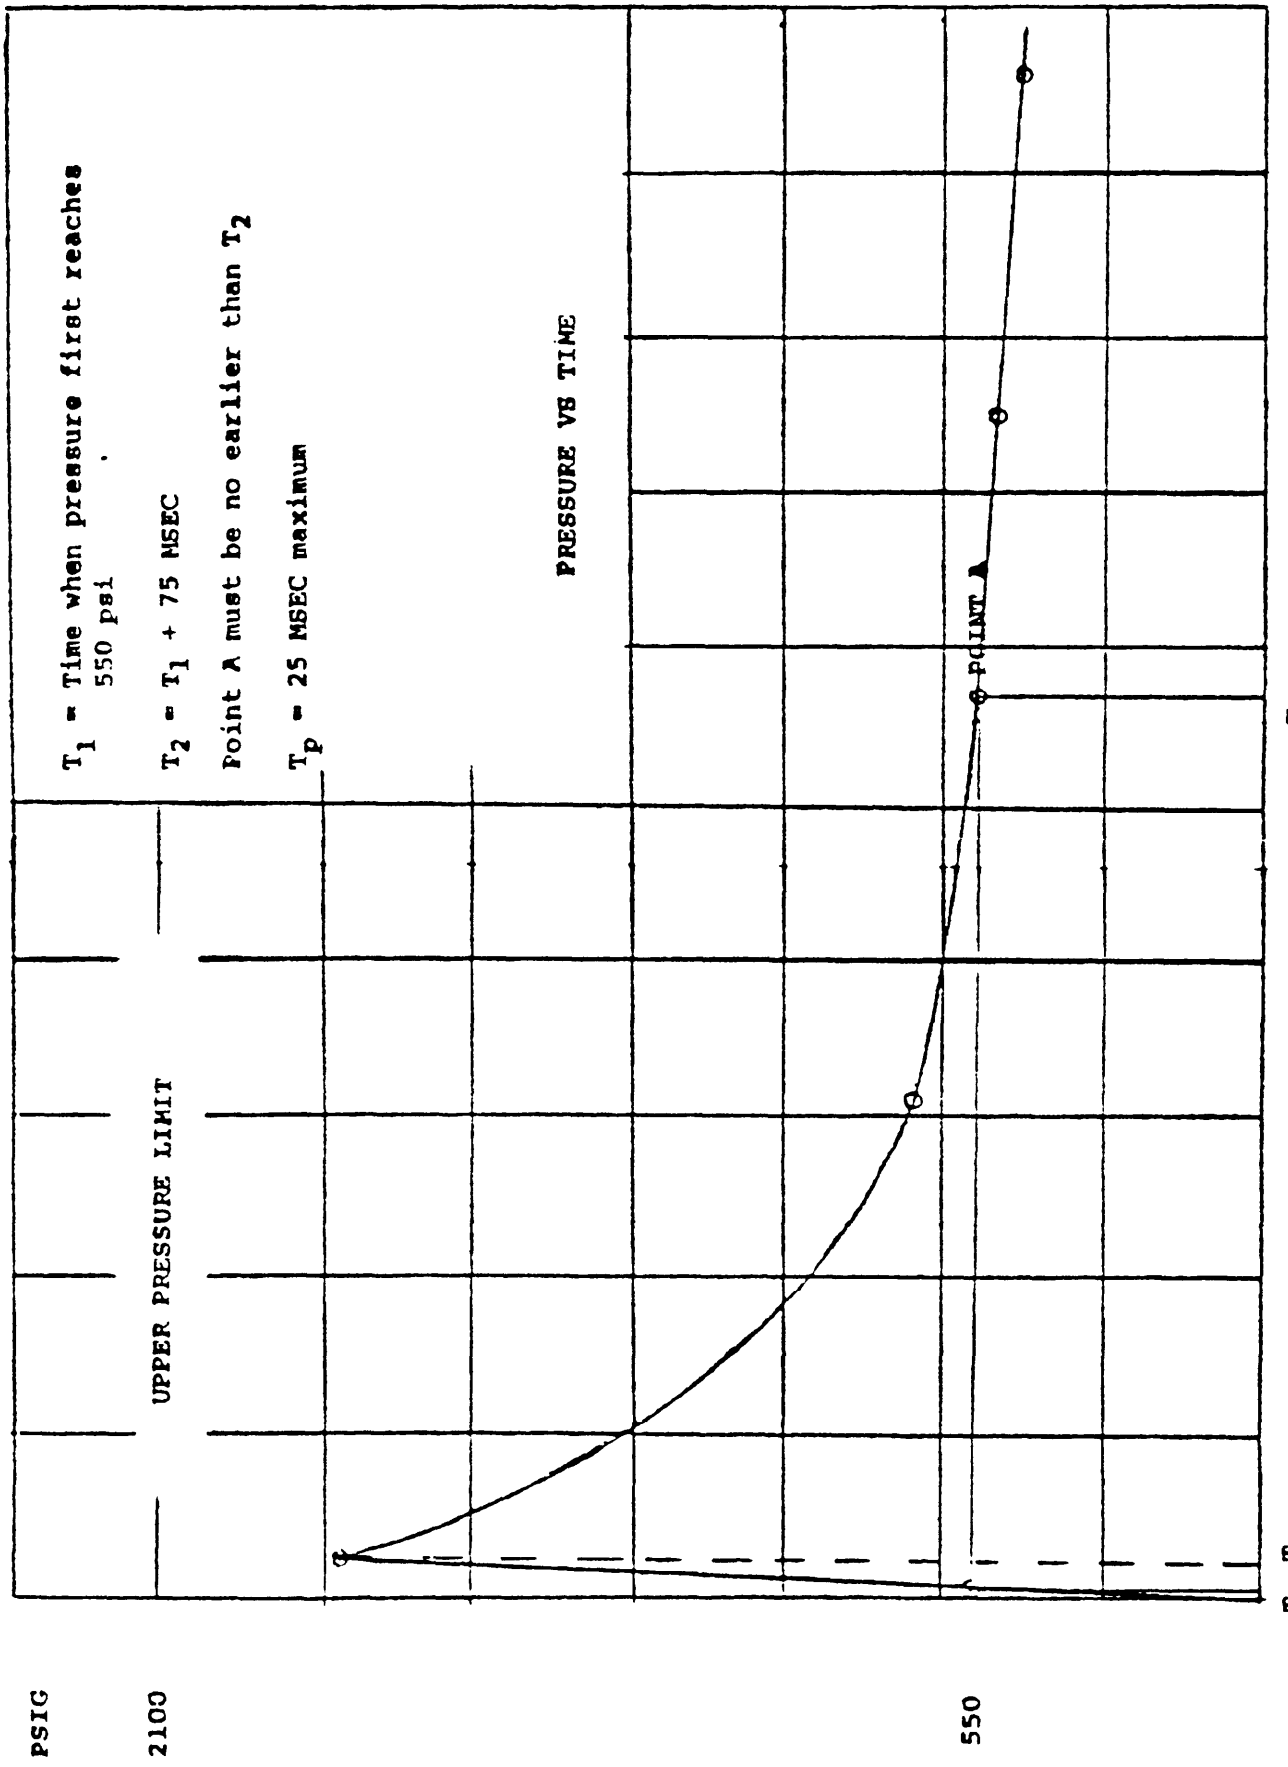

FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 202610-23T02:38Z
Check the source to verify that this is the current version before use.