NOTE: The document identifier and heading has been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.

INCH-POUND


MIL-PRF-19207/1G
23 August 1991
SUPERSEDING
MIL-F-19207/1F
12 November 1986


PERFORMANCE SPECIFICATION SHEET

FUSEHOLDERS, EXTRACTOR POST TYPE,
BLOWN FUSE INDICATING, TYPES FHL10U AND FHL10G

This specification is approved for use by all departments and agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-F-19207.

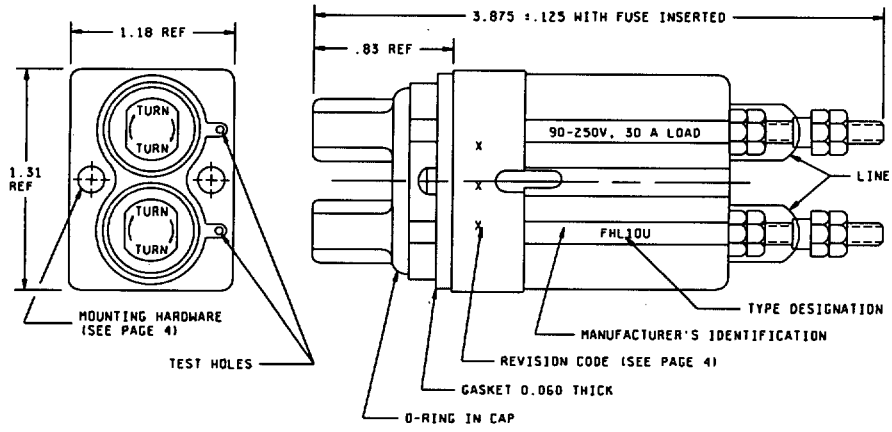

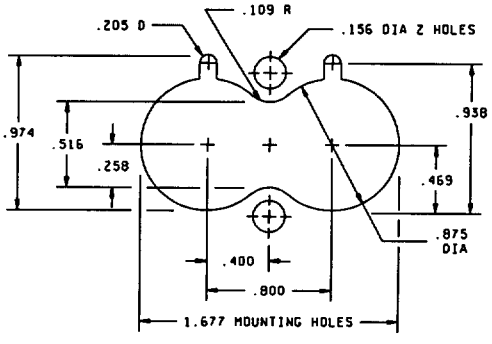

Inches	mm	Inches	mm
.060	1.52	0.800	20.32
.109	2.77	.830	21.08
.125	3.18	.875	22.23
.156	3.96	.938	23.83
.205	5.21	.974	24.74
.258	6.55	1.180	29.97
.400	10.16	1.677	42.60
.469	11.91	1.810	45.97
.516	13.11	3.875	98.43

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest 0.01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are .XX ±0.02 and .XXX ±0.005.


FIGURE 1. *Type FHL10U and type FHL10G fuseholders.*

Ⓖ denotes change

AMSC N/A
FSC 5920
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:24Z
Check the source to verify that this is the current version before use.

M19207/1-001 – Body for FHL10U
M19207/1-002 – Body for FHL10G

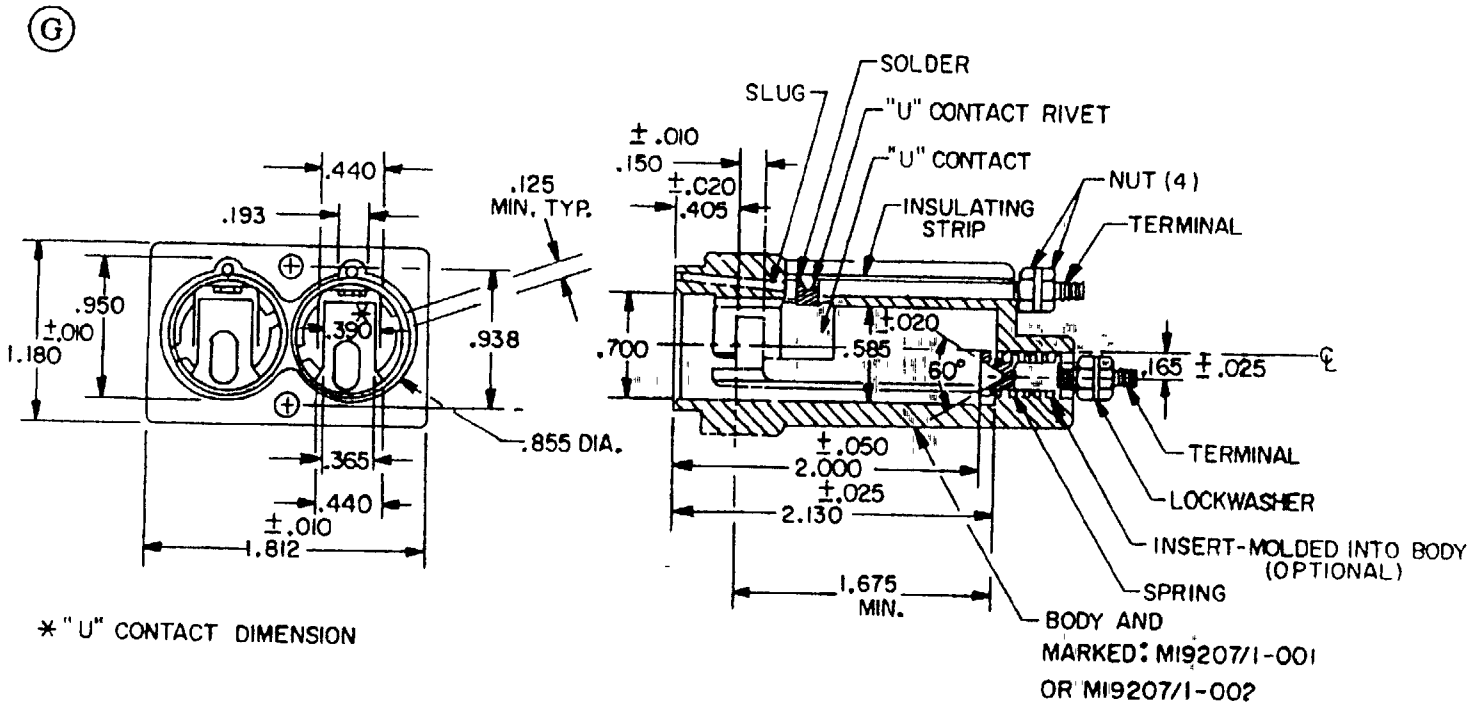

Inches	MM
010	0 25
020	0 51
025	0 64
050	1 27
125	3 18

Inches	MM
150	3 81
165	4 19
193	4 90
365	9 27
390	9 91


Inches	MM
405	10 29
440	11 18
585	14 86
700	17 78
855	21 72
938	23 83

Inches	MM
950	24 13
1.180	29 97
1.675	42 55
1.812	46 02
2.000	50 80
2.130	54 10

FIGURE 2. *Body for FHL10U and FHL10G fuseholders.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:24Z
Check the source to verify that this is the current version before use.

M19207/1-003 – Fuse carrier for FHL10U
M19207/1-004 – Fuse carrier for FHL10G

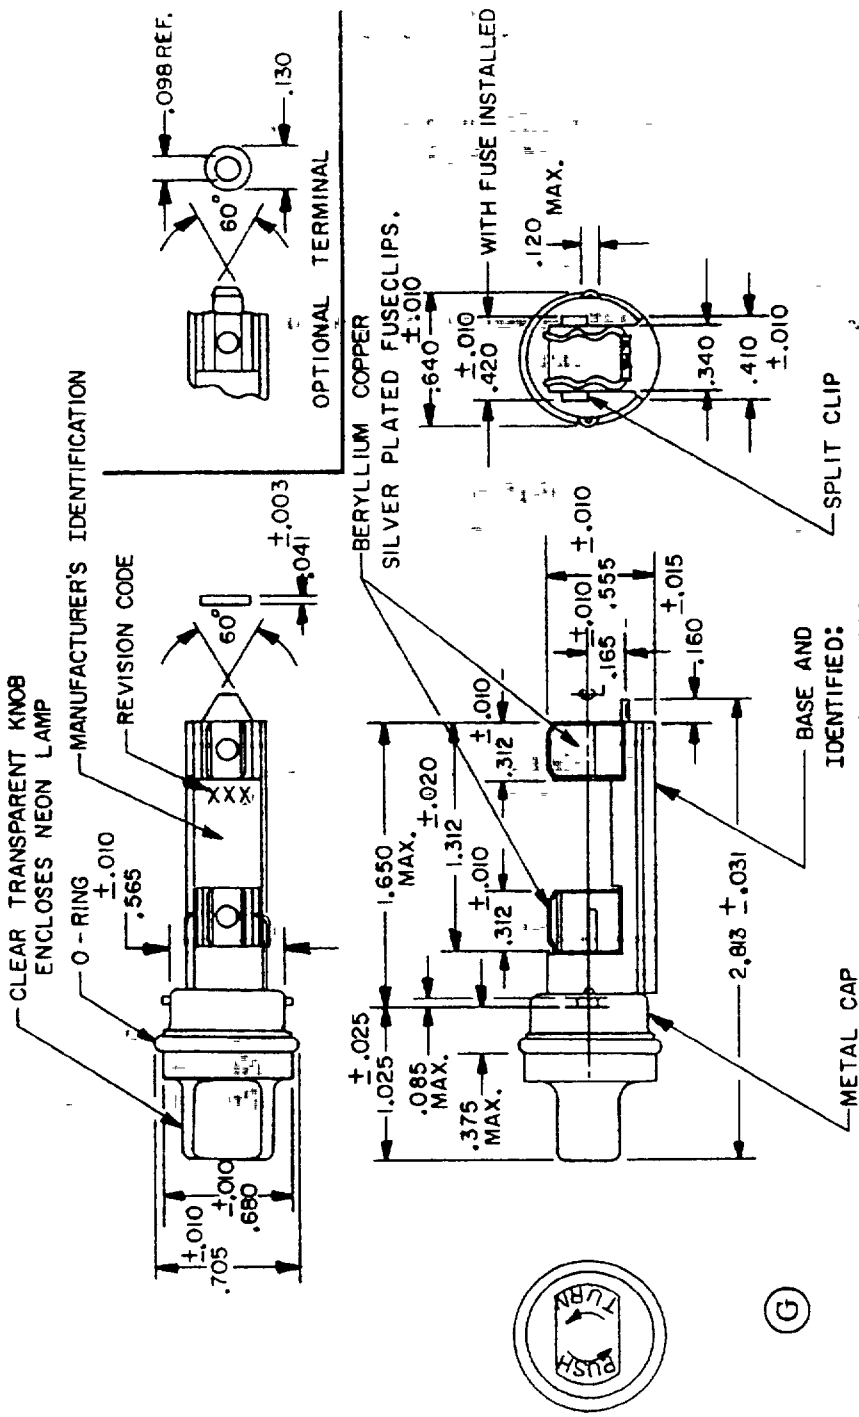

Inches	MM	Inches	MM	Inches	MM	Inches	MM	Inches	MM
.003	0.08	.031	0.79	.130	3.30	.375	9.53	.640	16.26
.010	0.25	.041	1.04	.160	4.06	.410	10.41	.680	17.27
.015	0.38	.085	2.16	.165	4.19	.420	10.67	.705	17.91
.020	0.51	.098	2.49	.312	7.92	.555	14.10	1.025	26.04
.025	0.64	.120	3.05	.340	8.64	.565	14.35	1.312	33.32

Inches	MM
1.650	41.91
2.813	71.45

FIGURE 3. *Fuse carrier for FHL10U and FHL10G fuseholders.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:24Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration See figures 1, 2, and 3
Body and carrier material MAI-60 or GDI-30F of MIL-M-14
Fuse accommodation
Ferrule type:
Size: 0.250 inch (0 64 mm) diameter, 1.250 inches (31.75 mm) length
Styles: MIL-F-15160, F02 and F03 and MIL-F-23419, FM09
Poles: Two
Rating: 30 amperes, 90-250 volts
Panel thickness: 0.125 inch (3.18 mm) maximum
Indicating: Neon lamp with clear cap
Lamp series resistor: MIL-R-39008/1 or MIL-R-39017/1, 120,000 ohms, 0.25 watt
Terminals: Stud type, No. 8-32 UNC-2A thread
Enclosure: Unsealed: FHL10U
Dripproof FHL10G (see note 2)
Test fuses:
Temperature rise: F03A125V30A of MIL-F-15160/3
Short circuit: F03A250V15A of MIL-F-15160/3
Mechanical shock: Method I of MIL-F-19207
Terminal strength: 20 pounds
Torque: Terminals – 15 pounds-inch
Salt spray (corrosion): Test condition B
Mounting hardware:
(G) Screw: 6-32UNC-2A, 7/8-inch long (min)
Pan/round head with sealing washer or pan self-sealing
Nut: 6-32UNC-2B square. A threaded metal insert may be used in lieu of nut

NOTES:

(G) 1. Revision code shall be G
2. All of the type FHL10G fuseholders submitted for delivery shall have been subjected to the dripproof test as specified in 4.6.16.2

Custodians:
Army – ER
Navy – SH
Air Force – 85

Preparing activity:
Navy – SH
(Project 5920-0459-01)

Review activities:
Army – MI, ME, AR
Navy – OS, EC
Air Force – 11, 17, 70, 71, 80, 82, 84

User activities.
Army – AT
Navy – AS, MC
Air Force – 19, 99

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:24Z
Check the source to verify that this is the current version before use.