
INCH-POUND
MIL-PRF-19207/1K
w/AMENDMENT 3
5 May 2023
SUPERSEDING
MIL-PRF-19207/1K
w/AMENDMENT 2
1 May 2019


PERFORMANCE SPECIFICATION SHEET

FUSEHOLDERS, EXTRACTOR POST TYPE, BLOWN FUSE INDICATING, TYPES FHL10U AND FHL10G

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification and MIL-PRF-19207.

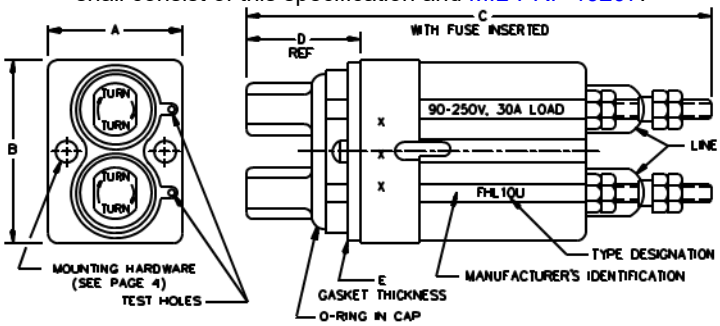



Ltr	Inches		mm		Ltr	Inches		mm	
	Min	Max	Min	Max		Min	Max	Min	Max
A	1.200 (REF)		30.48 (REF)		K	.511	.521	12.98	13.23
B	1.820 (REF)		46.23 (REF)		L	.253	.263	6.43	6.68
C	3.750	4.00	95.25	101.60	M	.933	.943	23.70	23.95
D	.830 (REF)		21.08 (REF)		N	.464	.474	11.79	12.04
E	.055	.065	1.40	1.65	P	.870	.880	22.10	22.35
F	.200	.210	5.08	5.33	R	.395	.405	10.03	10.29
G	.104	.114	2.64	2.90	S	.795	.805	20.19	20.45
H	.151	.161	3.84	4.09	T	1.672	1.682	42.47	42.72
J	.969	.979	24.61	24.87					


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ± 0.02 (0.51 mm) for two place decimals and ±0.005 (0.13mm) for three-place decimals.

FIGURE 1. Type FHL10U and type FHL10G fuseholders.

AMSC N/A
FSC 5920
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:24Z
Check the source to verify that this is the current version before use.

Part or Identifying Number (PIN): FHL10U-001 - Body for FHL10U
FHL10G-002 - Body for FHL10G

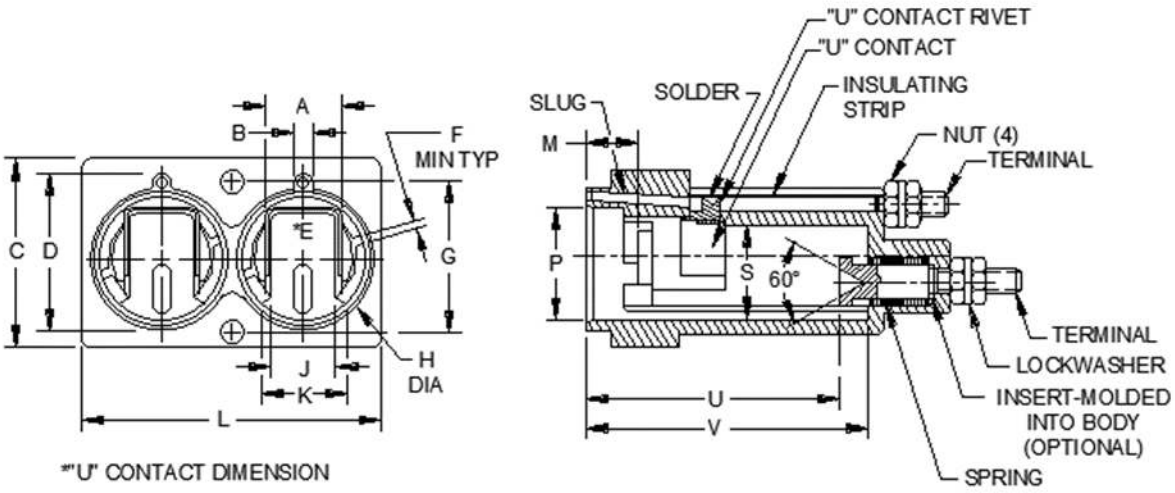


Ltr	Inches		mm		Ltr	Inches		mm	
	Min	Max	Min	Max		Min	Max	Min	Max
A	.435	.445	11.05	11.30	J	---	.400	---	10.16
B	.188	.198	4.78	5.03	K	---	.455	---	11.56
C	1.200 (REF)		30.48 (REF)		L	1.820 (REF)		46.23 (REF)	
D	.945	.955	24.00	24.26	M	---	.445	---	11.30
E	.385	.395	9.78	10.03	P	.695	.705	17.65	17.91
F	.125	---	3.18	---	S	.565	.605	14.35	15.37
G	.933	.943	23.70	23.95	U	1.950	2.050	49.53	52.07
H	.850	.860	21.59	21.84	V	2.105	2.155	53.47	54.74

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ± 0.02 (0.51 mm) for two place decimals and ±0.005 (0.13mm) for three-place decimals.

FIGURE 2. Body for FHL10U and FHL10G fuseholders.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:24Z
Check the source to verify that this is the current version before use.

Part or Identifying Number (PIN): FHL10U-003 - Fuse carrier for FHL10U
FHL10G-004 - Fuse carrier for FHL10G

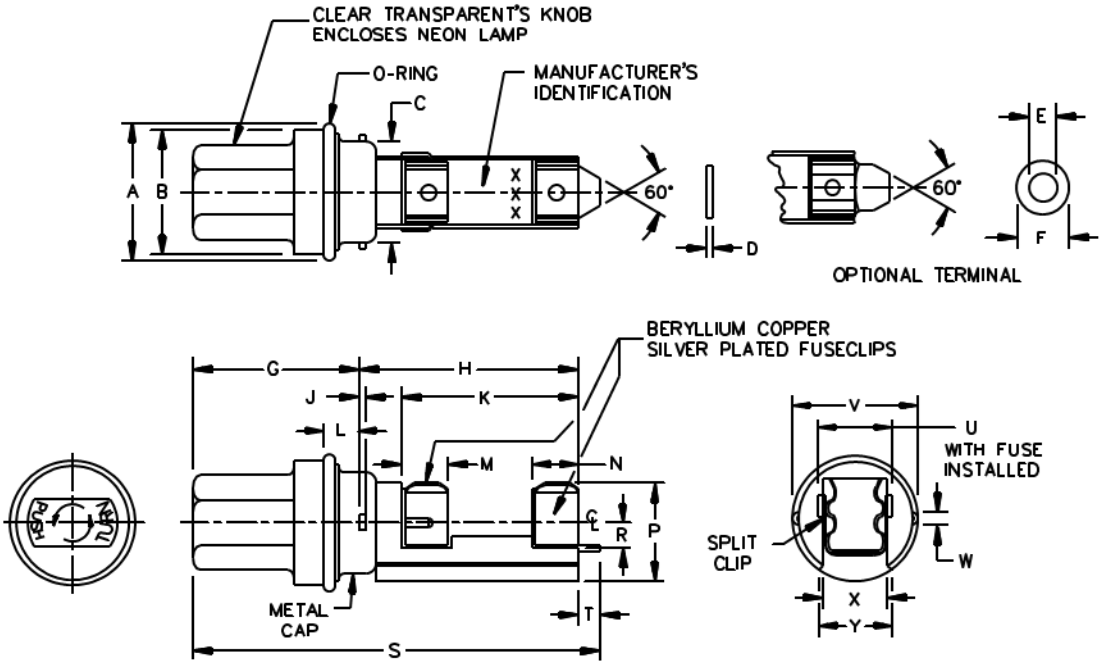

Ltr	Inches		mm		Ltr	Inches		mm	
	Min	Max	Min	Max		Min	Max	Min	Max
A	.695	.730	17.65	18.54	M	.350	.400	8.89	10.16
B	.670	.690	17.02	17.53	N	.302	.322	7.67	8.18
C	.555	.585	14.10	14.86	P	.545	.565	13.84	14.35
D	.038	.044	.965	1.12	R	.155	.175	3.94	4.45
E	.098 (REF)		2.49 (REF)		S	2.782	2.862	70.66	72.69
F	.125	.135	3.18	3.43	T	.145	.175	3.68	4.45
G	1.000	1.050	25.40	26.67	U	.410	.430	10.41	10.92
H	---	1.680	---	42.67	V	.620	.650	15.75	16.51
J	---	.085	---	2.16	W	---	.120	---	3.05
K	1.292	1.400	32.82	35.56	X	.330	.350	8.38	8.89
L	---	.375	---	9.53	Y	.400	.430	10.16	10.92

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ± 0.02 (0.51 mm) for two place decimals and ±0.005 (0.13mm) for three-place decimals.

FIGURE 3. Fuse carrier for FHL10U and FHL10G fuseholders.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:24Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Interface and physical dimensions: See figures 1, 2, and 3.

Cap and body molding material: Cap and body molding materials shall be selected to enable the fuseholder to meet the performance requirements of this specification. Additional information and guidance on body molding material are specified in the notes.

Fuse accommodation.

Ferrule type:

Size: 0.250 inch (6.35 mm) diameter, 1.250 inches (31.75 mm) length.

Styles: MIL-PRF-15160, F02 and F03 and MIL-PRF-23419, FM09.

(or equivalent size and style)

Poles: Two.

Rating: 30 amperes, 90-250 volts.

Panel thickness: 0.125 inch (3.18 mm) maximum.

Indicating: Neon lamp with clear cap.

Lamp series resistor: MIL-PRF-39017/1, 120,000 ohms, 0.25 watt.

Terminals: Stud type, No. 8-32 UNC-2A thread.

Enclosure: Unsealed: FHL10U.
Dripproof: FHL10G (see note 1)

Test fuses:

Temperature rise: F03A125V30A of MIL-PRF-15160/3.

Short circuit: F03A250V15A of MIL-PRF-15160/3.

Mechanical shock: Method I of MIL-PRF-19207.

Terminal strength: 20 pounds.

Torque: Terminals - 10 inch pound.

Salt atmosphere (corrosion): Test condition B.

Mounting hardware:

Screw: 6-32UNC-2A, 7/8-inch long (min).

Pan/round head with sealing washer or pan self-sealing.

Nut: 6-32UNC-2B square. A threaded metal insert may be used in lieu of nut.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:24Z
Check the source to verify that this is the current version before use.

NOTES:

1. All of the type FHL10G fuseholders submitted for delivery shall have been subjected to the dripproof test as specified in 4.6.16.2 of MIL-PRF-19207.
2. Cap and body molding material: It is suggested that type MAI-60, GDI-30F or SDG-F of American Society for Testing and Materials ASTM-D5948 be considered for meeting the cap and body molding material requirements of this specification. ASTM-D3935 is also suggested as guidance for cap material.

Referenced documents. In addition to MIL-PRF-19207, this document references the following:
MIL-PRF-15160 MIL-PRF-15160/3 MIL-PRF-23419 MIL-PRF-39017/1 ASTM-D3935 ASTM-D5948

Amendment notations. The margins of this specification sheet are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Custodians:

Army - CR
Navy - SH
Air force - 85
DLA - CC

Review Activities:
Army - AR, AT, CR4, MI
Navy - AS, EC, MC, OS
Air Force - 19, 70, 71, 84

Preparing Activity:

DLA - CC

(Project 5920-2023-007)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:24Z
Check the source to verify that this is the current version before use.