NOTE: The document identifier and heading has been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.

INCH-POUND

MIL-PRF-19207/2F
23 August 1991
SUPERSEDING
MIL-F-19207/2E
12 November 1986


PERFORMANCE SPECIFICATION SHEET


FUSEHOLDERS, EXTRACTOR POST TYPE,
BLOWN FUSE INDICATING, TYPES FHL11U AND FHL11G

This specification is approved for use by all departments and agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-F-19207.

(F)

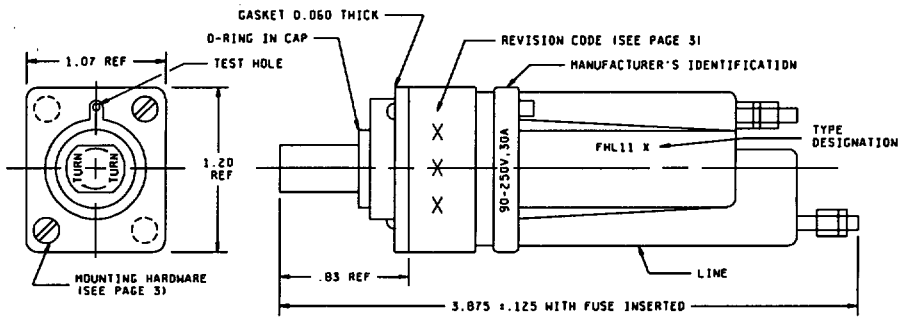




Inches	mm	Inches	mm
.060	1.52	.875	22.23
.125	3.18	.974	24.74
.156	3.96	1.070	27.18
.205	5.21	1.200	30.48
.375	9.53	3.875	98.43
.437	11.10		
.750	19.05		
.830	21.08		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest 0.01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are .XX ±0.02 and .XXX ±0.005.

FIGURE 1. *Type FHL11U and type FHL11G fuseholders.*

(F) denotes change

Source: https://assist.dla.mil -- Downloaded: 202610-18T12:25Z
Check the source to verify that this is the current version before use.

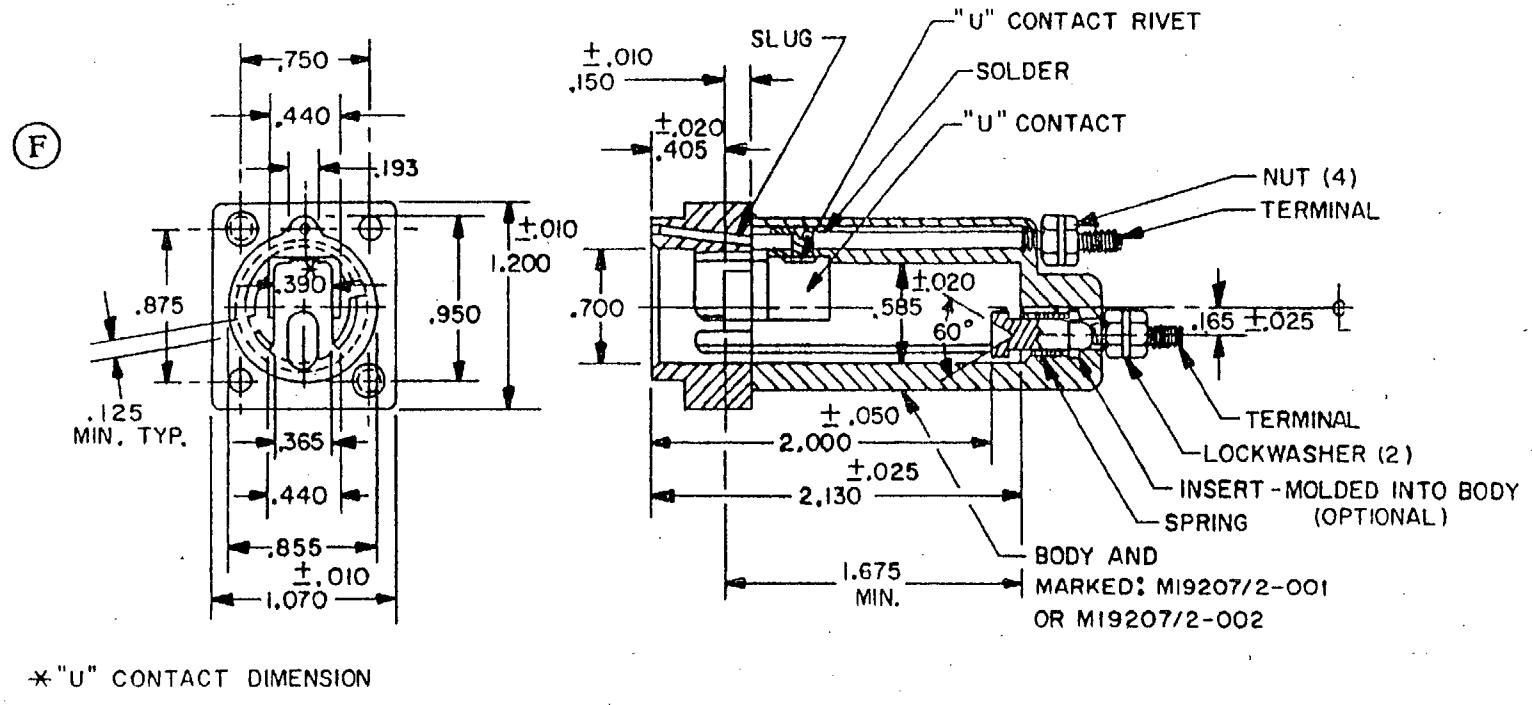

M19207/2-001 – Body for FHL11U
M19207/2-002 – Body for FHL11G

NOTES: Fuse carrier for M19207/2-001 shall be M19207/1-003.
Fuse carrier for M19207/2-002 shall be M19207/1-004.

(F)

Inches	MM	Inches	MM	Inches	MM	Inches	MM
.010	0.25	.150	3.81	.440	11.18	.950	24.13
.020	0.51	.165	4.19	.585	14.86	1.070	27.18
.025	0.64	.193	4.90	.700	17.78	1.200	30.48
.050	1.27	.365	9.27	.750	19.05	1.675	42.55
.125	3.18	.405	10.29	.855	21.72	2.000	50.80
				.875	22.23	2.130	54.10

FIGURE 2. *Body for FHL11U and FHL11G fuseholders.*

Source: https://assist.dla.mil -- Downloaded: 20260-18T12:25Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figures 1 and 2
Body material: MAI-60 or GDI-30F of MIL-M-14
Fuse accommodation:
  Ferrule type:
    Size: 0.250 inch (6.35 mm) diameter, 1.250 inches (31.75 mm) length
    Styles: MIL-F-15160, F02 and F03 and MIL-F-23419, FM09
Poles: One
Rating: 30 amperes, 90-250 volts
Panel thickness: 0.125 inch (3.18 mm) maximum
Indicating: Neon lamp with clear cap
Lamp series resistor: MIL-R-39008/1 or MIL-R-39017/1, 120,000 ohms, 0.25 watt
Terminals: Stud type, No. 8-32 UNC-2A thread
Enclosure: Unsealed: FHL11U
  Dripproof: FHL11G (see note 2)
Test fuses:
  Temperature rise: F03A125V30A of MIL-F-15160/3
  Short circuit: F03A250V15A of MIL-F-15160/3
Mechanical shock: Method I of MIL-F-19207
Terminal strength: 20 pounds
Torque: Terminals – 15 pounds-inch
Salt spray (corrosion): Test condition B
Mounting hardware:
(F) Screw: 6-32UNC-2A, 7/8-inch long (min)
  Pan/round head with sealing washer or pan head self-sealing.
  Nut: 6-32UNC-2B Hex. A threaded metal insert may be used in lieu of nut.

NOTES:

(F)
1. Revision code shall be F.
2. All of the type FHL11G fuseholders submitted for delivery shall have been subjected to the dripproof test as specified in 4.6.16.2.

Custodians:
Army – ER
Navy – SH
Air Force – 85

Preparing activity:
Navy – SH
(Project 5920-0459-02)

Review activities:
Army – MI, ME, AR
Navy – OS, EC
Air Force – 11, 17, 70, 71, 80, 82, 84

User activities:
Army – AT
Navy – AS, MC
Air Force – 19, 99

Source: https://assist.dla.mil -- Downloaded: 202610-18T12:25Z
Check the source to verify that this is the current version before use.