INCH-POUND

MIL-PRF-19207/2J
w/AMENDMENT 2
5 May 2023


SUPERSEDING
MIL-PRF-19207/2J
w/AMENDMENT 1
1 November 2018

PERFORMANCE SPECIFICATION SHEET

FUSEHOLDERS, EXTRACTOR POST TYPE, BLOWN FUSE INDICATING, TYPES FHL11U AND FHL11G

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification and MIL-PRF-19207.

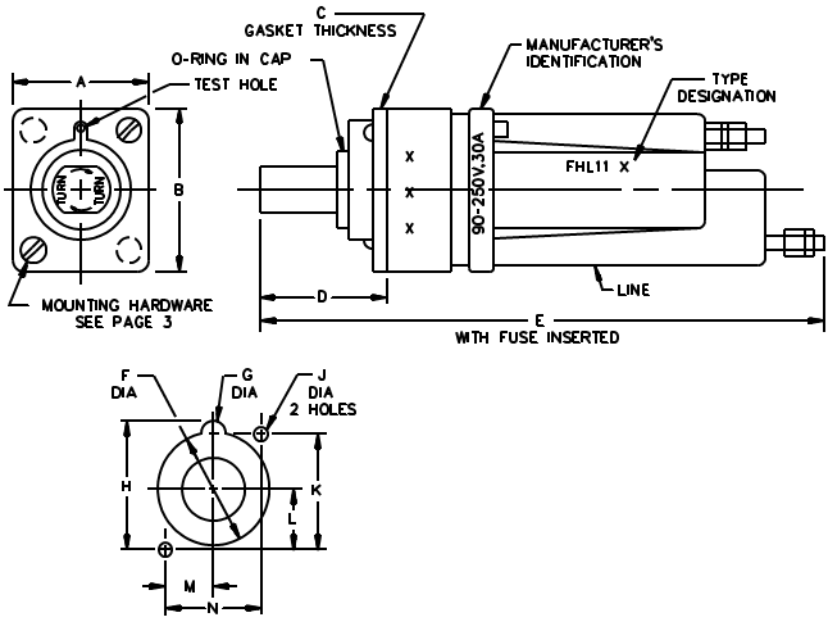

Ltr	Inches		mm		Ltr	Inches		mm	
	Min	Max	Min	Max		Min	Max	Min	Max
A	1.070 REF		27.18 REF		H	.969	.979	24.61	24.87
B	1.200 REF		30.48 REF		J	.151	.161	3.84	4.09
C	.055	.065	1.40	1.65	K	.870	.880	22.10	22.35
D	.830 REF		21.08 REF		L	.432	.442	10.97	11.23
E	3.750	4.000	95.25	101.60	M	.370	.380	9.40	9.65
F	.870	.880	22.10	22.35	N	.745	.755	18.92	19.18
G	.200	.210	5.08	5.33					

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ± 0.02 (0.51 mm) for two place decimals and ±0.005 (0.13mm) for three-place decimals.


FIGURE 1. Type FHL11U and type FHL11G fuseholders.

AMSC N/A

FSC 5920

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:24Z
Check the source to verify that this is the current version before use.

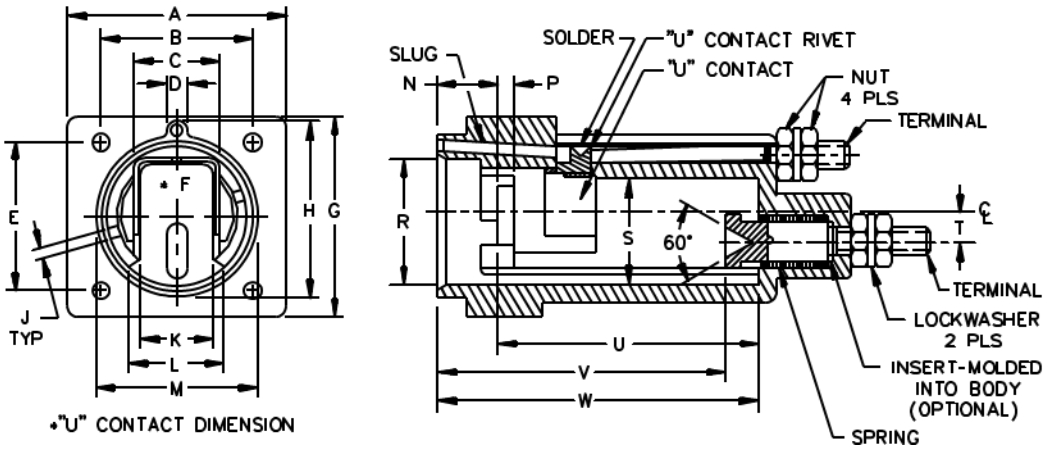

Ltr	Inches		mm		Ltr	Inches		mm	
	Min	Max	Min	Max		Min	Max	Min	Max
A	1.060	1.080	26.92	27.43	L	.435	.445	11.05	11.30
B	.745	.755	18.92	19.18	M	.850	.860	21.59	21.84
C	.435	.445	11.05	11.30	N	.385	.425	9.78	10.80
D	.188	.198	4.78	5.03	P	.140	.160	3.56	4.06
E	.870	.880	22.10	22.35	R	.695	.705	17.65	17.91
F	.385	.395	9.78	10.03	S	.565	.605	14.35	15.37
G	1.190	1.210	30.23	30.73	T	.140	.190	3.56	4.83
H	.945	.955	24.00	24.26	U	1.675	---	42.55	---
J	.125	---	3.18	---	V	1.950	2.050	49.53	52.07
K	.360	.370	9.14	9.40	W	2.105	2.155	53.47	54.74

Part or Identifying Number (PIN): FHL11U-001 - Body for FHL11U
FHL11G-002 - Body for FHL11G

NOTES: Fuse carrier for FHL11U-001 shall be FHL10U-003.
Fuse carrier for FHL11G-002 shall be FHL10G-004.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ± 0.02 (0.51 mm) for two place decimals and ±0.005 (0.13mm) for three-place decimals.

FIGURE 2. Body for FHL11U and FHL11G fuseholders.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:24Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Interface and physical dimensions: See figures 1 and 2.

Cap and body molding material: Cap and body molding materials shall be selected to enable the fuseholder to meet the performance requirements of this specification. Additional information and guidance on body molding material are specified in the notes.

Fuse accommodation.

Ferrule type:

Size: 0.250 inch (6.35 mm) diameter, 1.250 inches (31.75 mm) length.

Styles: MIL-PRF-15160, F02 and F03 and MIL-PRF-23419, FM09.

(or equivalent size and styles)

Poles: One

Rating: 30 amperes, 90-250 volts.

Panel thickness: 0.125 inch (3.18 mm) maximum.

Indicating: Neon lamp with clear cap.

Lamp series resistor: MIL-PRF-39017/1, 120,000 ohms, 0.25 watt.

Terminals: Stud type, No. 8-32 UNC-2A thread.

Enclosure: Unsealed: FHL11U.
Dripproof: FHL11G (see note 1)

Test fuses:

Temperature rise: F03A125V30A of MIL-PRF-15160/3.

Short circuit: F03A250V15A of MIL-PRF-15160/3.

Mechanical shock: Method I of MIL-PRF-19207.

Terminal strength: 20 pounds.

Torque: Terminals - 12 inch-pound.

Salt atmosphere (corrosion): Test condition B.

Mounting hardware:

Screw: 6-32UNC-2A, 7/8-inch long (min).
Pan/round head with sealing washer or pan self-sealing.

Nut: 6-32UNC-2B Hex. A threaded metal insert may be used in lieu of nut.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:24Z
Check the source to verify that this is the current version before use.

NOTES:

1. All of the type FHL11G fuseholders submitted for delivery shall have been subjected to the dripproof test as specified in 4.6.16.2 of MIL-PRF-19207.
2. Cap and body molding material: It is suggested that type MAI-60, GDI-30F or SDG-F of American Society for Testing and Materials ASTM-D5948 be considered for meeting the cap and body molding material requirements of this specification. ASTM-D3935 is also suggested as guidance for cap material.

Referenced documents. In addition to MIL-PRF-19207, this document references the following:
MIL-PRF-15160 MIL-PRF-15160/3 MIL-PRF-23419 MIL-PRF-39017/1 ASTM-D3935 ASTM-D5948

Amendment notations. The margins of this specification sheet are marked with vertical line to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Custodians:
Army - CR
Navy - SH
Air force - 85
DLA - CC

Preparing Activity:
DLA - CC

(Project 5920-2023-008)

Review Activities:
Army - AR, AT, CR4, MI
Navy - AS, EC, MC, OS
Air Force - 70, 71

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:24Z
Check the source to verify that this is the current version before use.