INCH-POUND

MIL-F-19207/3F
23 August 1991


SUPERSEDING
MIL-F-19207/3E
12 November 1986


MILITARY SPECIFICATION SHEET

FUSEHOLDERS, EXTRACTOR POST TYPE, BLOWN FUSE INDICATING, TYPES FHL12U AND FHL12G

is specification is approved for use by all departments and agencies of the Department Defense.

equirements for acquiring the product described herein shall consist of this specification the issue of the following specification listed in that issue of the Department of Defense pecifications and Standards (DODISS) specified in the solicitation: MIL-F-19207.

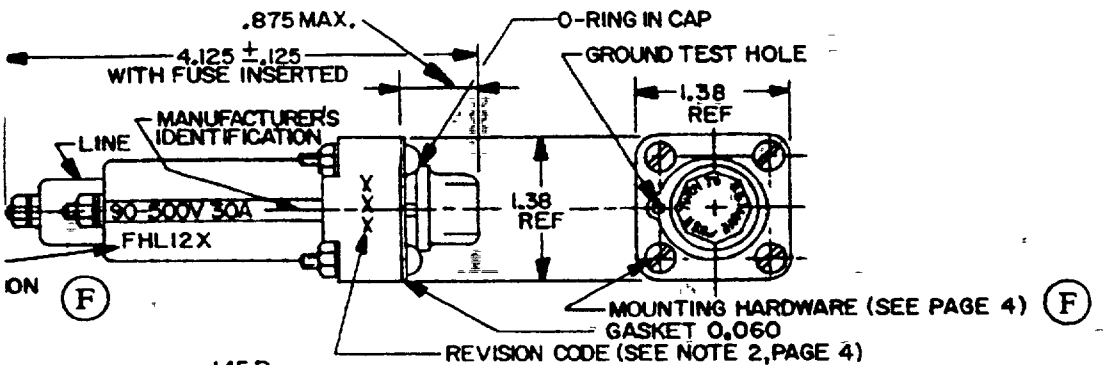

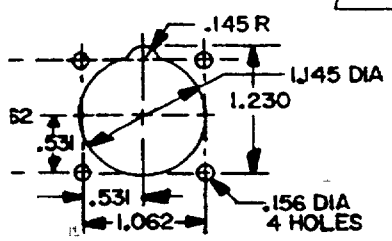

INCHES	MM	INCHES	MM
0.060	1.52	1.062	26.97
0.125	3.18	1.145	29.08
.145	3.68	1.230	31.24
.156	3.96	1.380	35.05
.531	13.49	4.125	104.78
.798	20.27		
.828	21.03		
.875	22.23		

ensions are in inches
ric equivalents (to the nearest 0.01 mm) are given for general information only and are based upon 1 inch = mm
ess otherwise specified tolerances is XXX ± 005


FIGURE 1. *Type FHL12U and type FHL12G fuseholders.*

F denotes changes.

FSC 5920

TION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:25Z
Check the source to verify that this is the current version before use.

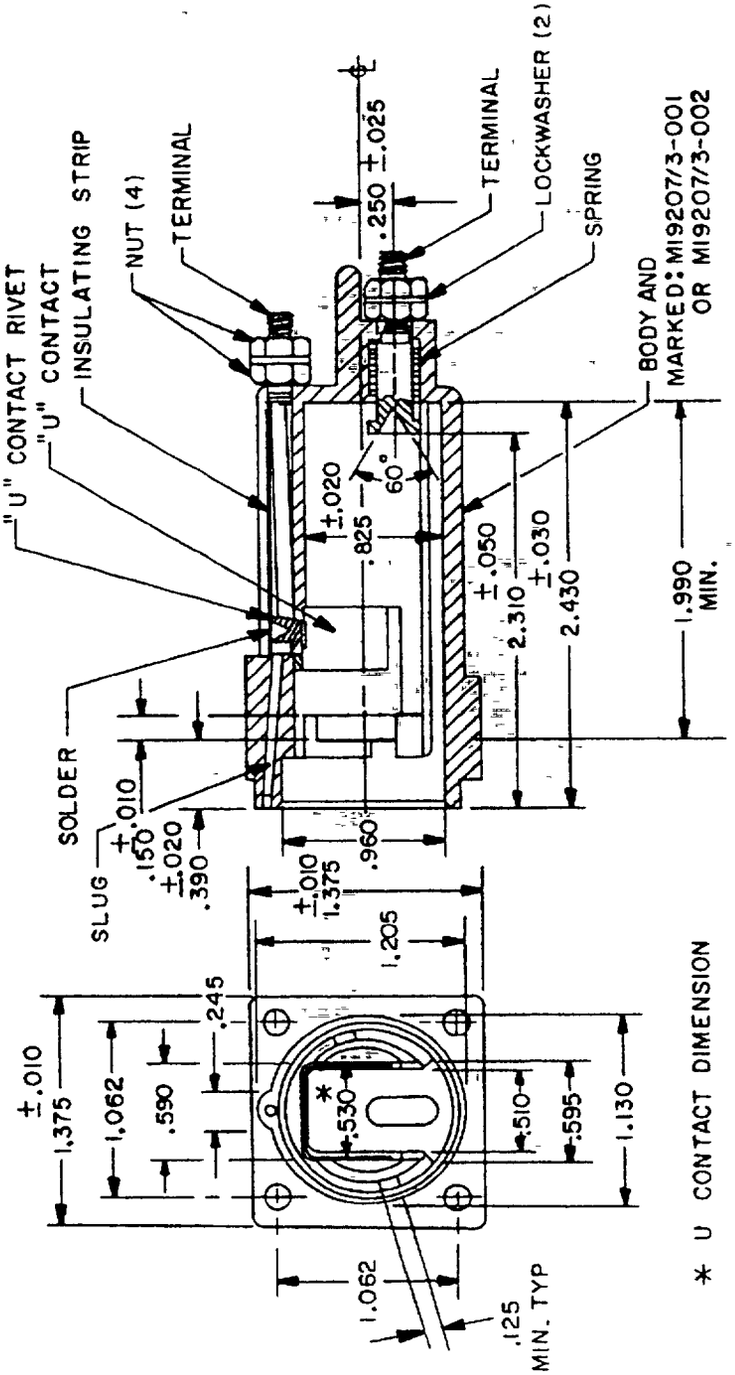


* U CONTACT DIMENSION

M19207/3-001 – Body for FHL12U
M19207/3-002 – Body for FHL12G

Inches	MM	Inches	MM	Inches	MM	Inches	MM	Inches	MM
010	0 25	125	3 18	.510	12.95	1 062	26 97	2 130	58 67
020	0.51	150	3 81	530	13 46	1 130	28 70	2.430	61 72
025	0 64	245	6 22	.590	14 99	1.205	30 61		
030	0 76	250	6.35	595	15 11	1.375	34 93		
050	1 27	390	9 91	825	20 96	1 990	50 55		

FIGURE 2. *Body for FHL12U and FHL12G fuseholders.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:25Z
Check the source to verify that this is the current version before use.

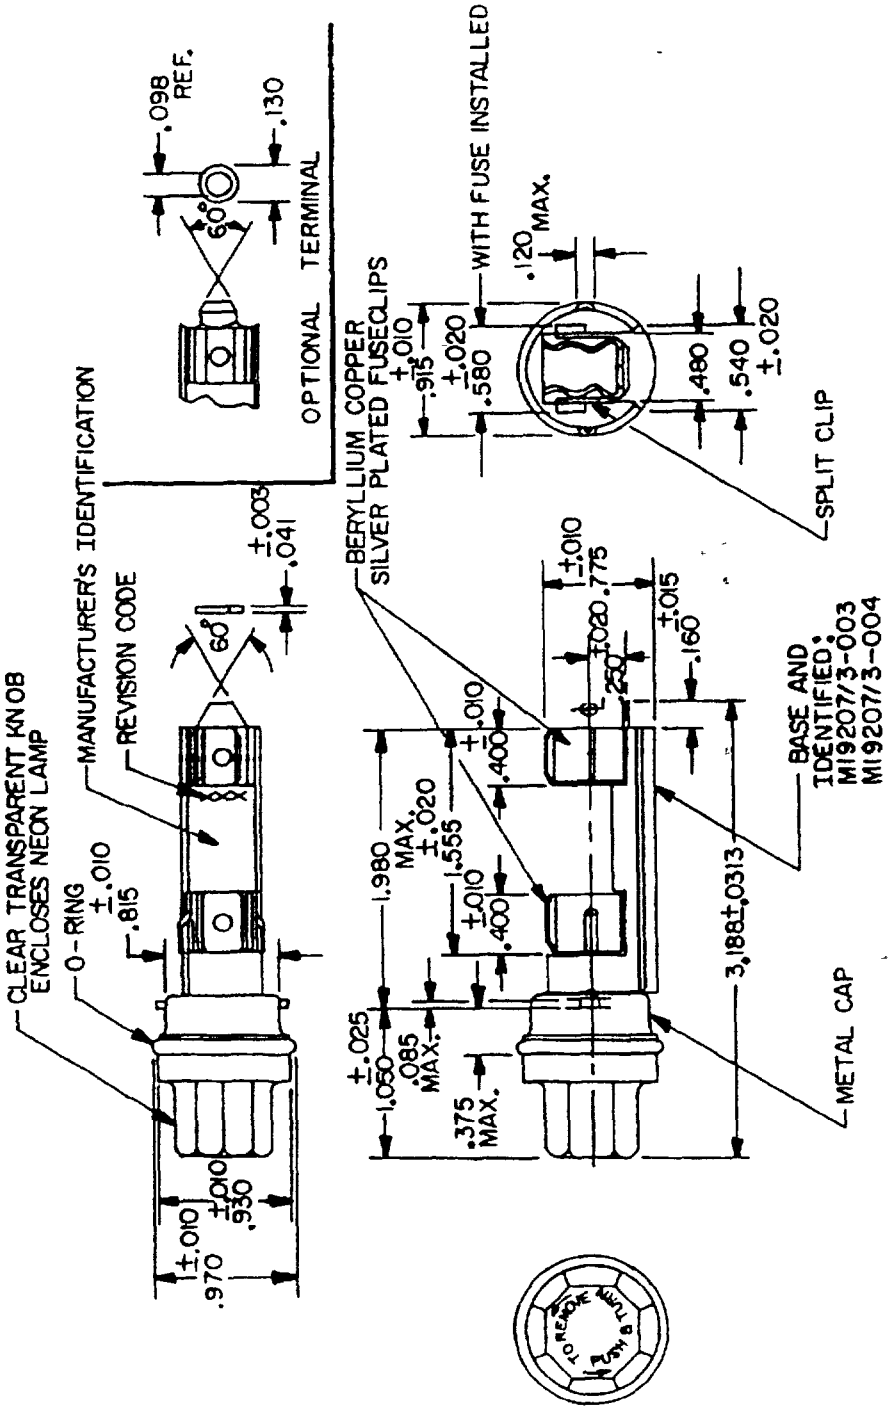

M19207/3-003 – Fuse carrier for FHL12U
M19207/3-004 – Fuse carrier for FHL12G

Inches	MM	Inches	MM	Inches	MM	Inches	MM	Inches	MM
010	0 25	031	0 79	125	3 05	.375	9 53	775	19 69
015	0.38	041	1 04	130	3 30	400	10 16	815	20 70
020	0 51	085	2.16	.160	4 06	480	12.19	.915	23 24
025	0.64	098	2.49	.250	6.35	.580	14 73	.930	23 62

Inches	MM
970	24 64
1 050	26 67
1.555	39.50
1 980	50 29
3 188	80 98

FIGURE 3. *Fuse carrier for FHL12U and FHL12G fuseholders*

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:25Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration: See figures 1, 2, and 3
Body material: MAI-60 or GDI-30F of MIL-M-14
Fuse accommodation:
  Ferrule type:
    Size: 0.406 inch diameter, 1.500 inches length
    Styles: MIL-F-15160, F09 and F60
Poles: One
Rating: 30 amperes, 90-500 volts
Panel thickness: 0.125 inch maximum
Indicating: Neon lamp with clear cap
Lamp series resistor: MIL-R-39017/2 or MIL-R-39008/2, 330,000 ohms, 0.5 watt
Terminals: Stud type, No. 8-32UNC-2A thread
Enclosure: Unsealed: FHL12U
  Dripproof: FHL12G (see note 2)
Test fuses:
  Temperature rise: F60C500V30A of MIL-F-15160/60
  Short circuit: F60C500V30A of MIL-F-15160/60
Mechanical shock: Method I of MIL-F-19207
Terminal strength: 20 pounds
Torque: Terminals – 15 pounds-inch
Salt spray (corrosion): Test condition B
Mounting hardware:
(F) Screw: 6-32UNC-2A, 7/8-inch long (min)
  Pan/round head with sealing washer or panhead self-sealing
  Nut: 6-32UNC-2B Hex. A threaded metal insert may be used in lieu of nut.

NOTES:

(F)
1. Revision code shall be F.
2. All of the type FHL12G fuseholders submitted for delivery shall have been subjected to the dripproof test as specified in 4.6.16.2.

Custodians:
Army – ER
Navy – SH
Air Force – 85

Preparing activity:
Navy – SH
(Project 5920-0459-03)

Review activities:
Army – MI, ME, AR
Navy – OS, EC
Air Force – 11, 17, 70, 71, 80, 82, 84

User activities:
Army – AT
Navy – AS, MC
Air Force – 19, 99

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:25Z
Check the source to verify that this is the current version before use.