INCH-POUND


MIL-PRF-19207/3G
16 June 1997
SUPERSEDING
MIL-PRF-19207/3F
23 August 1991

PERFORMANCE SPECIFICATION SHEET

# FUSEHOLDERS, EXTRACTOR POST TYPE, BLOWN FUSE INDICATING, TYPES FHL12U AND FHL12G

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification and MIL-PRF-19207.

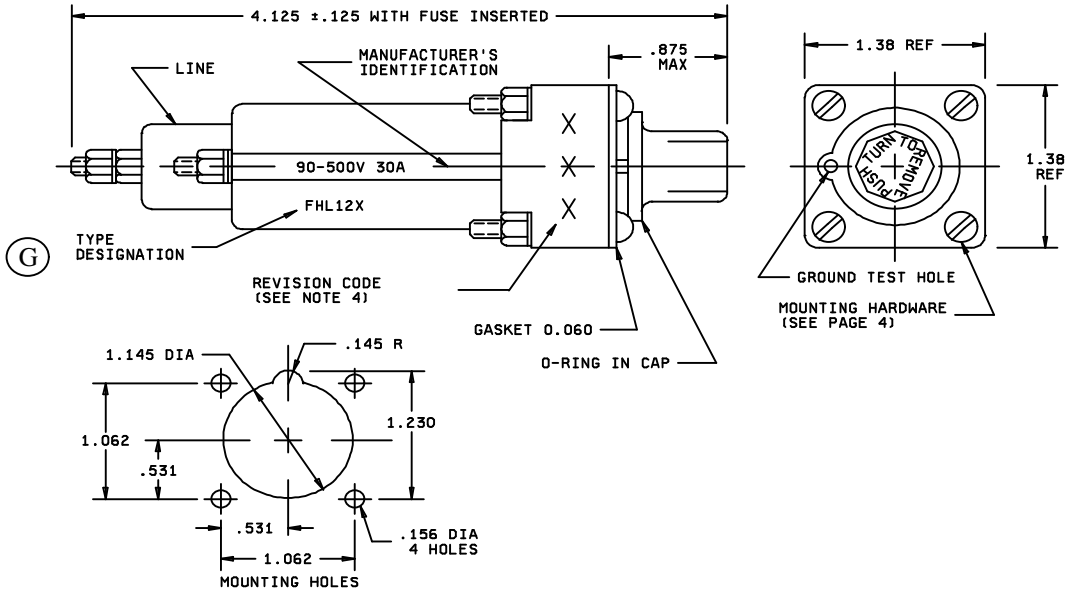


| Inches | mm | Inches | mm | Inches | mm | Inches | mm | Inches | mm |
|---|---|---|---|---|---|---|---|---|---|
| .060 | 1.52 | .156 | 3.96 | .828 | 21.03 | 1.145 | 29.08 | 4.125 | 104.78 |
| .125 | 3.18 | .531 | 13.49 | .875 | 22.23 | 1.230 | 31.24 | | |
| .145 | 3.68 | .798 | 20.27 | 1.062 | 26.97 | 1.380 | 35.05 | | |


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is .XXX ± .005 (.13 mm).
4. Revision code shall be G.

FIGURE 1. Type FHL12U and type FHL12G fuseholders

G denotes change


DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:25Z
Check the source to verify that this is the current version before use.

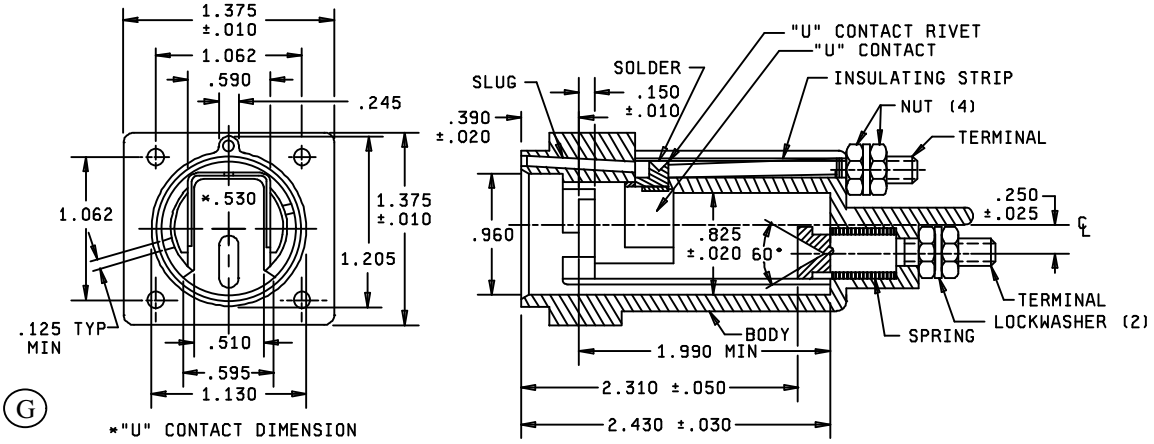



M19207/3-001 - Body for FHL12U
M19207/3-002 - Body for FHL12G

| Inches | mm | Inches | mm | Inches | mm | Inches | mm | Inches | mm |
|---|---|---|---|---|---|---|---|---|---|
| .010 | 0.25 | .125 | 3.18 | .510 | 12.95 | 1.062 | 26.97 | 2.130 | 58.67 |
| .020 | 0.51 | .150 | 3.81 | .530 | 13.46 | 1.130 | 28.70 | 2.430 | 61.72 |
| .025 | 0.64 | .245 | 6.22 | .590 | 14.99 | 1.205 | 30.61 | | |
| .030 | 0.76 | .250 | 6.35 | .595 | 15.11 | 1.375 | 34.93 | | |
| .050 | 1.27 | .390 | 9.91 | .825 | 20.96 | 1.990 | 50.55 | | |

FIGURE 2. Body for FHL12U and FHL12G fuseholders



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:25Z
Check the source to verify that this is the current version before use.

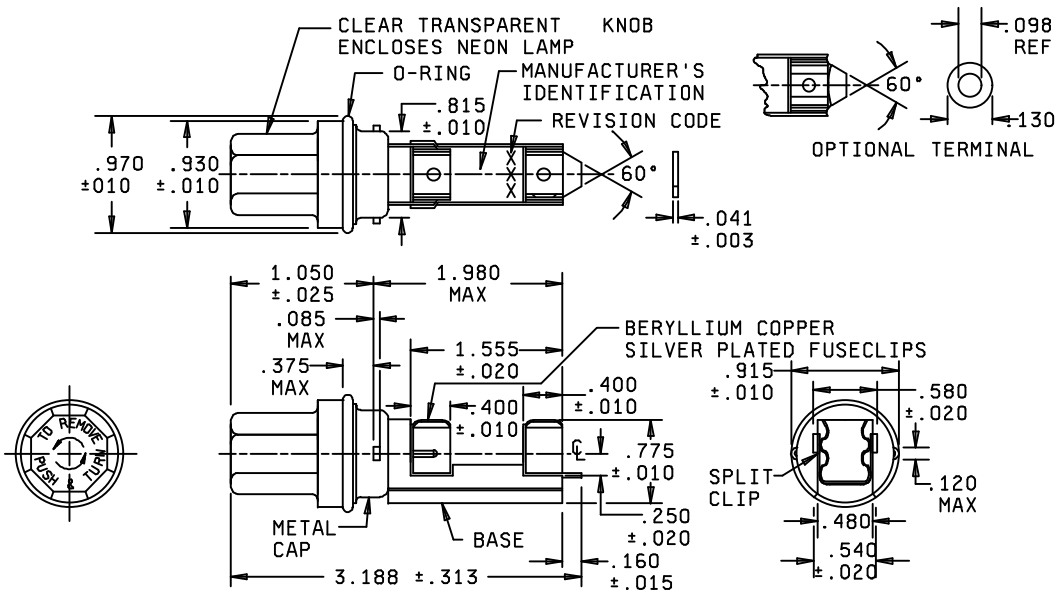


G

M19207/3-003 - Fuse carrier for FHL12U
M12207/3-004 - Fuse carrier for FHL12G

| Inches | mm | Inches | mm | Inches | mm | Inches | mm | Inches | mm |
|---|---|---|---|---|---|---|---|---|---|
| .010 | 0.25 | .041 | 1.04 | .160 | 4.06 | .580 | 14.73 | .970 | 24.64 |
| .015 | 0.38 | .085 | 2.16 | .250 | 6.35 | .775 | 19.69 | 1.050 | 26.67 |
| .020 | 0.51 | .098 | 2.49 | .375 | 9.53 | .815 | 20.70 | 1.555 | 39.50 |
| .025 | 0.64 | .125 | 3.05 | .400 | 10.16 | .915 | 23.24 | 1.980 | 50.29 |
| .031 | 0.79 | .130 | 3.30 | .480 | 12.19 | .930 | 23.62 | 3.188 | 80.98 |

FIGURE 3. Fuse carrier for FHL12U and FHL12G fuseholders



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:25Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1, figure 2, and figure 3.

G Body material: Body material shall be selected to enable the fuseholder to meet the performance requirements of this specification. Type MAI-60 or GDI-30F of MIL-M-14 have been successfully used in the past and should be considered for meeting the body material requirements of this specification.

Fuse accommodation:

Ferrule type:

Size: .406 inch diameter, 1.500 inches (38.1 mm) length.

Styles: MIL-PRF-15160, F09 and F60.

G Poles: One.

Rating: 30 amperes, 90 volts to 500 volts.

Panel thickness: 0.125 inch (3.175 mm) maximum.

Indicating: Neon lamp with clear cap.

Lamp series resistor: MIL-PRF-39017/2 or MIL-R-39008/2, 330,000 ohms, 0.5 watt.

Terminals: Stud type, No. 8-32UNC-2A thread.

Enclosure: Unsealed: FHL12U.

Dripproof: FHL12G - All of the type FHL12G fuseholders submitted for delivery shall have been subjected to the dripproof test as specified in 4.6.16.2.

Test fuses:

Temperature rise: F60C500V30A of MIL-PRF-15160/60.

Short circuit: F60C500V30A of MIL-PRF-15160/60.

G Mechanical shock: Method I of MIL-PRF-19207.

Terminal strength: 20 pounds.

Torque: Terminals: 15 inch-pounds.

Salt spray (corrosion): Test condition B.

Mounting hardware:

Screw: 6-32UNC-2A, 7/8-inch (22.2 mm) long (min).
Pan/round head with sealing washer or panhead self-sealing.

Nut: 6-32UNC-2B Hex. A threaded metal insert may be used in lieu of nut.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:25Z
Check the source to verify that this is the current version before use.

Marking: In addition to other required marking, the manufacturer's identification, the type designation with an appropriate dash number and the voltage rating shall appear on the fuseholder body but the location of each is optional. The military part number is not required on the fuseholder body.

Custodians:
Army - CR
Navy - SH
Air Force - 85

Review activities:
Army - AR, AT, CR4, MI
Navy - AS, EC, MC, OS
Air Force - 11, 17, 70, 71, 80

Preparing activity:
DLA - CC

(Project 5920-0516-01)



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:25Z
Check the source to verify that this is the current version before use.