NOTE: The document identifier and heading has been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.

INCH-POUND


MIL-PRF-19207/4G
23 August 1991
SUPERSEDING
MIL-F-19207/4F
30 December 1980

PERFORMANCE SPECIFICATION SHEET

FUSEHOLDERS, EXTRACTOR POST TYPE,
BLOWN FUSE INDICATING, TYPE FHL13G

This specification is approved for use by all departments and agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-F-19207.

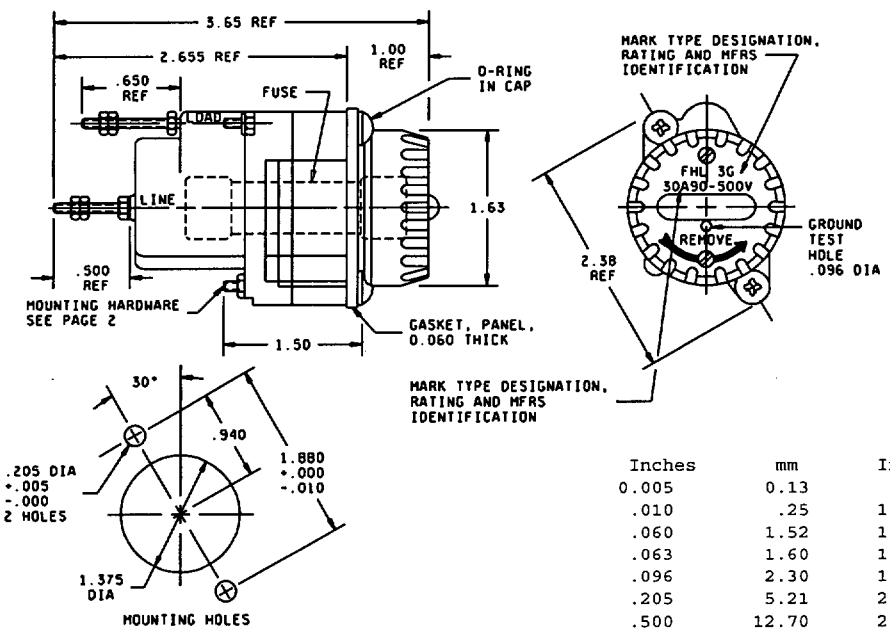

Inches	mm	Inches	mm
0.005	0.13	.940	23.98
.010	.25	1.000	25.4
.060	1.52	1.375	34.93
.063	1.60	1.63	41.40
.096	2.30	1.880	47.75
.205	5.21	2.380	60.45
.500	12.70	2.655	67.44
.650	16.51	3.650	92.71

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest 0.01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is .XXX ±.005.

FIGURE 1. *Type FHL13G fuseholders.*

(G) denotes changes.

AMSC N/A
FSC 5920

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-18T12:25Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

(G) Dimensions and configuration: See figure 1
Body material: MAI-60 or GDI-30F of MIL-M-14
Fuse accommodation:
Ferrule type:
Size: 0.563 inch (14.30 mm) diameter, 2 inches (50.8 mm) length
Style: MIL-F-15160, F15 and F61
Poles: One
Rating: 30 amperes, 90-500 volts
Panel thickness: 0.187 inch (4.75 mm) maximum
Indicating: Neon lamp with clear cap
Lamp series resistor: MIL-R-39017/2 or MIL-R-39008/2, 2 resistors, 160,000 ohms, 0.5 watt, one each lamp lead
Terminals: Stud type, No. 190-24 UNC-2A thread
Enclosure: Dripproof
Test fuses:
Temperature rise: F61C500V30A of MIL-F-15160/61
Short circuit: F61C500V30A of MIL-F-15160/61
Mechanical shock: Method I of MIL-F-19207
Terminal strength: 20 pounds
Torque: Terminals and cap insert – 15 pounds-inch
Salt spray (corrosion): Test condition B
(G) Mounting hardware:
Screw: .190-24UNC-2A, trusshead, 1.5 inches long (min) with sealing washer
Nut: .190-24UNC-2B Hex. A threaded metal insert may be used in lieu of nut.
Military part number: M19207/4-001 shall be for body
M19207/4-002 shall be for cap

Patent notice: The US Government has a royalty-free license under US Patent No. 3,225,164 and only under claim 4 of US Patent No. 2,989,610, owned by FIC Corporation, for the benefit of manufacturers of the items called for in this specification sheet either for the Government or for use in equipment to be delivered to the Government.

Custodians:
Army – ER
Air Force – 85

Review activities:
Army – MI, ME, AR
Navy – OS, EC
Air Force – 11, 17, 70, 71, 80, 82, 84

User activities:
Army – AT
Navy – AS, MC
Air Force – 19, 99

Preparing activity:
Navy – SH
(Project 5920-0459-04)

Source: https://assist.dla.mil -- Downloaded: 202610-18T12:25Z
Check the source to verify that this is the current version before use.