
INCH-POUND
MIL-PRF-19207/4L
w/AMENDMENT 2
19 November 2020
SUPERSEDING
MIL-PRF-19207/4L
w/AMENDMENT 1
1 November 2018

PERFORMANCE SPECIFICATION SHEET

FUSEHOLDERS, EXTRACTOR POST TYPE, BLOWN FUSE INDICATING, TYPE FHL13G

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification and MIL-PRF-19207.

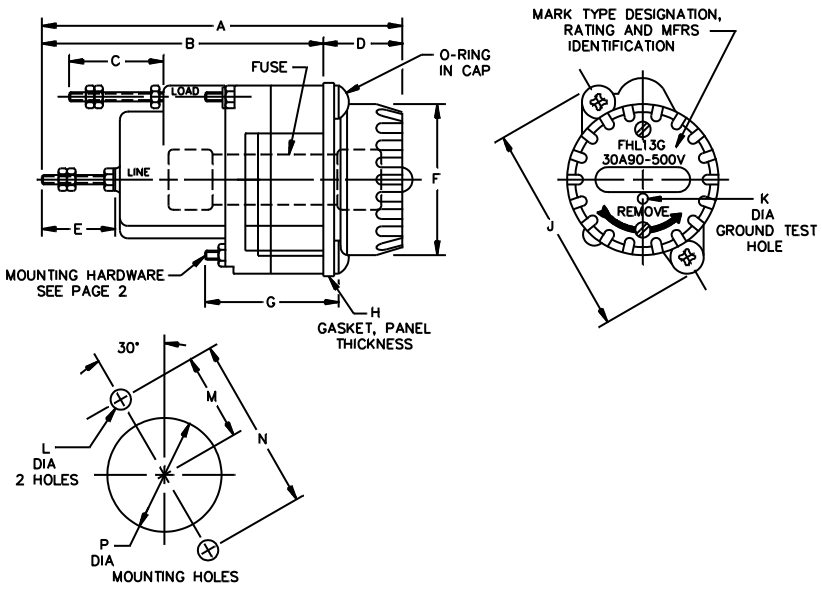

Ltr	Inches		mm		Ltr	Inches		mm	
	Min	Max	Min	Max		Min	Max	Min	Max
A	3.650 (REF)		92.71 (REF)		H	.055	.065	1.40	1.65
B	2.655 (REF)		67.44 (REF)		J	2.380 (REF)		60.45 (REF)	
C	.650 (REF)		16.51 (REF)		K	.091	.101	2.31	2.57
D	1.000 (REF)		25.40 (REF)		L	.205	.210	5.21	5.33
E	.5000 (REF)		12.70 (REF)		M	.935	.945	23.75	24.00
F	1.625	1.635	41.28	41.53	N	1.880	1.890	47.75	48.01
G	1.495	1.505	37.97	38.23	P	1.370	1.380	34.80	35.05

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is .XXX ± .005 (.13 mm).

FIGURE 1. Type FHL13G fuseholders.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:25Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Interface and physical dimensions: See figure 1.

Cap and body molding material: Based on past experience, types MAI-60, GDI-30F or SDG-F of American Society for Testing and Materials ASTM-D5948 has been used successfully for meeting the body molding material requirements of this specification. ASTM-D3935 is also suggested as guidance for cap material.

The military part number is not required on the fuseholder.

Fuse accommodation:

Ferrule type:

Size: 0.563 inch (14.30 mm) diameter, 2 inches (50.8 mm) length.

Style: MIL-PRF-15160, F15 and F61.

(or equivalent size and style).

Poles: One.

Rating: 30 amperes, 90 volts to 500 volts.

Panel thickness: 0.187 inch (4.75 mm) maximum.

Indicating: Neon lamp with clear cap.

Lamp series resistors: MIL-PRF-39017/2 two resistors, 160,000 ohms, 0.5 watt, one each lamp lead.

Terminals: Stud type, No. 190-24 UNC-2A thread.

Enclosure: Dripproof.

Test fuses:

Temperature rise: F61C500V30A of MIL-PRF-15160/61.

Short circuit: F61C500V30A of MIL-PRF-15160/61.

Mechanical shock: Method I of MIL-PRF-19207.

Terminal strength: 20 pounds.

Torque: Terminals and cap insert - 15 inch-pounds.

Salt atmosphere (corrosion): Test condition B.

Mounting hardware:

Screw: .190-24UNC-2A, truss head, 1.5 inches long (38.1 mm) (min) with sealing washer.

Nut: .190-24UNC-2B Hex. A threaded metal insert may be used in lieu of nut.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:25Z
Check the source to verify that this is the current version before use.

Part or Identifying Number (PIN): FHL13G shall be for the entire fuseholder body and cap. FHL13G-001 shall be for the fuseholder body and supersedes the military part number: M19207/4-001 and FHL13G-002 shall be for the cap and supersedes the military part number M19207/4-002.

Referenced documents. In addition to MIL-PRF-19207, this document references the following:

MIL-PRF-15160 MIL-PRF-15160/61 MIL-PRF-39017/2 ASTM-D3935 ASTM-D5948

Amendment notations. The margins of this specification sheet are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Custodians:
Army - CR
Navy - SH
Air force - 85
DLA - CC

Preparing Activity:
DLA - CC

(Project 5920-2021-001)

Review Activities:
Army - AR, AT, CR4, MI
Navy - AS, EC, OS
Air Force - 70, 71

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:25Z
Check the source to verify that this is the current version before use.