NOTE: The document identifier and heading has been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.

INCH-POUND

MIL-PRF-19207/5H
23 August 1991
SUPERSEDING
MIL-F-19207/5G
30 December 1980


PERFORMANCE SPECIFICATION SHEET

FUSEHOLDERS, EXTRACTOR POST TYPE,
BLOWN FUSE INDICATING, TYPE FHL14G

This specification is approved for use by all departments and agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-F-19207.

(H)

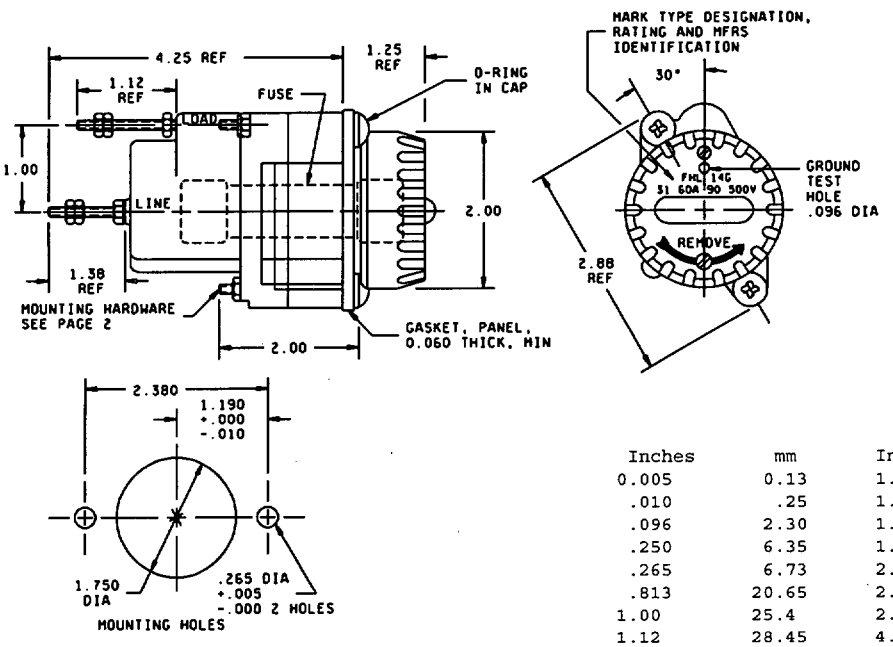

Inches	mm	Inches	mm
0.005	0.13	1.190	30.23
.010	.25	1.25	31.75
.096	2.30	1.38	35.05
.250	6.35	1.750	44.45
.265	6.73	2.00	50.8
.813	20.65	2.380	60.45
1.00	25.4	2.88	73.15
1.12	28.45	4.250	107.95

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest 0.01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerances for two place decimals shall be .XX ± .02 (0.5) and for three place decimals .XXX ±.005 (0.13).

FIGURE 1. *Type FHL14G fuseholder.*

(H) denotes changes.

AMSC N/A
FSC 5920

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-18T12:26Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

(H) Dimensions and configuration: See figure 1
Body material: MAI-60 or GDI-30F of MIL-M-14
Fuse accommodation:
Ferrule type:
Size: 0.813 inch (30.65 mm) diameter, 3 inches (76.2 mm) length
Styles: MIL-F-15160, F16 and F62
Poles: One
Rating: 31-60 amperes, 90-500 volts
Panel thickness: 0.187 inch (4.75 mm) maximum
Indicating: Neon lamp with clear cap
Lamp series resistor: MIL-R-39017/2 or MIL-R-39008/2, 2 resistors, 160,000 ohms, 0.5 watt, One
Terminals: Stud type, No. 250-20UNC-2A thread
Enclosure: Dripproof
Test fuses:
Temperature rise: F62C500V60A of MIL-F-15160/62
Short circuit: F62C500V60A of MIL-F-15160/62
Mechanical shock: Method I of MIL-F-19207
Terminal strength: 20 pounds
Torque: Terminals and cap insert – 15 pounds-inch
Salt spray (corrosion): Test condition B
Mounting hardware:
(H) Screw: .250-20UNC-2A, trusshead, 2.0 inches long (min) with sealing washer
Nut: .250-20UNC-2B Hex. A threaded metal insert may be used in lieu of nut.
Military part number: M19207/5-001 shall be for body
M19207/5-002 shall be for cap

Patent notice: The US Government has a royalty-free license under US Patent No. 3,225,164 and only under claim 4 of US Patent No. 2,989,610, owned by FIC Corporation, for the benefit of manufacturers of the items called for in this specification sheet either for the Government or for use in equipment to be delivered to the Government.

Custodians:
Army – ER
Air Force – 85

Preparing activity:
Navy – SH
(Project 5920-0459-05)

Review activities:
Army – MI, ME, AR
Navy – OS, EC
Air Force – 11, 17, 70, 71, 80, 82, 84

User activities:
Army – AT
Navy – AS, MC
Air Force – 19, 99

Source: https://assist.dla.mil -- Downloaded: 202610-18T12:26Z
Check the source to verify that this is the current version before use.