NOTE: The document identifier and heading has been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.

INCH-POUND


MIL-PRF-19207/6K
23 August 1991
SUPERSEDING
MIL-F-19207/6J
15 January 1986

PERFORMANCE SPECIFICATION SHEET

FUSEHOLDERS, EXTRACTOR POST TYPE,
BLOWN FUSE INDICATING AND NONINDICATING, TYPE FHL15G

This specification is approved for use by all departments and agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-F-19207.

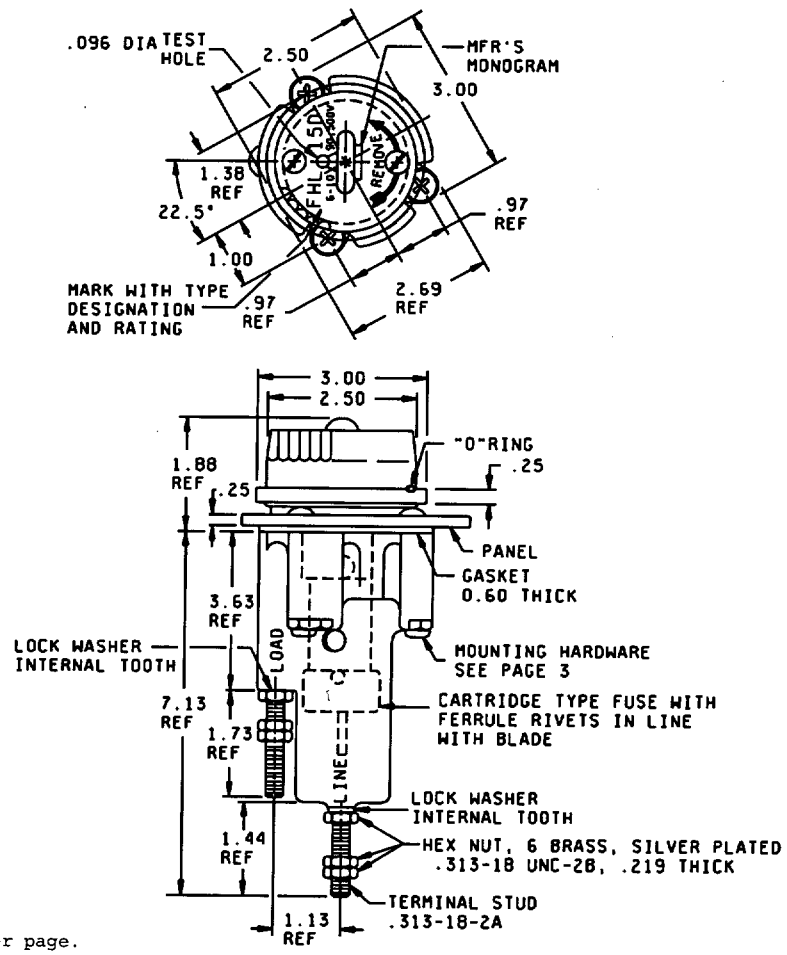

See notes on other page.


FIGURE 1. *Type FHL15G fuseholder.*

(K) denotes changes.

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

FSC 5920

Source: https://assist.dla.mil -- Downloaded: 202610-18T12:26Z
Check the source to verify that this is the current version before use.

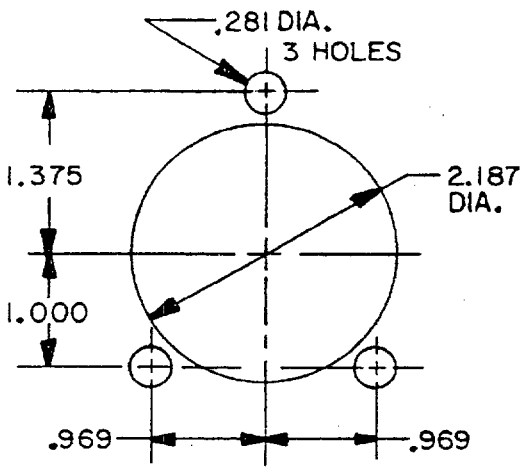

PANEL MOUNTING HOLES

Inches	MM	Inches	MM	Inches	MM	Inches	MM
.060	1.52	.97	24.64	1.44	36.58	2.50	63.55
.096	2.44	1.00	25.4	1.75	44.5	2.69	68.33
.25	6.4	1.13	28.70	1.875	47.63	3.00	76.2
.281	7.14	1.375	34.93	1.88	47.75	3.63	92.20
.313	7.55	1.38	35.05	2.187	55.55	7.13	181.10
.967	24.61						

(K)

NOTES:

1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are ± .005 (0.13 mm) for three place decimals and ± .02 (0.51 mm) for two place decimals.
3. Metric equivalents are given for general information only.

FIGURE 1. *Type FHL15G fuseholder – Continued.*

Source: https://assist.dla.mil -- Downloaded: 202610-18T12:26Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1

(K) Fuseholder body: Molded plastic, type MAI-60 or GDI-30F of MIL-M-14

Fuse accommodation: MIL-F-15160, style F63

Poles: One

Rating: 61-100 amperes, 90-500 volts

Panel thickness: 0.250 inch (6.35 mm) maximum

Indicating: Neon lamp with clear cap

(K) Lamp series resistors: MIL-R-39017/2 or MIL-R-39000/2, two 160,000 ohms, 0.5 watt. One each lamp lead for indicating model; none required for nonindicating model.

Nonindicating: No lamp or resistor required. Cap, color, gray

Terminals: Stud type, No. 5/16-18UNC-2A thread

Enclosure: Dripproof

Test fuses:

Temperature rise: F63C500V100A of MIL-F-15160/63

Short circuit: F63C500V100A of MIL-F-15160/63

Mechanical shock: Method I of MIL-F-19207

Terminal strength: 20 pounds

Fuse clip retention force:

Lower clip: 4 to 6 pounds

Cap clip: 10 to 14 pounds

Salt spray (corrosion): Test condition B

(K) Mounting hardware:

Screw: .250-20UNC-2A trusshead, 2.75 inches long (min) with sealing washer

Nut: .250-20UNC-2B Hex. A threaded metal insert may be used in lieu of nut.

Part number: M19207/6- (dash number from table I).

TABLE I. *Indicating features.*

Military part number FHL15G	Indicating	Nonindicating	Superseded number (FSCM 81349)
-001	X		FHL15G
-002		X	

Patent notice: The US Government has a royalty-free license under US Patent No. 3,225,164 and only under claim 4 of US Patent No. 2,989,610, owned by FIC Corporation, for the benefit of manufacturers of the items called for in this specification sheet either for the Government or for use in equipment to be delivered to the Government.

Source: https://assist.dla.mil -- Downloaded: 202610-18T12:26Z
Check the source to verify that this is the current version before use.

Custodians:
Army – ER
Navy – SH
Air Force – 85

Review activities:
Army – MI, ME, AR
Navy – OS, EC
Air Force – 11, 17, 70, 71, 80, 82, 84

User activities:
Army – AT
Navy – AS, MC
Air Force – 19, 99

Preparing activity:
Navy – SH
(Project 5920-0459-06)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:26Z
Check the source to verify that this is the current version before use.