INCH-POUND
MIL-PRF-19207/6L
16 June 1997
SUPERSEDING
MIL-PRF-19207/6K
23 August 1991

PERFORMANCE SPECIFICATION SHEET

FUSEHOLDERS, EXTRACTOR POST TYPE, BLOWN FUSE INDICATING AND NONINDICATING, TYPE FHL15G

This specification is approved for use by all Departments and Agencies of the Department of Defense.

(L) The requirements for acquiring the product described herein shall consist of this specification and MIL-PRF-19207.


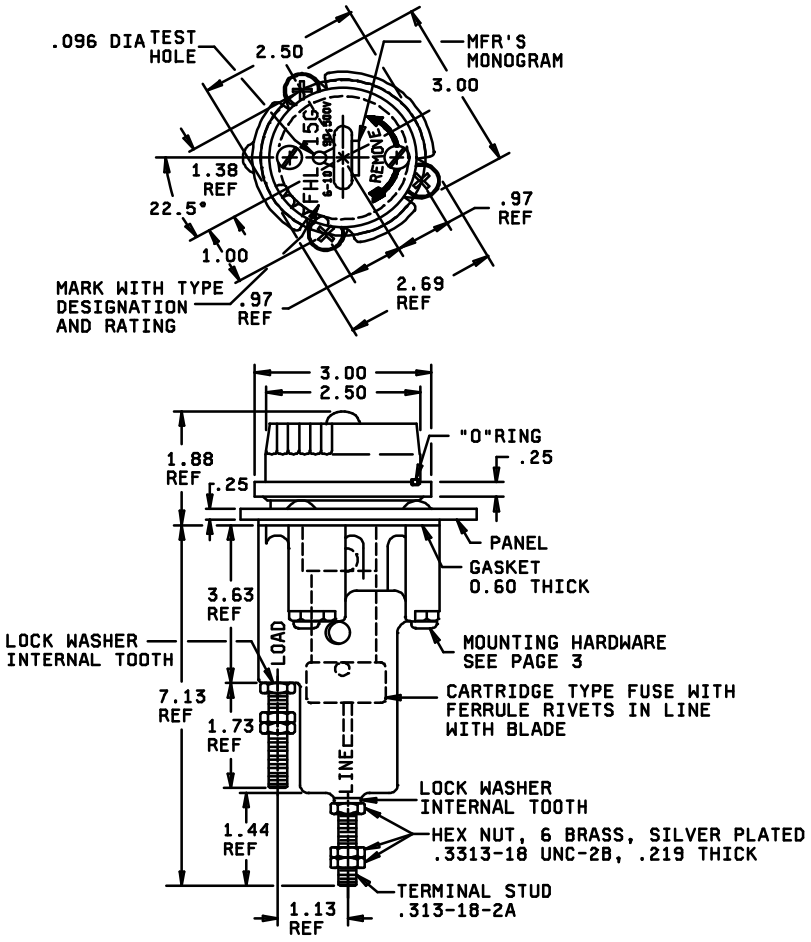


FIGURE 1. Type FHL15G fuseholder

(L) denotes changes.

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:26Z
Check the source to verify that this is the current version before use.

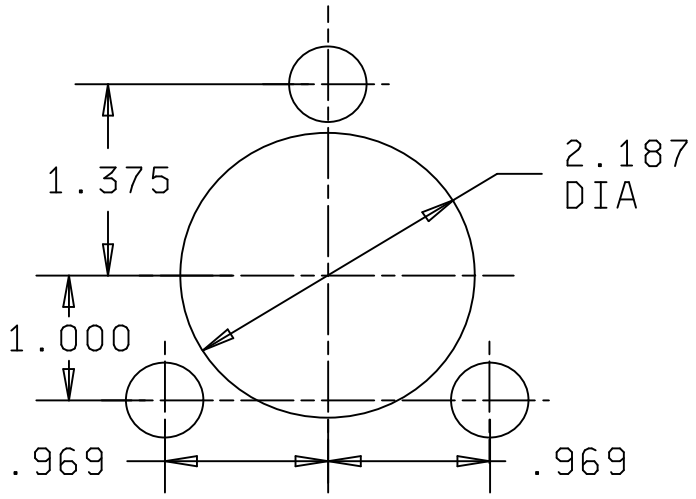

PANEL MOUNTING HOLES

PANEL MOUNTING HOLES

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.060	1.52	.97	24.6	1.44	36.6	2.50	63.6
.096	2.44	1.00	25.4	1.75	44.5	2.69	68.3
.250	6.40	1.13	28.7	1.875	47.63	3.00	76.2
.281	7.14	1.375	34.93	1.88	47.8	3.63	92.2
.313	7.55	1.38	35.1	2.187	55.55	7.13	181.1
.967	24.61						

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are ± .005 (0.13 mm) for three place decimals and ± .02 (0.5 mm) for two place decimals.
3. Metric equivalents are given for general information only.

FIGURE 1. Type FHL15G fuseholder- Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:26Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

(L) Fuseholder body: Body material shall be selected to enable the fuseholder to meet the performance requirements of this specification.

The military part number is not required on the fuseholder.

Body material: Type MAI-60 or GDI-030F of MIL-M-14 have been successfully used in the past and should be considered for meeting the body material requirements of this specification.

Fuse accommodation: MIL-PRF-15160, style F63.

Poles: One.

Rating: 61 amperes to 100 amperes, 90 volts to 500 volts.

Panel thickness: 0.250 inch (6.35 mm) maximum.

Indicating: Neon lamp with clear cap.

(L) Lamp series resistors: MIL-PRF-39017/2 or MIL-R-39008/2, two 160,000 ohms, 0.5 watt. One each lamp lead for indicating model; none required for nonindicating model.

Nonindicating: No lamp or resistor required. Cap, color, gray.

Terminals: Stud type, No. 5/16-18UNC-2A thread.

Enclosure: Dripproof.

Test fuses:

Temperature rise: F63C500V100A of MIL-PRF-15160/63.

Short circuit: F63C500V100A of MIL-PRF-15160/63.

Mechanical shock: Method I of MIL-PRF-19207.

Terminal strength: 20 pounds.

Fuse clip retention force:

Lower clip: 4 pounds to 6 pounds.

Cap clip: 10 pounds to 14 pounds.

Salt spray (corrosion): Test condition B.

Mounting hardware:

Screw: .250-20UNC-2A trusshead, 2.75 inches (70 mm) long (min) with sealing washer.

Nut: .250-20UNC-2B Hex.A threaded metal insert may be used in lieu of nut.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:26Z
Check the source to verify that this is the current version before use.

(L) Military part number: M19207/6- (dash number from table I)

Type designation: FHL15G- (dash number from table I)

TABLE I. Indicating features

Mil/TYPE dash number	Indicating	Nonindicating	Superseded number (FSCM 81349)
-001	X		FHL15G
-002		X	

Patent notice: The US Government has a royalty-free license under US Patent No. 3,225,164 and only under claim 4 of US Patent No. 2,989,610, owned by FIC Corporation, for the benefit of manufacturers of the items called for in this specification sheet either for the Government or for use in equipment to be delivered to the Government.

Custodians:
Army - CR
Navy - SH
AF - 85

Review activities:
Army - AR, AT, CR4, MI
Navy - AS, EC, MC, OS
Air Force - 11, 17, 70, 71, 80

Preparing activity:
DLA - CC

(Project 5920-0516-03)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:26Z
Check the source to verify that this is the current version before use.