INCH-POUND

MIL-F-19207/7K
23 August 1991


SUPERSEDING
MIL-F-19207/7J
15 January 1986

MILITARY SPECIFICATION SHEET

FUSEHOLDERS, EXTRACTOR POST TYPE, BLOWN FUSE INDICATING, TYPE FHL16G

This specification is approved for use by all departments and agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-F-19207.

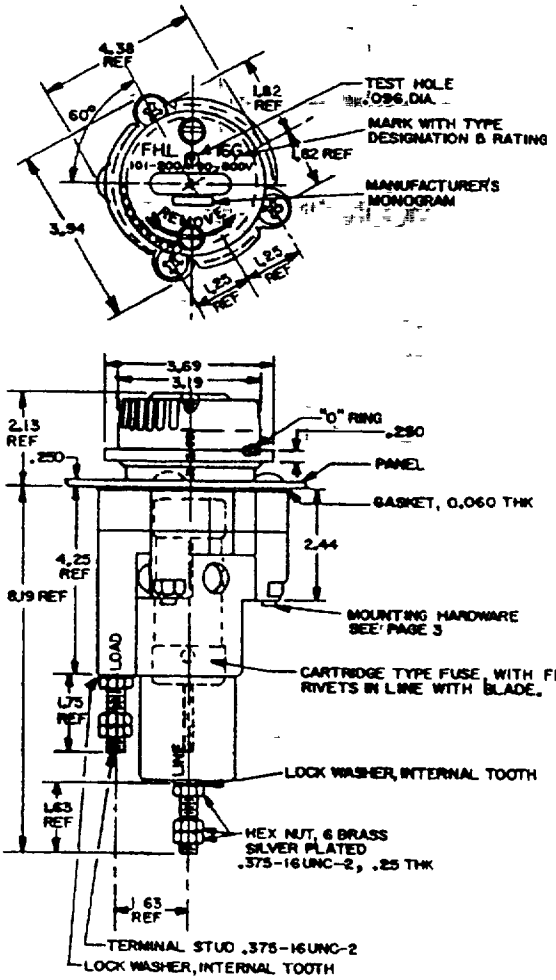

See notes on other page

FIGURE 1. *Type FHL16G fuseholder*


(K) denotes changes.

AMSC N/A

FSC 5920

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:26Z
Check the source to verify that this is the current version before use.

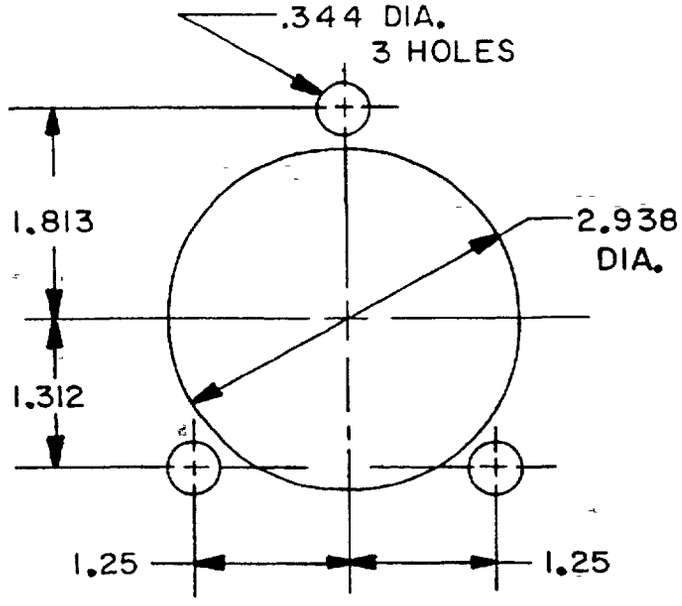

PANEL MOUNTING HOLES

Inches	MM	Inches	MM	Inches	MM	Inches	MM	Inches	MM
.060	1.52	.375	9.53	1.813	46 05	3.00	76.2	4 38	111.25
.096	2.44	1 25	31 8	1.82	46.23	3.19	81 0	8 19	208 0
.250	6.35	1.312	33.338	2.13	54 10	3.69	93 7		
.3125	7 938	1.63	41 40	2.44	62.0	3.94	100.1		
.344	8.74	1 75	44.5	2.9.38	74 63	4.25	108 0		

NOTES

1. Dimensions are in inches
2. Unless otherwise specified, tolerances are ± .005 (0 13 mm) for three placed decimals and ± .02 (0.51 mm) for two place decimals.
3. Metric equivalents are given for general information only

FIGURE 1. *Type FHL16G fuseholder – Continued.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:26Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration See figure 1

(K) Fuseholder body: Molded plastic, type MAI-60 or GDI-30F of MIL-M-14

Fuse accommodation: MIL-F-15160, styles F20 and F64

Poles: One

Rating: 101-200 amperes, 90-500 volts

Panel thickness: 0.250 inch (6.35 mm) maximum

Indicating: Neon lamp with clear cap

Lamp series resistors: MIL-R-39017/2 or MIL-R-39008/2, two resistors, 160,000 ohms, 0.5 watt. One each lamp lead

Terminals: Stud type, .375-16UNC-2A thread

Enclosure: Dripproof

Test fuses:

Temperature rise: F64C500V200A of MIL-F-15160/64

Short circuit: F64C500V200A of MIL-F-15160/64

Mechanical shock: Method I of MIL-F-19207

Terminal strength. 20 pounds

Fuse clip retention force.

Lower clip: 5 to 7 pounds

Cap clip: 13 to 15 pounds

Salt spray (corrosion): Test condition B

(K) Mounting hardware:

Screw. .3125-18UNC-2A, trusshead, 3 inches long (min) with sealing washer

Nut: .3125-18UNC-2B Hex. A threaded metal insert may be used in lieu of nut.

Part number: M19207/7-001

Patent notice: The US Government has a royalty-free license under US Patent No. 3,225,164 and only under claim 4 of US Patent No. 2,989,610, owned by FIC Corporation, for the benefit of manufacturers of the items called for in this specification sheet either for the Government or for use in equipment to be delivered to the Government.

Custodians:
Army – ER
Navy – SH
Air Force – 85

Review activities:
Army – MI, ME, AR
Navy – OS, EC
Air Force – 11, 17, 70, 71, 80, 82, 84

User activities:
Army – AT
Navy – AS, MC
Air Force – 19, 99

Preparing activity:
Navy – SH
(Project 5920-0459-07)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:26Z
Check the source to verify that this is the current version before use.