INCH-POUND
MIL-F-19207/9H
23 August 1991
SUPERSEDING
MIL-F-19207/9G
22 July 1986


MILITARY SPECIFICATION SHEET

FUSEHOLDERS, EXTRACTOR POST TYPE, BLOWN FUSE INDICATING, TYPES FHL18G1 AND FHL18G2

This specification is approved for use by all departments and agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-F-19207.

(H)

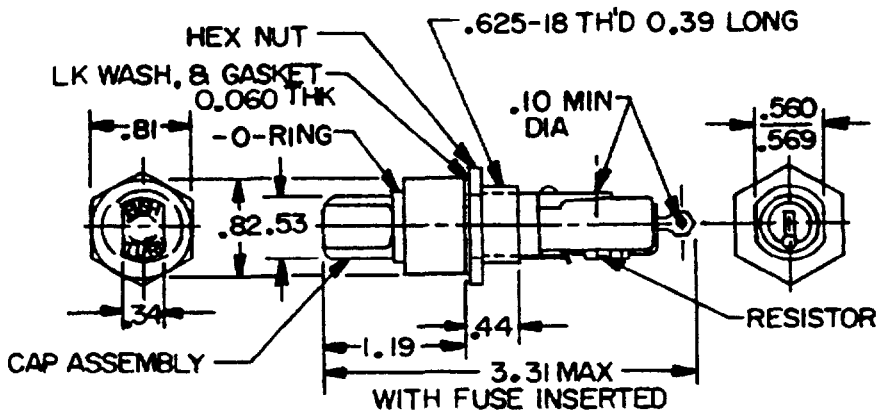

Inches	MM	Inches	MM	Inches	MM	Inches	MM
.060	1.52	440	11 18	.810	20.57	.570	14 48
100	2.54	.530	13.46	.820	20 83	.575	14 61
.340	8.64	.560	14.22	1 19	30.23	.625	15.88
.390	9 91	.569	14 45	3.31	84 07	.635	16 13

NOTES

1. Dimensions are in inches
2. Unless otherwise specified, tolerances for two placed decimals shall be .XX ± 0.02 (0 5) and for three place decimals .XXX ± 0 005 (0 13)
3. Metric equivalents (to the nearest 0 01 mm) are given for general information only and are based upon 1 inch = 25 4 mm


FIGURE 1. *Type FHL18G1.*

(H) denotes changes.

AMSC N/A FSC 5920

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:27Z
Check the source to verify that this is the current version before use.

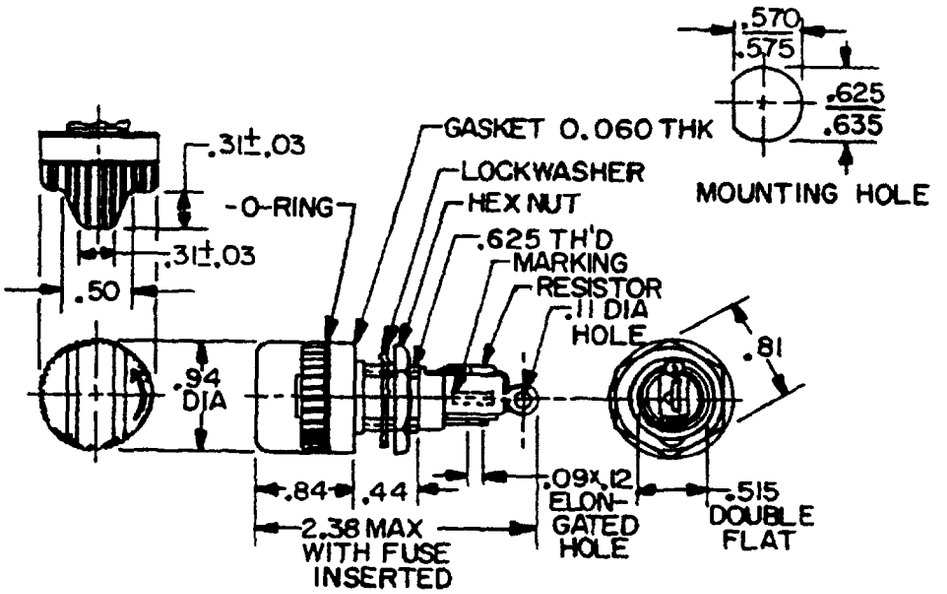

Inches	MM	Inches	MM	Inches	MM
.0.30	0.76	.31	7.88	.81	20.57
.0.60	1.25	44	11 18	.84	21.34
0 90	2.29	.513	13 03	94	23.88
.12	3.05	.81	20.57	2.38	60 45

FIGURE 2. *Type FHL18G2*

NOTES

1. Dimensions are in inches
2. Unless otherwise specified, tolerances for two placed decimals shall be .XX ± 0 02 (0 5) and for three place decimals .XXX ± 0 005 (0 13)
3. Metric equivalents (to the nearest 0.01 mm) are given for general information only and are based upon 1 inch = 25 4 mm

Source: https://assist.dla.mil -- Downloaded: 202610-18T12:27Z
Check the source to verify that this is the currentversion before use.

REQUIREMENTS:

Dimensions and configuration: See figures 1 and 2
Body molding material: GDI-30F or SDG-F of MIL-M-14
Fuse accommodation:
Ferrule type:
Size: 0.250 inch (6.35 mm) diameter, 1.250 inches (31.75 mm) length
Styles: MIL-F-15160, F02 and F03 and MIL-F-23419, FM09
Poles: One
Rating: 20 amperes (see table I for voltage)
Panel thickness: 0.187 inch (4.76 mm) maximum
Indicating: Incandescent lamp with amber color cap (see table I)
Gaskets and O-rings: ZZ-R-765
Lamp series resistor: (see table I)
Terminals: Solder lug type
Enclosure: Dripproof
Test fuses:
Temperature rise: F03A125V20A of MIL-F-15160/3
Short circuit. F03A125V20A of MIL-F-15160/3
Mechanical shock: Method II of MIL-F-19207
Terminal strength: 5 pounds
Torque: Terminals – 30 pounds-inch
Salt spray (corrosion): Test condition B
Marking: In addition to other required marking, the type designation with an appropriate dash number from table I shall appear on the fuseholder body. The voltage rating shall appear both on the fuseholder cap and body. The cap voltage marking shall be engraved or stamped and filled with white enamel

TABLE I. *Voltage, lamp, and series resistor.*

Dash number	Voltage rating	Lamp No [1]	Resistance ohms	Resistor type [2]	Resistor specification
-01	12-22	1764 or 1762X	Shorting wire	–	–
-02	23-33	1764 or 1762X	330	RWR-20	MIL-R-39008/2
-03	34-45	1764 or 1762X	681	RWR-80	MIL-R-39007/8
-04	46-60	1764 or 1762X	1,210	RWR-80	MIL-R-39007/8
-05	61-80	1764 or 1762X	1,870	RWR-89	MIL-R-39007/11
-06	81-90	1764 or 1762X	2,050	RWR-89	MIL-R-39007/11
-07	2.5-4	1784	Shorting wire	–	–
-08	5-7	1784	22.1	RWR-80	MIL-R-39007/8
-09	8-12	1784	39.2	RWR-80	MIL-R-39007/8

(H)

[1]Industry number.
[2]MIL-R-39017, type RLR resistors can be used in lieu of RCR types.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:27Z
Check the source to verify that this is the current version before use.

Patent notice: The US Government has a royalty-free license only under claims 3 through 6, 11, and 12 or US Patent No 2,854,549 owned by McGraw Electric Company only for the benefit of manufacturers of items called for in this specification sheet either for the Government or for use in equipment to be delivered to the Government

Custodians:
Army – ER
Navy – SH
Air Force – 85

Review activities:
Army – MI, ME, AR
Navy – OS, EC
Air Force – 11, 17, 70, 71, 80, 82, 84

User activities:
Army – AT
Navy – AS, MC
Air Force – 19, 99

Preparing activity:
Navy – SH
(Project 5920-0468-09)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:27Z
Check the source to verify that this is the current version before use.