DOD-STD-35-41A(MI)
2 February 1979
SUPERSEDING
MIL-STD-35-41 (MI)
25 MARCH 1974

MILITARY STANDARD

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

FILTERS, MECHANICAL, LIQUID, GAS/AIR

FSC EDS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL
DEVELOPMENT AND READINESS COMMAND
ALEXANDRIA, VA 22333

Filters, Mechanical-Liquid-Gas/Air
Automated Engineering
Document Preparation System

DOD-STD-35-41A(MI)

1. This Military Standard is approved for use by DARCOM, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S. Army Missile Research and Development Command, ATTN: DRDMI-ESD, Redstone Arsenal, Alabama 35809, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of DOD-STD-35-41A(MI) is to provide instructions for the preparation of Specification Requirements Sheets (SRS) in order to produce Military Specification Exceptions for Filters, Mechanical-Liquid-Gas/Air.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the DOD-STD-35.

3. It is important that the procedures described in the basic document (DOD-STD-35D and subsequent revisions) be followed explicitly in order to produce a document suitable for procurement. Information which is standard for all dash-numbered parts has been included in the basic document at the issuance of DOD-STD-35D. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:56Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
Paragraph	1.	SCOPE	1
	1.1	General	1
	1.2	Purpose	1
	1.3	Utilization	1
	1.4	Military Specification Exception Title Index	1
	2.	REFERENCED DOCUMENTS	5
	2.1	Issues of documents	5
	2.2	Other publications	6
	3.	DEFINITIONS	7
	4.	GENERAL REQUIREMENTS	8
	4.1	Introduction	8
	4.2	Specification Requirement Sheet (SRS)	8
	4.3	Configuration	8
	4.3.1	Dimensions	8
	4.3.2	Illustrations	8
	4.4	Units of measure	8
	5.	DETAILED REQUIREMENTS	9
	5.1	Introduction	9
	5.2	MSE Formats	9
	5.3	Referenced documents	9
	5.4	Tabulation	9
	5.5	Keyword Code Index (KCI) and Standard Paragraphs	11
	5.5.1	Interrelationship of Codes	11
	5.5.2	Automatic MSE Data	11
	5.5.3	DOD-STD-35 Tables	11

TABLES

Table	I.	Title Index	2
	II.	Tabulation candidates	10

APPENDICES

Appendix	A.	Illustrations	96
	B.	Characteristic Code Index	112
		Index	116

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS), provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for Filters, Mechanical-Liquid-Gas/Air.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate an MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects that are applicable to all AEDPS dash-numbered parts and are included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
Applicable Documents
d. Single and Multi-item Specifications (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. The title code for an MSE shall be selected from one of the MSE titles listed in the Title Index (see table I). Data bases have been established for the generation of MSE's for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for the assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index,

One of the six-digit codes listed in the Title Index, entered on an SRS, will specify that the title of the MSE will be the title shown in the Title Index.

Each MSE title listed in the Title Index is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information shown under coverage is intended for the user's reference; when more than one document is listed for an MSE title, this information will be found useful in determining which of the documents is most suitable for use as the base document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

TABLE I. TITLE INDEX.

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
FILTER, AIR, ELECTROSTATIC	206001	F-F-320	PRECIPITATOR
		MIL-F-22963	PRECIPITATOR
FILTER AND OILER AIRLINE	206002	MIL-F-82042	AIR LINE
FILTER AND UTILITIES UNIT, CHEMICAL-BIOLOGICAL SHELTER SYSTEM, TRAILER MOUNTED	206004	MIL-F-51367	M68
FILTER BODY FLUID	206009	MIL-F-5504	HYDRAULIC MICRONIC TYPE
		MIL-F-17690	LUBRICATING OIL
FILTER ELEMENT, FLUID, PRESSURE	206003	MIL-F-5504	HYDRAULIC
		AN6235	REPLACEABLE MICRONIC LINE TYPE
		AN6236	REPLACEABLE MICRONIC RSVR
		AN6237	REPLACEABLE MICRONIC VENT TYPE
		MIL-F-81833	NONCLEANABLE, 5 MICRON ABS
		MIL-F-83860	DISPOSABLE, 3 MICRON ABSOLUTE
		MIL-F-83861	DISPOSABLE, 5 MICRON ABSOLUTE
FILTER ELEMENT, FLUID, PRESSURE, MATERIAL	206005	MIL-F-10969	ELEM, AEROSOL
		MIL-F-13785	MATERIAL
		MIL-F-51079	FIRE RESISTANT
		MIL-F-51095	AEROSOL

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

TABLE 1. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
FILTER ELEMENT SET, CHEMICAL AND BIOLOGICAL	206007	MIL-F-50078	PROT MASK, M13
		MIL-F-51288	PROT MASK M13A1
FILTER ELEMENT, INTAKE AIR CLEANER	206008	F-F-300	REPLACEABLE, DRY TYPE
		MIL-F-81836	3 MICRON
FILTER, FLUID, PRESSURE	206006	MIL-F-5504	HYDR MIC TYPE
		MS28720	ACFT HYDRAULIC, 3000 PSI
		AN6234	REPLACEABLE ELEMENT TYPE
		AN6240	REPLACEABLE ELEM VENT TYPE
		MIL-F-8815	5 AND 15 MICRON
		M928896	STYLE B, NONBYP
FILTER, FLUID, PRESSURE, MULTI-LIQUID	206010	MIL-F-17559	FEEDWATER SYS
		MIL-F-17690	LUBRICATING OIL
		MIL-F-24404	HYDR SYSTEMS
FILTER, FLUID, VACUUM	206011	MIL-F-6128	INSTR SPLY
FILTER, GAS	206012	MIL-F-11137	150 CFM, M1O
		MIL-F-14512	M12A1
		MIL-F-50047	600 CFM, C22
FILTER, PARTICULATE	206013	MIL-F-11150	150 CFM, ABC-M9
		MIL-F-50043	600 CFM, C18
		MIL-F-50044	1200 CFM, C19
		MIL-F-50045	2500 CFM, C30
		MIL-F-50046	5000 CFM, C20
		MIL-F-51068	FIRE RESISTANT, HIGH EFFICIENCY
		MIL-F-51165	150 CFM, M9A1
		MIL-F-51194	20 CFM, M19
		MIL-F-51215	600 THRU 5000 CFM
		MIL-F-51221	150 CFM, M24
		MIL-F-51366	550 CFM, AND 1200 CFM

Source: https://assist.dla.mil -- Downloaded: 2026l0-23T20:56Z
Check the source to verify that this is the currentversion before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
FILTER, PARTICULATE	206013 (CONT)	MIL-F-52011	12 CFM, M13
FILTER, SEPARATOR, LIQUID FUEL	206014	MIL-F-8901	AVN AND MOTOR FUEL
		MIL-F-15618	AVN AND DIESEL FUEL
		MIL-F-23744	AVIATION AND MOTOR FUEL SKID MOUNTED
		MIL-F-27629	FFU-1/E TYPE
		MIL-F-27630	FFU-2/E TYPE
		MIL-F-38009	FFU-11/E TYPE
		MIL-F-52429	SKID MOUNTED, 15 GPM
		MIL-F-52556	FRAME MOUNTED, 1OO GPM
		MIL-F-52666	FRAME MOUNTED, 350 GPM
		MIL-F-52667	50 GPM CAPACITY
		MIL-F-52694	FRAME MOUNTED, 600 GPM
		MIL-F-83243	FFU-18/E THRU FFU-24/E TYPE
		MIL-F-83402	FFU-25/E TYPE
FILTER UNIT, WATER PURIFICATION	206015	MIL-F-3361	0.25 GPM CAP
		MIL-F-52579	20 GPM CAPACITY

Source: https://assist.dla.mil -- Downloaded: 2026l0-23T20:56Z
Check the source to verify that this is the currentversion before use.

2. REFERENCED DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal , form a part of this standard to the extent specified herein.

SPECIFICATIONS

FEDERAL

F-F-310	Filter, Air Conditioning: Viscous-Impingement and Dry Types, Replaceable

MILITARY

MIL-H-5606	Hydraulic Fluid, Petroleum Base, Aircraft, Missile, and Ordnance
MIL-F-8815	Filter and Filter Elements, Fluid Pressure, Hydraulic Line, 15 Micron Absolute and 5 Micron Absolute, Type 11 Systems, General Specification For
MIL-F-51068	Filter, Particulate, High-Efficiency, Fire Resistant
MIL-F-51079	Filter, Medium, Fire-Resistant, High-Efficiency

STANDARDS

MILITARY

DOD-STD-35	Automated Engineering Document Preparation System
MIL-STD-130	Identification Marking of U.S. Military Property
MIL-STD-810	Environmental Test Methods

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following documents form a part of this standard to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

ASTME380 Metric Practice Guide

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia, PA 19103.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

Definitions contained in DOD-STD-35 are applicable to Filters, Mechanical-Liquid-Gas/Air.

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:56Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare an SRS for Filters, Mechanical-Liquid-Gas/Air, it is necessary to use DOD-STD-35 in conjunction with this dash-numbered part. In the event the instructions or the writing methodology are not followed, an AEDPS edit routine will print error messages rather than the desired MSE document.

4.2 Specification Requirement Sheet (SRS). SRS requirements described in DOD-STD-35 are applicable to Filters, Mechanical-Liquid-Gas/Air.

4.3 Configuration.

4.3.1 Dimensions. SRS requirements for dimensions described in DOD-STD-35 are applicable to Filters, Mechanical-Liquid-Gas/Air.

4.3.2 Illustrations. Illustrations applicable to Filters, Mechanical-Liquid-Gas/Air are contained in Appendix A to this document.

4.4 Units of measure. The International System of Units (SI) or inch-pound units (U.S.), may be used to specify characteristics (e.g. weight, dimensions). Refer to ASTME380 for guidance in using SI. However, when different units of measure are available for specifying a characteristic, only one may be used. Both units of measure cannot appear in the same MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and references for instructions on specific requirements contained in DOD-STD-35.

5.2 MSE formats. AEDPS has the capability to prepare a six-section or a single-section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in DOD-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format

5.3 Referenced documents. Section 2 of the MSE may contain a list of all referenced documents within Sections 3, 4, and 5 of the MSE. Instructions for referencing documents to appear in Section 2 of the forthcoming MSE are contained in DOD-STD-35.

5.4 Tabulation. Instructions for tabulation are provided in DOD-STD-35. Table II provides codes for column headings which may be used for mechanical-liquid, gas/air filter characteristics. When different units of measure within one system (U.S. or SI) are available for specifying a characteristic, only one of the units may be tabulated; e.g. either ounces or pounds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

TABLE II. TABULATION CANDIDATES.

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
1564	FLOW RATE GAL PER MINUTE	1566	PRESS DROP MAXIMUM PSI	1610	PORT 1 SIZE INCHES
1622	PORT 2 SIZE INCHES	1612	PORT 1 SIZE MILLIMETER	1624	PORT 2 SIZE MILLIMETER
1618	PORT 1 THREAD	1630	PORT 2 THREAD	7022	WEIGHT OUNCES
7023	WEIGHT POUNDS	7021	WEIGHT GRAMS	7024	WEIGHT KG

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:56Z
Check the source to verify that this is the current version before use.

5.5 Keyword Code Index (KCI) and Standard Paragraphs. The KCI provides codes, to be entered on an SRS, that are unique for the type part covered by this dash-numbered part of DOD-STD-35. The left-hand page-presents the information in outline form using keywords and codes. The right-hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword on the KCI and its associated code. Enter, on the SRS, the code and the characteristic value required. After the part unique characteristics have been specified, refer to DOD-STD-35 when exceptions are required to Quality Assurance, Packaging, Notes, etc. Instructions are in DOD-STD-35 on how to enter any type characteristic value. Appendix B, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page number.

5.5.1 Interrelationship of codes. The interrelationship of the codes is shown by the indentation level of characteristic names on the KCI. The kind of characteristic value is shown by a colon, parentheses, period or underline. The paragraph, of which the code is a part, is shown by the standard paragraph adjacent to the code on a right-hand page. When a characteristic value entered with a code becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact entry as supplied with the code, except for "X" entries.

5.5.2 Automatic MSE data. Some statements, such as Altitude Temperature, will appear in the printed MSE without having to make additional entries. These statements are linked by data base logic to characteristic codes listed under then and will print automatically depending on the type MSE selected. Explanations are noted on the KCI as required.

5.5.3 DOD-STD-35 Tables, The KCI of this document contains references to tables in Appendix A of DOD-STD-35. Most of the tables are in preprinted form and should be reproduced, applicable data entered, and attached to the SRS for submittal. Refer to DOD-STD-35 for a general explanation in the generation of tables.

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*REQUESTER'S NAME	0101
*COMPANY NAME/COMMAND	0102
*STREET/BUILDING	0103
*CITY, STATE, ZIP	0104
*PHONE NUMBER, INCLUDE AREA CODE, AUTOVON IF APPLICABLE	0105
*DATE	1003
*REQUESTER FSCM	1004
*CONTRACT NUMBER/OFFICE SYMBOL	1005
*BASE DOCUMENT	1006
*SYSTEM APPLICATION	1008
*GOVERNMENT DESIGN ACTIVITY FSCM	6369
*FORMAT (SELECT ONE)	
SIX SECTION DOCUMENT	0700
ONE SECTION DOCUMENT	0800
*CONTROL (SELECT ONE)	
SOURCE.	6873

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
0101	0101.
0102	0102.
0103	0103.
0104	0104.
0105	0105.
1003	1003.
1004	USER(S) FSCM(S) 1004.
1005	CONTRACT NUMBER OR OFFICE SYMBOL 1005.
1006	THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), 1006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.
1008	SYSTEM APPLICATION 1008.
6369	GOVERNMENT DESIGN ACTIVITY FSCM 6369.
0700	
0800	
	SOURCE(S).
6873	THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER(S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTROL (CONT)	
SPECIFICATION.	6874
*SOURCE TABLE	
NOTE: REFER TO TABLE V OF DOD-STD-35.	
APERTURE CARDS REQUIRED.	0107
REVISION OF AEDPS DOCUMENT (NUMBER)	0108
SCOPE	
NOTE: THIS ENTRY IS AUTOMATIC AND DETERMINED BY THE TITLE CODE USED.	
PART NUMBER	
NOTE: AUTOMATIC WITH A SINGLE ITEM MSE.	
NOTE: AUTOMATIC WITH A MULTI-ITEM MSE.	
UNITS OF MEASURE (SELECT ONE)	
U.S.	6941
SI.	6942

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

6874 THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).

0107

0108 0108.

SCOPE.

SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE.

PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER.

PART NUMBER. THE PART NUMBER FOR THE ITEMS IS THE SAME AS THE NUMBER OF THIS DOCUMENT PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.

6941 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES UNLESS OTHERWISE SPECIFIED.

6942 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES UNLESS OTHERWISE SPECIFIED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PROOF PRESSURE RATING	
MINIMUM PROOF PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	7587
(KILOPASCALS)	7588
BURST PRESSURE RATING	
MINIMUM BURST PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	7589
(KILOPASCALS)	7590
TEMPERATURE RATING	
MAXIMUM OPERATING (DEGREES CELSIUS)	5069
MAXIMUM STORAGE (DEGREES CELSIUS)	7302
MAXIMUM SERVICE (DEGREES CELSIUS)	4905
MINIMUM OPERATING (DEGREES CELSIUS)	5068
MINIMUM STORAGE (DEGREES CELSIUS	7301
MINIMUM SERVICE (DEGREES CELSIUS)	4904
NOMINAL OPERATING (DEGREES CELSIUS)	5046

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	PROOF PRESSURE RATING.
7587	THE MINIMUM PROOF PRESSURE RATING SHALL BE 7587 POUNDS PER SQUARE INCH.
7588	THE MINIMUM PROOF PRESSURE RATING SHALL BE 7588 KILOPASCALS.
	BURST PRESSURE RATING.
7589	THE MINIMUM BURST PRESSURE RATING SHALL BE 7589 POUNDS PER SQUARE INCH.
7590	THE MINIMUM BURST PRESSURE RATING SHALL BE 7590 KILOPASCALS.
	TEMPERATURE RATING.
5069	THE MAXIMUM OPERATING TEMPERATURE RATING SHALL BE 5069 DEGREES CELSIUS.
7302	THE MAXIMUM STORAGE TEMPERATURE RATING SHALL BE 7302 DEGREES CELSIUS.
4905	THE MAXIMUM SERVICE TEMPERATURE RATING SHALL BE 4905 DEGREES CELSIUS.
5068	THE MINIMUM OPERATING TEMPERATURE RATING SHALL BE 5068 DEGREES CELSIUS.
7301	THE MINIMUM STORAGE TEMPERATURE RATING SHALL BE 7301 DEGREES CELSIUS.
4904	THE MINIMUM SERVICE TEMPERATURE RATING SHALL BE 4904 DEGREES CELSIUS.
5046	THE NOMINAL OPERATING TEMPERATURE RATING SHALL BE 5046 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ALTITUDE RATING	
OPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5060
SEA LEVEL TO (METERS)	5061
NONOPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5062
SEA LEVEL TO (METERS)	5063
OPERATING PRESSURE RATING	
MINIMUM OPERATING PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	7581
(KILOPASCALS)	7582
MAXIMUM OPERATING PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	7583
(KILOPASCALS)	7584
NOMINAL OPERATING PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	7585

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	ALTITUDE RATING.
5060	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5060 FEET.
5061	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5061 METERS.
5062	THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5062 FEET.
5063	THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5063 METERS.
	OPERATING PRESSURE RATING.
7581	THE MINIMUM OPERATING PRESSURE RATING SHALL BE 7581 POUNDS PER SQUARE INCH.
7582	THE MINIMUM OPERATING PRESSURE RATING SHALL BE 7582 KILOPASCALS.
7583	THE MAXIMUM OPERATING PRESSURE RATING SHALL BE 7583 POUNDS PER SQUARE INCH.
7584	THE MAXIMUM OPERATING PRESSURE RATING SHALL BE 7584 KILOPASCALS.
7585	THE NOMINAL OPERATING PRESSURE RATING SHALL BE 7585 POUNDS PER SQUARE INCH.

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OPERATING PRESSURE RATING (CONT)	
NOMINAL OPERATING PRESSURE (CONT)	
(KILOPASCALS)	7586
MICRON RATING	
ABSOLUTE (MICRON)	1563
NOMINAL (MICRON)	1565
CONFIGURATION	
(ILLUSTRATION NUMBER), SEE APPENDIX A	1009
*UNITS (SELECT ONE)	
U.S. (SELECT ONE)	
INCHES.	7572
FEET.	7573
SI (SELECT ONE)	
CENTIMETERS.	7576
MILLIMETERS.	7577
ILLUSTRATIONS	
(NUMBER), SEE APPENDIX A	4950
NOTE: THIS CODE IS USED TO ENTER APPLICABLE ILLUSTRATIONS WHICH DO NOT HAVE DIMENSIONS.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7586	THE NOMINAL OPERATING PRESSURE RATING SHALL BE 7586 KILOPASCALS.
1563	THE MICRON RATING SHALL BE 1563 MICRON(S) ABSOLUTE.
1565	THE NOMINAL MICRON RATING SHALL BE 1565 MICRON(S).
	CONFIGURATION.
1009	CONFIGURATION (ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 1009.
7572	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN INCHES OR DEGREES.
7573	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN FEET OR DEGREES.
7576	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN CENTIMETERS OR DEGREES.
7577	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN MILLIMETERS OR DEGREES.
4950	ILLUSTRATION(S). ILLUSTRATION(S) 4950 SHALL APPLY TO AID IN THE DEFINITION OF PARAMETERS.

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TABULATED CHARACTERISTICS (SEE TABLE IV, DOD-STD-35)	
MATERIALS (SEE TABLES VI AND VII, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VII IS USED.	
FINISHES (SEE TABLES VIII AND IX, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE IX IS USED.	
METALS	
DISSIMILAR METALS.	7580
DESIGN AND CONSTRUCTION	
FLOW RATE (SELECT ONE)	
U.S. (SELECT ONE)	
(GALLONS PER MINUTE)	1564
(STANDARD CUBIC FEET PER MINUTE)	1562
(POUNDS PER MINUTE)	1600
SI (SELECT ONE)	
(CUBIC METERS PER SECOND)	1602

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	MATERIAL(S) . MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
	FINISH(S). FINISH(S) SHALL BE AS SPECIFIED IN THE FINISH TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REVERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
7580	METALS. ALL METALS, WHEN USED, (UNLESS OTHERWISE SPECIFIED HEREIN) SHALL BE CORROSION-RESISTANT TYPES OR TREATED TO RESIST CORROSION. DISSIMILAR METALS SHALL NOT BE USED IN INTIMATE CONTACT WITH EACH OTHER UNLESS SUITABLY FINISHED TO RESIST ELECTROLYTIC CORROSION. CURRENT CARRYING PARTS (WHERE APPLICABLE) SHALL BE NONFERROUS, EXCEPT FOR TERMINALS FORMING PART OF A METAL-TO-GLASS SEAL.
	DESIGN AND CONSTRUCTION.
1564	FLOW RATE. THE FLOW RATE SHALL BE 1564 GALLONS PER MINUTE.
1562	FLOW RATE. THE FLOW RATE SHALL BE 1562 STANDARD CUBIC FEET PER MINUTE.
1600	FLOW RATE. THE FLOW RATE SHALL BE 1600 POUNDS PER MINUTE.
1602	FLOW RATE. THE FLOW RATE SHALL BE 1602 CUBIC METERS PER SECOND.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
SI (CONT)	
(KILOGRAMS PER SECOND)	1604
(LITERS PER HOUR)	1606
MEDIA DOCUMENT (DOC DES)	1567
MEDIA (NAME)	1570
MEDIA TEMPERATURE (DEGREES CELSIUS)	1569
MAXIMUM PRESSURE DROP (SELECT ONE)	
(POUNDS PER SQUARE INCH)	1566
(KILOPASCALS)	1571
PORT CONFIGURATION	
PORT ONE	
DOCUMENT (DOC DES)	1608
SIZE (SELECT ONE)	
U.S.	
(INCHES)	1610
SI	
(MILLIMETERS)	1612
STYLE (LETTERS)	1614
DESIGNATION	1616
THREAD (DES)	1618

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1604	FLOW RATE. THE FLOW RATE SHALL BE 1604 KILOGRAMS PER SECOND.
1606	FLOW RATE. THE FLOW RATE SHALL BE 1606 LITERS PER HOUR.
1567	THE MEDIA SHALL BE IN ACCORDANCE WITH 1567.
1570	THE MEDIA SHALL BE 1570.
1569	THE MEDIA TEMPERATURE SHALL BE 1569 DEGREES CELSIUS.
1566	MAXIMUM PRESSURE DROP. THE PRESSURE DROP SHALL BE NOT GREATER THAN 1566 POUNDS PER SQUARE INCH.
1571	MAXIMUM PRESSURE DROP. THE PRESSURE DROP SHALL BE NOT GREATER THAN 1571 KILOPASCAL(S).
1608	THE PORT ONE CONFIGURATION SHALL BE IN ACCORDANCE WITH 1608.
1610	THE PORT ONE SIZE SHALL BE 1610 INCH(S).
1612	THE PORT ONE SIZE SHALL BE 1612 MILLIMETER(S)
1614	THE PORT ONE STYLE SHALL BE 1614.
1616	THE PORT ONE DESIGNATION SHALL BE 1616.
1618	THE PORT ONE THREAD SHALL BE 1618.

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
PORT CONFIGURATION (CONT)	
PORT TWO	
DOCUMENT (DOC DES)	1620
SIZE (SELECT ONE)	
U.S.	
(INCHES)	1622
SI	
(MILLIMETERS)	1624
STYLE (LETTER)	1626
DESIGNATION	1628
THREAD (DESIGNATION)	1630
WEIGHT	
MAXIMUM WEIGHT PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	7022
(POUNDS)	7023
SI (SELECT ONE)	
(GRAMS)	7021
(KILOGRAMS)	7024

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1620 THE PORT TWO CONFIGURATION SHALL BE IN ACCORDANCE WITH 1620.

1622 THE PORT TWO SIZE SHALL BE 1622 INCH(S).

1624 THE PORT TWO SIZE SHALL BE 1624 MILLIMETER(S).

1626 THE PORT TWC STYLE SHALL BE 1626.

1628 THE PORT TWO DESIGNATION SHALL BE 1628.

1630 THE PORT TWO THREAD SHALL BE 1630.

7022 MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7022 OUNCE(S).

7023 MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7023 POUND(S).

7021 MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7021 GRAM(S).

7024 MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7024 KILOGRAM(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
WEIGHT (CONT)	
MINIMUM WEIGHT PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	6943
(POUNDS)	6944
SI (SELECT ONE)	
(GRAMS)	6945
(KILOGRAMS)	6946
NOMINAL WEIGHT PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	6996
(POUNDS)	6997
SI (SELECT ONE)	
(GRAMS)	6998
(KILOGRAMS)	6999

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

6943 MINIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT LESS THAN 6943 OUNCE(S).

6944 MINIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT LESS THAN 6944 POUND(S).

6945 MINIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT LESS THAN 6945 GRAM(S).

6946 MINIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT LESS THAN 6946 KILOGRAM(S).

6996 NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6996 OUNCE(S) .

6997 NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6997 POUND(S).

6998 NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6998 GRAM(S).

6999 NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6999 KILOGRAM(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ACIDITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	2908
AS FOLLOWS:	2930
MEDIA PH VALUE	
MINIMUM	2912
MAXIMUM	2910
NOMINAL	2932
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2902
PER MIL-F-51079.	2904
AIRFLOW RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2210
AS FOLLOWS:	2220
MAXIMUM PRESSURE DROP ACROSS FILTER ELEMENT (SELECT ONE)	
(MILLIMETERS OF WATER)	2212
(PASCALS)	2222

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2908	ACIDITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2908.
2930	ACIDITY. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2912	THE MEDIA PH VALUE SHALL BE NOT LESS THAN 2912.
2910	THE MEDIA PH VALUE SHALL BE NOT GREATER THAN 2910.
2932	THE MEDIA PH VALUE SHALL BE 2932.
2902	ACIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2902.
2904	ACIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-F-51079.
2210	AIRFLOW RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2210.
2220	AIRFLOW RESISTANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2212	THE PRESSURE DROP ACROSS FILTER ELEMENT SHALL BE NOT GREATER THAN 2212 MILLIMETER(S) OF WATER.
2222	THE PRESSURE DROP ACROSS FILTER ELEMENT SHALL BE NOT GREATER THAN 2222 PASCAL(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
AIRFLOW RESISTANCE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2202
PER DOCUMENT (DOC DES)	2224
MINIMUM VELOCITY OF AMBIENT TEMPERATURE AIRFLOW	
(CENTIMETERS PER MINUTE)	2206
BURST PRESSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2076
AS FOLLOWS:	2020
MAXIMUM BURST PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2078
(KILOPASCALS)	2022
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2051
PER MIL-F-8815.	2024

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH	
2202	AIRFLOW RESISTANCE.	TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2202.
2224	AIRFLOW RESISTANCE.	TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2224.
2206	THE VELOCITY OF AMBIENT TEMPERATURE AIRFLOW SHALL BE NOT LESS THAN 2206 CENTIMETERS PER MINUTE.	
2076	BURST PRESSURE.	THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2076.
2020	BURST PRESSURE.	THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2078	THE BURST PRESSURE SHALL BE NOT GREATER THAN 2078 POUNDS PER SQUARE INCH.	
2022	THE BURST PRESSURE SHALL BE NOT GREATER THAN 2022 KILOPASCAL(S) .	
2051	BURST PRESSURE.	TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2052.
2024	BURST PRESSURE.	TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-F-8815.

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
BURST PRESSURE (CONT)	
PER MIL-F-8815. (CONT)	
MAXIMUM RATE OF PRESSURE INCREASE (SELECT ONE)	
(POUNDS PER SQUARE INCH PER MINUTE)	2056
(KILOPASCALS)	2026
MINIMUM TEST DURATION (SELECT ONE)	
(SECONDS)	2028
(MINUTES)	2058
(HOURS)	2030
TEST TEMPERATURE (DEGREES CELSIUS)	2060
TOLERANCE (DEGREES CELSIUS)	2065
SOAK TEMPERATURE (DEGREES CELSIUS)	2066
TOLERANCE (DEGREES CELSIUS)	2067
MINIMUM SOAK DURATION (SELECT ONE)	
(SECONDS)	2080
(MINUTES)	2082
(HOURS)	2072
COLD START	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2973

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD	PARAGRAPH
2056	THE RATE OF PRESSURE INCREASE SHALL BE 2056 POUNDS PER SQUARE INCH PER MINUTE.	
2026	THE RATE OF PRESSURE INCREASE SHALL BE 2026 KILOPASCAL(S).	
2028	THE TEST DURATION SHALL BE 2058 SECOND(S).	
2058	THE TEST DURATION SHALL BE 2058 MINUTE(S).	
2030	THE TEST DURATION SHALL BE 2030 HOUR(S).	
2060	THE TEST TEMPERATURE SHALL BE 2060 DEGREES CELSIUS.	
2065	THE TEST TEMPERATURE TOLERANCE SHALL BE 2065 DEGREES CELSIUS.	
2066	THE SOAK TEMPERATURE TOLERANCE SHALL BE 2066 DEGREES CELSIUS.	
2067	THE SOAK TEMPERATURE TOLERANCE SHALL BE 2067 DEGREES CELSIUS.	
2080	THE SOAK DURATION SHALL BE NOT LESS THAN 2080 SECOND(S).	
2082	THE SOAK DURATION SHALL BE NOT LESS THAN 2082 MINUTE(S).	
2072	THE SOAK DURATION SHALL BE NOT LESS THAN 2072 HOUR(S).	
2973	COLD START. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2973.	

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
COLD START (CONT)	
REQUIREMENTS (CONT)	
AS FOLLOWS:	2970
MAXIMUM PRESSURE DROP (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2974
(KILOPASCALS)	2972
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2952
PER MIL-F-8815.	2950
TEST FLUID (NAME)	2954
OPTIONAL TEST FLUID TO CONFORM TO MIL-H-5606.	2956
TEST FLUID TEMPERATuRE (DEGREES CELSIUS)	2958
TOLERANCE (DEGREES CELSIUS)	2959
DIFFERENTIAL PRESSURE ACROSS FILTER ELEMENT (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2964
TOLERANCE (POUNDS PER SQUARE INCH)	2960
(KILOPASCALS)	2962

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2970	COLD START. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2974	THE PRESSURE DROP SHALL BE NOT GREATER THAN 2974 POUNDS PER SQUARE INCH.
2972	THE PRESSURE DROP SHALL BE NOT GREATER THAN 2972 KILOPASCAL(S).
2952	COLD START. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2952.
2950	COLD START. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-F-8815.
2954	THE TESTING FLUID SHALL BE 2954.
2956	THE OPTIONAL TEST FLUID SHALL CONFORM TO MIL-H-5606.
2958	THE TEST FLUID TEMPERATURE SHALL BE 2958 DEGREES CELIUS.
2959	THE TOLERANCE SHALL BE 2959 DEGREES CELSIUS.
2964	THE DIFFERENTIAL PRESSURE ACROSS FILTER ELEMENT SHALL BE 2964 POUNDS PER SQUARE INCH.
2960	THE TOLERANCE SHALL BE 2960 POUNDS PER SQUARE INCH.
2962	THE DIFFERENTIAL PRESSURE ACROSS FILTER ELEMENT SHALL BE 2962 KILOPASCAL(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
COLD START (CONT)	
(KILOPASCALS) (CONT)	
TOLERANCE (KILOPASCALS)	2966
CONTTRELL PRECIPITATE ARRESTANCY EFFICIENCY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2526
THE MINIMUM CONTTRELL PRECIPITATE ARRESTANCE EFFICIENCY (PERCENT)	2528
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2502
PER F-F-310.	2530
AIRFLOW VELOCITY (SELECT ONE)	
(FEET PER MINUTE)	2506
TOLERANCE (FEET PER MINUTE)	2532
(METERS PER SECOND)	2534
TOLERANCE (METERS PER SECOND)	2536
TEST DURATION (MINUTES)	2538
TOLERANCE (MINUTES)	2540

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2966	THE TOLERANCE SHALL BE 2966 KILOPASCAL(S).
2526	CONTTRELL PRECIPITATE ARRESTANCY EFFICIENCY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2526.
2528	CONTTRELL PRECIPITATE ARRESTANCY EFFICIENCY. THE CONTTRELL PRECIPITATE ARRESTANCE EFFICIENCY SHALL BE ~~2528~~ PERCENT.
2502	CONTTRELL PRECIPITATE ARRESTANCY EFFICIENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2502.
2530	CONTTRELL PRECIPITATE ARRESTANCY EFFICIENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH F-F-310.
2506	THE AIRFLOW VELOCITY SHALL BE 2506 FEET PER MINUTE.
2532	THE TOLERANCE SHALL BE 2532 FEET PER MINUTE.
2534	THE AIRFLOW SHALL BE 2534 METERS PER SECOND.
2536	THE TOLERANCE SHALL BE 2536 METERS PER SECOND.
2538	THE TEST DURATION SHALL BE 2538 MINUTE(S).
2540	THE TOLERANCE SHALL BE 2540 MINUTE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTTRELL PRECIPITATE ARRESTANCY EFFICIENCY (CONT)	
AIRFLOW VELOCITY (CONT)	
CONTTRELL PRECIPITATE CONCENTRATION (GRAM PER CUBIC FOOT)	2518
TOLERANCE (GRAM PER CUBIC FOOT)	2542
CYCLING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2766
AS FOLLOWS:	2762
NO MALFUNCTION OF DEVICE.	2764
NO EVIDENCE OF PHYSICAL DAMAGE.	2768
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2752
PER MIL-F-8815.	2754
TEST FLUID PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2770
TOLERANCE (POUNDS PER SQUARE INCH)	2772
(KILOPASCALS)	2774
TOLERANCE (KILOPASCALS)	2776

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2518	THE CONTTRELL PRECIPITATE CONCENTRATION SHALL BE 2518 GRAMS PER CUBIC FOOT.
2542	THE TOLERANCE SHALL BE 2542 GRAM PER CUBIC FOOT.
2766	CYCLING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2766.
2762	CYCLING. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2764	THERE SHALL BE NO MALFUNCTION OF DEVICE.
2768	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
2752	CYCLING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2752.
2754	CYCLING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-F-8815.
2770	THE TEST FLUID PRESSURE SHALL BE 2770 POUNDS PER SQUARE INCH.
2772	THE TOLERANCE SHALL BE 2772 POUNDS PER SQUARE INCH.
2774	THE TEST FLUID PRESSURE SHALL BE 2774 KILOPASCAL(S).
2776	THE TOLERANCE SHALL BE 2776 KILOPASCAL(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CYCLING (CONT)	
PER MIL-F-8815. (CONT)	
FILTER ELEMENT DISENGAGED AND REINSTALLED (TIMES)	2780
NUMBER OF TEST CYCLES (QUANTITY)	2756
TEST FLUID TEMPERATURE (DEGREES CELSIUS)	2758
TOLERANCE (DEGREES CELSIUS)	2782
DOP SMOKE PENETRATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2612
MAXIMUM PARTICLE PENETRATION (PERCENT)	2614
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2602
PER DOCUMENT (DOC DES)	2604
MINIMUM VELOCITY OF AMBIENT TEMPERATURE AIRFLOW (CENTIMETERS PER MINUTE)	2606
AVERAGE DOP PARTICLE SIZE (MICRONS)	2608

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2780	THE FILTER ELEMENT SHALL BE DISENGAGED AND REINSTALLED 2780 TIME(S).
2756	THERE SHALL BE 2756 TEST CYCLE(S).
2758	THE TEST FLUID TEMPERATURE SHALL BE 2758 DEGREES CELSIUS.
2782	THE TOLERANCE SHALL BE 2782 DEGREES CELSIUS.
2612	DOP SMOKE PENETRATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2612.
2614	DOP SMOKE PENETRATION. THE PARTICLE PENETRATION SHALL BE 2614 PERCENT.
2602	DOP SMOKE PENETRATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2602.
2604	DOP SMOKE PENETRATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2604.
2606	THE VELOCITY OF AMBIENT TEMPERATURE AIRFLOW SHALL BE 2606 CENTIMETERS PER MINUTE.
2608	THE AVERAGE DOP PARTICLE SIZE SHALL BE 2608 MICRON(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DUST	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4724
NO EVIDENCE OF PHYSICAL DAMAGE.	1510
NO EVIDENCE OF DUST PENETRATION.	4801
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4895
PER MIL-STD-810, METHOD 510.	4953
TEST SPECIMEN(S) SHALL BE OPERATED DURING TEST STEP(S) (NUMBERS)	4872
*DURATION OF OPERATION (HOURS)	6299
SPECIMEN ORIENTATION SHALL BE CHANGED DURING TEST.	1539
SECOND 6-HOUR TEST IMMEDIATELY FOLLOWING TEMPERATURE STABILIZATION IN STEP 2.	4956
STEP 2 AND STEP 3 TEMPERATURE (DEGREES CELSIUS)	4840
ELONGATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2808

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4724	DUST. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4724.
1510	DUST. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4801	THERE SHALL BE NO EVIDENCE OF DUST PENETRATION.
4895	DUST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4895.
4953	DUST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 510 OF MIL-STD-810.
4872	ITEMS SHALL BE OPERATED DURING STEP(S) 4872.
6299	DURATION OF OPERATION SHALL BE 6299 HOUR(S).
1539	ORIENTATION SHALL BE CHANGED DURING THE TEST.
4956	THE SECOND 6-HOUR TEST SHALL BE PERFORMED IMMEDIATELY AFTER REACHING STABILIZATION IN STEP 2.
4840	THE TEMPERATURE SHALL BE 4840 DEGREES CELSIUS FOR STEPS 2 AND 3.
2808	ELONGATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2808.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ELONGATION (CONT)	
REQUIREMENTS (CONT)	
THE MINIMUM VALUE FOR THE AVERAGE OF THE ELONGATION MEASUREMENTS TAKEN DURING TESTING ON THE FILTER ELEMENTS IN THE MACHINE DIRECTION AND THE CROSS DIRECTION SHALL BE (PERCENT AT RUPTURE)	2810
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2802
PER MIL-F-51079.	2804
FILTER ASSEMBLY PROOF PRESSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1976
NO EVIDENCE OF PHYSICAL DAMAGE.	1978
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1952
PER MIL-F-8815.	1930
MAXIMUM RATE OF PRESSURE INCREASE (SELECT ONE)	
(POUNDS PER SQUARE INCH PER MINUTE)	1932

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2810	ELONGATION. THE VALUE FOR THE AVERAGE OF THE ELONGATION MEASUREMENTS TAKEN DURING TESTING ON THE FILTER ELEMENTS IN THE MACHINE DIRECTION AND THE CROSS DIRECTION SHALL BE NOT LESS THAN 2810 PERCENT AT RUPTURE.
2802	ELONGATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2802.
2804	ELONGATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-F-51079.
1976	FILTER ASSEMBLY PROOF PRESSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1976.
1978	FILTER ASSEMBLY PROOF PRESSURE. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1952	FILTER ASSEMBLY PROOF PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1952.
1930	FILTER ASSEMBLY PROOF PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-F-8815.
1932	THE RATE OF PRESSURE INCREASE SHALL BE NOT GREATER THAN 1932 POUNDS PER SQUARE INCH PER MINUTE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FILTER ASSEMBLY PROOF PRESSURE (CONT)	
MAXIMUM RATE OF PRESSURE INCREASE (CONT)	
(KILOPASCALS)	1934
MINIMUM TEST DURATION (SELECT ONE)	
(SECONDS)	1954
(MINUTES)	1958
(HOURS)	1956
TEST TEMPERATURE (DEGREES CELSIUS)	1960
TOLERANCE (DEGREES CELSIUS)	1962
SOAK TEMPERATURE (DEGREES CELSIUS)	1966
TOLERANCE (DEGREES CELSIUS)	1968
MINIMUM SOAK DURATION (SELECT ONE)	
(SECONDS)	1980
(MINUTES)	1982
(HOURS)	1972
FILTER ASSEMBLY RELIEF VALVE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2670
AS FOLLOWS:	2630

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1934 THE RATE OF PRESSURE INCREASE SHALL BE NOT GREATER THAN 1934 KILOPASCAL(S).

1954 THE TEST DURATION SHALL BE 1954 SECOND(S).

1958 THE TEST DURATION SHALL BE 1958 MINUTE(S).

1956 THE TEST DURATION SHALL BE 1956 HOUR(S).

1960 THE TEST TEMPERATURE SHALL BE 1960 DEGREES CELSIUS.

1962 THE TOLERANCE SHALL BE 1962 DEGREES CELSIUS.

1966 THE SOAK TEMPERATURE SHALL BE 1966 DEGREES CELSIUS.

1968 THE TOLERANCE SHALL BE 1968 DEGREES CELSIUS.

1980 THE SOAK DURATION SHALL BE 1980 SECOND(S).

1982 THE SOAK DURATION SHALL BE 1982 MINUTE(S).

1972 THE SOAK DURATION SHALL BE 1972 HOUR(S).

2670 FILTER ASSEMBLY RELIEF VALVE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2670.

2630 FILTER ASSEMBLY RELIEF VALVE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FILTER ASSEMBLY RELIEF VALVE (CONT)	
AS FOLLOWS: (CONT)	
CRACKING PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2672
TOLERANCE (POUNDS PER SQUARE INCH)	2674
(KILOPASCALS)	2676
TOLERANCE (KILOPASCALS)	2678
MINIMUM RESEAT PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2690
(KILOPASCALS)	2692
MAXIMUM DIFFERENTIAL PRESSURE AT RATED FLOW BETWEEN INLET AND OUTLET PORTS (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2680
(KILOPASCALS)	2686
MAXIMUM DIFFERENTIAL PRESSURE ACROSS RELIEF VALVE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2682
(KILOPASCALS)	2688
PERCENT OF RATED FLOW (PERCENT)	2684

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2672	THE CRACKING PRESSURE SHALL BE 2672 POUNDS PER SQUARE INCH.
2674	THE TOLERANCE SHALL BE 2674 POUNDS PER SQUARE INCH.
2676	THE CRACKING PRESSURE SHALL BE 2676 KILOPASCAL(S).
2678	THE TOLERANCE SHALL BE 2678 KILOPASCAL(S).
2690	THE RESEAT PRESSURE SHALL BE NOT LESS THAN 2690 POUNDS PER SQUARE INCH.
2692	THE RESEAT PRESSURE SHALL BE NOT LESS THAN 2692 KILOPASCAL(S).
2680	THE DIFFERENTIAL PRESSURE AT RATED FLOW BETWEEN INLET AND OUTLET PORTS SHALL BE 2680 POUNDS PER SQUARE INCH.
2686	THE DIFFERENTIAL PRESSURE AT RATED FLOW BETWEEN INLET AND OUTLET PORTS SHALL BE 2686 KILOPASCALS.
2682	THE DIFFERENTIAL PRESSURE ACROSS RELIEF VALVE SHALL BE 2682 POUND(S) PER SQUARE INCH.
2688	THE DIFFERENTIAL PRESSURE ACROSS RELIEF VALVE SHALL BE 2688 KILOPASCAL(S).
2684	THE PERCENT OF RATED FLOW SHALL BE 2684 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FILTER ASSEMBLY RELIEF VALVE (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM LEAKAGE RATE AT CRACKING PRESSURE (CUBIC CENTIMETERS PER MINUTE)	2664
MAXIMUM LEAKAGE RATE AT RESEAT PRESSURE (CUBIC CENTIMETERS PER MINUTE)	2662
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2652
PER MIL-F-8815.	2658
TEST FLUID (NAME)	2654
TEST FLUID (DOC DES)	2656
TEST FLUID TEMPERATURE (DEGREES CELSIUS)	2650
TOLERANCE (DEGREES CELSIUS)	2640
FILTER ELEMENT BUBBLE POINT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2366
AS FOLLOWS:	2330

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2664	THE LEAKAGE RATE AT CRACKING PRESSURE SHALL BE NOT GREATER THAN 2664 CUBIC CENTIMETERS PER MINUTE.
2662	THE LEAKAGE RATE AT RESEAT PRESSURE SHALL BE NOT GREATER THAN 2662 CUBIC CENTIMETERS PER MINUTE.
2652	FILTER ASSEMBLY RELEIF VALVE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2652.
2658	FILTER ASSEMBLY RELIEF VALVE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-F-8815.
2654	THE TEST FLUID SHALL BE 2654.
2656	THE TEST FLUID SHALL BE IN ACCORDANCE WITH 2656.
2650	THE TEST FLUID TEMPERATURE SHALL BE 2650 DEGREES CELSIUS.
2640	THE TOLERANCE SHALL BE 2640 DEGREES CELSIUS.
2366	FILTER ELEMENT BUBBLE POINT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2366.
2330	FILTER ELEMENT BUBBLE POINT. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FILTER ELEMENT BUBBLE POINT (CONT)	
AS FOLLOWS: (CONT)	
MINIMUM INITIAL BUBBLE POINT PRESSURE (SELECT ONE)	
(INCHES OF WATER)	2368
(MILLIMETERS OF WATER)	2362
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2352
PER MIL-F-8815.	2354
OPTIONAL TEST FLUID, PROPRIETARY SOLVENT NUMBER 3.	2356
TEST FLUID TEMPERATURE (DEGREES CELSIUS)	2358
TOLERANCE (DEGREES CELSIUS)	2370
FILTER ELEMENT COLLAPSE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2458
AS FOLLOWS:	2454
MINIMUM DIFFERENTIAL PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2460

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2368	THE INITIAL BUBBLE POINT PRESSURE SHALL BE NOT LESS THAN 2368 INCH(S) OF WATER.
2362	THE INITIAL BUBBLE POINT PRESSURE SHALL BE NOT LESS THAN 2362 MILLIMETER(S) OF WATER.
2352	FILTER ELEMENT BUBBLE POINT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2352.
2354	FILTER ELEMENT BUBBLE POINT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-F-8815.
2356	OPTIONAL TEST FLUID PROPRIETARY SOLVENT NUMBER 3 SHALL APPLY.
2358	THE TEST FLUID TEMPERATURE SHALL BE 2358 DEGREES CELSIUS.
2370	THE TOLERANCE SHALL BE 2370 DEGREES CELSIUS.
2458	FILTER ELEMENT COLLAPSE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2458.
2454	FILTER ELEMENT COLLAPSE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2460	THE DIFFERENTIAL PRESSURE SHALL BE NOT LESS THAN 2460 POUND(S) PER SQUARE INCH.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FILTER ELEMENT COLLAPSE (CONT)	
MINIMUM DIFFERENTIAL PRESSURE (CONT)	
(KILOPASCALS)	2462
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2452
PER MIL-F-8815.	2456
FILTER ELEMENT EFFICIENCY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2158
MINIMUM FILTER ELEMENT EFFICIENCY (PERCENT)	2160
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2152
PER MIL-F-8815.	2154
FILTRATION CAPACITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2320

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2462	THE DIFFERENTIAL PRESSURE SHALL BE NOT LESS THAN 2462 KILOPASCAL(S).
2452	FILTER ELEMENT COLLAPSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2452.
2456	FILTER ELEMENT COLLAPSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-F-8815.
2158	FILTER ELEMENT EFFICIENCY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2158.
2160	FILTER ELEMENT EFFICIENCY. THE FILTER ELEMENT EFFICIENCY SHALL BE NOT LESS THAN 2160 PERCENT.
2152	FILTER ELEMENT EFFICIENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2152.
2154	FILTER ELEMENT EFFICIENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-F-8815.
2320	FILTRATION CAPACITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2320.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FILTRATION CAPACITY (CONT)	
REQUIREMENTS (CONT)	
AS FOLLOWS:	2321
MINIMUM CUMULATIVE WEIGHT OF FOREIGN MATTER (SELECT ONE)	
(OUNCES PER SQUARE INCH)	2332
(GRAMS PER SQUARE METER)	2334
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2302
PER F-F-310.	2304
PRESSURE DROP (SELECT ONE)	
(INCHES OF WATER)	2306
TOLERANCE (INCHES OF WATER)	2308
(MILLIMETERS OF WATER)	2314
TOLERANCE (MILLIMETERS OF WATER)	2316
AIRFLOW VELOCITY (SELECT ONE)	
(FEET PER MINUTE)	2312
TOLERANCE (FEET PER MINUTE)	2324
(METERS PER MINUTE)	2326
TOLERANCE (METERS PER MINUTE)	2328

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2321 FILTRATION CAPACITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2320.

2332 THE CUMULATIVE WEIGHT OF FOREIGN MATTER SHALL BE NOT LESS THAN 2332 OUNCES PER SQUARE INCH.

2334 THE CUMULATIVE WEIGHT OF FOREIGN MATTER SHALL BE NOT LESS THAN 2334 GRAMS PER SQUARE METER.

2302 FILTRATION CAPACITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2302.

2304 FILTRATION CAPACITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH F-F-310.

2306 THE PRESSURE DROP SHALL BE 2306 INCH(S) OF WATER.

2308 THE TOLERANCE SHALL BE 2308 INCH(S) OF WATER.

2314 THE PRESSURE DROP SHALL BE 2314 MILLIMETER(S) OF WATER.

2316 THE TOLERANCE SHALL BE 2316 MILLIMETER(S) OF WATER.

2312 THE AIRFLOW VELOCITY SHALL BE 2312 FEET PER MINUTE.

2324 THE TOLERANCE SHALL BE 2324 FEET PER MINUTE.

2326 THE AIRFLOW VELOCITY SHALL BE 2326 METER(S) PER MINUTE.

2328 THE TOLERANCE SHALL BE 2328 METER(S) PER MINUTE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FLOW FATIGUE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2400
AS FOLLOWS:	2402
MINIMUM DIFFERENTIAL PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2404
(KILOPASCALS)	2406
MAXIMUM DIFFERENTIAL PRESSURE	
(POUNDS PER SQUARE INCH)	2408
(KILOPASCALS)	2410
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3052
PER MIL-F-8815.	3054
TEST FLUID TEMPERATURE (DEGREES CELSIUS)	3056
TOLERANCE (DEGREES CELSIUS)	3058
TEST FLUID (NAME)	3060
TEST FLUID (DOC DES)	3062

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2400	FLOW FATIGUE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2400.
2402	FLOW FATIGUE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2404	THE DIFFERENTIAL PRESSURE SHALL BE NOT LESS THAN 2404 POUNDS PER SQUARE INCH.
2406	THE DIFFERENTIAL PRESSURE SHALL BE NOT LESS THAN 2406 KILOPASCAL(S).
2408	THE DIFFERENTIAL PRESSURE SHALL BE NOT GREATER THAN 2408 POUNDS PER SQUARE INCH.
2410	THE DIFFERENTIAL PRESSURE SHALL BE NOT GREATER THAN 2410 KILOPASCAL(S).
3052	FLOW FATIGUE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3052.
3054	FLOW FATIGUE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-F-8815.
3056	THE TEST FLUID TEMPERATURE SHALL BE 3056 DEGREES CELSIUS.
3058	THE TOLERANCE SHALL BE 3058 DEGREES CELSIUS.
3060	THE TEST FLUID SHALL BE 3060.
3062	THE TEST FLUID SHALL BE IN ACCORDANCE WITH 3062.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDES (KCI)

CHARACTERISTIC NAME	CHAR CODE
FLOW FATIGUE (CONT)	
PER MIL-F-8815. (CONT)	
CYCLE RATE (SELECT ONE)	
(MINIMUM CYCLES PER MINUTE)	3064
(MAXIMUM CYCLES PER MINUTE)	3066
FLOW SURGE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3020
AS FOLLOWS:	3022
PRESSURE INCREASE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	3024
(KILOPASCALS)	3026
DURATION OF DIFFERENTIAL PRESSURE INDICATOR NOT ACTUATING (SECONDS)	3028
STARTING DURATION DIFFERENTIAL PRESSURE INDICATOR ACTUATING (SECONDS)	3030
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3032
PER MIL-F-8815.	3034

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

3064 THE CYCLE RATE SHALL BE NOT LESS THAN 3064 CYCLES PER MINUTE.

3066 THE CYCLE RATE SHALL BE NOT GREATER THAN 3066 CYCLES PER MINUTE.

3020 FLOW SURGE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3020.

3022 FLOW SURGE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

3024 THE PRESSURE INCREASE SHALL BE 3024 POUNDS PER SQUARE INCH.

3026 THE PRESSURE INCREASE SHALL BE 3026 KILOPASCAL(S).

3028 THE DURATION OF DIFFERENTIAL PRESSURE INDICATOR NOT ACTUATING SHALL BE 3028 SECOND(S).

3030 THE STARTING DURATION DIFFERENTIAL PRESSURE INDICATOR ACTUATING SHALL BE 3030 SECOND(S).

3032 FLOW SURGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3032.

3034 FLOW SURGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-F-8815.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FLOW SURGE (CONT)	
PER MIL-F-8815. (CONT)	
TEST REPEATING PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	3036
(KILOPASCALS)	3038
FUNGUS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4760
FUNGUS RESISTANT BY CERTIFICATION OR BY TEST.	4761
NO EVIDENCE OF FUNGUS GROWTH WHEN TESTED.	4762
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4754
PER MIL-STD-810, METHOD 508.	4755
TEST PERIOD (DAYS)	4756

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

3036 THE TEST REPEATING PRESSURE SHALL BE 3036 POUNDS PER SQUARE INCH.

3038 THE TEST REPEATING PRESSURE SHALL BE 3038 KILOPASCAL(S).

4760 FUNGUS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4760.

4761 FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OF SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THE MANUFACTURER SHALL VERIFY BY CERTIFICATION THAT ALL EXTERNAL MATERIALS ARE FUNGUS RESISTANT OR SHALL PERFORM THE FUNGUS TEST. WHEN THE FUNGUS TEST IS PERFORMED, THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.

4762 FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OF! SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.

4754 FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4754.

4755 FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 508 OF MIL-STD-810.

4756 TEST PERIOD SHALL BE 4756 DAY(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HIGH SYSTEM PRESSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2430
AS FOLLOWS:	2432
RATED FLOW AT DIFFERENTIAL PRESSURE ACROSS THE ORIFICE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2434
(KILOPASCALS)	2436
RATED FLOW THROUGH THE ORIFICE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2438
(KILOPASCALS)	2440
CYCLE RATE REPEATED (TIMES)	2442
INLET PRESSURE INCREASE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2444
(KILOPASCALS)	2446
INLET PRESSURE DECREASE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2448
(KILOPASCALS)	2464

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2430	HIGH SYSTEM PRESSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2430.
2432	HIGH SYSTEM PRESSURE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2434	THE RATED FLOW AT DIFFERENTIAL PRESSURE ACROSS THE ORIFICE SHALL BE 2434 POUNDS PER SQUARE INCH.
2436	THE RATED FLOW AT DIFFERENTIAL PRESSURE ACROSS THE ORIFICE SHALL BE 2436 KILOPASCAL(S).
2438	THE RATED FLOW THROUGH THE ORIFICE SHALL BE 2438 POUNDS PER SQUARE INCH.
2440	THE RATED FLOW THROUGH THE ORIFICE SHALL BE 2440 KILOPASCAL(S).
2442	THE CYCLE RATE SHALL BE REPEATED 2442 TIME(S).
2444	THE INLET PRESSURE INCREASE SHALL BE 2444 POUNDS PER SQUARE INCH.
2446	THE INLET PRESSURE INCREASE SHALL BE 2446 KILOPASCAL(S).
2448	THE INLET PRESSURE DECREASE SHALL BE 2448 POUNDS PER SQUARE INCH.
2464	THE INLET PRESSURE DECREASE SHALL BE 2464 KILOPASCAL(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HIGH SYSTEM PRESSURE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2420
PER MIL-F-8815.	2422
MAXIMUM TEST PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2424
(KILOPASCALS)	2426
TEST TEMPERATURE (DEGREES CELSIUS)	2428
TOLERANCE (DEGREES CELSIUS)	2429
LEAKAGE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2412
NO MEASURABLE LEAKAGE.	2414
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2416
PER MIL-F-8815.	2417

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2420	HIGH SYSTEM PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2420.
2422	HIGH SYSTEM PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-F-8815.
2424	THE TEST PRESSURE SHALL BE NOT GREATER THAN 2424 POUNDS PER SQUARE INCH.
2426	THE TEST PRESSURE SHALL BE NOT GREATER THAN 2426 KILOPASCAL(S) .
2428	THE TEST TEMPERATURE SHALL BE 2428 DEGREES CELSIUS.
2429	THE TOLERANCE SHALL BE 2429 DEGREES CELSIUS.
2412	LEAKAGE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2432.
2414	LEAKAGE. THERE SHALL BE NO MEASURABLE LEAKAGE.
2416	LEAKAGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2416.
2417	LEAKAGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-F-8815.

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LEAKAGE (CONT)	
PER MIL-F-8815.	
TEST PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2418
(KILOPASCALS)	2470
LEAKAGE MEASUREMENT DURATION AFTER REMOVAL OF EXCESS FLUID (SELECT ONE)	
(SECONDS)	2472
(MINUTES)	2474
(DAYS)	2476
REPEATED TEST PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2478
(KILOPASCALS)	2480
HUMIDITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4798
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.	4799
NO DEGRADATION OF PERFORMANCE.	4815

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2418	THE TEST PRESSURE SHALL BE 2418 POUNDS PER SQUARE INCH.
2470	THE TEST PRESSURE SHALL BE 2470 KILOPASCAL(S).
2472	THE LEAKAGE MEASUREMENT DURATION AFTER REMOVAL OF EXCESS FLUID SHALL BE 2472 SECOND(S).
2474	THE LEAKAGE MEASUREMENT DURATION AFTER REMOVAL OF EXCESS FLUID SHALL BE 2474 MINUTE(S).
2476	THE LEAKAGE MEASUREMENT DURATION AFTER REMOVAL OF EXCESS FLUID SHALL BE 2476 DAY(S).
2478	THE REPEATED TEST PRESSURE SHALL BE 2478 POUNDS PER SQUARE INCH.
2480	THE REPEATED TEST PRESSURE SHALL BE 2480 KILOPASCAL(S).
4798	HUMIDITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4798.
4799	HUMIDITY. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.
4815	THERE SHALL BE NO DEGRADATION OF PERFORMANCE.

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HUMIDITY (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4788
PER MIL-F-51068.	2482
IMMERSION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3070
NO EVIDENCE OF PHYSICAL DAMAGE.	3072
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3074
PER MIL-F-8815.	3076
IMMERSION MEDIA (NAME)	3078
IMMERSION MEDIA (DOC DES)	3080
HIGH TEMPERATURE DURATION (SELECT ONE)	
(MINUTES)	3082
(HOURS)	3084
HIGH TEMPERATURE FLUID (DEGREES CELSIUS)	3086
LOW TEMPERATURE DURATION (SELECT ONE)	
(MINUTES)	3088
(HOURS)	3090

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4788	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4788.
2482	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-F-51068.
3070	IMMERSION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3070.
3072	IMMERSION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
3074	IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3074.
3076	IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-F-8815.
3078	THE IMMERSION MEDIA SHALL BE 3078.
3080	THE IMMERSION MEDIA SHALL BE IN ACCORDANCE WITH 3080.
3082	THE HIGH TEMPERATURE DURATION SHALL BE 3082 MINUTE(S).
3084	THE HIGH TEMPERATURE DURATION SHALL BE 3084 HOUR(S).
3086	THE HIGH TEMPERATURE FLUID SHALL BE 3086 DEGREES CELSIUS.
3088	THE LOW TEMPERATURE DURATION SHALL BE 3088 MINUTE(S).
3090	THE LOW TEMPERATURE DURATION SHALL BE 3090 HOUR(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
IMMERSION (CONT)	
LOW TEMPERATURE DURATION (CONT)	
LOW TEMPERATURE FLUID (DEGREES CELSIUS)	3092
LOW SYSTEM PRESSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2040
AS FOLLOWS:	2042
INDICATOR OPERATING PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2044
(KILOPASCALS)	2046
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2048
PER MIL-F-8815.	2050
INLET PORT INCREASE RATE (SELECT ONE)	
(POUNDS PER SQUARE INCH PER MINUTE)	2055
(KILOPASCALS)	2062
PRESSURE CYCLED (TIMES)	2064
PRESSURE CYCLE RATE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2068
(KILOPASCALS)	2074

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

3092 THE LOW TEMPERATURE FLUID SHALL BE 3092 DEGREES CELSIUS.

2040 LOW SYSTEM PRESSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2040.

2042 LOW SYSTEM PRESSURE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

2044 THE INDICATOR OPERATING PRESSURE SHALL BE 2044 POUNDS PER SQUARE INCH.

2046 THE INDICATOR OPERATING PRESSURE SHALL BE 2046 KILOPASCAL(S).

2048 LOW SYSTEM PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2048.

2050 LOW SYSTEM PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-F-8815.

2055 THE INLET PORT INCREASE RATE SHALL BE 2054 POUNDS PER SQUARE INCH.

2062 THE INLET PORT INCREASE RATE SHALL BE 2062 KILOPASCAL(S).

2064 THE PRESSURE SHALL BE CYCLED 2064 TIME(S).

2068 THE PRESSURE CYCLE RATE SHALL BE 2068 POUNDS PER SQUARE INCH.

2074 THE PRESSURE CYCLE RATE SHALL BE 2074 KILOPASCAL(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MAXIMUM PARTICLE PASSED	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2260
AS FOLLOWS:	2264
PARTICLES PASSED (SELECT ONE)	
MINIMUM (MICRONS)	2266
NOMINAL (MICRONS)	2261
MAXIMUM (MICRONS)	2262
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2252
PER MIL-F-8815.	2254
MAXIMUM MEMBRANE FILTER DISK	
MICRON RATING (MICRONS)	2556
MEDIA MIGRATION AND ABRASION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2558
THERE SHALL BE NO MEDIA MIGRATION TRACEABLE TO THE FILTER ELEMENT, ITS PACKAGING, OR ABRASION BETWEEN PARTS.	2560

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2260	PARTICLE PASSED. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2260.
2264	PARTICLE PASSED. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2266	THE PARTICLES PASSED SHALL BE NOT LESS THAN 2266 MICRON(S).
2261	THE PARTICLES PASSED SHALL BE 2261 MICRON(S).
2262	THE PARTICLES PASSED SHALL BE NOT GREATER THAN 2262 MICRON(S).
2252	PARTICLE PASSED. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2252.
2254	PARTICLE PASSED. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-F-8815.
2556	THE MEMBRANE FILTER DISK MICRON RATING SHALL BE 2256 MICRON(S).
2558	MEDIA MIGRATION AND ABRASION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2558.
2560	MEDIA MIGRATION AND ABRASION. THERE SHALL BE NO MEDIA MIGRATION TRACEABLE TO THE FILTER ELEMENT, ITS PACKAGING, OR ABRASION BETWEEN PARTS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MEDIA MIGRATION AND ABRASION (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2052
PER MIL-F-8815.	2054
SALT FOG	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4998
NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.	4999
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4779
PER MIL-STD-810, METHOD 509.	4780
SALT SOLUTION (PERCENT)	4786
EXPOSURE PERIOD (HOURS)	4783
DRYING PERIOD (HOURS)	4775
SHOCK	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2884

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2052	MEDIA MIGRATION AND ABRASION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2052.
2054	MEDIA MIGRATION AND ABRASION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-F-8815.
4998	SALT FOG. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4998.
4999	SALT FOG. THERE SHALL BE NO EVIDENCE OF CORROSION, PHYSICA DAMAGE OR DEGRADATION OF PERFORMANCE.
4779	SALT FOG. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4779.
4780	SALT FOG. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 509 OF MIL-STD-810.
4786	SOLUTION SHALL BE 4786 PERCENT SALT.
4783	DURATION OF THE TEST SHALL BE 4783 HOUR(S).
4775	DRYING PERIOD SHALL BE 4775 HOUR(S).
2884	SHOCK. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2884.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK (CONT)	
REQUIREMENTS (CONT)	
THE DIFFERENTIAL PRESSURE INDICATOR SHALL REMAIN IN ITS ORIGINAL EXTENDED OR RETRACTED POSITION DURING TEST.	2882
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2812
PER MIL-F-8815.	2814
NUMBER OF IMPACT SHOCKS (QUANTITY)	2816
LEVELS (SELECT ONE)	
(20'G)	2820
(50'G)	2822
(100'G)	2824
SHOCK IMPULSE TEST DURATION (MILLISECONDS)	2826
TOLERANCE (MILLISECONDS)	2828
MAXIMUM G DURATION (MILLISECONDS)	2830
TENSILE STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1908
AS FOLLOWS:	1914

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2882	SHOCK. THE DIFFERENTIAL PRESSURE INDICATOR SHALL REMAIN IN ITS ORIGINAL EXTENDED OR RETRACTED POSITION DURING TEST.
2812	SHOCK. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2812.
2814	SHOCK. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-F-8815.
2816	THE NUMBER OF IMPACT SHOCKS SHALL BE 2816.
2820	THE LEVELS OF SHOCK SHALL BE 20 G.
2822	THE LEVELS OF SHOCK SHALL BE 50 G.
2824	THE LEVELS OF SHOCK SHALL BE 100 G.
2826	THE SHOCK IMPULSE TEST DURATION SHALL BE 2826 MILLISECOND(S).
2828	THE TOLERANCE SHALL BE 2828 MILLISECOND(S).
2830	THE G DURATION SHALL BE NOT GREATER THAN 2830 MILLISECOND(S).
1908	TENSILE STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1908.
1914	TENSILE STRENGTH. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TENSILE STRENGTH (CONT)	
AS FOLLOWS: (CONT)	
MINIMUM VALUE OF AVERAGE TENSILE STRENGTH MEASUREMENTS TAKEN DURING TESTING ON THE FILTER ELEMENTS IN MACHINE DIRECTION (SELECT ONE)	
(POUNDS PER INCH OF WIDTH)	1910
(NEWTONS PER MILLIMETER OF WIDTH)	1916
MINIMUM VALUE OF AVERAGE TENSILE STRENGTH MEASUREMENTS TAKEN DURING TESTING ON THE FILTER ELEMENTS IN THE CROSS DIRECTION (SELECT ONE)	
(POUNDS PER INCH OF WIDTH)	1912
(NEWTONS PER MILLIMETER OF WIDTH)	1918
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1902
PER MIL-F-51079.	1904

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1910 THE VALUE OF AVERAGE TENSILE STRENGTH MEASUREMENT(S) TAKEN DURING TESTING ON THE FILTER ELEMENT IN MACHINE DIRECTION SHALL BE NOT LESS THAN 1910 POUNDS PER INCH OF WIDTH.

1916 THE VALUE OF AVERAGE TENSILE STRENGTH MEASUREMENT(S) TAKEN DURING TESTING ON THE FILTER ELEMENT IN MACHINE DIRECTION SHALL BE NOT LESS THAN 1916 NEWTONS PER MILLIMETER OF WIDTH.

1912 THE VALUE OF AVERAGE TENSILE STRENGTH MEASUREMENT(S) TAKEN DURING TESTING ON THE FILTER ELEMENT IN THE CROSS DIRECTION SHALL BE NOT LESS THAN 1912 POUNDS PER INCH OF WIDTH.

1918 THE VALUE OF AVERAGE TENSILE STRENGTH MEASUREMENT(S) TAKEN DURING TESTING ON THE FILTER ELEMENT IN THE CROSS DIRECTION SHALL BE NOT LESS THAN 1918 NEWTONS PER MILLIMETER OF WIDTH.

1902 TENSILE STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1902.

1904 TENSILE STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-F-51079.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE CYCLING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2230
THE FILTERS SHALL SHOW NO EVIDENCE OF CORROSION OF METAL FRAMES, FASTENERS, OR HARDWARE CLOTH AFTER ANY CYCLE.	2232
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2234
PER MIL-F-51068.	2236
CYCLE EXPOSURE	
ARCTIC (DEGREES CELSIUS)	2238
RELATIVE HUMIDITY (PERCENT)	2240
TROPICAL (DEGREES CELSIUS)	2242
RELATIVE HUMIDITY (PERCENT)	2244
DESERT (DEGREES CELSIUS)	2246
RELATIVE HUMIDITY (PERCENT)	2248
VIBRATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4681

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2230	TEMPERATURE CYCLING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2230.
2232	TEMPERATURE CYCLING. THE FILTERS SHALL SHOW NO EVIDENCE OF CORROSION OF METAL FRAMES, FASTENERS OR HARDWARE CLOTH AFTER ANY CYCLE.
2234	TEMPERATURE CYCLING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2234.
2236	TEMPERATURE CYCLING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-F-51068.
2238	THE ARCTIC CYCLE EXPOSURE SHALL BE 2238 DEGREES CELSIUS.
2240	THE RELATIVE HUMIDITY SHALL BE 2240 PERCENT.
2242	THE TROPICAL CYCLE EXPOSURE SHALL BE 2242 DEGREES CELSIUS.
2244	THE RELATIVE HUMIDITY SHALL BE 2244 PERCENT.
2246	THE DESERT CYCLE EXPOSURE SHALL BE 2246 DEGREES CELSIUS.
2248	THE RELATIVE HUMIDITY SHALL BE 2248 PERCENT.
4681	VIBRATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4681.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION (CONT)	
REQUIREMENTS (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE.	4682
REMAIN WITHIN SPECIFIED TOLERANCE.	1538
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1505
PER MIL-STD-810, METHOD 514.1.	1514
*PROCEDURE NUMBER (ROMAN NUMERAL)	1518
EQUIPMENT (CATEGORY)	1540
CURVE (LETTERS)	1525
APPLICABLE TABLE (NUMBER)	1532
APPLICABLE FIGURE (NUMBER)	1559
OPERATION NOT REQUIRED.	1424
TEST FLUID (NAME)	2632
TEST FLUID (DOC DES)	2634
VIBRATION DURATION (SELECT ONE)	
(SECONDS)	2636
(MINUTES)	2638

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4682	VIBRATION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1538	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1505	VIBRATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT. EXCEPT 1505.
1514	VIBRATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 514.1 OF MIL-STD-810.
1518	PROCEDURE NUMBER 1518 SHALL APPLY.
1540	THE EQUIPMENT CATEGORY SHALL BE 1540 IN ACCORDANCE WITH METHOD 514.1 OF MIL-STD-81O.
1525	CURVE 1525 SHALL APPLY.
1532	PROCEDURE AND TIME SCHEDULE SHALL BE AS SHOWN ON TABLE 1532 OF METHOD 514.1 OF MIL-STD-810.
1559	TEST CURVES SHALL BE AS SHOWN IN FIGURE 1559 OF METHOD 514.1 OF MIL-STD-810.
1424	OPERATION DURING THE TEST IS NOT REQUIRED.
2632	VIBRATION. THE TEST FLUID SHALL BE 2632.
2634	VIBRATION. THE TEST FLUID SHALL BE 2634.
2636	THE VIBRATION DURATION SHALL BE 2636 SECOND(S).
2638	THE VIBRATION DURATION SHALL BE 2638 MINUTE(S).

Source: https://assist.dla.mil -- Downloaded: 2026l0-23T20:56Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION (CONT)	
PER MIL-STD-810, METHOD 514.1. (CONT)	
FREQUENCY RATE (CYCLES PER SECOND)	2642
TOLERANCE (CYCLES PER SECOND)	2644
WATER REPELLENCY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2730
AS FOLLOWS:	2732
MINIMUM HEAD OF WATER PENETRATION OF MEDIUM PRIOR TO IRRADIATION (SELECT ONE)	
(INCHES)	2734
(MILLIMETERS)	2736
MINIMUM WATER REPELLENCY OF FILTER MEDIUM AFTER THE MEDIUM IS EXPOSED TO GAMMA IRRADIATION (SELECT ONE)	
(INCHES)	2738
(MILLIMETERS)	2740
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2720

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2642 THE FREQUENCY RATE SHALL BE 2642 CYCLES PER SECOND.

2644 THE TOLERANCE SHALL BE 2644 CYCLES PER SECOND.

2730 WATER REPELLENCY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2730.

2732 WATER REPELLENCY. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

2734 THE HEAD OF WATER PENETRATION OF MEDIUM PRIOR TO IRRADIATION SHALL BE NOT LESS THAN 2734 INCH(S).

2736 THE HEAD OF WATER PENETRATION OF MEDIUM PRIOR TO IRRADIATION SHALL BE NOT LESS THAN 2736 MILLIMETER(S).

2738 THE WATER REPELLENCY OF FILTER MEDIUM AFTER THE MEDIUM IS EXPOSED TO GAMMA IRRADIATION SHALL BE NOT LESS THAN 2738 INCH(S).

2740 THE WATER REPELLENCY OF FILTER MEDIUM AFTER THE MEDIUM IS EXPOSED TO GAMMA IRRADIATION SHALL BE NOT LESS THAN 2740 MILLIMETER(S).

2720 WATER REPELLENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2720.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
WATER REPELLENCY (CONT)	
TEST METHODS (CONT)	
TEST PER MIL-F-51079.	2722
NUMBER OF SPECIMENS TO BE TESTED (QUANTITY)	2724
SPECIMEN WIDTH (SELECT ONE)	
(INCHES)	2726
(MILLIMETERS)	2728
SPECIMEN THICKNESS (SELECT ONE)	
(INCHES)	2710
(MILLIMETERS)	2712
SPECIMEN LENGTH (SELECT ONE)	
(INCHES)	2714
(MILLIMETERS)	2716
SPECIMEN DIAMETER (SELECT ONE)	
(INCHES)	2718
(MILLIMETERS)	2721
WATER REPELLENCY INDICATOR (NAME)	2723
STORAGE CONDITIONS	
(YEARS)	1529

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2722 WATER REPELLENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-F-51079.

2724 THE NUMBER OF SPECIMENS TO BE TESTED SHALL BE 2724.

2726 THE SPECIMEN WIDTH SHALL BE 2726 INCH(S).

2728 THE SPECIMEN WIDTH SHALL BE 2728 MILLIMETER(S) .

2710 THE SPECIMEN THICKNESS SHALL BE 2710 INCH(S).

2712 THE SPECIMEN THICKNESS SHALL BE 2712 MILLIMETER(S).

2714 THE SPECIMEN LENGTH SHALL BE 2714 INCH(S) .

2716 THE SPECIMEN LENGTH SHALL BE 2716 MILLIMETER(S) .

2718 THE SPECIMEN DIAMETER SHALL BE 2718 INCH(S).

2721 THE SPECIMEN DIAMETER SHALL BE 2721 MILLIMETER(S).

2723 THE TYPE OF WATER REPELLENCY INDICATOR SHALL BE 2723.

STORAGE CONDITIONS.

1529 ITEMS SHALL WITHSTAND 1529 YEARS OF STORAGE WHEN PROPERLY PRESERVED, PACKAGED AND MECHANICALLY PROTECTED WITHOUT REQUIRING MAJOR REPAIR.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
STORAGE CONDITIONS (CONT)	
CERTIFY MAXIMUM CURE DATE TO DELIVERY (QUARTERS)	4942
CERTIFY MINIMUM SHELF LIFE AFTER DELIVERY (QUARTERS)	4943
CERTIFY MAXIMUM MANUFACTURE DATE TO DELIVERY (QUARTERS)	4944
AGE LIMITATION PER MIL-STD-1523.	5209
MOUNTING HARDWARE (SEE TABLE X, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE X IS USED.	
WORKMANSHIP	
(DOC DES)	6870
ADDITIONAL REQUIREMENTS	
A_____	7001
B_____	7002
c_____	7003
D_____	7004
E_____	7005

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4942	MANUFACTURER SHALL CERTIFY THAT THE CURE DATE SHALL BE NOT GREATER THAN 4942 QUARTERS PRIOR TO DELIVERY DATE.
4943	MANUFACTURER SHALL CERTIFY THAT THERE SHALL BE NOT LESS THAN 4943 QUARTERS OF SHELF LIFE AFTER DELIVERY.
4944	MANUFACTURER SHALL CERTIFY THAT THE DATE OF MANUFACTURE SHALL BE NOT GREATER THAN 4944 QUARTERS PRIOR TO DATE OF DELIVERY.
5209	AGE LIMITATIONS OF THE FINISHED PRODUCT SHALL BE IN ACCORDANCE WITH MIL-STD-1523.
	MOUNTING HARDWARE. MOUNTING HARDWARE IDENTIFIED IN THE FOLLOWING TABLE SHALL BE FURNISHED WITH EACH ITEM.
6870	WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.
	ADDITIONAL REQUIREMENTS.
7001	(A) 7001.
7002	(B) 7002.
7003	(c) 7003.
7004	(D) 7004.
7005	(E) 7005.

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PART MARKING (SELECT ONE)	
(DOC DES)	6372
MIL-STD-130.	7629
ADDITIONAL PART MARKING	
A____	6991
B____	6992
C____	6993
D____	6994
E____	6995
APPLICABLE DOCUMENTS (SEE DOD-STD-35)	
QUALITY ASSURANCE PROVISIONS (SEE DOD-STD-35)	
PACKAGING (SEE DOD-STD-35)	
NOTES (SEE DOD-STD-35)	
NOMENCLATURE (SEE DOD-STD-35)	
SUPERSEDED DOCUMENT (SEE DOD-STD-35)	
PART NUMBER CROSS-REFERENCE (SEE DOD-STD-35)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6372	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.
7629	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.
	ADDITIONAL PART MARKING.
6991	(A) 6991.
6992	(B) 6992.
6993	(C) 6993.
6994	(D) 6994.
6995	(E) 6995.

Custodians:
Army-MI

Review activities:
Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SG
Army-WC

User activity:
Army-MU

Preparing activity:
Army-MI


(Project EDS-A284)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

APPENDIX A


ILLUSTRATIONS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

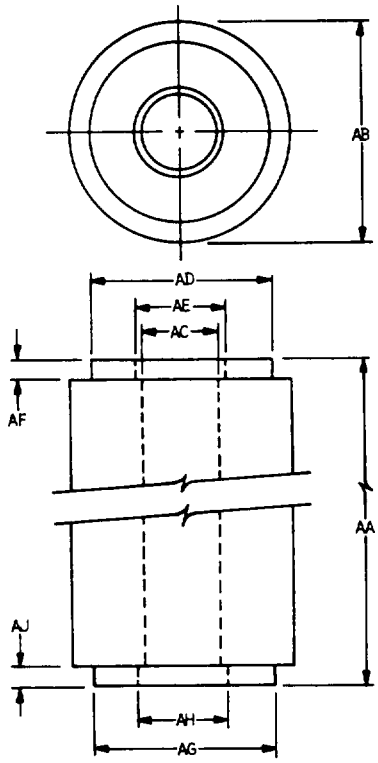


206-01-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

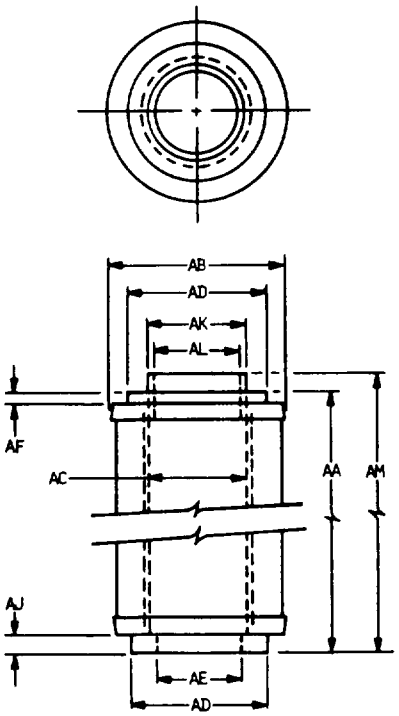


206-01-2

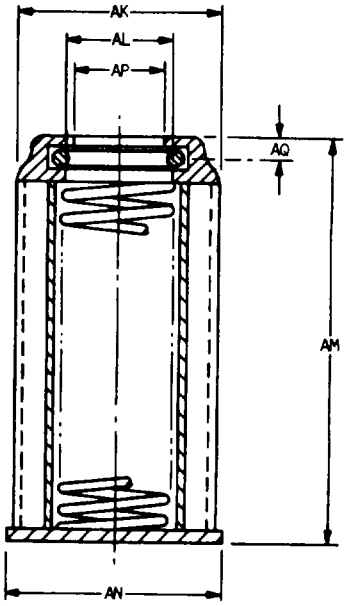


206-01-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

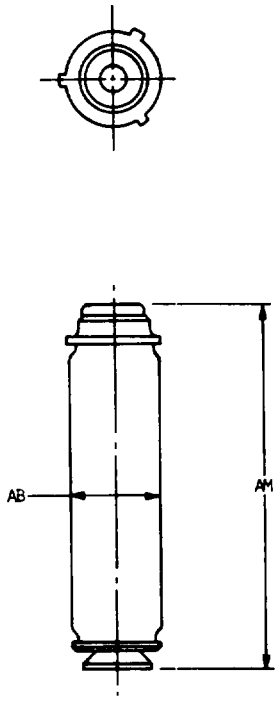


206-01-4

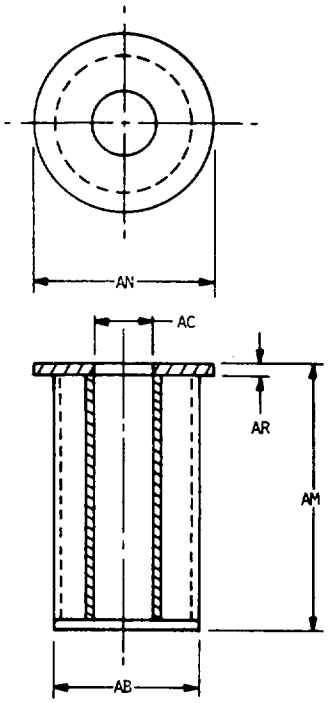



206-01-5

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

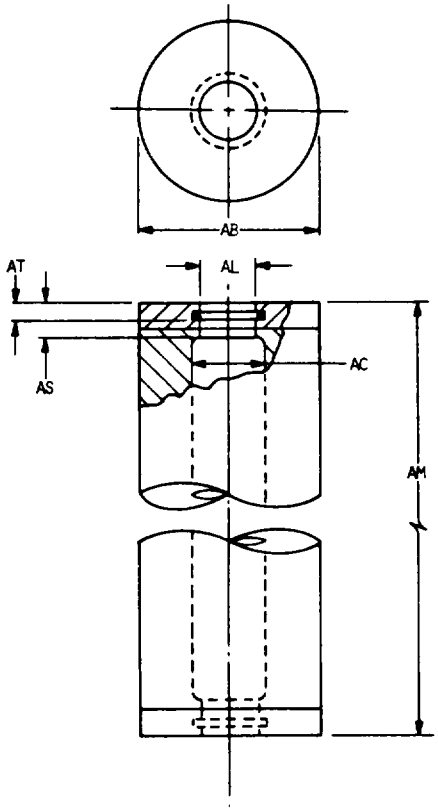


206-01-6







206-01-7

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

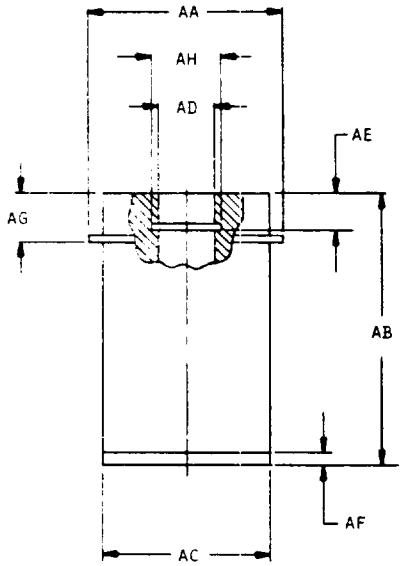


206-01-8

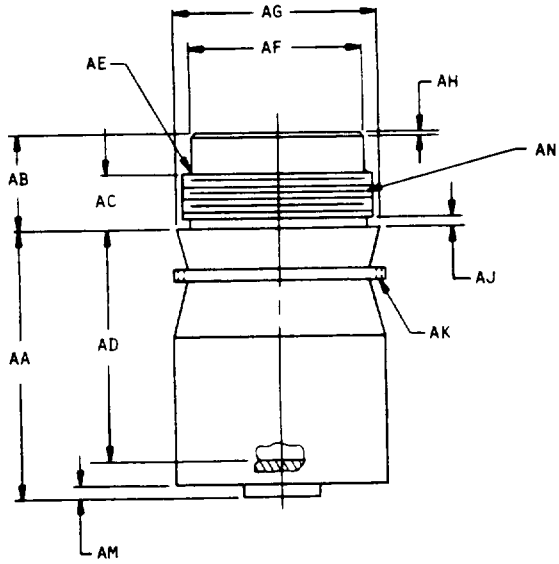

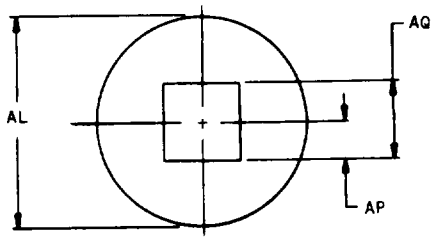


206-01-9

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

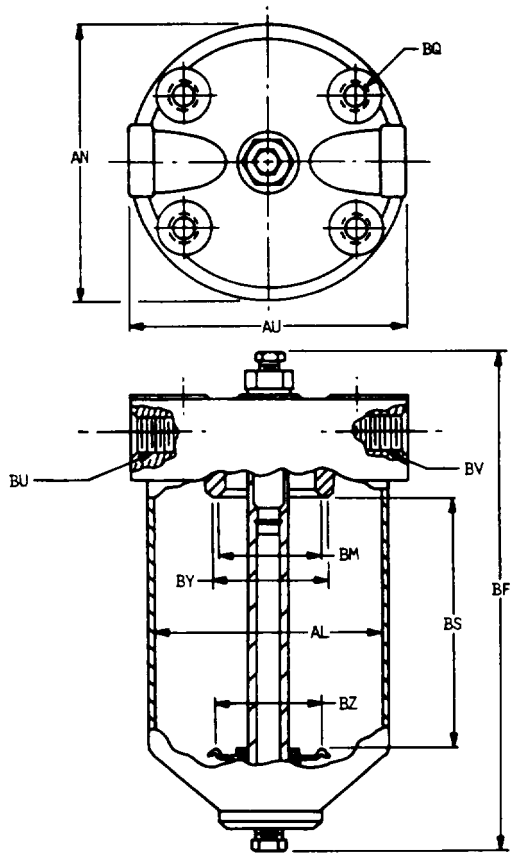


206-02-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

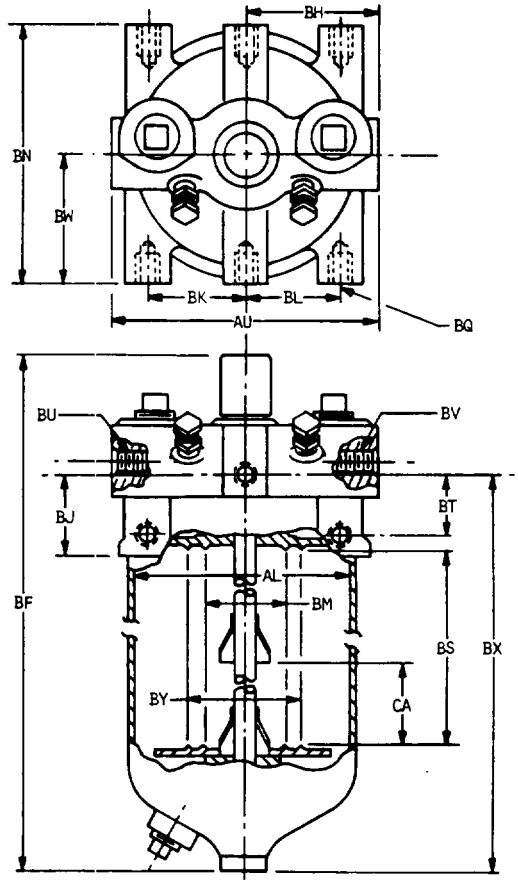



206-02-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

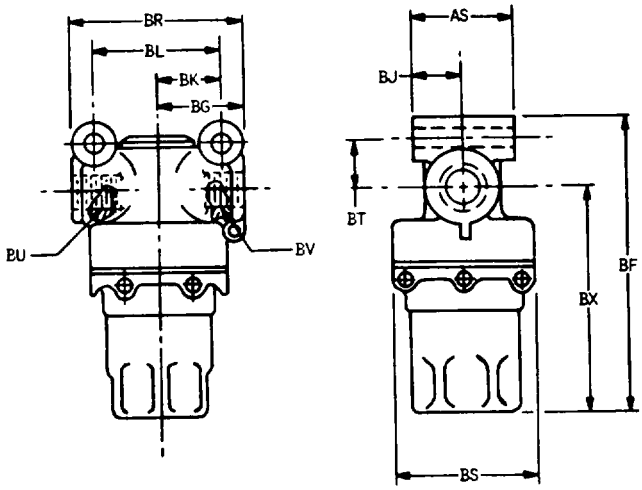


206-02-3

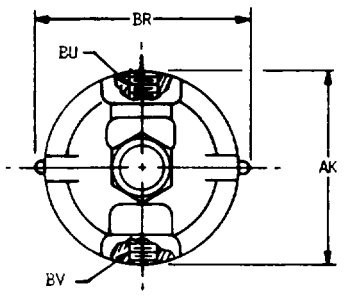

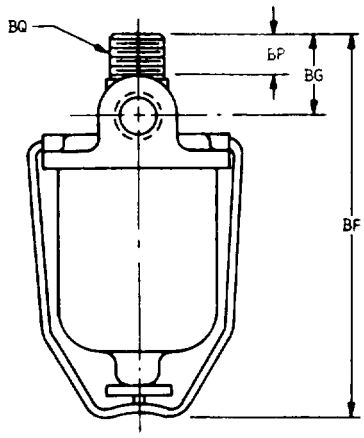


206-02-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

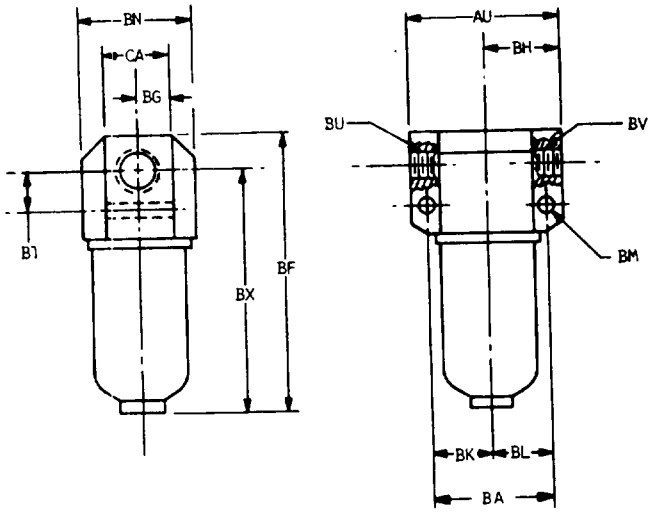


206-02-5

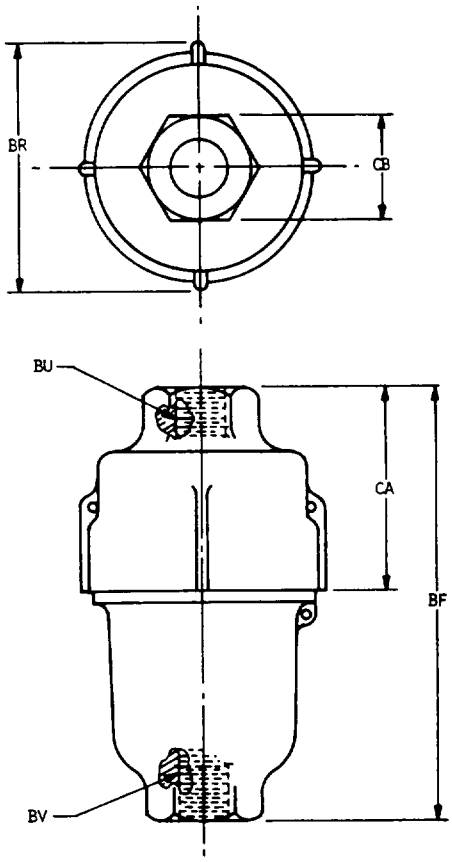


206-02-6

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

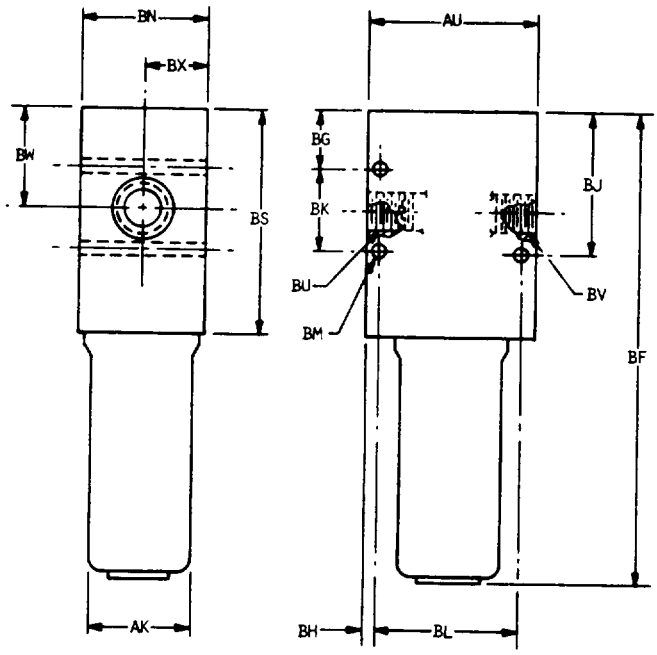


206-02-7

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

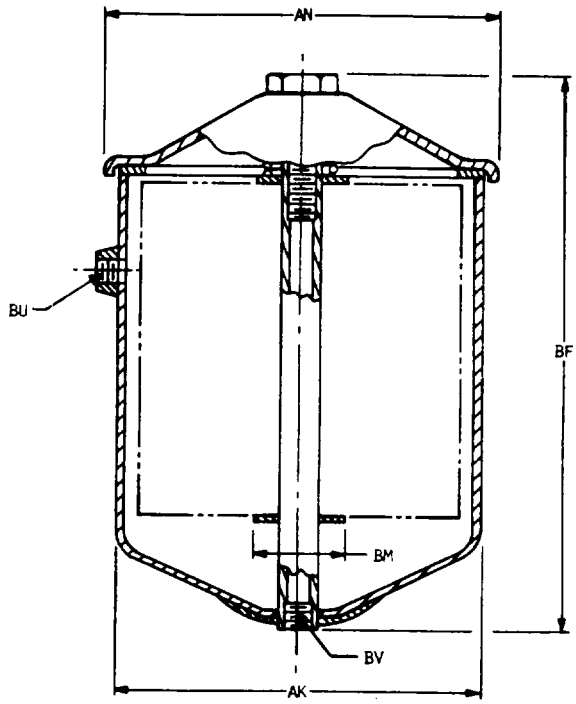


206-02-8

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

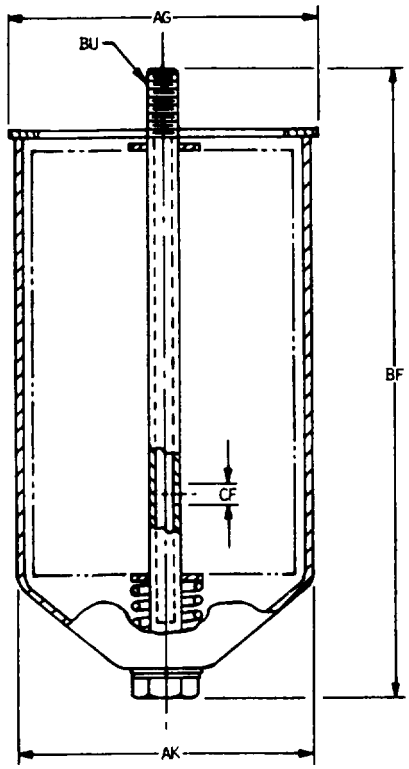


206-02-9

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

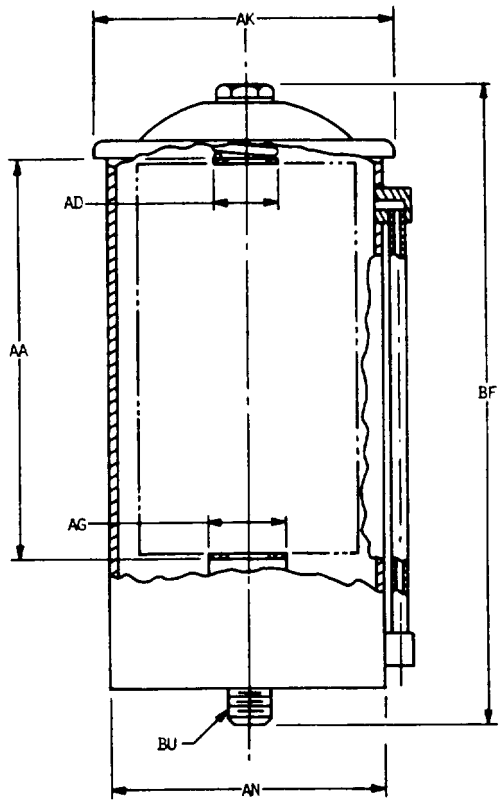


206-02-10

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

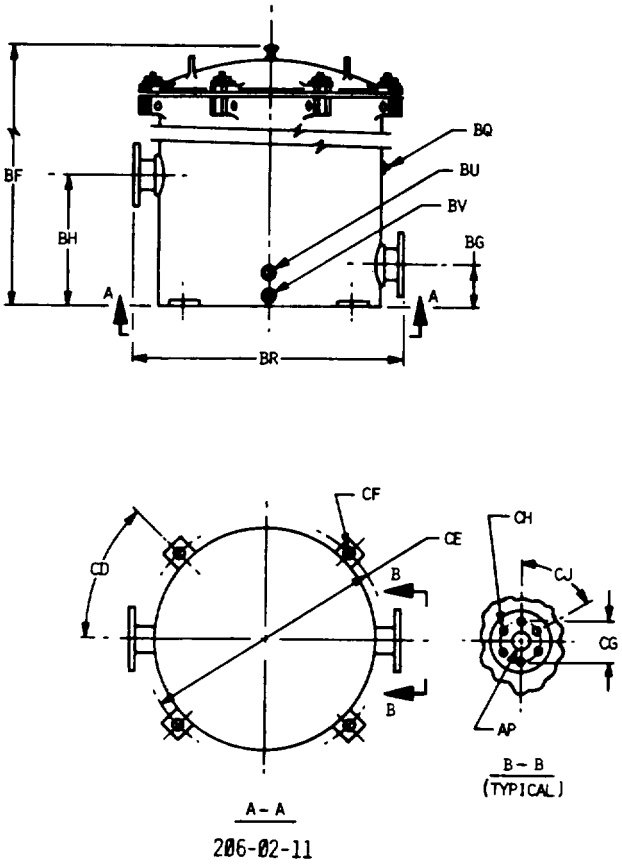


206-02-11


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

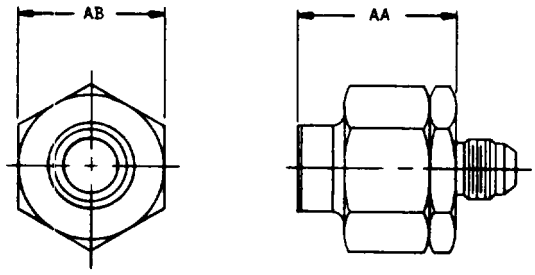

206-02-12

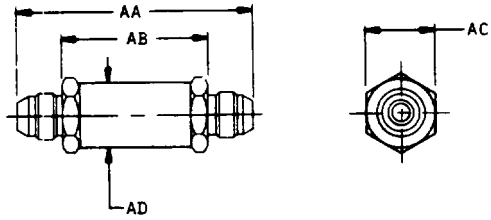

206-02-13

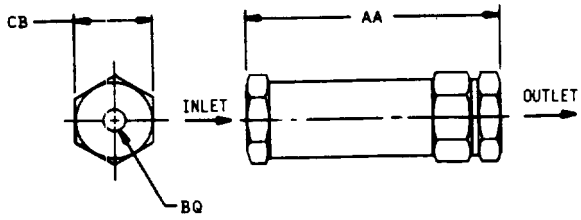

206-02-14

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	12	1608	24	2028	34	2238	84
0102	12	1610	24	2030	34	2240	84
0103	12	1612	24	2040	74	2242	84
0104	12	1614	24	2042	74	2244	84
0105	12	1616	24	2044	74	2246	84
0107	14	1618	24	2046	74	2248	84
0108	14	1620	26	2048	74	2252	76
0700	12	1622	26	2050	74	2254	76
0800	12	1624	26	2052	32	2260	76
1003	12	1626	26	2054	74	2261	76
1004	12	1628	26	2056	34	2262	76
1005	12	1630	26	2058	34	2264	76
1006	12	1902	82	2060	34	2266	76
1008	12	1904	82	2062	74	2302	58
1009	20	1908	80	2064	74	2304	58
1424	86	1910	82	2065	34	2306	58
1505	86	1912	82	2066	34	2308	58
1510	44	1914	80	2067	34	2312	58
1514	86	1916	82	2068	74	2314	58
1518	86	1918	82	2072	34	2316	58
1525	86	1930	46	2074	74	2320	56
1529	90	1932	46	2076	32	2321	58
1532	86	1934	48	2(78	32	2324	58
1538	86	1952	46	2080	34	2326	58
1539	44	1954	48	2082	34	2328	58
1540	86	1956	48	2152	56	2330	52
1559	86	1958	48	2154	56	2332	58
1562	22	1960	48	2158	56	2334	58
1563	20	1962	48	2160	56	2352	54
1564	22	1966	48	2202	32	2354	54
1565	20	1968	48	2206	32	2356	54
1566	24	1972	48	2210	30	2358	54
1567	24	1976	46	2212	30	2362	54
1569	24	1978	46	2220	30	2366	52
1570	24	1980	48	2222	30	2368	54
1571	24	1982	48	2224	32	2370	54
1600	22	2020	32	2230	84	2400	60
1602	22	2022	32	2232	84	2402	60
1684	24	2024	32	2234	84	2404	60
1606	24	2026	34	2236	84	2406	60

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:56Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2408	60	2526	38	2684	50	2810	46
2410	60	2528	38	2686	so	2812	80
2412	68	2530	38	2688	50	2814	80
2414	68	2532	38	2690	50	2816	80
2416	68	2534	38	2692	50	2820	80
2417	68	2536	36	2710	90	2822	80
2418	70	2538	38	2712	90	2824	80
2420	68	2540	38	2714	90	2826	80
2422	68	2542	40	2716	90	2828	80
2424	68	2556	76	2718	90	2830	80
2426	68	2558	76	2720	88	2882	80
2428	68	2560	76	2721	90	2884	78
2429	68	2602	42	2722	90	2902	30
2430	66	2604	42	2723	90	2904	30
2432	66	2606	42	2724	90	2908	30
2434	66	2608	42	2726	90	2910	30
2436	66	2612	42	2728	90	2912	30
2438	66	2614	42	2730	88	2930	30
2440	66	2630	48	2732	88	2932	30
2442	66	2632	86	2734	88	2950	36
2444	66	2634	86	2736	88	2952	36
2446	66	2636	86	2738	88	2954	36
2448	66	2638	86	2740	88	2956	36
2452	56	2640	52	2752	40	2958	36
2454	54	2642	88	2754	40	2959	36
2456	56	2644	88	2756	42	2960	36
2458	54	2650	52	2758	42	2962	36
2460	54	2652	52	2762	40	2964	36
2462	56	2654	52	2764	40	2966	38
2464	66	2656	52	2766	40	2970	36
2470	70	2658	52	2768	40	2972	36
2472	70	2662	52	2770	40	2973	34
2474	70	2664	52	2772	40	2974	36
2476	70	2670	48	2774	40	3020	62
2478	70	2672	50	2776	40	3022	62
2480	70	2674	50	2780	42	3024	62
2482	72	2676	50	2782	42	3026	62
2502	38	2678	50	2802	46	3028	62
2506	38	2680	50	2804	46	3030	62
2518	60	2682	50	2608	44	3032	62

Source: https://assist.dla.mil -- Downloaded: 2026l0-23T20:56Z
Check the source to verify that this is the currentversion before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
3034	62	4801	44	6996	28		
3036	64	4815	70	6997	28		
3038	64	4840	44	6998	28		
3052	60	4872	44	6999	28		
3054	60	4895	44	7001	92		
3056	60	4904	16	7002	92		
3058	60	4905	16	7003	92		
3060	60	4942	92	7004	92		
3062	60	4943	92	7005	92		
3064	62	4944	92	7021	26		
3066	62	4950	20	7022	26		
3070	72	4953	44	7023	26		
3072	72	4956	44	7024	26		
3074	72	4998	78	7301	16		
3076	72	4999	78	7302	16		
3078	72	5046	16	7572	20		
3080	72	5060	18	7573	20		
3082	72	5061	18	7576	20		
3084	72	5062	18	7577	20		
3086	72	5063	18	7580	22		
3088	72	5068	16	7581	18		
3090	72	5069	16	7582	18		
3092	74	5209	92	7583	18		
4681	84	6299	44	7584	18		
4682	86	6369	12	7585	18		
4724	44	6372	94	7586	20		
4754	64	6870	92	7587	16		
4755	64	6873	12	7588	16		
4756	64	6874	14	7589	16		
4760	64	6941	14	7590	16		
4761	64	6942	14	7629	94		
4762	64	6943	28				
4775	78	6944	28				
4779	78	6945	28				
4780	78	6946	28				
4783	78	6991	94				
4786	78	6992	94				
4788	72	6993	94				
6798	70	6994	94				
4799	70	6995	94				

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

INDEX

Page

Acidity- 30
Additional Part Marking- 94
Additional Requirements- 92
Airflow Resistance- 30
Altitude Rating- 18
Aperture Cards Required- 14
Applicable Documents- 94

Base Document- 12
Burst Pressure- 32
Burst Pressure Rating- 16

City, State, Zip- 12
Cold Start- 34
Company Name/Command- 12
Configuration - 20
Contract Number/Office Symbol - 12
Control, Source - 12
Control, Specification- 14
Conttrell Precipitate Arrestancy Efficiency - - - - - - - - - - - - - - - - - 38
Cycling - 40

Date- 12
Design and Construction- 22
DOP Smoke Penetration- 42
Dust- 44

Elongation- 44

Filter Assembly Proof Pressure- 46
Filter Assembly Relief Valve- 48
Filter Element Bubble Point- 52
Filter Element Collapse - 54
Filter Element Efficiency - 56
Filtration Capacity - 56
Finishes- 22
Flow Fatigue- 60
Flow Rate - 22
Flow Surge- 62
Format- 12
Fungus- 64

Government Design Activity FSCM- 12

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

High System Pressure- 66
Humidity- 70

Illustrations- 20
Immersion- 72

Leakage- 68
Low System Pressure- 74

Materials- 22
Maximum Particle Passed- 76
Maximum Pressure Drop- 24
Media Migration and Abrasion- 76
Metals- 22
Micron Rating- 20
Mounting Hardware- 92

Nomenclature- 94
Notes- 94

Operating Pressure Rating- 18

Packaging- 94
Part Marking- 94
Part Number- 14
Part Number Cross-Reference- 94
Phone Number- 12
Port Configuration- 24
Port One- 24
Port Two- 26
Proof Pressure Rating- 16

Quality Assurance Provisions- 94

Requester FSCM- 12
Requester's Name - 12
Revision of AEDPS Document (Number)- 14

Salt Fog - 78
Scope- 14
Shock- - - -- 78
Source Table- 14
Storage Conditions- 90
Street/Building- 12

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

Page

Superseded Document - - -

SPECIFICATION REQUIREMENT SHEET (SRS)

SHEET____OF____

*TITLE CODE 1 2 3 4 5 6	*REQUESTER NO. 7 8 9 10 11 12	CHAR CODE 13	14	15	16
*REQUESTER'S NAME		Ø	1	Ø	1
*COMPANY NAME/COMMAND		Ø	1	Ø	2
*STREET/BUILDING		Ø	1	Ø	3
*CITY, STATE, ZIP		Ø	1	Ø	4
*PHONE NO. INCLUDE A/C AUTOVON IF APPLICABLE		Ø	1	Ø	5
*DATE		1	Ø	Ø	3
*REQUESTER FSCM		1	Ø	Ø	4
*CONTRACT NO./OFFICE SYMBOL		1	Ø	Ø	5
*BASE DOCUMENT		1	Ø	Ø	6
*SYSTEM APPLICATION		1	Ø	Ø	8
*GOVERNMENT DESIGN ACTIVITY FSCM		6	3	6	9
*FORMAT SIX SECTION DOCUMENT.		Ø	7	Ø	Ø
ONE SECTION DOCUMENT.		Ø	8	Ø	Ø
APERTURE CARDS REQUIRED.		Ø	1	Ø	7
REVISION OF AEDPS DOCUMENT NO.		Ø	1	Ø	8
*CONTROL SOURCE.		6	8	7	3
SPECIFICATION.		6	8	7	4
*SOURCE TABLE		9	1	5	1
UNIT OF MEASURE U.S.		6	9	4	1
SI.		6	9	4	2

CHARACTERISTIC VALUE

20 25 30 35 40 45 50 55 60 65 70 75 79 LINE NO. 80

PLEASE SUPPLY THE FOLLOWING:

DASH-NUMBERED PART _____ REV _____ NOTICE # _____

AS A FINAL CHECK, SCAN THE SRS FOR THE FOLLOWING COMMON ERRORS:

- ☐ MANDATORY CHARACTERISTIC CODES AND VALUES NOT SUPPLIED
- ☐ ZERO (Ø) WRITTEN WITHOUT VIRGULE (O)
- ☐ USE OF POUND SIGN (#) WITHOUT ACCOMPANYING CHARACTERISTIC VALUE
- ☐ POUND SIGN (#) OMITTED FROM END OF STATEMENT (CHARACTERISTIC VALUE)
- ☐ CHARACTERISTIC CODE USED MORE THAN ONCE (OTHER THAN MULTILINE STATEMENT)
- ☐ MULTILINE STATEMENT NOT NUMBERED IN COLUMN 80

*MANDATORY

Source: https://assist.dla.mil -- Downloaded: 202640-23120:562
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.