MIL-C-51108A(EA)
8 October 1974
SUPERSEDING
MIL-C-51108(MU)
19 April 1968

MILITARY SPECIFICATION

CARRIER, AIRCRAFT CHEMICAL-BIOLOGICAL MASK, ABC-M17

This specification is approved for use by all Departments and Agencies of the Department of Defense

1. SCOPE

1.1 This specification covers one type of chemical-biological mask carrier.

2. APPLICABLE DOCUMENTS

2.1 Government documents. The following documents of the issue in effect on the date of invitation for bids or request for proposal form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

CCC-C-419 - Cloth, Duck, Cotton, Unbleached, Plied-Yard (Army and Numbered).

STANDARDS

FEDERAL

FED-STD-191 - Textile Test Methods.

FED-STD-123 - Marking for Domestic Shipment (Civil Agencies).

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.

FSC 4240

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:50Z
Check the source to verify that this is the current version before use.

DRAWINGS

US ARMY ARMAMENT COMMAND

EDGEWOOD ARSENAL

D5-4-343 - Carrier, Aircraft Chemical-Biological Mask, ABC-M17.

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Materials and components. All materials and components shall be in accordance with Drawing D5-4-343 and the subsidiary drawings listed thereon.

3.1.1 Reinforcing strip. When rubber-coated duck is used for the reinforcing strip, Drawing B5-4-321, it shall consist of duck weighing 8.25 ounces per square yard, conforming to type III of CCC-C-419, which has been evenly coated on both sides with a cured natural or synthetic rubber compound. The coated duck shall have a minimum weight of 21 ounces per square yard (see 4.3) and the surfaces shall not be tacky to the touch.

3.2 Manufacture and assembly. The carrier shall be manufactured and assembled in accordance with Drawing D5-4-343.

3.2.1 Stitching. All rows of stitching shall be straight or regular lines, free from loose stitches or thread loops. When stitching is not of continuous thread, each thread end or break shall be back stitched (wherever practicable) for no less than two inches. All seams and hems shall be back stitched at the ends to prevent raveling.

3.2.2 Fasteners. The male and female components of all fasteners shall be securely attached to the fabric. The pressure used in attaching the fastener components shall be applied so that the fabric shall not be weakened or injured. The attached fasteners shall function smoothly and efficiently.

3.2.3 Marking. The finished carrier shall be legibly and indelibly marked as shown on Drawing D5-4-343.

3.3 Workmanship. The carrier shall be free from damage (tears, cuts, and holes) and contamination (grease, oil and foreign matter).

Source: https://assist.dla.mil -- Downloaded: 20261O-22T20:50Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.

4.1.1 Supplier's responsibility. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to specified requirements.

4.1.2 Objective evidence. The supplier shall provide objective evidence acceptable to the contracting officer that the requirements of 3.1 and section 5 for which specific inspection has not been provided in this specification have been satisfied.

4.2 Quality conformance inspection.

4.2.1 Lotting. A lot shall consist of the carriers produced by one manufacturer from the same type of material and under essentially the same manufacturing conditions and offered for shipment at one time.

4.2.2 Sampling.

4.2.2.1 Carriers. Sampling shall be conducted in accordance with MIL-STD-105.

4.2.2.2 Rubber-coated duck. Three cuts, one foot long across the width of the roll, shall be taken at random from each roll of rubber-coated duck.

4.2.3 Inspection procedure.

4.2.3.1 Examination.

4.2.3.1.1 Carriers. Sample carriers shall be examined in accordance with the classification of defects and MIL-STD-105.

4.2.3.1.2 Rubber-coated duck. Sample cuts of rubber-coated duck shall be examined in accordance with the classification of defects, as applicable, and tested as specified in 4.3. When rubber-coated duck is used, it shall be inspected for tackiness prior to assembly.

Source: https://assist.dla.mil -- Downloaded: 20261O-22T20:50Z
Check the source to verify that this is the current version before use.

4.2.3.2 Classification of defects.

(a) Carrier, aircraft chemical-biological mask, ABC-M17 (Dwg. D5-4-343).

Categories	Defects
Critical:	None defined
Major:	AQL 1.0 percent defective
101	Component missing, incorrect, or incorrectly assembled
102	Inability of carrier to properly contain all the specified contents
103	Hardware nonfunctional
104	Inside diameter of grommet less than 0.880 inch
105	Damage
106	Contamination (grease and oil)
107	Marking missing, incorrect, or illegible
Minor:	AQL 2.5 percent defective
201	Seams turned incorrectly
202	Stitching incorrect
203	Reinforcing strip tacky to the touch
204	Hardware coating missing, inadequate, or incorrect
205	Contamination (other than Major 106)

4.3 Test. The weight per square yard of the rubber-coated duck shall be determined in accordance with method 5041 of FED-STD-191.

4.4 Acceptance/rejection criteria. If any cut of rubber-coated duck fails to meet the applicable requirements of 3.1.1, the roll represented shall be rejected.

5. PREPARATION FOR DELIVERY

5.1 Packaging, packing and marking, interplant shipment (see 6.3). The carriers shall be packaged and packed to afford adequate protection from the supplier to the first receiving activity for immediate use. Shipping containers shall comply with the rules and regulations applicable to the mode of transportation. In addition to any marking required by the contract or order, marking shall conform to FED-STD-123.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:50Z
Check the source to verify that this is the current version before use.

5.2 Repair parts. When this item is procured for storage and issue as a repair part, preservation, packaging, packing and marking shall be specified on the repair part packaging data sheet which is identified by the National Stock Number for the repair part.

6. NOTES

6.1 Intended use. The ABC-M17 carrier is a component of the ABC-M24 Aircraft Chemical-Biological Mask and is intended to support and protect the mask when not in use.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.

(b) Size marking to be placed on packaging and packing containers.

6.3 Interplant shipments. Packaging for supplies and materials which will not enter the military supply system. Typical interplant shipments are shipments from a vendor to a subcontractor or a prime contractor, or from a subcontractor to a prime contractor, or from a vendor or contractor to a military arsenal or plant.

6.4 International interest. Certain provisions of this specification are the subject of international standardization agreement QSTAG 234. When amendment, revision, or cancellation of this specification is proposed which will affect or violate the international agreement concerned, the preparing activity will take appropriate reconciliation action through international standardization channels including departmental standardization offices, if required.

6.5 Figure 1. Figure 1 is a miniature reproduction of assembly drawing and is attached for information only.

Custodian:

Army - EA


Preparing activity:

Army - EA

Project No. 4240-A620

☆U.S. GOVERNMENT PRINTING OFFICE: 1974-603-112/3222

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:50Z
Check the source to verify that this is the current version before use.

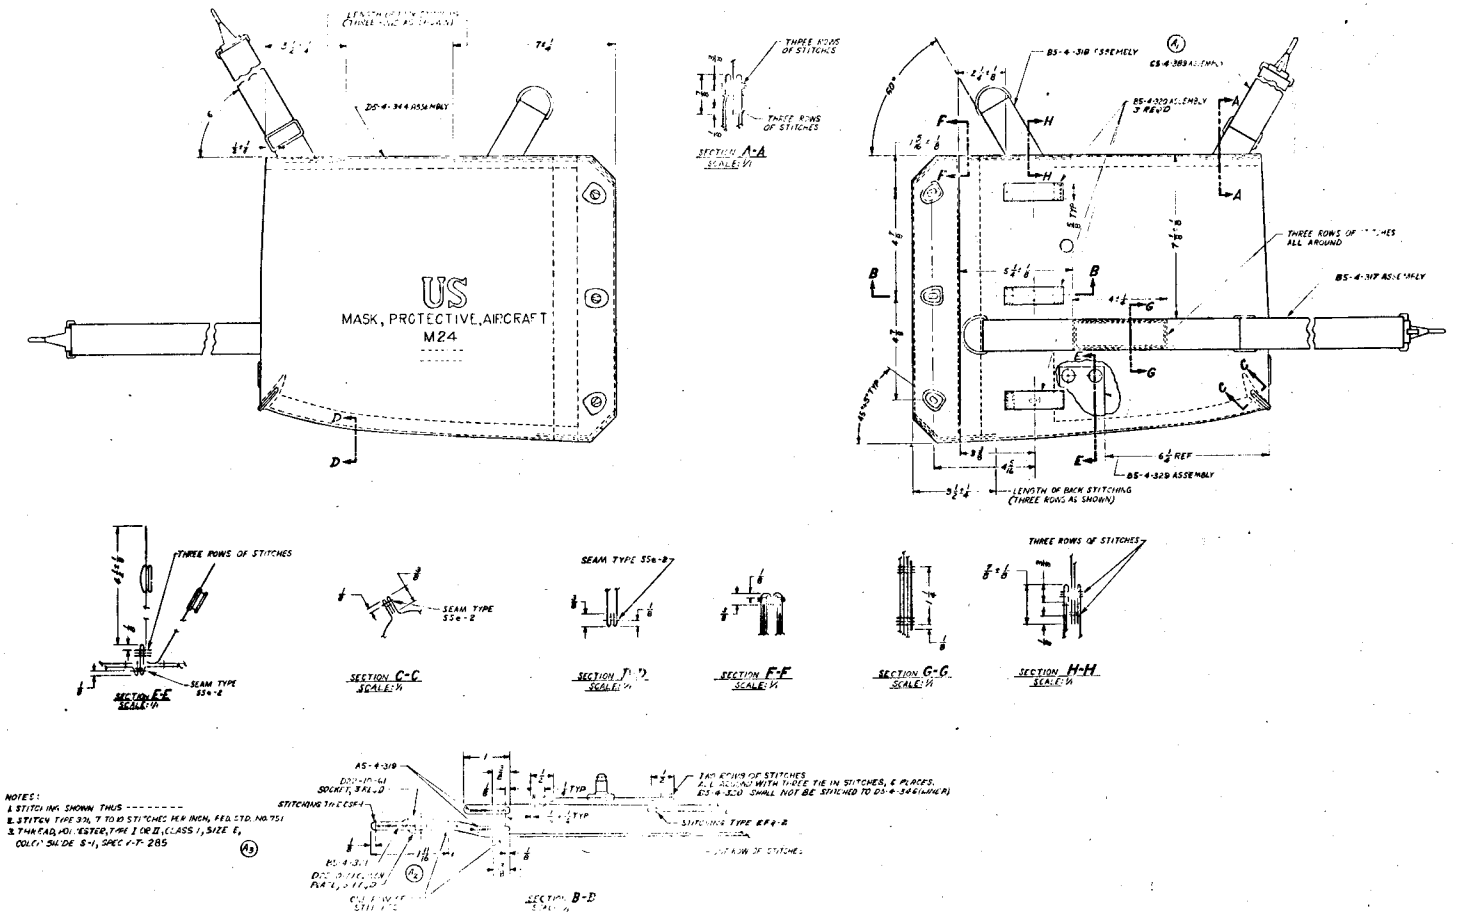

THIS FIGURE IS A MINIATURE COPY OF AN EDGEWOOD ARSENAL DRAWING AND IS FOR INFORMATION ONLY: THE DRAWING REFERENCE IN PARAGRAPH 2.1 GOVERNS

Figure 1

Carrier, Aircraft Chemical-Biological Mask, ABC-M17

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:50Z
Check the source to verify that this is the current version before use.