
MILITARY SPECIFICATION SHEET

TOOL KITS, ELECTRICAL CONNECTORS, CONTACTS, AND CONNECTOR AND CABLE ACCESSORIES: TOOL KIT FOR MIL-C-22520/2 CRIMPING TOOL AND POSITIONERS

This specification is approved for use by Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the tool kit described herein shall consist of this document and the latest issue of Specification MIL-T-83507.

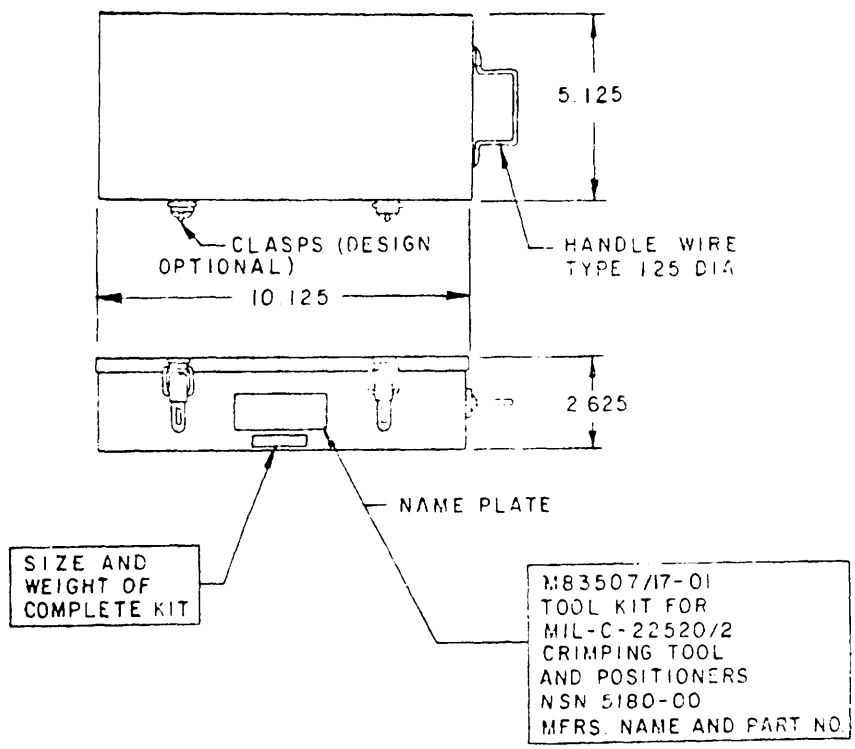

NOTES:
1. For drawing notes and metric equivalents, see figure 5.
2. Part number M83507/17-01 includes case and tools.

FIGURE 1. Tool kit for MIL-C-22520/2 crimping tool and positioners.

FSC 5180


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:24Z
Check the source to verify that this is the current version before use.

Parts List:

(1)	M83507/17-02	- Tool case assembly.
(1)	M22520/2-01	- Crimp tool frame.
(1)	M22520/2-02	- Positioner.
(1)	M22520/2-03	- Positioner.
(1)	M22520/2-04	- Positioner.
(1)	M22520/2-05	- Positioner.
(1)	M22520/2-06	- Positioner.
(1)	M22520/2-07	- Positioner.
(1)	M22520/2-08	- Positioner.
(1)	M22520/2-09	- Positioner.
(1)	M22520/2-10	- Positioner.
(1)	M22520/3-1	- In-service inspection gage.

(1 set) - Contents charts, instruction sheets, and tool selection chart.


FIGURE 1. Tool Kit for MIL-C-22520/2 crimping tool and positioners - Continued.

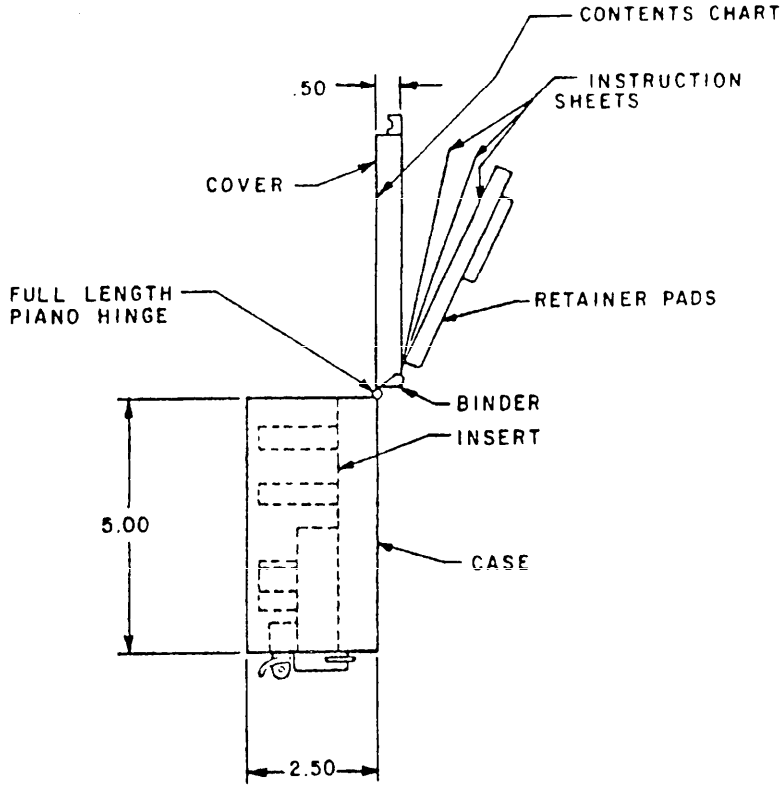

NOTES:
1. See figure 5, note 4.
2. Part number M83507/17-02 for case only (tools not included).


FIGURE 2. Tool case assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:24Z
Check the source to verify that this is the current version before use.

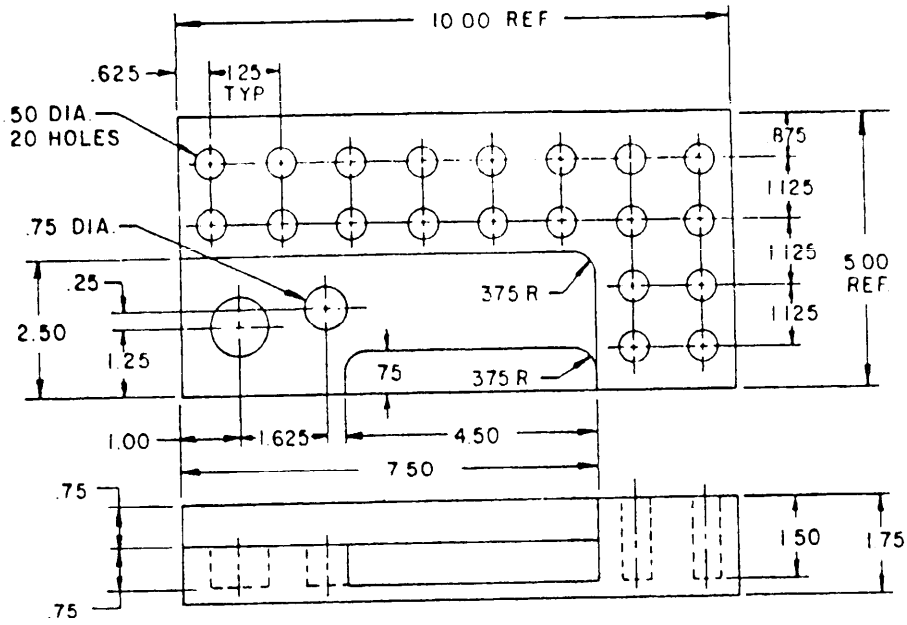

NOTES:
1. For drawing notes and metric equivalents, see figure 5.
2. This insert is part of the tool case assembly (see figure 2).

FIGURE 3. Insert.

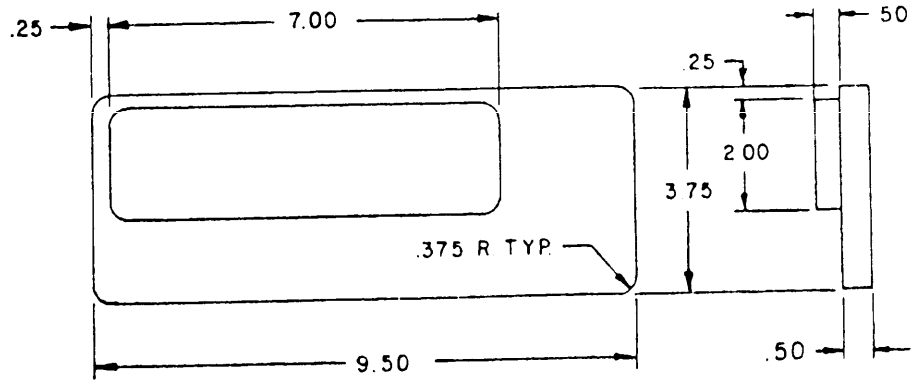

NOTES:
1. For drawing notes and metric equivalents, see figure 5.
2. This retainer is part of the tool case assembly (see figure 2).


FIGURE 4. Retainer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:24Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.125	3.18	.75	19.0	1.50	38.1	2.625	66.68	7.00	177.8
.25	6.4	.875	22.22	1.625	41.28	3.75	95.25	7.50	190.5
.375	9.52	1.00	25.4	1.75	44.4	4.50	114.3	9.50	241.3
.50	12.7	1.125	28.58	2.00	50.8	5.00	127.0	10.00	254.0
.625	15.88	1.25	31.8	2.50	63.5	5.125	130.18	10.125	257.18


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are ±.031 (.79 mm).
4. Remove all burrs, break sharp edges and corners.

FIGURE 5. Drawing notes and metric equivalents.

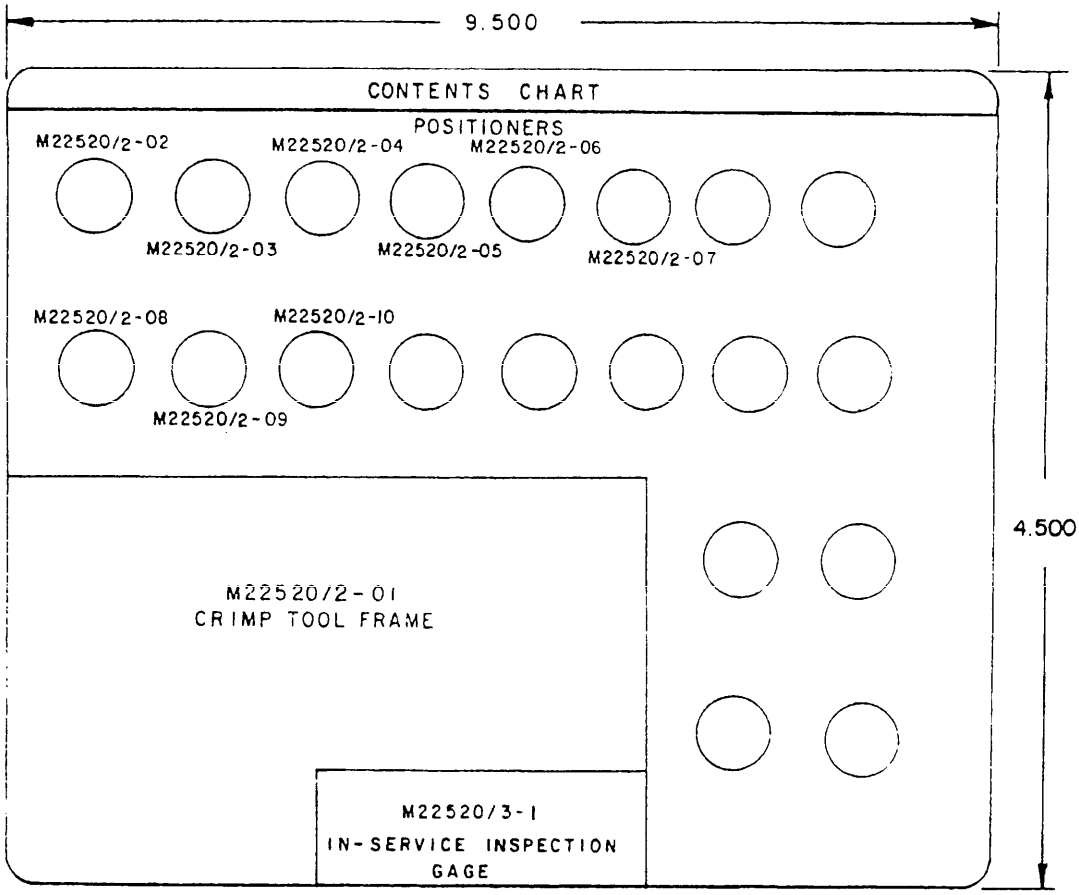

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:24Z
Check the source to verify that this is the current version before use.

INSTRUCTION SHEETS ARE AS FOLLOWS:

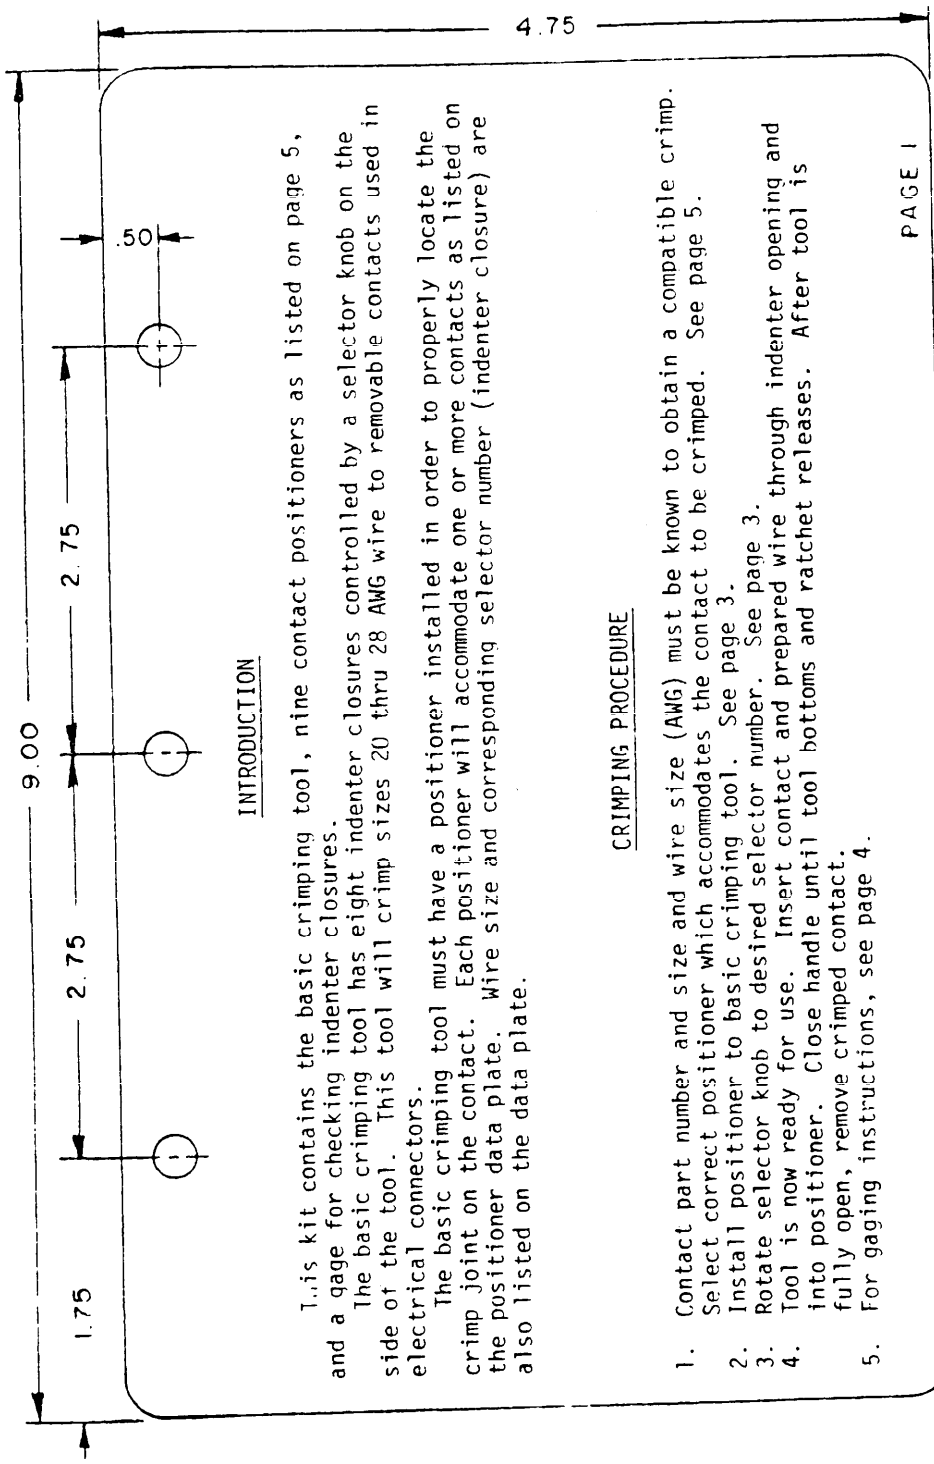

INTRODUCTION

This kit contains the basic crimping tool, nine contact positioners as listed on page 5, and a gage for checking indenter closures.

The basic crimping tool has eight indenter closures controlled by a selector knob on the side of the tool. This tool will crimp sizes 20 thru 28 AWG wire to removable contacts used in electrical connectors.


The basic crimping tool must have a positioner installed in order to properly locate the crimp joint on the contact. Each positioner will accommodate one or more contacts as listed on the positioner data plate. Wire size and corresponding selector number (indenter closure) are also listed on the data plate.

CRIMPING PROCEDURE

1. Contact part number and size and wire size (AWG) must be known to obtain a compatible crimp. Select correct positioner which accommodates the contact to be crimped. See page 5.
2. Install positioner to basic crimping tool. See page 3.
3. Rotate selector knob to desired selector number. See page 3.
4. Tool is now ready for use. Insert contact and prepared wire through indenter opening and into positioner. Close handle until tool bottoms and ratchet releases. After tool is fully open, remove crimped contact.
5. For gaging instructions, see page 4.

PAGE 1

Source: https://assist.dla.mil -- Downloaded: 202610-23T08:24Z
Check the source to verify that this is the currentversion before use.

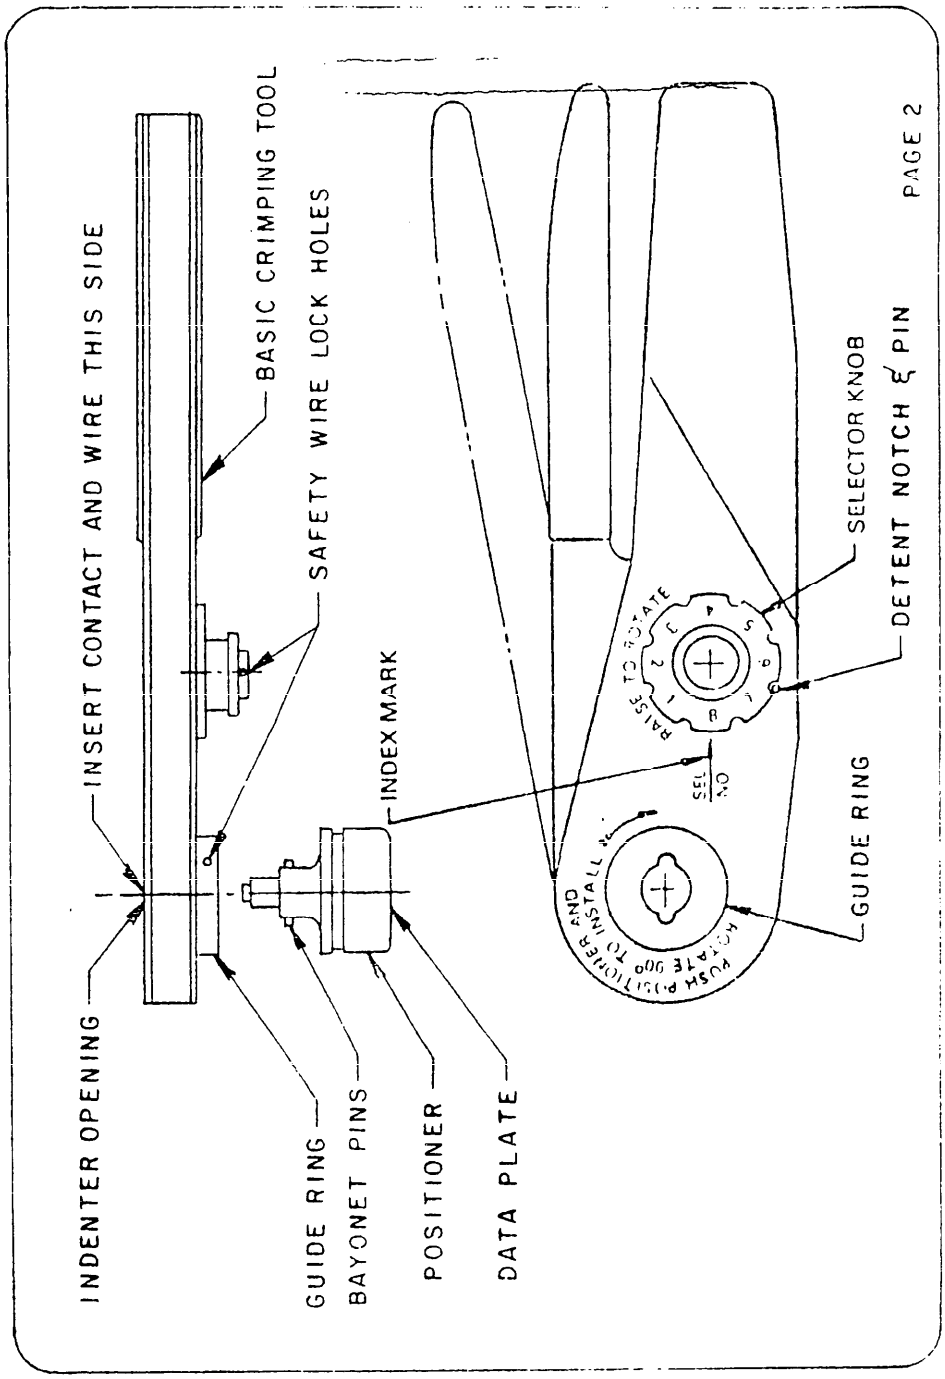

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:24Z
Check the source to verify that this is the current version before use.

GENERAL INSTRUCTIONS

Handle should be in open position when installing positioner and rotating selector knob.

TO INSTALL POSITIONER

Align positioner with guide ring as shown on page 2. Bayonet pins will pass thru notches in guide ring. Rotate positioner clockwise 90° until it stops. Release positioner and it will snap into locking position. Safety wire may be used to prevent removal of positioner by unauthorized personnel.

TO SET SELECTOR KNOB


Determine correct selector number (indenter closure) from data plate on end of positioner. Lift selector knob and rotate until desired number is in line with index mark. Release knob when detent notch is in line with detent pin. Selector knob may be locked in any one position with a safety wire.

TOOL IS NOW READY FOR USE


After removing crimped contact from tool, inspect crimped joint for proper location and determine if wire is visible thru inspection hole in side of contact crimp barrel.

PAGE 3

Source: https://assist.dla.mil -- Downloaded: 202610-23T08:24Z
Check the source to verify that this is the currentversion before use.

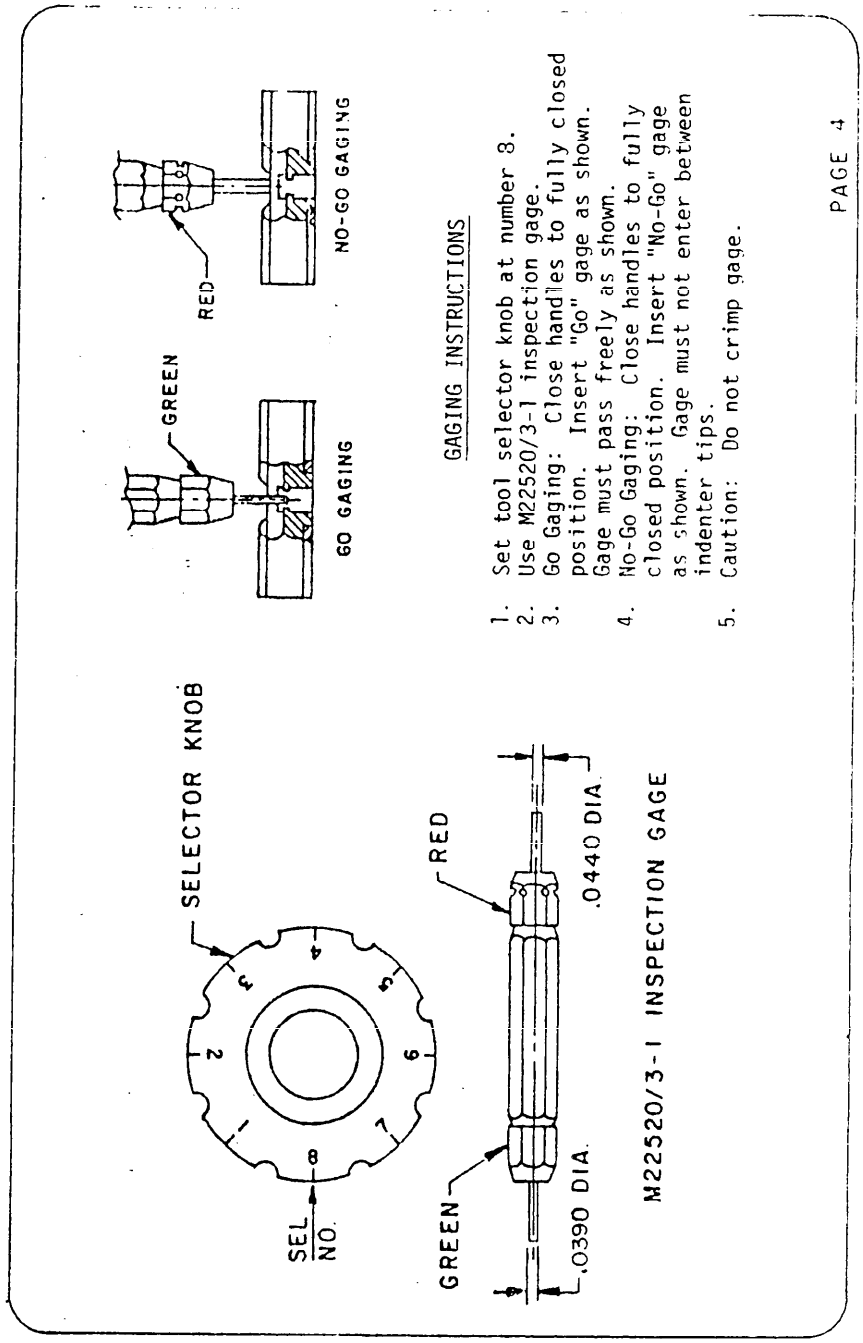

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:24Z
Check the source to verify that this is the current version before use.

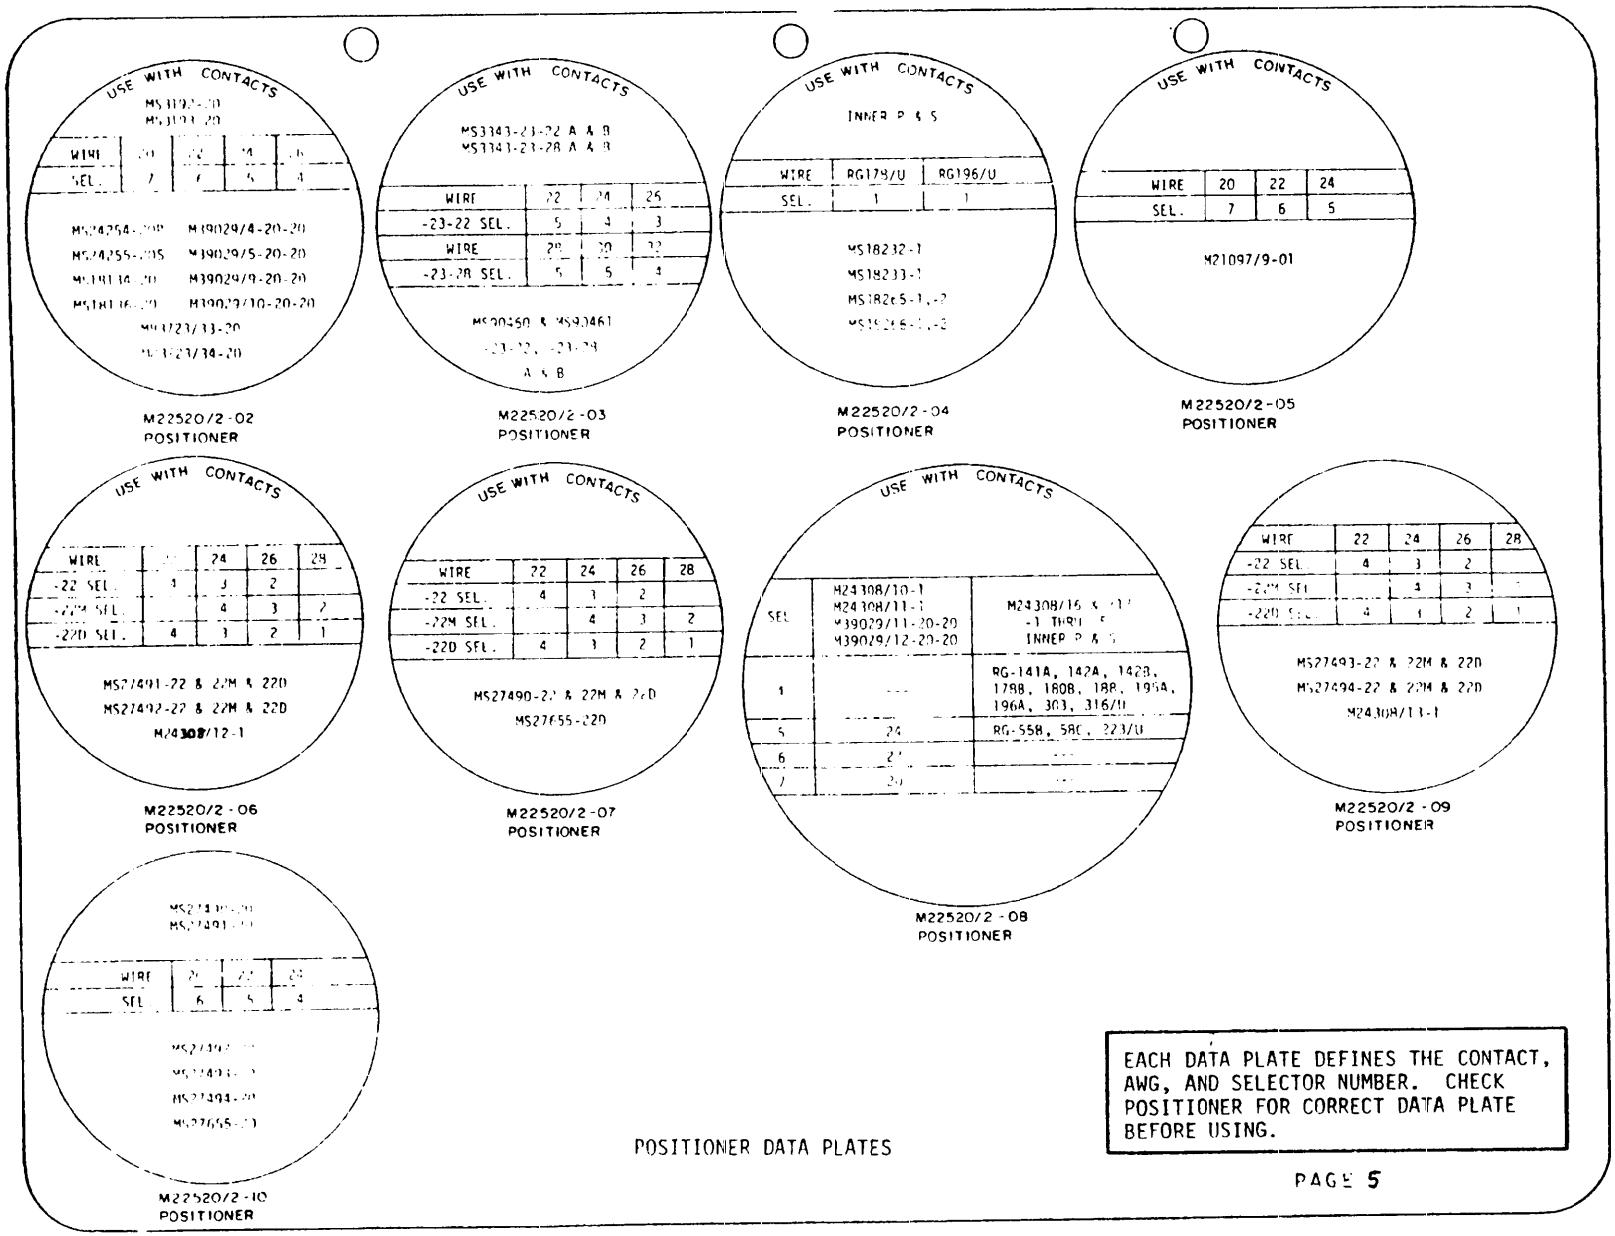

Source: https://assist.dla.mil -- Downloaded: 2026/10-23T08:24Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and configuration: See figures 1 through 5.

Materials:
Case and cover (category 3): Sheet metal, 21 gage in accordance with QQ-S-698; gray baked enamel on all metal parts.
Instruction sheets and contents chart: White vinyl 0.020 inch (0.51 mm) thick.
Insert and retainer pad: Fire retardant foamed polythylene in accordance with PPP-C-1752; color is optional.

Clasps, draw pull type with provision for locking device, handles, and hinges: Suitably plated to resist corrosion.

Nameplate: In accordance with MIL-P-19834.

Binder: Looseleaf, three ring, 0.562 inch (14.27 mm) ±0.062 inch (1.57 mm) I.D., 2.75 inc (69.9 mm) center distance between rings, securely riveted to inside of cover.

Instruction sheets and contents chart (see pages 4 through 9): Lettering shall be legibl and protected with a transparent coating. Contents chart (centered on inside of case cover) shall have pressure sensitive adhesive backing and show the insert cavity configurations and the respective tool part numbers; a list of NSN's will also be suppli

Part number:
M83507/17-01 - Tool Kit for MIL-C-22520/2 crimping tool and positioners.
M83507/17-02 - Tool case assembly.

QUALIFICATION:

Qualifying activity: Naval Weapons Support Center (Code 3064), Crane, Indiana 47522.

Custodian:
Navy - AS

Review activities:
Navy - EC
DLA - ES

User activity:
Navy - MC

Preparing activity:
Navy - AS

Agent:
DLA - ES

(Project 5180-N112)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:24Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers' vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE
MIL-T-[illegible]7/17 (AS) 7 July 1976

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?
☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 202610-23T08:24Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE NAVY
DoD-316

U.S.MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

COMMANDER,
DESC-ESD,
1507 WILMINGTON PIKE
DAYTON, OH 45444

FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-23T08:24Z
Check the source to verify that this is the current version before use.