MIL-W-50422A(PA)
29 March 1974
SUPERSEDING
MIL-W-50422(MU)
15 May 1969

MILITARY SPECIFICATION

WARHEAD, HE, M18A1
LOADING AND ASSEMBLY

1. SCOPE

1.1 This specification contains special requirements not normally covered by the drawings and provides quality assurance provisions for the loading for one type of shaped charge warhead for the Rocket, 66MM, Anti-Tank, M72A2.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposals form a part of this specification to the extent specified herein:

SPECIFICATION

MILITARY

MIL-D-1000 - Drawings, Engineering and Associated Lists.
MIL-A-2550 - Ammunition and Special Weapons: General Specification for.
MIL-O-45445 - Octol, General Specification for.

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-109 - Quality Assurance Terms and Definitions.
MIL-STD-453 - Radiographic Inspection.
MIL-STD-1168 - Lot Numbering of Ammunition.
MIL-STD-1235 - Single and Multilevel Continuous Sampling Procedures and Tables for Inspection by Attributes.

NON-MILITARY

ASTM-A-36 - Structural Steel
ASTM-A-370 - Mechanical Testing

FSC: 1340

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:24Z
Check the source to verify that this is the current version before use.

DRAWINGS

PICATINNY ARSENAL

9220247 - Body Loading Assembly

PUBLICATIONS

PICATINNY ARSENAL

ET-9220247 - Equipment Tabulation

OTHER PUBLICATIONS

American Iron and Steel Institute Steel Products Manual "Carbon Steel: Plates

(Copies of specifications, standards, drawings and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the Contracting Officer.)

3. REQUIREMENTS

3.1 Material.-Materials shall be in accordance with the applicable drawings and specifications.

3.1.1 Parts.-All parts used in the assembly shall meet all requirements of applicable drawings and specifications.

3.2 Body Loading Assembly.-The body loading assembly shall comply with all requirements specified on drawings (dwg.) 9220247 and with all requirements specified in the applicable specifications.

3.3 Cavitation of Loaded Warhead.-The explosive charge shall be considered in five segments as defined in Figure I. Cavitation shall be determined radiographically as specified in 4.4.1.

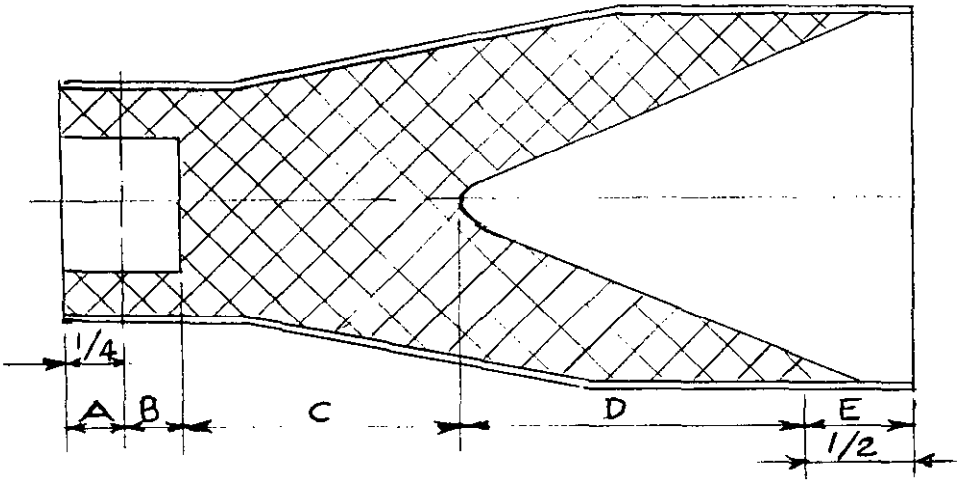


FIG. 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:24Z
Check the source to verify that this is the current version before use.

3.3.1 Section A.-Cracks, chips and voids in this section shall not exceed forty (40) percent of the total area. (Visual)

3.3.2 Section B.-There shall be no chips or cracks in Section B. No cavity shall have a dimension in excess of 1/16 inch. (Visual) This section includes the base of the booster well.

3.3.3 Maximum allowable conditions in Sections C, D and E:

	Segments		
	C	D	E
Sum of projected area of the cavity (sq. in.)	1/16	1/16	1/64
Projected length of any cavity excluding cracks (in.)	3/16	1/8	1/8
Number of cracks	1	0	2
Cracks, max. projected width (in.) (see 3.3.4)	1/32	0	1/16

3.3.4 Cracks.-No crack which indicates complete severence of the explosive charge shall be permitted in any segment. Hairline cracks in any segment shall be disregarded for computing the total number of cracks. A hairline crack is defined as a crack having less than a maximum width of 1/64 inch at any point.

3.3.5 Cavities Extending into Two Segments.-The projected area of cavities extending into two segments shall meet the requirements of both segments.

3.4 Penetration.-The loaded warhead shall function satisfactorily as evidenced by complete detonation and penetration of mild steel.

Stand-off Distance (Measured from tip of nose cap to target)	Penetration
0.0 inches	11.6 inches min.

Variability Around the Mean.-At 0.0 inches, the mean penetration less the product of k and the standard deviation shall be greater than the minimum requirement. The k-factors utilized for various sample size are indicated in paragraphs 4.3.3.1.2 and 4.3.3.2.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:24Z
Check the source to verify that this is the current version before use.

3.5 Composition of Regenerated Octol.-When riser material is recycled, no TNT shall be added to the mixture of virgin octol and recycled material. Riser material shall be recycled for a maximum of ten successive melts. If riser material is used in a melt, the riser material used shall be obtained from the immediate preceding melt.

3.6 Workmanship.-All parts, subassemblies and assemblies shall be free of chips, dirt, grease, rust and any other foreign material that may impair porper functioning of the item or that may cause premature functioning or deterioration in storage. Cleaning method used shall not be injurious to any of the parts, nor shall the parts be contaminated by the cleaning agent used. Painted or coated surfaces shall be restored when these surfaces have been marred or scratched. All marking shall be clean and sharply defined.

3.7 First Article Inspection.-This specification makes provisions for first article inspection. Requirements for the submission of first article samples by the contractor shall be specified in the contract.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for Inspection.-Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to the prescribed requirements. Reference shall be made to Standard MIL-STD-109 in order to define terms used herein. The provisions of Specification MIL-A-2550 shall apply.

4.1.1 Submission of Product.-At the time each completed lot of items deliverable under the contract is submitted to the Government for acceptance, the contractor shall supply the following information accompanied by a certificate which attests that the information provided is correct and applicable to the product being submitted:

a. A statement that the lot complies with all of the quality assurance provisions specified in this specification.

b. Drawing and specification number and date, together with identification and date of changes thereto.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:24Z
Check the source to verify that this is the current version before use.

c. A statement that all material purchased by the contractor meets requirements, when such material is controlled by Government or commercial specifications referenced in any of the contractual documents, and that certificates of conformance are on file and available for review.

d. Number of items in the lot.

e. Date submitted.

The certificate shall be signed by a responsible agent of the certifying organization. The initial certificate submitted shall be substantiated by evidence of the agent's authority to bind his principal. Substantiation of the agent's authority will not be required with subsequent certificates unless, during the course of the contract, this authority is vested in another agent of the certifying organization.

4.2 First Article Inspection.

4.2.1 Submission.-The contractor shall submit a first article sample to a Government-approved facility as designated by the Contracting Officer for evaluation in accordance with the provisions of 4.2.2. The first article sample shall consist of sixty (60) warhead assemblies in accordance with dwg. 9220247 which have been produced by the contractor or furnished by a supplier and which have been manufactured using the same production processes, procedures, and equipment which will be used in fulfilling the contract. All parts and materials, including packaging and packing, shall be obtained from the same sources of supply as will be used in regular production. Prior to submission, the contractor shall inspect the sample to the degree necessary to assure that it conforms to the requirements of the contract and shall submit a record of this inspection with the sample, including statements of findings of tests and examinations and certificates of conformance for materials (see 4.1.1.c). A sample containing known defects will not be submitted unless specifically authorized by the Contracting Officer. A first article sample or portion thereof, as directed by the Contracting Officer, shall also be submitted whenever there is a lapse in production for a period in excess of 90 days, or whenever a change occurs in manufacturing process, material used, drawing, specification or source of supply such as to significantly affect product uniformity as determined by the Government.

4.2.2 Inspections to be Performed.-Each warhead will be subjected by the Government to any or all of the examinations and tests specified in 4.3.2 and 4.3.3 of this specification and to any or all requirements of the applicable drawings.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:24Z
Check the source to verify that this is the current version before use.

4.2.3 Rejection.-If any assembly fails to comply with any of the applicable requirements, the first article sample shall be rejected. The Government reserves the right to terminate its inspection upon any failure of an assembly or component in the sample to comply with any of the stated requirements. In the event of rejection, the Government reserves the right to require the contractor to take corrective action and submit a new first article, or portion thereof. Until a first article sample is accepted, the contractor is in no way authorized by the Government to initiate regular production unless otherwise directed by the Contracting Officer.

4.3 Inspection Provisions.

4.3.1 Lot Formation.-The term "inspection lot" as used in this specification is defined as an essentially homogeneous collection of units of product from which a representative sample is drawn and inspected to determine conformance with applicable requirements. The sample selected shall represent only that quantity of units from which the sample was drawn and shall not be construed to represent any prior or subsequent quantities presented for inspection. Homogeneity shall be considered to exist provided the inspection lot has been produced by one manufacturer, in one unchanged process, in accordance with the same drawing, same drawing revision, same specification and same specification revision and complies with the provisions for submission of product as specified in MIL-STD-105. Changes to the process, specification, or drawing not affecting safety, performance, interchangeability, or storage, as determined by the Government, shall not be deemed to alter the homogeneity of an inspection lot. All material submitted for inspection in accordance with this specification shall comply with the homogeneity criteria specified herein regardless of the type of sampling procedure which is being applied to determine conformance with requirements. Lot numbering, as required, shall be in accordance with MIL-STD-1168. Each inspection lot of loaded completed warheads shall contain:

a. Metal parts from not more than one interfix lot number from one manufacturer.

b. Loaded warheads from not more than one production batch. A batch is defined as one explosive melt.

c. Octol from not more than two lots from one manufacturer. When riser material is used with a virgin octol melt, the added riser material will have no lot identity.

d. Octol from not more than one interfix lot number from one manufacturer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:24Z
Check the source to verify that this is the current version before use.

4.3.2 Examination.-The examination listed in the following subparagraphs shall be performed on inspection lots (see 4.3.1) of the components or assemblies designated in the applicable paragraph headings. Inspection for critical defects (and major defects, when so specified) shall be 100 percent. Sampling plans for major and minor defects shall be in accordance with MIL-STD-105 except that continuous sampling plans in accordance with MIL-STD-1235 may be used if approved by the Government. Instead of applying the AQL's designated herein to the groups of major and minor defects listed, the contractor may elect to apply AQL's to individual defects using and AQL of 0.40 percent for each major defect and an AQL of 0.65 percent for each minor defect. When this method is elected, it shall be applied to all of the major and minor defects listed in the applicable subparagraph if this section, except where 100 percent inspection is specified, and shall be documented as part of the contractor's inspection system. Equipment necessary for the performance of the inspections listed shall be in accordance with 4.3.4.

4.3.2.1 Warhead Assembly (see dwg. 9220011 covering a detail of dwg. 9220247).

Categories	Defects	Method of Inspection	Code No. (see 6.2)
Critical:	None defined.		
Major:	AQL 0.40 percent		
101.	Evidence of foreign material	Visual	01001
Minor:	None defined.		

4.3.2.2 Assembly, Body Loading (see dwg. 9220247).

Categories	Defects	Method of Inspection	Code No.
Critical:			
1.	Octol caked on outside of assembly	Visual	02001
Major:	AQL 0.65 percent		
101.	Depth of booster well	Gage	02002
102.	Diameter of booster well	Gage	02003
103.	Assembly dented, distorted, or otherwise damaged	Visual	02004
104.	Runout of inside diameter of booster cavity with small outside diameter of body	Gage	02005

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:24Z
Check the source to verify that this is the current version before use.

Minor: AQL 0.65 percent
201. Evidence of poor workmanship.....Visual 02006

4.3.3 Testing.

4.3.3.1 First Article Sample (see 4.2.1).-The samples submitted as the first article quantity shall be tested as specified herein after being examined 100 percent for the applicable classifications of defects in paragraph 4.3.2.

4.3.3.1.1 Cavitation of Loaded Warhead (see 3.3), Major Defect, Code No. 02007.-A sample of 60 body loading assemblies shall be selected for the first article and examined as specified in 4.4.1. If one or more warheads are classed defective, the first article shall be rejected. The examination shall be as specified in 4.4.1.

4.3.3.1.2 Penetration - Mild Steel, 0.0 Inch Standoff.-Major Defects, Code No. 02008.-Failure to meet variability around the mean.-A sample of 60 body loading assemblies shall be selected for the first article and tested as specified in 4.4.2. The first article shall be rejected if the 60 warheads fail to meet the variability requirement (see 3.4, k=2.18).

4.3.3.2 Production.

4.3.3.2.1 Cavitation of Loaded Warhead (see 3.3), Major Defect, Code No. 02007.-A randomly selected sample of fifty (50) body loading assemblies (dwg. 9220247) shall be selected and examined as specified in 4.4.1. If two or more warheads are classed defective, the lot shall be subjected to 100 percent examination. Those warheads which are classed defective shall be removed from the lot. If the initially selected sample of 50 warheads contains fewer than two defects, the lot shall be radiographically accepted without further testing.

4.3.3.2.2 Penetration - Mild Steel - 0.0 Inch Standoff.-Major Defects, Code No. 02008.-Failure to meet variability around the mean.-A randomly selected sample of eight (8) warheads shall be selected from each batch and tested as specified in 4.4.2.

A double sampling shall be utilized for determining acceptance of each batch for variability around the mean when tested as specified in 4.4.2. The plan is as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:24Z
Check the source to verify that this is the current version before use.

Acceptance	$X_8 - 2.881(s)_8 \geq$	Requirement (see 3.4),Accept lot
Criteria	$X_8 - 2.881(s)_8 <$	Requirement,Apply rejection criteria
Rejection	$X_8 - 1.273(s)_8 <$	Requirement, Reject lot
Criterion	$X_8 - 1.273(s)_8 \geq$	Requirement,Take 2nd samle of 16
Second	$X_{24} - 2.154(sD)_{24} \geq$	Requirement, Accept lot
Sample	$X_{24} - 2.154(sD)_{24} <$	Requirement, Reject lot

where X_8 is the mean of 8 samples, s_8 is the standard deviation of 8 samples, X_{24} is the mean of 24 samples, and s_{24} is the standard deviation of 24 samples.

4.3.3.2.5 Viscosity of Regenerated Octol (see 3.5).-The testing of this paragraph shall be performed only when regenerated octol is used and shall be for information only. A 500-525 gram sample of octol shall be selected from the octol pouring spout at the beginning and end of each production shift and a 500-525 gram sample of octol shall be selected from the octol pouring spout midway during any pouring operation which exceeds four hours. The sample shall be tested for viscosity as per paragraph 4.3.6 of MIL-O-45445, with the exception that the temperature of the octol shall be the pouring temperature which shall be recorded.

4.3.4 Inspection Equipment.-Equipment Tabulation ET-9220247 identifies the inspection equipment required to perform the examinations and tests prescribed in this section. The contractor shall design inspection equipment in accordance with the instructions in paragraph 6.3.

4.3.4.1 Government Rights to Documentation.-Inspection equipment drawings and lists provided and revised in accordance with the requirements of the ET may be used by DOD activities for design, procurement, manufacture, testing, evaluation, production and receiving inspection, overhaul, shipping, storage, identification of stock, ordering and storage of replacement parts, inspection of items at overhaul, general maintenance of equipment, construction, survey and whenever inspection equipment drawings are needed.

4.4 Test Methods and Procedures.

4.4.1 Radiographic Inspection.-The loaded warhead shall be radiographically examined, in accordance with the procedures of MIL-STD-453, by directing the beam normal to the longitudinal axis of the warhead. The change shall be radiographed twice, the second

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:24Z
Check the source to verify that this is the current version before use.

picture to be displaced 90 degrees from the first, except that the second radiograph shall not be made if the assembly is rejected by the first view. Both views shall be normal to the warhead longitudinal axis. The penetrameter used in the application specified in MIL-STD-453 shall be designed and constructed to insure a two (2) percent sensitivity. Any loaded warhead containing an explosive charge which does not satisfy the requirements of paragraph 3.3 shall be classed defective and removed from the lot.

4.4.2 Penetration.-The warhead assembly, dwg. 9220247, when fitted with a production nose cap shall be mounted in a test fixture and aligned perpendicular to the center of the target stack. The standoff distance shall be measured from the top of the nose cap perpendicular to the target stack. The target stack shall be of sufficient height to contain the warhead jet. The maximum depth of penetration shall be measured to nearest 1/10 inch by a probe of the last plate penetrated. The warhead shall be initiated by a M48 electric detonator, or a M36A1 alternate, with the booster pellet in place. The penetration test at 0.0 inch stand-off shall be conducted using a 5 inch diameter by 10 inch long mild steel cylinder with sufficient 2 inch thick plates to attain a height of 20 inches. The test shall be in accordance with all the requirements of paragraph 4.3.3.2.2. If the lot fails to meet the requirements of 4.3.3.2.2, the lot shall be rejected.

4.4.2.1 Mild Steel.-This paragraph specifies the mild steel to be used in the penetration tests. Mild steel is defined as carbon steel plate or rounds of ASTM-A-36 structural quality. The mild steel shall meet the requirements of ASTM-A-36 and the following requirements:

a. The hardness of the test material shall be from 116 to 156 Brinell.

b. The plates shall have a nominal thickness of 2 inches.

c. The cylinders shall have a diameter of 5 inches and shall be 10 inches long.

Samples for Testing.-Each plate or rod as rolled shall meet the requirements stated above. The "as rolled condition" is defined as the original total mill product rolled from a slab or directly from an ingot. The test specimens from the "as rolled" material shall be in accordance with AISI Steel Products Manual.

The hardness determination shall be made on each mill product and on a representative sample of stack target material. The representative hardness sample of target material shall be selected randomly in accordance with special inspection level S-3 of MIL-STD-105, using the Single Sampling Plan for Normal Inspection, Table II A.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:24Z
Check the source to verify that this is the current version before use.

The hardness measurements of the random samples shall be taken at the center of the target material on both the upper and the lower surfaces that will be perpendicular to the longitudinal axis of warhead to be tested. Failure of one or more pieces of target material to meet the hardness requirements shall be cause for rejection of all pieces obtained from the original mill product. All mechanical testing shall be performed on each mill product in accordance with ASTM-A-370.

5. PREPARATION FOR DELIVERY

6. NOTES

6.1 Ordering Data.-Procurement documents shall specify the following:

a. Title, number and date of this specification.
b. Ammunition data cards shall be prepared for each lot in accordance with MIL-STD-1167.

6.2 Inspection Code Numbers.-The five digit code numbers assigned to the inspections herein are to facilitate future data collection and analysis by the Government. These code numbers are used to correlate the characteristics cited on Equipment Lists with the inspection listed in this specification. They should also be cited as references on drawings of equipment designs submitted by the contractor (see 6.3.3).

6.3 Inspection Equipment Designs.-Inspection equipment designs are of two types - Government Special Inspection Equipment (SIE) designs and contractor designs. SIE designs are designated by drawing numbers (on the Equipment Lists referenced on the Equipment Tabulation) or (under the "Method of Inspection" headings in Section 4). Design responsibility for all other inspection equipment is assigned to the contractor. Equipment to be designed by the contractor is designated "CD". The contractor need not furnish any design when a complete Government SIE design is provided. Unless otherwise specified, however, the contractor may submit alternate or modified contractor designs of SIE in accordance with 6.3.2 and 6.3.3, should he elect to do so.

6.3.1 SIE Designs.-SIE designs may consist of any of the following:

a. Detailed drawings which completely depict all information necessary for the fabrication and use of the item of inspection equipment.
b. A source control drawing or a specification control

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:24Z
Check the source to verify that this is the current version before use.

drawing as defined in MIL-STD-100.

c. An envelope drawing, as defined in MIL-STD-100, which establishes the criteria which a detail design shall meet. When envelope drawings are specified, the contractor shall prepare designs which comply with the criteria therein.

6.3.2 Contractor Designs.-Contractor designs are required for all inspection equipment for which SIE designs are not specified, and may include commercial equipment which the contractor proposes to use. (Commercial equipment is defined as unmodified equipment which is cataloged and available for purchase by the general public). Contractor designs shall include appropriate instructions, calibration procedures and maintenance procedures. Commercial equipment shall be fully described by catalog listings or other means which provide sufficient information to permit identification and evaluation by the Government, and may include illustrations and engineering data. Designs shall be prepared for any special fixture(s) required to be used with commercial equipment, or with SIE designs, if not otherwise covered thereby (See 6.3.1c). Designs shall be of the category and form (per MIL-D-1000) specified in the Contract Data Requirements Lists (DD Form 1423). The contractor is referred to MIL-HDBK-204, "Inspection Equipment Design" for guidance. The specification number and the applicable five-digit defect code number (or other specific identifying information) from Section 4 of this specification shall be referenced on each contractor design, together with the component or assembly drawing number and revision letter to which the specific design applies.

6.3.3 Submission of Designs for Approval.-Contractor designs shall be approved by the Government prior to fabricating or procuring the equipment. Designs shall be submitted for approval in accordance with the stipulations, time frame and distribution specified in the Contract Data Requirements List (DD Form 1423) or in the contract. Partial submission of inspection equipment is permissible and encouraged; however, the completion date for design review will be based on the date of the final submission of designs. Picatinny Arsenal design review will normally be accomplished within one month after receipt.

6.4 Submission of First Article Sample.-Instructions as to the location for the evaluation of the first article sample shall be obtained from the Contracting Officer. Upon receipt of such request, the Contracting Officer shall advise Picatinny Arsenal and instructions will be issued accordingly. All inquiries should be forwarded to: Commanding Officer, Picatinny Arsenal, Dover, New Jersey, ATTN: SARPA-QA-I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:24Z
Check the source to verify that this is the current version before use.

6.5 Calculation of Sample Standard Deviation.-The sample standard deviation shall be calculated using the following formula or its equivalent:

$$s = \sqrt{\frac{(x - \bar{x})^2}{n - 1}}$$

where:

s = sample standard deviation
x = numerical value of individual observations
$\bar{x}$ = mean value for the sample
n = sample size

6.6 Submission of Test Data.-In addition to the normal distribution of records, one copy of all test data shall be forwarded to each of the following:

Commanding Officer
Picatinny Arsenal
ATTN: SARPA-QA-A-R
SARPA-AD-E-C-1
Dover, New Jersey 07801

NOTICE: When Government drawings, specifications or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Custodian:
Army - PA

Preparing Activity:
Army - PA

Project Number: 1340-A422

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:24Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:24Z
Check the source to verify that this is the current version before use.