MIL-J-4421E(USAF)
2 November 19[illegible]
SUPERSEDING
MIL-J-4421D(USAF)
19 April 1961

MILITARY SPECIFICATION

JACKET, WOMAN'S, WOOL, BLUE

1. SCOPE

1.1 This specification covers one type of woman's wool serge jacket furnished in short, regular, and long lengths in the following sizes (see 6.2):

8	14	20	42
10	16	38	44
12	18	40	46

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids, or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

Federal

L-P-378	Plastic Film (Polyethylene Thin Gage)
V-B-871	Button, Sewing Hole, and Button, Staple, (Plastic and Pearl)
V-F-106	Fastener, Slide, Interlocking
V-T-276	Thread, Cotton
V-T-280	Thread, Cotton Gimp, Buttonhole
V-T-301	Thread, Silk
UU-T-111	Tape; Paper, Gummed (Sealing and Securing)
CCC-T-191	Textile Test Methods
DDD-L-20	Label; Clothing, Equipage, and Tentage, (General Use)
DDD-T-86	Tape, Textile, Cotton, General Purpose, (Gray, Bleached or Dyed)
PPP-B-636	Box, Fiberboard

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

Military

MIL-C-297	Cloth, Cotton Warp, and Spun Hair-Wool Filling, Interlining
MIL-C-326	Cloth, Cotton, Silesia
MIL-C-340	Cloth, Cotton, Buckram (for Interlining)
MIL-C-368	Cloth, Rayon-Acetate, Lining
MIL-C-823	Cloth, Wool, Serge
MIL-P-15064	Pad, Shoulder Sleeve

STANDARDS

Federal

FED-STD-751	Stitches, Seams, and Stitchings

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	Marking for Shipment and Storage

DRAWING

Air Force

53C20892	Jacket, Woman's, Wool, Blue

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Materials

3.1.1 Basic material. The basic material for the jacket shall conform to type I, class 7 of MIL-C-823. The color shall be USAF color shade No. 1084 (see 6.3).

3.1.2 Lining. The material for lining the body, the sleeves, the inside breast pocket facings, and the waistband back tab shall conform to type I, class 2 of MIL-C-368. The color of the lining shall be blue, USAF color shade No. 1086 (see 6.3).

3.1.3 Interlining. The material for interlining the fronts shall be unbleached cloth, conforming to type III of MIL-C-297.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

3.1.4 Silesia. The material for the inside pockets and the stay pieces for the front and of the underply at the right front waistband interlinings, the shoulder, the armhole, and the simulated pockets, the waistband back tab, and inside pockets shall be black and shall conform to type I of MIL-C-326.

3.1.5 Buttons. The buttons shall conform to type II, class D, style 20 or 21 of V-B-871. The size of the two buttons on the outside of the left band shall be 24 lines; the size of the remaining seven buttons shall be 30 lines. The color of all the buttons shall be blue, USAF color shade No. 1084 (see 6.3).

3.1.6 Gimp. The gimp for reinforcing the buttonholes shall be a No. 3 silk gimp with a cotton core, soft or hard finish. The gimp shall not be less than 100 yards per ounce. The gimp for the buttonhole for the rayon waistband tab shall be cotton, soft or glazed finish, conforming to size No. 8, type I or II of V-T-280. The gimp shall be vat dyed blue, USAF color shade No. 1083 (see 6.3) and shall show good colorfastness to dry cleaning.

3.1.7 Collar interlining. The material for interlining the collar shall conform to class 2 of MIL-C-340.

3.1.8 Shoulder pads. The shoulder pads shall conform to type II of MIL-P-15064.

3.1.9 Snap fastener. The snap fastener for the front closure of the jacket shall be a dress snap fastener, sewing hole size "C," round or square. The metal for the snap fastener shall be brass and the color black.

3.1.10 Slide fastener. The slide fastener for the front closure of the jacket shall conform to type IV, size L, style 8, short tab pull of V-F-106. The tape shall be vat dyed blue, USAF color shade No. 1083 (see 6.3). The metal components of the slide fastener shall be fabricated of natural finish aluminum. The dyed tape shall show good colorfastness to dry cleaning only, when tested as specified.

3.1.11 Thread. The thread for seaming, stitching, button attachment, buttonholes, and felling for the basic material shall be vat dyed blue, USAF color shade No. 1083 (see 6.3). Unless otherwise specified, the lower thread shall be identical to the upper thread specified in the sewing operations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

3.1.11.1 Cotton. All cotton thread shall conform to V-T-276. The thread for seaming, stitching, felling, and buttonholes, except where the use of silk is specified, shall be mercerized, cotton, machine thread, type IC2, ticket No. A and O and soft finish, cotton, machine thread, type IA3, ticket No. 50 to 70, 3 ply. The thread for sewing on buttons shall be soft or silk (glazed) finish, cotton, machine thread, type IA3 or IB3, ticket No. 12, 16, and 20, 4 ply. The thread for stitching canvas shall be soft or silk (glazed) finish, white, cotton, machine thread, type IA2 or IB2, ticket No. 30 to 70, 3 ply. The thread for basting shall be a good commercial grade, bleached or unbleached cotton, or the same thread employed in seaming and stitching the jacket. The dyed thread shall show colorfastness to wet-dry cleaning.

3.1.11.2 Silk. Where the sewing operations specify silk thread for machine sewing, the thread shall be as designated in V-T-301 and in table I of this specification. Where the sewing operations specify silk thread for hand sewing, the thread shall be type III, class 3, letter size designations A and C as designated in table I of this specification and in V-T-301. The dyed thread shall show colorfastness to light and to wet-dry cleaning.

3.1.12 Tape. The material for taping the armholes, the backs, the front edges, and the lapel breakline shall be unbleached or bleached, woven, cotton tape, conforming to class 1 or 2 of DDD-T-86. The tape shall be 1/4 inch wide for the armholes and the back and 3/8 inch wide for the front edges and the bridle.

3.1.12.1 Shrinkage. The tape shall be preshrunk and shall not shrink more than 4 percent in the direction of the length when tested as specified. The preshrinkage process shall not be identified by trade name or trademark on the tape, the ticket, or the package. All tapes shall be wet and dried out.

3.1.13. Hanger. The hanger for the jacket shall be vat dyed blue, USAF color shade No. 1083 (see 6.3) and shall be rayon and cotton, flat braid having the following physical requirements:

Number of carriers	12 (continuous filament viscose rayon)
Ends per carrier	1
Warp ends	12 (two-ply cotton)
Picks per inch	30
Number of lines	3 or 6
Width	1/8 to 3/16 inch

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

TABLE I - SEWING OPERATIONS

No.	Description of Operation	Thread	Stitch Type	Seam and Stitching Type	Stitches Per Inch
1.	CUTTING				
	a. The material shall be spread face to face; that is to say, the face of one ply of material shall be over and against the face of the next ply below. The spread of the cloth shall be not more than 80 single plies (40 jackets) high.				
	b. The cloth shall be carefully laid up in uniform widths and lengths, and care shall be taken in spreading the material so that the plies are not stretched or full and that one side of the lay is even. Each component part in the top ply of the main lay shall be marked with the size of the jacket.				
	c. When cutting small sections or single cuts, the material may be cut face to face on the fold lengthwise.				
	d. The jacket shall be cut in strict accordance with patterns which show size, shape, placement of pockets, directional lines, and notches for proper assembly of all parts. Directional lines shall be in the warp direction of the material.				
	e. Except the shoulder loop linings, the band linings, the undercollar pieces, and the simulated pocket facings, which may be cut from ends, all component parts of the jacket shall be cut from one piece of material. The undercollar shall be cut with the long dimension on the bias. When the undercollar is cut from ends, the two pieces shall match.				

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

No.	Description of Operation	Thread	Stitch Type	Seam and Stitching Type	Stitches Per Inch
	f. The bands and the cuffs shall be cut with the directional lines in the direction of the warp. The topcollar and the shoulder loops shall be cut with the long dimension across the width of the material.				
2.	CUT THE LININGS. The cloth rayon lining for the body of the jacket, the sleeves, the inside breast pocket facings, and the waistband back tab shall be cut with the warp directional lines and in strict accordance with the patterns. Each component part of the top ply in the main lay shall be marked with the size of jacket. The linings of sleeves and the waistband back tab may be cut from ends. When sleeve linings are cut from ends, the parts shall match and the sleeves shall match each other.				
3.	CUT THE TRIMMINGS				
	a. The cotton warp and spun hair-wool filling cloth interlinings for the fronts shall be cut in the direction of the warp and in strict accordance with the patterns.				
	b. The collar interlining shall be cut with the long dimension on the bias.				
	c. The silesia for the front interlinings, the shoulders and the armhole stays shall be cut on the bias, and the silesia for the inside pockets, the pocket stays, and the waistband tab shall be cut with the long dimension in the direction of the warp.		"		

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

TABLE I - SEWING OPERATIONS (CONT)

No.	Description of Operation	Thread	Stitch Type	Seam and Stitching Type	Stitches Per Inch
4.	SHADE MARKING. Except for parts cut from ends as indicated in No. 1 and 2, all component parts of the jacket shall be marked to insure a uniform shade and size throughout the jacket. The sleeve linings shall be shade marked.				
5.	MAKE THE FRONTS				
	a. Seam the cut dart at fronts with a 1/4-inch seam; the seam shall taper to nothing at the top of the simulated breast pockets.	A	301	SSa-1	12 to 16
	b. Seam the cut dart at the neck of the fronts with a 1/4-inch seam; the seam shall taper to nothing at the bottom.	A	301	SSa-1	12 to 16
	c. Seam the cut darts at the bottom of the fronts as indicated on the patterns; the seam shall taper to nothing at the top of the darts.	A	301	SSa-1	12 to 16
	d. Press the dart seams open and flat with a heated pressing iron.				
	e. Sew a strip of bias-cut silesia on the fronts along the shoulder seam 1 to 1-1/2 inches from the gorge, to 1/2 to 3/4 inch from the armhole. Sew a bias-cut strip of the silesia not less than 4 inches long on the armhole, 3/8 to 3/4 inch down from the shoulder.	A	301	SSaa-1	12 to 16

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

TABLE I - SEWING OPERATIONS (CONT)

No.	Description of Operation	Thread	Stitch Type	Seam and Stitching Type	Stitches Per Inch
	f. Sew a 1/4-inch tape on the armhole from 1 inch above the front notch to the side seam. Sew a 1/4-inch tape on the backs from the side seam to 1 inch from the shoulder seam; the tape shall be held taut. Taping armholes on the fronts and the backs may be done in one operation after the side seam is joined.	A	301	SSaa-1	12 to 16
6.	MAKE THE SIMULATED BREAST POCKETS				
	a. Mark simulated pocket openings on the right and the left front as indicated by the marks on the patterns; apply the folded material for the piped edges with the silesia stay piece on the underside and seam, with 1/8-inch gage at the top and the bottom of the drill marks. Cut between the two parallel rows of stitching, tongue notching the corners.	A	301		12 to 16
	b. Turn the piped edges through the openings and stitch the openings on the inside through the facings and the silesia stay piece, securely tacking the tongue-notched corners. Piped edges shall finish not more than 3/16 inch wide.	A	301	SSa-1	12 to 16
	OR				
	c. The piped edges (No. 6.a and 6.b) may be performed automatically by machine.	A	101		12 to 16
	d. Press the simulated pockets smooth and flat with a heated iron or machine.				

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

TABLE I - SEWING OPERATIONS (CONT)

No.	Description of Operation	Thread	Stitch Type	Seam and Stitching Type	Stitches Per Inch
7.	MAKE THE INTERLINING FOR THE FRONTS				
	a. The front interlinings shall consist of two separate pieces, a center front and a side front which extend to the shoulder and the armholes.				
	b. Abut or overlap the edges of the side front to the center front of the interlinings with a strip of silesia stay on the underside, and zigzag stitch.	50/3 to 70/3	304	FSd-3	4 to 6
8.	BASTE THE FRONTS TO THE INTERLININGS				
	a. Baste the fronts to the interlinings from below the shoulder through the center, to the bottom of the jacket; baste around the armholes and along breakline of the lapel. Baste down along the front edges. The interlinings shall extend well beyond the armhole.	commer-cial	301 or hand	hopper	
	b. Securely tack the simulated pockets to the inter-linings, front and back.		301 or hand	hopper	1 to 2 2 to 4
	c. Baste the bridle tape on the breakline of each lapel, holding the tape taut, with fullness on the front.		301 or hand	hopper	1 to 2 1 to 2
	d. Trim the excess canvas at the shoulders and the armholes.				

MIL-J-44211E(USAF)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

TABLE I - SEWING OPERATIONS (CONT)

No.	Description of Operation	Thread	Stitch Type	Seam and Stitching Type	Stitches Per Inch
9.	PAD THE LAPELS				
	a. Pad the lapels of the jacket to the interlining with 6 to 8 rows of blindstitching with fullness on the interlining between the rows of stitching to roll the lapels.	30/3 to 70/3	103	SSm-1	4 to 6
	b. The bridle tape shall be blindstitched on the front and the back edges.	30/3 to 70/3	103	SSm-1	4 to 6
	c. The bridle tapes shall extend above the gorge seam and shall extend to within 1 inch of the front edge.				
10.	UNDERPRESSING. After the lapels are padded, the left and the right fronts of the jacket shall be pressed smooth individually over a suitably shaped press buck to conform to the shape of the body.				
11.	MAKE THE BACKS				
	a. Form pleats on the bottom of the back, as indicated on the patterns, and stitch across the bottom of the pleats. The outer edge of the pleats in each side of the back shall face toward the side seams.	A	301	SSa-1	12 to 16
	b. Seam the back shoulder darts; the dart shall be tapered to nothing at the bottoms.	A	301	OSf-1	12 to 16
	c. Press the shoulder darts to one side, with the inside fold facing toward the center.				

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

No.	Description of Operation	Thread	Stitch Type	Seam and Stitching Type	Stitches Per Inch
	d. Stitch a 1/4-inch tape across the back at the neck between the shoulder seams.	A	301	SSaa-1	12 to 16
12.	JOIN THE SIDE SEAMS				
	a. Turn under the front vent edge in line with the side seam line and the notch at the bottom indicated on the pattern and the back vent edge 3/8 inch and stitch 3/16 inch from the edge, forming the sides of the vent.	O silk	301	EFa-1	12 to 16
	b. Join the side seams to 3/8 inch below the top of the vent.	A	301	SSa-1	12 to 16
	c. Raise stitch side seam 3/16 inch with the fronts on the top of the backs. The upper vent edge stitching and the raised stitching of the side seams shall meet.	O silk	301	LSq-2(b) shows finished seam	12 to 16
	d. Bartack the top of the side vents with a horizontal bartack 3/8 to 1/2 inch long. The bartacks may be through the outer shell or through the outer shell and the rayon lining.	A silk	bartack		28 per bartack
13.	SHAPE THE LAPELS				
	a. Shape the lapels with a shaper and trim the front.				
	b. Trim the interlining from the point of the lapels.				
	c. The lapels shall be shaped after the padding operation.				

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

No.	Description of Operation	Thread	Stitch Type	Seam and Stitching Type	Stitches Per Inch
	d. Trim the front and trim the canvas 1/4 inch away from the edge of the front and the lapels.				
14.	SEW ON THE SLIDE FASTENER				
	a. Mark and position the slider portion of the slide fastener on the face of the right facing, as indicated by marks on the patterns, and double stitch 1/4-inch gage through the fastener tape and the right facing, with the top and the bottom of the tape securely tacked. The top end of the tape shall be turned under and caught in the double stitching.	A	301	LSa-2	12 to 16
	b. Mark and position the pin portion of the slide fastener on the outside of the left front, as indicated by the marks on the patterns, and double stitch 1/4-inch gage through the back edge of the fastener tape, front and interlining, with the top and the bottom of tape securely tacked. The top end of tape shall be turned under and caught in the double stitching.	A	301	LSa-2	12 to 16
	OR				
	c. The fastener tape may be positioned and sewn through the left front, interlining and facing.	A	301	SSa-2	12 to 16
15.	MAKE THE FRONT LININGS				
	a. Stitch the foreparts of the lining to the facings.	A	301	SSa-1	12 to 16

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

No.	Description of Operation	Thread	Stitch Type	Seam and Stitching Type	Stitches Per Inch
	b. Stitch the darts in the fronts of the linings, with the top of the darts tapering to nothing. Turn the darts to one side and press.	A	301	Osf-1	12 to 16
	c. Form and stitch the pleat at the front of shoulder as indicated on the patterns, or the pleats may be formed when basting the linings. The outside edge of the pleat shall face the armhole.	A	301	Osf-1	12 to 16
16.	MAKE THE INSIDE BREAST POCKETS				
	a. Make the left and the right inside horizontal breast pockets through the lining and the facings as indicated on the patterns.				
	b. Stitch the rayon pocket facing and the welt piece to the silesia pocket piece, with the raw edge turned in. When the edge is selvage, it does not need to be turned in.	A	301	LSd-1	12 to 16
	c. Seam the welt pocket piece to the lining facing as indicated by markings or patterns, 1/4-inch to 3/8-inch welt, with the silesia stay on the underside.	A	301	SSa-1	12 to 16
	d. Sew the facing pocket piece parallel to and above the first seam, to accommodate the width of the welt, through the lining facing.	A	301	SSa-1	12 to 16
	e. Cut an opening between the two rows of stitching, tongue notching the end of the opening.				

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

TABLE I - SEWING OPERATIONS (CONT)

No.	Description of Operation	Thread	Stitch Type	Seam and Stitching Type	Stitches Per Inch
	f. Turn the pocket and the welt piece through the cut opening. Tack the corners, and raise stitch the upper side of the opening 1/16-inch to 1/8-inch gage.	A	301	SSa-1	12 to 16
	g. Stitch around the silesia pocket. The silesia pocket stay shall extend and shall be caught in the armhole seam.	A	301	SSa-1	12 to 16
	h. The opening of the finished pocket shall be not less than 4-1/2 inches. The depth of the finished pocket shall be not less than 5-3/4 inches nor more than 6-1/4 inches for all sizes when measured to the top of the pocket welt.				
	i. The label shall be sewed to the rayon lining, centered on and directly below the welt of the right inside breast pocket of the jacket.	A	301	SSa-1	12 to 16
17.	BASTE THE FRONT FACINGS. Match, fit, and baste the facings to the jacket, putting in proper fullness in the chest and the lapels.		301 or hand	hopper	
18.	TAPE THE EDGES (FRONT). Tape and stitch the edges of the fronts, with a 3/8-inch tape, from the corner of the lapel to the collar notch to the bottom of jacket.	A	301	SSa-1	12 to 16

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

TABLE I - SEWING OPERATIONS (CONT)

No.	Description of Operation	Thread	Stitch Type	Seam and Stitching Type	Stitches Per Inch
19.	FELL THE TAPE				
	a. Blindstitch the back edge of the tape to the canvas interlining.	30/3 to 70/3	103	SSm-1	3 to 4
	b. Press the edges flat and smooth with a heated pressing iron.				
20.	Pull the bastings, trim, and turn the facing to the inside of the jacket.				
21.	Baste the edges of the fronts and the lapels, forcing out the edges.		101 or hand		
22.	MAKE THE BACK LININGS				
	a. Seam the darts in the backs of the lining, as indicated on the patterns, tapering the darts to nothing at the top.	A	301	OSf-1	12 to 16
	b. Turn the darts to one side and press flat with a heated pressing iron.				
	c. Join the center back seam of the lining.	A	301	SSa-1	12 to 16
	d. Join the side seams of the lining with a 3/4-inch seam, leaving the seam open for the depth of the side vents.	A	301	SSa-1	12 to 16

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

TABLE I - SEWING OPERATIONS (CONT)

No.	Description of Operation	Thread	Stitch Type	Seam and Stitching Type	Stitches Per Inch
23.	Press the pockets smooth, and press the facing seam and the side seams of the lining to one side with a heated pressing iron. The facing joining seam to the front lining shall be pressed toward the side seam, and the side seam on each side shall be pressed in the same direction in relation to the center back.				
24.	BASTE THE FACING (SECOND BASTING)				
	a. Baste the second row of stitching in from the edge of the fronts and the lapels.		301 or hand	hopper	
	b. Baste across from the lapel break to the point of the lapel, placing proper fullness in the lapel to allow the lapel to roll.		301 or hand	hopper	
	c. Baste along the breakline of the lapel.		301 or hand	hopper	
	d. Baste the back edge of the facing, putting in fullness over the chest.		301 or hand	hopper	
	e. The seam at the back edge of the facings shall be hand tacked or blindstitched by machine to the interlining from 3 inches below the shoulder to 2 inches above the top of the breast pocket.	30/3 to 70/3 50/3 to 70/3	hand or 103	SSm-1	2 to 4 6 to 8

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

TABLE I - SEWING OPERATIONS (CONT)

No.	Description of Operation	Thread	Stitch Type	Seam and Stitching Type	Stitches Per Inch
25.	MATCH THE SHOULDER LOOPS. Baste or stitch the loops to the shoulders at the armholes. Trim even with the armhole. The edge of the curved end of the loop shall be even with the raw edge of the gorge outlet and the back edge of loop 1/2 inch back of the shoulder seam at the armhole. The loops shall measure finished 2 inches wide at the armhole seam line.	A	301 or 101	SSa-1	6 to 8
26.	BASTE THE LININGS TO THE JACKET				
	a. Baste across the front and the back shoulders, around the armholes, and along the waistline.		301 hand	hopper	
	b. Turn in the lining at the vent opening and baste.	30/3 to 70/3	hand		
27.	JOIN THE SHOULDER SEAMS OF THE JACKET. Join the fronts and the backs of the jacket at the shoulder working in the proper fullness on the backs. Press the shoulder seam open with a heated pressing iron.	A	301	SSa-1	12 to 16
28.	MAKE THE SHOULDER LOOPS				
	a. The shoulder loops shall be made of two pieces of the basic material. Seam all around the edges of the shoulder loops; turn, work out the rounded end of the loops, and single stitch, 3/16 inch from the edge.	0 silk	301	SSe-2	12 to 16
	b. Press the shoulder loops smooth and flat with a heated pressing iron.				

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

TABLE I - SEWING OPERATIONS (CONT)

No.	Description of Operation	Thread	Stitch Type	Seam and Stitching Type	Stitches Per Inch
29.	SEW ON THE SHOULDER PADS. Properly position the shoulder pads and tack to the front interlining.	30/3 to 70/3	301	hopper	1 to 2
		30/3 to 40/3	hand		6 to 8
30.	Fit and baste the lining to the neckline, with the neck end of the lining back shoulder edge turned under and lapped over the front.		hand		
31.	Seam the lining across the top of the back, catching the braided loop hanger. The hanger shall finish 2 inches (±1/4 inch) long and flat at the neck.	A	301	SSa-1	12 to 16
32.	MAKE THE COLLAR				
	a. Seam the wool undercollar pieces.	A	301	SSa-1	12 to 16
	b. Press the undercollar seam open and flat with a heated pressing iron.				
	c. Seam the undercollar interlining pieces.	A	301	LSa-1	12 to 16
	d. Quilt the interlining to the entire undercollar with not less than four, nor more than six, rows of blindstitching.	50/3 to 70/3	103 or	SSm-1	6 to 8
		50/3 to 70/3	301	SSm-1	6 to 8
	e. Trim the undercollar interlining 1/4 inch away from the neck edge of the undercollar, turn in the undercollar edge 1/4 inch from the folded edge along the neck edge of the undercollar, and stitch 1/16 to 1/8 inch.	A	301	EFa-1	12 to 16
	f. Press the quilted undercollar with a heated pressing iron.				

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

TABLE I - SEWING OPERATIONS (CONT)

No.	Description of Operation	Thread	Stitch Type	Seam and Stitching Type	Stitches Per Inch
	g. Mark the shape of the undercollar with a shaper.				
	h. Form the breakline of the undercollar, with a row of stitching.	A	301	SSv-1	12 to 16
	i. Baste the topcollar to the undercollar, placing proper fullness across the shoulder part and at the points.		101 or hand		
	j. Seam the topcollar to the undercollar, as marked, retaining fullness.	A	301	SSe-2(a)	12 to 16
	k. Trim the collar, remove the bastings, turn and baste around the sides and the outer edges. Place a second row of basting close to the breakline, placing proper fullness. Trim the neck edge of the topcollar, leaving the proper seam allowance.	commercial	101 or hand		2 to 4
33.	SET THE COLLAR				
	a. Seam the topcollar to the facings (gorge) from the collar notch on the top of the lapel to a point not less than 1 inch beyond the breakline, with proper width of the seam to coincide with the step at the lapel and with the proper allowance of the topcollar for seaming.	A	301	SSa-1	12 to 16
	b. The collar points shall be even in length.				

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

TABLE I - SEWING OPERATIONS (CONT)

No.	Description of Operation	Thread	Stitch Type	Seam and Stitching Type	Stitches Per Inch
	c. Notch the width of the seam allowance, and tack the gorge seam open to the gorge seam of the jacket front and interlining from the front end of the collar to the back of the breakline, catching the end of the bridle tapes in the tacking.	A 30/3 to 70/3	301 or hand	SSa-1	12 to 16 2 to 4
	d. Baste the undercollar to the neck, putting in fullness across the shoulder.		hand		2 to 4
	e. Tack the top of the jacket and the lining to the undercollar interlining across the back.	A A A	103 or 301 or hand	SSm-1 SSm-1	4 to 6 4 to 6 2 to 4
	f. Turn under and baste the lower edge of the top-collar across the back.		hand		
	g. Fell the topcollar across the back and securely tack the undercollar ends and the jacket fronts.	C silk	hand		6 to 8
34.	MAKE THE SLEEVES AND THE SLEEVE LININGS				
	a. Fold and stitch the pleats at the bottom in the top and the under-sleeve lining as indicated on the patterns. The outside folds of the pleats in the top and under-sleeve lining at the top of the stitching shall face the sleeve opening.	A	301	OSf-1	12 to 16
	b. Fold the pleats of the wool sleeves in the top and under-sleeve, as indicated by the marks on the patterns, and stitch on the inside as tucks; the stitching shall extend approximately 2 inches upward from the bottom raw edge of the sleeves. The pleats shall face toward the sleeve opening on the outside.	A	301	OSf-1	12 to 16

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

No.	Description of Operation	Thread	Stitch Type	Seam and Stitching Type	Stitches Per Inch
	c. Join the wool front seam.	A	301	LSr-2(a)	12 to 16
	d. Join the wool back seam of the sleeve to the top of the sleeve opening; notch the under-sleeve seam allowance at the top of the vent.	A	301	SSa-1	12 to 16
	e. Bartack the top of the sleeve vent openings with horizontal bartack 3/8 to 1/2 inch long. The bartack may be through the wool sleeve or the sleeve and the lining.	A	bartack		28 per bartack
	f. Press the front and the back seams open and flat, with a heated pressing iron, creasing the vent opening edge in line with the open back seam.				
	g. Join the back seam of the lining. Join the upper vent edge of the lining to the wool sleeves together from the top of the vent opening to approximately 1/2 inch above the sleeve outlet allowance.	A	301	SSa-1	12 to 16
	h. Join under-sleeve vent edges of the lining and wool sleeves together from the top of the opening to approximately 1/2 inch above the seam outlet allowance; turn, and stitch 1/8 to 3/16 inch from the edge from the top of the vent to approximately 1/2 inch above outlet allowance.	A	301	SSe-2	12 to 16
	i. Join front seam of lining.	A	301	LSr-2(a)	12 to 16

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

TABLE I - SEWING OPERATIONS (CONT)

No.	Description of Operation	Thread	Stitch Type	Seam and Stitching Type	Stitches Per Inch
	j. Tack the front seam of the sleeve lining to the forearm seam of the sleeve and tack the back seam of the sleeve lining to the back of the sleeve, keeping the lining full when tacking. When tacked by hand, both ends of the tacking shall be securely back-stitched. Tacking shall commence 4 inches down from the top of the sleeve and shall extend to 4 inches from the bottom of the sleeve on the front seam and to 4 inches above the top of the sleeve opening on the back seam.	30/3 to 40/3 30/3 to 40/3	hand 301		1 to 2 6 to 8
35.	SET IN THE SLEEVES				
	a. Match and seam in the sleeves, notch to notch with a 3/8-inch seam, distributing fullness and catching the end of the shoulder loop in the seam at the sleeve head.	A	301	SSa-1	12 to 16
	b. With a heated pressing iron, press the armhole seam fullness completely around the armhole and hold short and open the seam across the top from the back notch to not less than 4 inches forward of the shoulder seam.				
36.	MAKE THE SLEEVE CUFFS				
	a. The cuffs shall be made of one piece of the basic material.				
	b. Fold the cuffs and stitch the side edges; turn, work out the ends of the cuff, and single stitch the side and the bottom folded edge 3/16 inch from the edge.	0 silk	301	SSe 2 and OSf-1	12 to 16

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

No.	Description of Operation	Thread	Stitch Type	Seam and Stitching Type	Stitches Per Inch
	c. Press the cuffs smooth and flat with a heated pressing iron.				
37.	SEW ON THE CUFFS				
	a. Seam the outer ply of the cuffs to the sleeves and across the underside of the top vent opening to the cuff notch, leaving a 1-1/4-inch outlet. Turn and raise stitch 3/16 inch from the edge through the underside of the cuff, securely tacking the ends.	O silk	301	BSf-2	12 to 16
	b. Turn in the corresponding outlet at the bottom of the sleeve lining and baste the lining to the bottom of the sleeve along the cuff joining seam.	commercial	hand or 101		
38.	EDGE STITCHING. Single stitch all around the fronts, the lapels, and the collar; the stitching shall be 3/16 inch from the edge.	O silk	301	SSe-2(b)	12 to 16
39.	Single stitch through the right front of the jacket 2 inches inward from the finished front edge; the stitching shall extend approximately 1 inch above the bottom of the neck dart and the ends of the stitching shall be backtacked. The stitching shall not show on the lapel when the jacket is worn.	O silk	301	SSa-1	12 to 16
40.	BASTE AND TACK THE ARMHOLES				
	a. Position the shoulder pad against the shoulder in the back with the edges of the shoulder pads even with the sleeve cap seam allowance; baste the balance of the shoulder seam in the lining, and baste all around the armhole.	30/3 to 70/3	hand		

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

TABLE I - SEWING OPERATIONS (CONT)

No.	Description of Operation	Thread	Stitch Type	Seam and Stitching Type	Stitches Per Inch
	b. Tack all around the armhole, hand or machine tack.	30/3 to 70/3	hand or	SSa-1	2 to 4
	NOTE: When the armholes are tacked by machine, No. 40.c may be omitted.	30/3 to 70/3	301		6 to 8
	c. Tack the base of the armhole from the sleeve notch on the front to the sleeve notch on the back.	A	301	SSa-1	6 to 8
	d. Trim away the excess lining and the interlining.				
41.	MAKE THE RAYON WAISTBAND BACK TAB				
	a. Fold the rayon piece in half and seam the side edges, catching the silesia buttonhole stay; turn, and stitch 1/8 inch from the edge, continuing the stitching across the folded edge.	A	301	SSe-2 and OSf-1	12 to 16
	b. Mark and make three buttonholes in the back tab, as indicated on the patterns.				
	c. Buttonholes shall be eyelet-end, square-bar or taper-bar type, worked over a No. 8 gimp to fit 27-line buttons. When a square-bar buttonhole is used, the end shall be bartacked in a separate operation.	B silk	buttonhole		70 per buttonhole
		A silk	bartack		21 per bartack
42.	MAKE THE WAISTBANDS				
	a. RIGHT FRONT BAND. Make two buttonholes in the center of the right end of the band lining through the stay piece, as indicated by the marks on the patterns; the buttonholes shall not show through the outer band. In the finished band the eyelet ends				

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

TABLE I - SEWING OPERATIONS (CONT)

No.	Description of Operation	Thread	Stitch Type	Seam and Stitching Type	Stitches Per Inch
	of the buttonholes shall be 2 inches apart with the purled edges of the first buttonhole 5/8 inch from the edge.				
	b. The buttonholes shall be eyelet-end, cut-first, square-bar type, worked over a silk gimp, to fit a 24-line button. The lower thread shall be silk, designation C. The ends of the buttonholes shall be securely bartacked in a separate operation.	B silk A silk		button-hole bartack	70 per buttonhole 21 per bartack
	c. Seam the band lining to the outer band, along the side (vent edge), bottom edge, and edges of the extension to the notch on the top edge.	A	301	SSe-2(a)	12 to 16
	d. Turn, work out the corners and the ends of the band, and edge stitch 3/16 inch from the edge all around the band.	O silk	301	SSe-2(b)	12 to 16
	e. LEFT FRONT BAND. Seam the band lining to the outer band, along the sides (front and vent edges) and the bottom.	A	301	SSe-2(a)	12 to 16
	f. Turn, work out the corners and the edges of the band, and edge stitch 3/16 inch from edge all around the band.	O silk	301	SSe-2(a)	12 to 16
	g. BACK BAND. Center and stitch the waistband back tab to the top of the band lining piece.	A	301	SSa-1	12 to 16
	h. Seam the band and the band lining on the side and the bottom edges; turn, and work out the corners and edges.	A	301	SSe-2	12 to 16

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

No.	Description of Operation	Thread	Stitch Type	Seam and Stitching Type	Stitches Per Inch
	i. Seam the outer ply of the band sections, face-to-face to the bottom of the corresponding sections of the jacket, observing the seam allowance at bottom of the jacket sections. The fronts of the jacket for width of facing and side vent edges for width of turn-under may be inserted between the outer and the inner plies of the waistband when seaming the band sections.	A	301	SSq-2(a)	12 to 16
	j. Turn and raise stitch 3/16 inch from the edge through the band and the waistband back tab and all around the band.	O silk	301	LSq-2(b)	12 to 16
	k. Turn in the bottom of the lining, retaining the center back pleat, and baste to the jacket, forming a pleat over the bands.	commer-cial	301 or hand	hopper	
43.	FELL BOTTOM OF JACKET. The bottom of the body lining shall be blindstitched to the top of the band under the bellows pleat catching only the underside of the bellows pleat, or the felling may be done by hand.	O silk C silk	301 or hand		5 to 6 5 to 6
44.	COMPLETE THE HAND FELLING				
	a. Tack all around the end of the shoulder loops to the undercollar.	A or C silk	hand		6 to 8
	b. Fell the undercollar to the jacket by hand and securely tack the corners.	A or C silk	hand		6 to 8

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

TABLE I - SEWING OPERATIONS (CONT)

No.	Description of Operation	Thread	Stitch Type	Seam and Stitching Type	Stitches Per Inch
	c. Hand fell the lining all around the armholes, and back stitch the bottom of the armhole from the front seam of the sleeve to the side seam.	A or C silk	hand		6 to 8
	d. Hand fell the lining at the shoulders, the bottom of sleeves, the corners of the front lining, and the vent opening, in the side seams and in the back seam of the sleeves; or the bottom of the sleeve linings may be felled by machine.	A or C silk 0 silk	hand 301	 EFc-1(b)	6 to 8 5 to 6
	e. Hand fell the top edge of the front bands to the front facings and to the vent turn-under on the side openings, if the top edge of the inner band is not seamed to the bottom of the fronts when attaching the bands in No. 42.i.	A or C	hand		6 to 8
45.	BUTTONHOLES				
	a. Make a buttonhole to fit a 30-line button in each end of the left band through the band and the band lining, with the purled edge of the eyelet 1/2 inch from the curved (vent) edge and front (straight) edge, as indicated by the marks on the patterns.				
	b. Make a buttonhole to fit a 30-line button in the center of the upperside of each cuff, with the purled edge of the eyelet 1/2 inch from the point.				
	c. Make a buttonhole to fit a 30-line button in the right band at the vent opening through the band lining, with the purled edge of the eyelet 1/2 inch from the curved end.				

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

No.	Description of Operation	Thread	Stitch Type	Seam and Stitching Type	Stitches Per Inch
	d. The buttonholes shall be well-made, eyelet-end, cut-first, square-bar type worked over a silk gimp. The lower thread shall be silk, designation C.	B silk	buttonhole		70 per buttonhole
	e. The buttonholes shall be securely bartacked in a separate operation.	A silk	bartack		21 per bartack
46.	CLEAN THE JACKET				
	a. Pull the basting threads. All ends of the stitching shall be trimmed, and loose threads removed from the jacket.				
	b. Remove all spots, stains, and shade tickets without injury to the fabric.				
47.	PRESS THE JACKET				
	a. After the first of the following pressing operations, place the jacket on a hanger until completion of the pressing.				
	b. Press the edges (edge pressing machine).				
	c. Press the fronts (front machine).				
	d. Press the sleeves and cuffs (back machine).				
	e. Press the back (back machine).				
	f. Press the collar (collar machine).				

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

TABLE I - SEWING OPERATIONS (CONT)

No.	Description of Operation	Thread	Stitch Type	Seam and Stitching Type	Stitches Per Inch
	g. Block the armhole; the topsleeve shall be shrunk in.				
	h. Crease the armhole (except across the top) solid at the edge of the armhole seam allowance on the inside edge of the armhole (armhole machine).				
	i. Press the lapels.				
48.	FINISH PRESS				
	a. Press the jacket lining smooth with a hand pressing iron.				
	b. Remove gloss, wrinkles, creases, spots, and impressions on the fronts, the undercollar, the lapels, the collar, and the sleeves. When the sleeves are creased in the pressing operation, the creases shall be removed in the finish pressing to assure roll-sleeve effect.				
	c. Touch up all spots overlooked in the machine pressing.				
49.	MARK THE LOCATIONS FOR THE BUTTONS				
	a. Mark the location of the button on the sleeve cuffs; the button shall be aligned with the button-hole and 1/2 inch from the edge of the cuff when measured to the center of the button.				

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

No.	Description of Operation	Thread	Stitch Type	Seam and Stitching Type	Stitches Per Inch
	b. Mark the location of the buttons for the side opening on the back band. The center of the first button shall be aligned with the buttonhole, and the second shall be in line with and 1 inch back from the first button; the measurement shall be taken from the center of the first button to the center of the second button. c. With the slide fastener closed, mark the location for one button on the inside of the right band to correspond with the eyelet of the buttonhole in the front end of the left band. d. Mark the location of the buttons on the outside of the left band; the first button shall be aligned with the eyelet of the second buttonhole of the right extension band, and the second button shall be in line with and 2 inches in back of the first button; the measurement shall be taken from the center of the first button to the center of the second button.				
50.	SEW ON THE BUTTONS				
	a. Sew two 30-line buttons on the outside of each end of the back band at the markings specified in No. 49.b.	20/4 20/4 12/4 to 16/4	101 or 11 301 hand		21 to 24 per button 14 to 16 per button 4 per button double thread

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

TABLE I - SEWING OPERATIONS (CONT)

No.	Description of Operation	Thread	Stitch Type	Seam and Stitching Type	Stitches Per Inch
	b. Sew one 30-line button by hand on the inside of the right front band at the markings specified in No. 49.c. The stitching shall not show on the outside of the band.	12/4 16/4	hand		4 per button double thread
	c. Sew two 24-line buttons on the outside of the left band at the markings specified in No. 49.d.	20/4	101 or		21 to 24 per button
		20/4	301 or		14 to 16 per button
		12/4 to 16/4	hand		4 per button double thread
	d. Sew a 30-line button on each cuff at the markings specified in No. 49.a.	20/4	101 or		21 to 24 per button
		20/4	301 or		14 to 16 per button
		12/4 to 16/4	hand		4 per button double thread
	e. All buttons shall be hand or machine shank wrapped. Hand-wrapped shanks shall be tacked off with not less than two stitches, and the thread ends shall be hidden.	30/4	101		21 to 24 per button
51.	SET THE SNAP FASTENERS				
	a. Sew a socket snap fastener to the left front, 3/4 inch above the top end of the slide-fastener tape and 1-1/2 inches in from the front edge.	A or C silk	hand		3 to 4 per hole

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

TABLE I - SEWING OPERATIONS (CONT)

No.	Description of Operation	Thread	Stitch Type	Seam and Stitching Type	Stitches Per Inch
	b. Sew a stud snap fastener on the underside of right front to correspond to the socket portion of the snap fastener on the left front.	A or C silk	hand		3 to 4 per hole
	c. The snap fastener sewing shall be tacked off with not less than two stitches.				
52.	Brush the jacket and examine.				

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

3.2 Patterns. The manufacturer's working patterns shall be identical in size and shape to the patterns referenced on 53020892 which provides an allowance of 3/8 inch for all seams, unless otherwise indicated on the patterns (see 3.4). The pattern drawings include the working collar and the lapel shapers.

3.3 Design. The jacket shall be single-breasted and fully lined and shall have shoulder loops, a closed fly front with a slide-fastener closure, a snap fastener at the top of the slide fastener, a button and a buttonhole on the waistband at the bottom of the slide fastener, a rounded-peak lapel, left and right side simulated outer breast pockets, left and right side inner breast pockets, and double-pleated top sleeve terminals with barrel cuffs and lap-over button closures. There shall be four pleats at the lower back, a waistband with side adjustment accomplished by a tab and two buttons, the long pointed extension to the front of the waistband with two buttons on the waistband, and two hidden buttonholes in the waist-band extension.

3.4 Construction. The jacket shall be constructed in accordance with tables I and II, but the manufacturer is not required to follow the exact sequence of operations as listed therein. The pleats, the darts, and the topsleeve at the vents shall be sewn on the notch; the outer shell and lining outlets at the side seams and the under-sleeve front seam on the linings, and the basic material shall be sewn 1/4 inch back of the notch to provide a 3/4-inch seam; however, the linings shall be trimmed to fit the body of the jacket.

3.4.1 Stitches, seams and stitching. The stitches, seams and stitchings shall conform to FED-STD-751. Whenever two or more methods, seams, or stitches are specified for the same operation, any one of them may be used.

3.4.1.1 Tacking and backstitching. Ends of all seams and stitchings produced with stitch type 301, when not caught in other seams or stitching, shall be securely backtacked. Thread breaks shall be secured by stitching back of the break.

3.4.1.2 Stitches per inch. The number of stitches per inch specified in table I shall be interpreted to mean the minimum and maximum number of stitches permitted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

TABLE II - FINISHED MEASUREMENTS IN INCHES

Measurement 1/	Size												Tolerance
	8	10	12	14	16	18	20	38	40	42	44	46	
1/2 bust													
Short	18-3/4	19-1/4	20	20-3/4	21-1/2	22-1/4	23-1/4	24	25	26	27	28-1/4	± 3/4
Regular	18-3/4	19-1/4	20	20-3/4	21-1/2	22-1/4	23-1/4	24	25	26	27	28-1/4	± 3/4
Long	18-3/4	19-1/4	20	20-3/4	21-1/2	22-1/4	23-1/4	24	25	26	27	28-1/4	± 3/4
1/2 waist													
Short	12-1/4	12-3/4	13-1/2	14-1/4	15	15-3/4	16-1/2	17-1/2	18-7/8	19-7/8	20-7/8	22	± 3/4
Regular	12-1/4	12-3/4	13-1/2	14-1/4	15	15-3/4	16-1/2	17-1/2	18-7/8	19-7/8	20-7/8	22	± 3/4
Long	12-1/4	12-3/4	13-1/2	14-1/4	15	15-3/4	16-1/2	17-1/2	18-7/8	19-7/8	20-7/8	22	± 3/4
Sleeve inseam													
Short	15-3/4	15-7/8	16	16-1/8	16-1/4	16-3/8	16-1/2	16-3/4	16-3/4	16-3/4	16-3/4	16-3/4	± 1/2
Regular	16-3/4	16-7/8	17	17-1/8	17-1/4	17-3/8	17-1/2	17-3/4	17-3/4	17-3/4	17-3/4	17-3/4	± 1/2
Long	17-3/4	17-7/8	18	18-1/8	18-1/4	18-3/8	18-1/2	18-3/4	18-3/4	18-3/4	18-3/4	18-3/4	± 1/2
Back length													
Short	20-1/4	20-1/4	20-3/8	20-3/8	20-1/2	20-5/8	20-3/4	20-1/4	20-1/4	20-3/8	20-1/2	20-5/8	± 1/2
Regular	21-1/4	21-1/4	21-3/8	21-1/2	21-5/8	21-3/4	21-3/4	21	21	21-1/8	21-1/4	21-3/8	± 1/2
Long	22	22	22-1/8	22-1/8	22-1/8	22-1/4	22-3/8	21-3/4	21-3/4	21-7/8	22	22-1/8	± 1/2

1/ NOTE:

The measurement of the 1/2 bust shall be taken with the jacket buttoned and laid flat, from the folded edge to the folded edge at the base of the armhole.

The measurement of the 1/2 waist shall be taken from the folded edge to the folded edge at the center of the waistband with the fronts closed and the waistband buttoned.

The measurement of the sleeve inseam shall be taken at the base of the armhole, along the inseam to the bottom of the finished sleeve.

The measurement of the back length shall be taken along the center of the back from the undercollar seam to the bottom edge of the waistband.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

3.5 Identification of product

3.5.1 Identification label. The identification label shall conform to type I, class 1 of DDD-L-20 and shall measure approximately 1-3/4 inches by 2-3/4 inches. Unless otherwise specified the height of the lettering shall be a minimum of 1/8 inch. The information on the label shall be as follows:

Jacket, Woman's Wool, Blue
Contract No. 1/
Stock No. 1/
Wool Content 2/
Name _____
Rank _____ Serial No. _____
Organization _____

1/ The manufacturer shall insert the applicable information.

2/ See 3.5.2.

3.5.2 Wool products label. Each jacket shall be marked in accordance with the Wool Products Labeling Act of 1939. The legend may be included in the identification label.

3.6 Workmanship. The jacket shall be constructed in a thoroughly workmanlike manner. The finished jacket shall be clean and free from any defects that might affect appearance or functionability.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Inspection for acceptance. Unless otherwise specified hereinafter, inspection shall be in accordance with the provisions set forth in MIL-STD-105.

4.2.1 Testing of components. Except that this specification shall govern in the event of conflict, testing of components shall in accordance with applicable subsidiary specifications and drawings referenced herein to the extent applicable. In addition to the test provisions contained in subsidiary specifications and drawings referenced herein, testing shall be performed on components listed in table III and 4.2.1.1.1 for the characteristics noted therein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

TABLE III - TESTING OF COMPONENTS

Component and Characteristic	Test Method	Determinations Per Sample Unit
Silk gimp, No. 3 (see 3.1.6)		
Identification of material	1110 of CCC-T-191 1/	1
Identification of material core	1200 of CCC-T-191 1/	1
Finish	visual	1
Yards/ounce, minimum	4010 of CCC-T-191	1
Color	visual	1
Colorfastness to dry cleaning	4620 of CCC-T-191	1
Snap fastener (see 3.1.9)		
Type (round or square hole)	visual	1
Size	standard commercial	1
Color	visual	1
Material identification (brass)	standard commercial 1/	1
Tape for slide fastener (see 3.1.10)		
Colorfastness to dry cleaning	4622 of CCC-T-191	1
Tapes, cotton for staying (see 3.1.12.1)		
Preshrinkage	see 4.2.1.1.1	5
Hanger, (flat braid) (see 3.1.13)		
Identification of material	1200 and 1500 of CCC-T-191 1/	1
Identification of dye	standard commercial	1
Numbers of carriers	standard commercial	1

1/ A certificate of compliance will be acceptable for this requirement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

4.2.1.1 Sampling for testing. Unless specifically requested by the Government, Government furnished materials shall not be sampled or tested. The inspection level for each component tested shall be S-1 of MIL-STD-105. The acceptable quality level for each characteristic tested shall be 6.5 defects per 100 units. The unit for expressing the lot size and the sample unit for testing each component shall be in accordance with applicable subsidiary specification and table IV.

TABLE IV - LOT SIZE AND SAMPLE UNIT FOR TESTING

Component	Lot Size Express As	Sample Unit for Testing
Button	gross	15 each
Cloth, padding, canvas	yards	1-1/2 yards, full width
Snap fastener	gross	10 complete sets
Braid (for hanger)	yards	3 yards
Thread 1/	bobbins	sufficient number of bobbins to total a minimum of 360 yards

1/ When threads are purchased in the form of cones, spools, tubes, and bobbins, thread from each of them shall be tested.

4.2.1.1.1 Shrinkage of tape. The tape used for staying armholes, front edges, and lapel breakline shall be tested for the shrinkage requirement specified in 3.1.12.1. Five determinations per sample unit shall be made. The five specimens of tape shall each be 20 inches long.

4.2.1.1.1.1 Procedure. Four liters of water 100°F and not over 50 parts per million hardness shall be entered into a suitable glass or metal container. The water shall contain 0.2 percent (based on the weight of the tape) of an anionic wetting agent. The tape specimens shall be placed into the container and kept submerged beneath the surface of the water for a period of 1/2 hour without agitation. At the end of this period, the specimen shall be centrifugally extracted for 5 minutes in a 17-inch diameter extractor at a speed of 1575 revolutions per-minute or in any other extractor for a time that will produce an

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

equivalent extraction and shall then be dried in a circulating-air oven at a temperature of 200°F. After drying, the specimens shall be pressed with a conventional-heated hand iron; care shall be taken not to stretch the tape.

4.2.1.1.1.2 Measurement of shrinkage. After reaching equilibrium in the standard atmosphere, the length of the specimens shall be measured, and the shrinkage shall be computed in accordance with the following formula: original measurement minus shrunk measurement times 100 equals percent shrinkage. The measurements shall be taken to the nearest 0.1 inch, and the shrinkage shall be reported to the nearest 0.1 percent. The results shall be reported as the average of the five determinations to the nearest 0.1 inch and shrinkage to the nearest 0.1 percent. The shrinkage of the tape shall not be more than 4 percent in the direction of the length.

4.2.2 Examination of end item. The end item shall be examined for defects. Except for defects with an asterisk (*) in the classification column, the defects found during examination of the end item shall be classified in accordance with 4.2.2.1, 4.2.2.2, and 4.2.2.3. Defects with an asterisk (*) in the classification column shall be classified as a major defect when affecting appearance of serviceability seriously and as a minor A defect when affecting appearance or serviceability but not seriously. The inspection level shall be II of MIL-STD-105 for 4.2.2.1 and 4.2.2.2 (combined) and S-3 of appendix to MIL-STD-105 for 4.2.2.3. The acceptable quality level for 4.2.2.1 and 4.2.2.2 (combined) shall be 2.5 defects per 100 units for major defects, 15.0 defects per 100 units for major and minor A (combined) defects, and 40.0 defects per 100 units for total major and minor A and B (combined) defects. The acceptable quality level for 4.2.2.3 shall be 4.0 defects per 100 units for defects (one class).

4.2.2.1 General defects. General defects found during examination shall be classified as follows:

	Classification		
		Minor	
	Major	A	B
1. BARTACKS (EXCLUDING BUTTONHOLE BARTACKS)			
a. Missing, insecure, or misplace not serving intended purpose -one bartack			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

	Classification		
		Minor	
	Major	A	B
-two bartacks		X	
-three or more bartacks	X		
b. Length of bartack, except on buttonholes, less than 3/8 inch or more than 1/2 inch			X
2. BUTTONHOLES (CONSTRUCTION)			
a. One or more omitted or added	X		
b. Stitches not securely caught in fabric, causing stitches to pull away from fabric	X		
c. One or more broken stitches in			
-one buttonhole		X	
-two or more buttonholes	X		
d. More than two skipped stitches in one or more buttonholes		X	
e. Bartack on square-bar type omitted or loose			
-one buttonhole		X	
-two or more buttonholes	X		
f. Bartack on square-bar type misplaced not serving intended purpose.			
-on one buttonhole			X
-on two or more buttonholes		X	
g. End of taper-bar type not securely tacked			
-one buttonhole		X	
-two or more buttonholes	X		
h. Buttonhole not corresponding to size of button			
-too small, not permitting button to enter buttonhole	X		
-too large, 3/8 inch or more longer than diameter of button (measured from purled edges of eyelet)		X	
i. Gimp omitted on one or more buttonholes		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

	Classification		
		Minor	
	Major	A	B
j. Ragged edges, affecting appearance			X
k. One or more uncut buttonholes not specified type or uncut		X	
l. One or more poorly made buttonholes, affecting appearance		X	
3. BUTTONS (APPLYING TO ALL BUTTONS)			
a. One button missing, loose, or broken		X	
b. Two or more buttons missing, loose, or broken	X		
c. Not specified type, size, or color		X	
d. Tacking of ends on hand-sewn buttons, omitted or insecure on			
-one button			X
-two or more buttons		X	
e. Wrapped shank omitted or loose on			
-one button			X
-two or more buttons		X	
f. Buttons sewn through one ply of material except on underside of right band			
-one to two buttons		X	
-three or more buttons	X		
g. Hand-wrapped shanks not tacked off securely with ends of thread hidden			X
4. CLEANNESS			
a. One or more ink spots or stains of an obviously permanent nature			
b. One or more removable spots or stains clearly noticeable		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

	Classification		
		Minor	
	Major	A	B
c. Thread ends not trimmed or bastings not removed from jacket (to be scored when the condition exists on major portion of jacket)			X
d. Two or more shade tickets not removed			X
5. COMPONENTS AND ASSEMBLY			
a. Any defective component			
b. Any component part omitted			
c. Any required operation omitted or improperly performed			
6. CUTTING			
a. Bands and cuffs not cut with the long dimension of each in the warp direction of the material	X		
b. Long dimension of undercollar sections not cut on the bias	X		
c. Topcollar or shoulder loops not cut with the long dimension of each in the warp direction of the material	X		
d. Rayon lining for body or sleeves, not cut with the length direction of material (warp) running from top to bottom of body or sleeves	X		
e. Rayon lining for waistband back tab or inside pocket welt or facing not cut with the long dimension in the length direction of material (warp)		X	
7. DARTS, OUTSIDE (APPLYING TO ALL DARTS)			
a. One or more omitted	X		
b. Ends of darts not properly tapered, unsightly bulge, affecting appearance		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

	Classification		
		Minor	
	Major	A	B
8. WOOL CONTENT LABEL (WHEN LEGEND IS NOT INCORPORATED IN IDENTIFICATION LABEL)			
a. Missing, incorrect, or illegible			X
9. MATERIAL DEFECTS AND WORKMANSHIP DAMAGES. When the condition of a material defect is weakening or nonweakening, is inconspicuous, and has a negligible effect on serviceability, the material defect shall be classified no defect. When the condition of workmanship damage is weakening or nonweakening, is inconspicuous, and has a negligible effect on serviceability, the workmanship damage shall be classified as a minor B defect. When the condition of a material defect or workmanship damage definitely weakens the material or is conspicuously located so that it is clearly noticeable, the material defect or workmanship damage shall be classified as follows:	=		
a. Any hole		•	
b. Any weakening defect such as smash, multiple float, loose slub, etc, that may develop into a hole		•	
c. Needle chew that could develop into a hole		•	
d. Cut, tear, mend, or burn or one or more exposed drill holes		•	
e. Shade bar, unsightly slubs, etc			
-on outside except undercollar		•	
-on undercollar and on inside except sleeve linings		X	
-on sleeve linings			X
10. PRESSING			
a. Burned or scorched		•	
b. Omitted or poorly pressed (unless otherwise classified)		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

	Classification		
		Minor	
	Major	A	B
c. Linings not pressed smooth			X
d. Gloss, wrinkles, creases, or basting impressions not removed throughout major portion of jacket			X
e. Armholes stretched			
f. Sleeves creased, i.e., not rolled pressed		X	
g. Inside of armhole, except across top, not creased solid		X	
h. Pressing impressions not removed on major portion of jacket			X
i. Armholes not blocked or improperly blocked, distorting hang of sleeves			
j. Lapel, front, or collar edges bulky, i.e., not pressed solid, affecting appearance		X	
k. Armhole seam not pressed open across top from back notch to 4 inches forward of shoulder seam		X	
11. POLYETHYLENE BAG			
a. Any bag not completely sealed			X
12. SEAMS AND STITCHING			
a. Accuracy of seaming			
(1) Seams twisted, puckered, or pleated, affecting appearance		X	
(2) Part of garment caught in any unrelated operation or stitching			
(3) Unsightly hand felling or blindstitching exposed and visible on outside of garment, affecting appearance		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

	Classification		
		Minor	
	Major	A	B
(4) Thread break or end of stitching (stitch type 301), when not caught in other seam or stitching, not securely backtacked		X	
(5) Not specified shade or various shades of thread used on outside of same jacket			
b. Gage of stitching, edge, top, or raised stitching			
(1) Irregular, i.e., unevenly gaged, or corresponding stitchings not uniformly gaged, affecting appearance (to be scored only when the condition exists on major portion of seam)		X	
(2) Beyond range of width gage specified or varies more than 1/16 inch when no range is specified (to be scored only when condition exists on major portion of seam)			X
c. Open seam. Broken, skipped, or run-off stitches shall constitute an open seam.			
(1) On outside (except undercollar felling)			
-1/8 inch or more but less than 1/4 inch			X
-1/4 inch or more but less than 1/2 inch		X	
-more than 1/2 inch	X		
(2) On undercollar felling			
-1/8 inch or more but not more than 1/4 inch			X
-more than 1/4 inch		X	
(3) On inside (including hand felling but not machine felling)			
-1/4 inch or more but not more than 1/2 inch			X
-more than 1/2 inch		X	
(4) On machine felling 1 inch or more		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

	Classification		
		Minor	
	Major	A	B
d. Raw edges. Raw edges not securely caught in stitching shall be classified as an open seam. Raw edges shall be classified as such only when they occur at places where edge is required to be turned under.			
(1) On joining seams, when resulting in an open seam, score as an open seam.			
(2) On edge, top, or raised stitching when resulting in an open seam (outside only)			
-over 1/4 inch to and including 1/2 inch			X
-over 1/2 inch		X	
e. Run-Offs			
(1) On joining seams when resulting in an open seam, score as an open seam.			
f. Seam and stitch type			
(1) Not seam type specified		X	
(2) Not stitch type specified		X	
g. Stitch tension. Puckering is evidence of tight tension. When puckering is evident, the seam shall be tested by exerting normal pull in lengthwise direction of the seam or stitching.			
(1) Loose tension, resulting in a loose seam	X		
(2) Tight tension (stitches break when normal strain is applied to seam or stitching) score as an open seam.			
(3) Loose tension on edge, top, or raised stitching, resulting in loosely exposed bobbin thread or top thread		X	
h. Stitches per inch (to be scored only when the condition exists on major portion of seam)			

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

	Classification		
		Minor	
	Major	A	B
(1) Less than minimum specified on all seams (except on labels)			
-one or two stitches			X
-three stitches		X	
-four or more stitches	X		
(2) One or more stitches less than minimum specified on labels			X
(3) One or more stitches in excess of maximum specified			X
i. Stitches, skipped or broken (on top, raise, or edge stitching when seam is seamed, turned, and stitched)			
(1) 1/4 inch or more but not more than 1/2 inch			X
(2) More than 1/2 inch		X	
13. SHADED PARTS			
a. On outside			
(1) Any shaded parts (except undercollar parts, band linings, and shoulder loop linings)			
(2) Undercollar parts badly shaded		X	
b. On inside			
(1) Any lining part badly shaded except sleeve linings		X	
(2) Sleeve lining parts in the same sleeve or pair of sleeve linings in same jacket badly shaded		X	

4.2.2.2 Detailed defects (jacket buttoned on form). Detailed defects (jacket button on form) shall be classified as follows:

	Classification		
		Minor	
	Major	A	B
1. COLLAR			
a. Construction and setting			

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

	Classification		
		Minor	
	Major	A	B
(1) Short, i.e., causing puckers on back or fronts or pulling lapel breakline, causing fronts to roll out		*	
(2) Long, i.e., setting away from neck, or lower end of lapel roll more than 2 inches above snap fastener		*	
(3) Collar not properly set, causing a decided curve or bulge on creaseline at joining to gorge seam		*	
(4) Tight at joining to gorge seam or across back, causing fullness on lapels or fullness or pleats across outside of back		*	
b. Collar edge			
(1) Collar edge short across shoulders causing fold at top of collar to rise above creaseline			
-1/4 inch or more but not more than 1/2 inch		X	
-more than 1/2 inch	X		
(2) Crooked, affecting appearance		X	
(3) Undercollar leaf exposed along collar edge, affecting appearance (to be scored only when the condition exists for a distance of 1 inch or more or at various places)		X	
(4) Tacking on corners of undercollar to lapel omitted or insecure		X	
c. Topcollar			
(1) Tight, i.e., causing edges to curl or bulging on undercollar		*	
(2) Twisted, i.e., having a diagonal twist		*	
(3) Pull, i.e., having puckers or fullness		*	

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

	Classification		
		Minor	
	Major	A	B
(4) Pull, i.e., topcollar folds 1/8 inch or more from creased edge of undercollar		X	
d. Undercollar			
(1) Interlining pleated, affecting smoothness of topcollar			
(2) Interlining tight or twisted, causing puckers on undercollar		X	
(3) Tight at joining to fronts or back, causing puckers on pleats at neck			
(4) Row of stitching forming breakline through interlining omitted		X	
(5) Row of stitching forming hem along neck edge omitted		X	
(6) Tacking of neck outlet to undercollar across back omitted or insecure			X
(7) Center back seam not spread open		X	
(8) Center seam off-center of back -1/4 inch or more but not more than 3/8 inch			X
-more than 3/8 inch		X	
e. Gorge seam			
(1) Seam not pressed open		X	
(2) Crooked, affecting appearance		X	
(3) Tacking omitted or insecure			X
2. LAPELS			
a. Lapel facings			
(1) Twisted, short, or tight causing lapels to curl out			

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

	Classification		
		Minor	
	Major	A	B
(2) Fullness or puckers			
b. Lapel edges			
(1) Irregular causing crooked edges, affecting appearance		X	
(2) Not properly forced out, leaving a fold of more than 1/16 inch			X
(3) Lapel edge stretched, affecting appearance		X	
(4) Front part exposed on lapel edge, affecting appearance (to be scored only when the condition exists on major portion of seam)		X	
(5) Tape set on tight causing puckering at edges, affecting appearance		X	
(6) Gap between top edge of lapel and end of collar on one side of jacket not uniform with other side of jacket by 1/4 inch or more		X	
c. Bridle tape			
(1) Misplace, i.e., tape extending beyond breakline on lapel side		X	
(2) Not held taut, allowing lapel to stretch along breakline		X	
(3) Excessively tight, causing puckers or pleats along breakline		X	
d. Collar and lapel shapes			
(1) Not uniform, i.e., left and right top edge of lapels or lower ends of collar vary in length 1/4 inch or more		X	
(2) Rounded corners at ends of collar poorly shaped or not of uniform shape or size, affecting appearance		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

	Classification		
		Minor	
	Major	A	B
(3) Lapels poorly shaped or not of uniform size or shape			
(4) Length of shapes uniform, but varying from pattern by			
-1/4 inch or more but not more than 3/8 inch		X	
-more than 3/8 inch	X		
3. SHOULDER (CONSTRUCTION)			
a. Shoulder seam curved towards back at armhole seam from normal position by			
-1/4 inch or more but not more than 3/8 inch			X
-more than 3/8 inch		X	
b. One or both shoulder seams not pressed open		X	
4. SHOULDER PADS			
a. Shoulder pad not properly set on shoulder, causing shoulder to twist or pucker or causing shoulder lining or pad to bulge		X	
b. Shoulder pads not completely caught in armhole tacking		X	
c. Shoulder pads misplaced, i.e., too far back or front, not serving intended purpose		X	
d. One or both shoulder pads omitted		X	
5. SHOULDER LOOPS			
a. Upperside of loop full or twisted		X	
b. Poorly shaped, affecting appearance		X	
c. Misplaced so that it will not lie flat when tacked causing bulge or twist on loop, affecting appearance		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

	Classification		
		Minor	
	Major	A	B
d. Misplaced, i.e., shoulder seam is exposed	X		
e. Short, i.e., rounded and not extending to undercollar seam by			
-1/8 inch or more but not more than 3/8 inch			X
-more than 3/8 inch		X	
f. Misplaced, i.e., one loop further forward or back from position of other loop by more than 1/4 inch		X	
g. Tacking on rounded end omitted or insecure		X	
h. Long, i.e., extending beyond width of gorge (neck) seam outlet by more than 1/4 inch			X
i. Width of loop at sleevehead less than 1-7/8 inches			X
j. Back edge of loop from shoulder seam at armhole			
-less than 3/8 inch but not less than 1/4 inch or more than 5/8 inch but not more than 3/4 inch			X
-less than 1/4 inch or more than 3/4 inch		X	
k. Not properly tacked causing bulge or twist on loop or puckers across shoulder, affecting appearance		X	
6. ARMHOLES (CONSTRUCTION)			
a. Stretched			
b. Tape too tight causing puckering around armhole seam, affecting appearance		X	
c. Crooked seam, affecting appearance		X	
d. Armholes not tacked completely		X	
e. Unsightly felling or tape stitching exposed and visible on outside surface		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

	Classification		
		Minor	
	Major	A	B
7. SLEEVES			
a. Setting and hang			
(1) Sleeve fullness misplaced			
(2) Sleeve tight in armhole, i.e., roll effect not present on front or back of sleeves			
(3) Sleeve too far back, i.e., front edge of sleeve more than 1-1/4 inches back of rear waist dart on front at waistband seam	X		
(4) Sleeve too far front, i.e., front end of sleeve more than 1-1/4 inches forward from rear waist dart on front at waistband seam	X		
(5) Hang of sleeves in opposite direction, i.e., one sleeve too far forward and one sleeve too far back, tolerance of 1 inch but not exceeding 1-1/2 inches from rear waist dart on front at waistband seam		X	
(6) Sleeve back seam unequal distance from shoulder seam (outside) by more than 1/2 inch		X	
(7) Lower part of top sleeve tight causing bulge, break, or twist on sleeve at front of armhole			
b. Sleeve lining			
(1) Twisted, tight, or short causing bulge, twist, or puckering on outside of sleeves			
(2) Sleeve lining too long causing lining to sag at bottom 1/2 inch or more below felling of cuffs			X
(3) Outlet on bottom of sleeve lining omitted		X	
(4) Outside fold of one or more pleats in top or under-sleeve lining not facing the sleeve opening			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

	Classification		
		Minor	
	Major	A	B
(5) One or more pleats at bottom omitted		X	
(6) Sleeve lining seam out of alignment more than 3/4 with corresponding sleeve seam at armhole or at bottom of sleeves			X
(7) Pleats on lining extending less than 1-1/2 inches above felling to top of cuff			X
c. Construction of sleeves			
(1) Back or front seams not pressed open (wool)		X	
(2) Outlet on bottom of sleeves omitted		X	
(3) Tacking on one or both sleeve lining seams to corresponding sleeve seams omitted, insecure, or incomplete from 4-1/2 inches from top of sleeve to 4-1/2 inches above cuff on front seam or above top of vent on back seams			X
d. Sleeve pleats			
(1) One or more pleats omitted	X		
(2) Outside fold of pleats in top or under sleeve not facing toward sleeve opening		X	
(3) Pleats on one sleeve placed 3/8 inch or more from position of pleats on other sleeve		X	
(4) Extending to less than 1 inch above joining seam to cuff		X	
(5) Uneven in length by 3/8 inch or more		X	
e. Sleeve vent openings			
(1) Under sleeve overlapping top sleeve at opening	X		
(2) Openings uneven in length by 1/4 inch or more to top of cuffs		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

	Classification		
		Minor	
	Major	A	B
(3) Lining tight, short, or twisted causing puckers or twist at vent opening, affecting appearance		X	
(4) Row of stitching on vent edge of under sleeve omitted			X
f. Sleeve cuffs			
(1) Cuffs reversed, i.e., constructed or attached to sleeve with buttonhole on under-sleeve side of opening	X		
(2) Upperside pointed end poorly shaped, affecting appearance		X	
(3) Upperside of cuff twisted, affecting appearance		X	
(4) Fullness on upperside of cuff, affecting appearance		X	
(5) Irregular in width by 3/16 inch or more, affecting appearance		X	
(6) Button not aligned with buttonholes causing a noticeable bulge or twist on either side of opening, affecting appearance		X	
(7) Purled edge of cuff buttonhole eyelet (positioned from pointed end)			
-less than 3/8 inch but not less than 1/4 inch or more than 5/8 inch but not more than 3/4 inch			X
-less than 1/4 inch or more than 3/4 inch		X	
(8) Buttonhole off-center by 1/4 inch or more		X	
(9) Cuff button (center of button) from end of cuff			
-less than 3/8 inch but not less than 1/4 inch or more than 3/4 inch but not more than 1 inch			X
-less than 1/4 inch or more than 1 inch		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

	Classification		
		Minor	
	Major	A	B
8. SNAP FASTENER			
a. Not specified type, size, or color		X	
b. Stud or socket omitted, not securely sewn, mismated, or defective, affecting function		X	
NOTE: Stud and socket shall be checked for proper functioning by opening and closing several times.			
c. Stud not aligned with socket causing a noticeable bulge or twist on fronts when closed, affecting appearance		X	
d. Reversed, i.e., socket on right facing and stud on left front		X	
e. Tacking of thread end omitted or insecure		X	
f. Center of socket from left front edge			
-less than 1-3/8 inches but not less than 1-1/4 inches or more than 1-5/8 inches but not more than 1-3/4 inches			X
-less than 1-1/4 inches or more than 1-3/4 inches		X	
g. Center of socket from top end of slide-fastener tape on left front			
-less than 5/8 inch but not less than 1/2 inch or more than 7/8 inch but not more than 1 inch			X
-less than 1/2 inch or more than 1 inch		X	
9. EQUAL LENGTH OF CLOSED FRONTS AT BOTTOM OF WAISTBAND			
a. Right front shorter than left front at bottom by			
-3/16 inch or more but not more than 3/8 inch		X	
-more than 3/8 inch	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

	Classification		
		Minor	
	Major	A	B
b. Right front longer than left front at bottom by			
-more than 1/4 inch but not more than 1/2 inch		X	
-more than 1/2 inch	X		
c. Bottom front corner of left band exposed beyond edge of band by			
-3/16 inch or more but not more than 3/8 inch		X	
-more than 3/8 inch	X		
10. ALIGNMENT OF BUTTONS OF LEFT BAND WITH BUTTONHOLES ON RIGHT BAND (EXTENSION PIECE)			
a. One or both buttons out of alignment with eyelet buttonholes causing a noticeable bulge or twist on band extension when buttoned, affecting appearance.		X	
11. ALIGNMENT OF BUTTON ON UNDERSIDE OF RIGHT BAND WITH BUTTONHOLE ON END OF LEFT BAND			
a. Not aligned, causing a noticeable bulge or twist on band or front when buttoned, affecting appearance		X	
b. Button sewing stitches caught through outside surface of band		X	
12. BUTTONHOLE ON FRONT END OF LEFT BAND (POSITION)			
a. Off-center by more than 3/16 inch		X	
b. Position from front edge (measurement taken from purled edge of eyelet to end of band)			
-less than 3/8 inch but not less than 1/4 inch or more than 3/4 inch but not more than 7/8 inch			X
-less than 1/4 inch or more than 7/8 inch		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

	Classification		
		Minor	
	Major	A	B
13. BUTTONS ON LEFT BAND (POSITION)			
a. Buttons out of horizontal alignment by 3/16 inch or more		X	
b. Second button less than 1-3/4 inches or more than 2-1/4 inches from first button (measurement taken from center of first button to center of second button)		X	
14. BUTTONHOLES OF RIGHT BAND LINING (POSITION)			
a. Off-center by more than 3/16 inch		X	
b. Constructed through outer band	X		
c. First buttonhole less than 1/2 inch or more than 3/4 inch from end of band (measurement taken from purled edge of eyelet to end of band)		X	
d. Second buttonhole less than 1-3/4 inches or more than 2-1/4 inches from first buttonhole (measurement taken from center of second eyelet)		X	
e. Stay piece for reinforcing both buttonholes omitted		X	
15. SLIDE FASTENER (POSITION, CONSTRUCTION, AND WORKABILITY)			
a. Omitted or defective, i.e., affecting function	X		
b. Tapes stitched too close to metal chain, not permitting slider to pass	X		
c. Stitching on lower ends of tapes too close to metal chain, not permitting separating pin to enter the retainer	X		
d. Tape on left front not stitched through interlining	X		
e. Reversed, i.e., pin side on right facing and slider portion on left front	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

	Classification		
		Minor	
	Major	A	B
f. Not specified type, size, or color	X		
g. Tapes stitched to right front facing or left front with one row of stitching		X	
h. Tape on right front facing stitched through front	X		
i. Tapes on right front facing set too loosely or too tightly causing noticeable bulging on tapes or fronts		*	
j. Lower ends unequal distance from top edge of bands by 1/4 inch or more		X	
k. Top end of one or both tapes not turned under and caught in the double stitching		X	
l. Slider pull omitted	X		
NOTE: Slide fastener shall be checked for proper function by opening and closing.			
16. FRONTS (CONSTRUCTION)			
a. Row of stitching on right front through facing omitted	X		
b. Row of stitching on right front not through facing	X		
c. Right front twisted between edge and row of stitching through facing		*	
d. Facing short, tight, or twisted causing fullness or twists on fronts		*	
e. Fullness or twist on left front between edge and slide fastener, affecting appearance		X	
f. Row of stitching on right front less than 1-3/4 inches or more than 2-1/4 inches from edge		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

	Classification		
		Minor	
	Major	A	B
g. One or more bottom front dart seams not pressed open		X	
h. Row of stitching on right front exposed on lapel when jacket is worn, affecting appearance		X	
17. FRONT EDGES			
a. Front edges stretched, affecting appearance		X	
b. Puckering on edges, affecting appearance		X	
c. Irregular or crooked, affecting appearance		X	
d. Not properly forced out having a fold of more than 1/16 inch			X
e. Facing exposed on right front edge			X
18. LENGTH OF OPEN FRONTS TO THE BOTTOM OF WAISTBAND			
a. Uneven in length by			
-more than 1/4 inch but not more than 1/2 inch		X	
-more than 1/2 inch	X		
19. INTERLINING (FITTING CANVAS FRONTS)			
a. Tight, short, or twisted causing fullness or twist on outside of jacket			
b. Too full causing jacket front to have a wavy appearance or not lie smoothly			
c. Canvas front not caught in armhole tacking for a distance of			
-more than 1 inch but not more than 2 inches			X
-more than 2 inches		X	
20. BODY LINING FITTING (FRONT AND BACK)			
a. Tight, short, or twisted causing fullness or twist on outside of jacket			

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

	Classification		
		Minor	
	Major	A	B
21. POCKETS (BREAST SIMULATED)			
a. One or both omitted	X		
b. Facing omitted	X		
c. Welts more than 3/16 inch wide		X	
d. Tacking of tongue notch at ends of opening to welt ends and facing omitted or insecure		X	
e. Welts irregular or not uniform in width, affecting appearance		X	
f. Edges of welts 1/8 inch or more apart at openings		X	
g. Pockets out of horizontal alignment by -1/4 inch or more but not more than 1/2 inch		X	
-more than 1/2 inch	X		
h. Positioned unevenly from armhole seams by more than 1/2 inch		X	
i. Openings uneven in length by more than 1/4 inch		X	
j. Set on crookedly, affecting appearance		X	
k. Corners of opening pleated or puckered, affecting appearance		X	
22. SHOULDER DARTS (ON BACK)			
a. Cut-type construction	X		
b. Uneven in length by 3/8 inch or more		X	
c. Dart on right back placed 1/4 inch or more from position of dart on left back			X
d. Outside edge not pressed toward armhole seam			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

	Classification		
		Minor	
	Major	A	B
23. BACK PLEATS (OUTSIDE)			
a. One or more omitted or added	X		
b. Cut-type construction	X		
c. Outer edge of pleats on each side of center not facing toward side seam		X	
d. Pleats on right side of back placed 3/8 inch or more from position of pleats on left back		X	
24. SHOULDER DARTS (ON FRONTS)			
a. Seam not pressed open		X	
b. Lower end not extending to seam joining top piping to front or extending below seam joining lower piping to front		X	
25. FRONT NECK DARTS			
a. Seam not pressed open		X	
b. Uneven in length by			
-1/4 inch or more but not more than 1/2 inch			X
-more than 1/2 inch		X	
OUTSIDE OF JACKET (SPREAD OUT ON TABLE)			
26. SIMULATED BREAST POCKETS (TACKING ON FRONT AND BACK ENDS TO INTERLINING)			
a. Tacking omitted or insecure			
-on one end of one or both pockets			X
-on both ends of one or both pockets		X	
27. WAISTBAND (CONSTRUCTION)			
a. Outer waistband badly twisted			
b. Outer waistband pleated or puckered at seam joining waistband to jacket, affecting appearance		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

	Classification		
		Minor	
	Major	A	B
c. Outer waistband tight at joining to jacket causing puckers or pleats on bottom of jacket, affecting appearance		X	
d. Outlet on bottom of jacket omitted	X		
e. Outer waistband irregular in width by 3/16 inch or more, affecting appearance		X	
f. Right front end extension poorly shaped, affecting appearance		X	
g. Curved ends of front bands at side vents poorly shaped, affecting appearance		X	
h. Top edge of outer waistband not lapped on top of fronts or back		X	
i. Top or lower edges irregular, affecting appearance		X	
j. Raise stitching on top edge of waistband not caught through waistband lining and back tab		X	
k. Outlet on bottom of jacket less than 3/4 inch or more than 1-1/4 inches wide		X	
l. Length of front end extension less than 5 inches or more than 5-1/2 inches long (measured from end of extension to edge of right front)		X	
28. SIDE VENTS			
a. Construction			
(1) Back overlapping front	X		
(2) Opening uneven in length by 1/4 inch or more to top edge of waistband		X	
(3) Lining tight, short, or twisted causing puckers or twist at vent openings, affecting appearance		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

	Classification		
		Minor	
	Major	A	B
(4) Edge stitching omitted on front or back vent edges		X	
b. Side vent (buttons and buttonholes)			
(1) First button on ends of back band out of alignment with eyelet of buttonhole on end of front band buttonhole, causing a noticeable bulge or twist, affecting appearance		X	
(2) Position of second button from first button (measurement taken from center of first button to center of second button)			
-less than 3/4 inch but not less than 1/2 inch or more than 1-1/4 inches but not more than 1-1/2 inches			X
-less than 1/2 inch but not more than 1-1/2 inches		X	
(3) Buttonhole off-center of band by 3/16 inch or more		X	
(4) Position of buttonhole from end of front band (measurement taken from purled edge of eyelet to end)			
-less than 3/8 inch but not less than 1/4 inch or more than 3/4 inch but not more than 7/8 inch			X
-less than 1/4 inch or more than 7/8 inch		X	
INSIDE OF JACKET (SPREAD OUT ON TABLE)			
29. HANGER			
a. Omitted or ends not securely stitched through back		X	
b. Braid not specified type, size, or color		X	
c. Length of hanger			
-less than 1-3/4 inches but not less than 1-1/4 inches or more than 2-1/4 inches			X
-less than 1-1/4 inches		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

	Classification		
		Minor	
	Major	A	B
30. FACINGS, FRONTS			
a. Excessive fullness		X	
b. Tacking on back edge of one or both facings to interlinings			
-omitted		X	
-insecure or incomplete from 3-1/2 inches below the shoulder seam to 2-1/2 inches above the inside breast-pocket opening			X
31. INSIDE POCKETS			
a. One or both omitted	X		
b. Opening not extending into front facing or extending into front facing by more than 1 inch		X	
c. Silesia stay not extending into armhole seam, i.e., not caught to armhole seam		X	
d. Length of opening			
-less than 4-1/2 inches but not less than 4-1/4 inches			X
-less than 4-1/4 inches		X	
e. Depth of pocket measured to top edge of pocket welt			
-less than 5-3/4 inches but not less than 5-3/8 inches or more than 6-1/4 inches			X
-less than 5-3/8 inches		X	
f. Tacking of tongue notch to end of welt and pocket omitted or insecure		X	
g. Raise stitching on upperside of opening omitted		X	
32. IDENTIFICATION LABEL			
a. Missing, incorrect, or illegible		X	
b. Size shown on label not in conformance with size shown on intermediate or outer container, as applicable			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

	Classification		
		Minor	
	Major	A	B
c. Not stitched on four sides			X
d. Misplaced, i.e., not positioned on right front lining below the welt of the inside breast pocket			X
33. LININGS (FRONTS AND BACK)			
a. Twisted, not affecting smoothness on outside surface of jacket			X
b. Excessive fullness or pleats			X
c. One or more darts omitted on front linings		X	
d. One or more darts omitted on back linings		X	
e. Center back pleat omitted		X	
f. Shoulder pleat omitted on one or both front linings		X	
g. Bellows pleat omitted on bottom of lining at top band		X	
34. LINING SIDE OF ARMHOLES			
a. Tacking around armhole through lining, interfacing, shoulder, and sleeve-head pads omitted or insecure or the tacking at base of armhole from sleeve notch on the front to the sleeve notch on the back not machine tacked		X	
b. Hand back stitching from front seam in sleeve to side seam of one or both armholes			
-omitted		X	
-incomplete			X
35. WAISTBAND LININGS			
a. Badly twisted		X	
b. Excessive fullness			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

36. WAISTBAND BACK TAB	Classification		
		Minor	
	Major	A	B
a. Construction			
(1) Omitted	X		
(2) Lower edge exposed below bottom edge of waistband			
(3) Silesia buttonhole stay omitted		X	
(4) Tab not securely stitched to top of band lining		X	
(5) Off-center with back band by 1/2 inch or more		X	
(6) Lower edge unevenly spread from bottom of band by more than 1/4 inch			X
b. Tab buttonholes (position)			
(1) Unequally spaced by more than 1/4 inch		X	
(2) Purled edge of buttonhole eyelet less than 3/8 inch or more than 5/8 inch from bottom folded edge			X
(3) End buttonhole positioned less than than 3/4 inch or more than 1-1/4 inches from side edge.			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

	Classification		
		Minor	
	Major	A	B
(4) Center buttonhole unevenly spaced from end buttonholes by more than 1/4 inch			X
(5) Purled edge of eyelets unevenly spaced from bottom edge of tab by more than 3/16 inch.			X

4.2.2.3 Finished measurement defects. Any finished measurement of the 1/2 bust, the 1/2 waist, the sleeve length, and the back length deviating from the dimension and tolerance specified in Table II shall be classified as a finished measurement defect. Sleeve length uneven by more than 1/2 inch shall be scored as a finished measurement defect.

4.2.3 Examination of preparation of delivery requirements. An examination shall be made to determine if packaging, packing, and marking requirements of section 5 of this specification have been met. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 of MIL-STD-105, and the acceptable quality level shall be 4.0 defects per 100 units. Shipping containers fully prepared for delivery shall be examined for defects in accordance with the following:

EXAMINE	DEFECT
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application
Materials	Any component missing Any component damaged, affecting serviceability
Workmanship	Inadequate application of components, such as: incomplete closure of case liners, container flaps, loose strapping, inadequate stapling Bulging or distortion of containers

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

Content (exterior and interior)	Number of intermediate packages is more or less than required Number of jackets per intermediate package is more or less than required. 1/

4.3 Tests. The method of testing shall be in accordance with CCC-T-191, wherever applicable, and table III.

5. PREPARATION FOR DELIVERY

5.1 Packaging

5.1.1 Level A. Each jacket shall be folded to approximately 20 inches in width by 12 inches in length. The jacket shall then be placed in a bag that is a flat size of approximately 21 inches by 15 inches and that is made of polyethylene conforming to type I, grade A, B, or C, finish 1 or 2 of L-P-378. All seams and closures shall be heat sealed (see 5.3.1) and shall conform to the heat-seal-strength requirements of L-P-378. Prior to or during the heat-sealing operation, excess air shall be expelled to the extent necessary to permit packaging in the intermediate container.

5.1.1.1 Intermediate packaging. Each polyethylene bag shall be placed in a container that is approximately 20 inches long, 12 inches wide, and 2 inches deep. The container shall conform to type I, class 1, style RSC, minimum bursting strength 200 pounds per square inch (psi) of PPP-B-636. Tape conforming to UU-T-111 applied over the flap openings and extending down on the sides of the container shall be used to seal the container.

5.2 Packing

5.2.1 Level A. Sixteen jackets of one size only, packaged as specified in 5.1, shall be packed in an exterior-type shipping container conforming to type I or II, class 2, V3c or V3s, style RSC of PPP-B-636. Closure and strapping of the container shall be in accordance with the appendix of the container specification. The inside dimensions of the container shall be 24 inches long, 20 inches wide, and 16 inches deep. Toward the end of the contract or when there are less than the amount of the same size required per container, mixed sizes (see 5.3.2) may be packed within the same shipping container.

1/ For this defect one intermediate package from each container in the sample shall be examined.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

5.2.2 Level B. Sixteen jackets of one size only, packaged as specified in 5.1, shall be packed in an exterior-type shipping container conforming to type I or II, class 1, style RSC, minimum bursting strength 275 psi of PPP-B-636. The inside dimensions of the container shall be 24 inches long, 20 inches wide, and 16 inches deep. The containers shall be sealed by applying a suitable adhesive (glue) throughout the entire area of contact between the flaps or by a combination of metal stitching the bottom flaps and sealing the top flaps with adhesive. Toward the end of the contract or when there are less that the quantity of the same size required per container, mixed sizes (see 5.3.2) may be packed with the same shipping container.

5.3 Marking. Intermediate and exterior shipping containers shall be marked in accordance with the requirements of MIL-STD-129.

5.3.1 Polyethylene packages. Before sealing the polyethylene packages (see 5.1.1), a paper label printed black on white and containing the stock number, the nomenclature, the size, and the quantity of the jackets contained therein shall be inserted in the bag so that it is readable through the polyethylene.

5.3.2 Mixed sizes. Each shipping container packed with mixed sizes (see 5.2.1 and 5.2.2) shall have a 5-inch by 4-inch, white, paper label securely attached to the end and side. The words "mixed sizes" shall be plainly printed thereon. The correct quantity and size of jacket contained therein shall be legibly printed under "mixed sizes."

6. NOTES

6.1 Intended use. The jacket covered by this specification is intended to be worn as a component of the dress uniform by the women of the Air Force and as an optional jacket to the wool coat covered by MIL-C-4259.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification

b. Size and length required (see 1.1)

c. Selection of applicable level of packing

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

6.3 Samples. Samples of USAF color shades may be obtained from the procuring activity or as directed by the contracting officer.


6.4 Figure. Figure 1 shows general design and is for information only.

Custodian:
Air Force - 11


Preparing activity:
Air Force - 11

Other interests:
Reviewers:
Air Force - 11, 67


Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

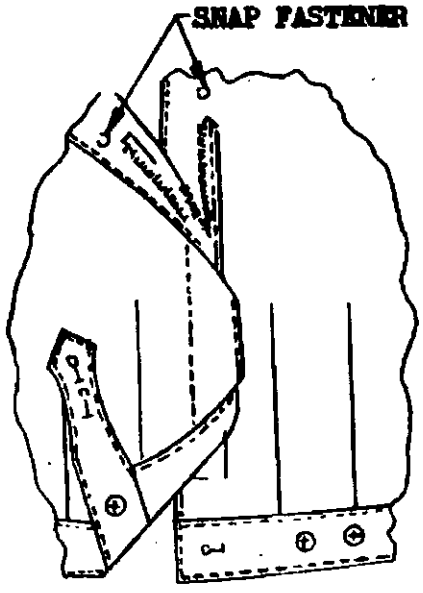

DETAIL OF FRONT CLOSING

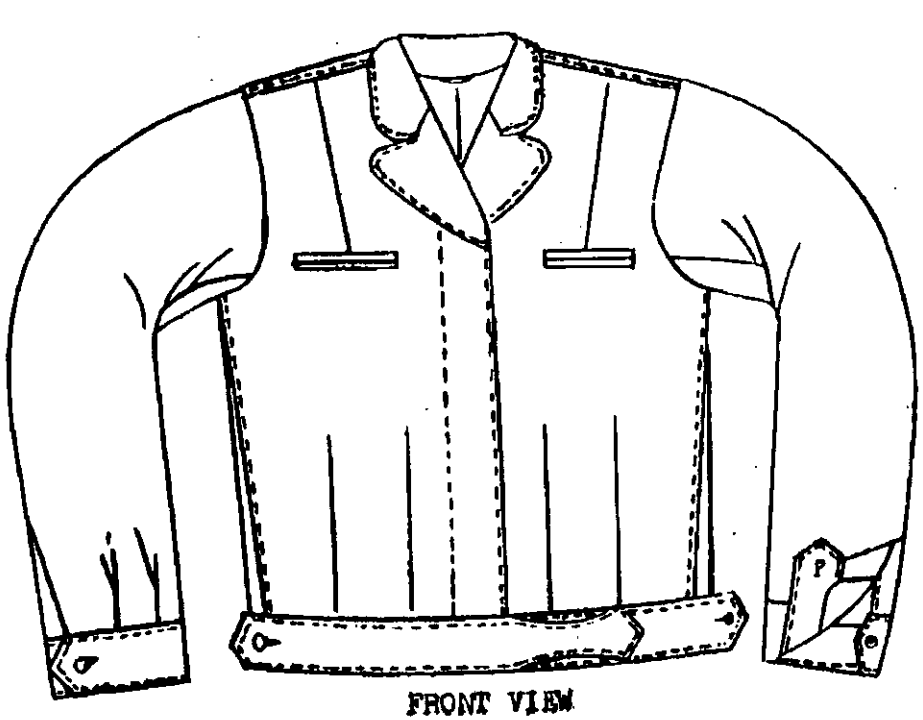

FRONT VIEW

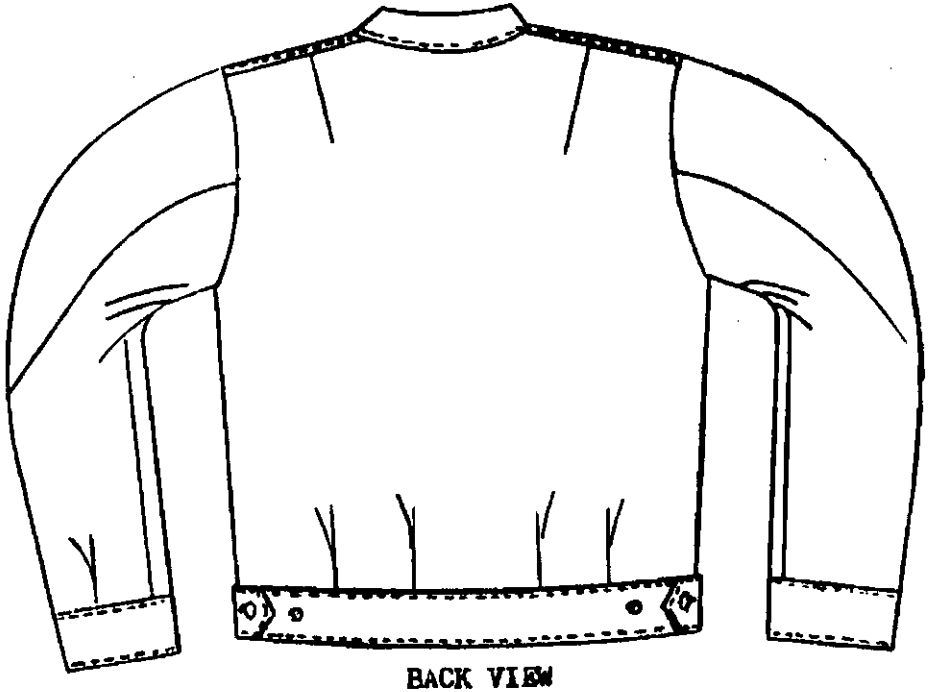

BACK VIEW

FIGURE 1 - JACKET

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET	Form Approved Budget Bureau No. 119-R052

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use of the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity.

SPECIFICATION

ORGANIZATION	CITY AND STATE

CONTRACT NO.	QUANTITY OF ITEMS PROCURED	DOLLAR AMOUNT $

MATERIAL PROCURED UNDER A

☐ Direct Government Contract ☐ Subcontract

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES" IN WHAT WAY?

4. REMARKS (Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)

SUBMITTED BY (Printed or typed name and activity)	DATE

DD Form 1426

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.