INCH-POUND

MIL-L-4387D
16 January 1990
SUPERSEDING
MIL-L-4387C
9 September 1976

MILITARY SPECIFICATION

LUBRICATION DISPENSING EQUIPMENT ACCESSORIES

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers accessories used with powered and hand-operated lubricating equipment.

1.2 Classification. The accessories covered by this specification shall be of the following types, classes, styles, and sizes, as specified (see 6.2):

Type I - Couplings.
  Class 1 - Hydraulic.
    Style A - Straight, internal connecting threads (see figures 1 and 1a).
      Size 1 - 1/8 inch-27 NPTF, with check valve.
      Size 2 - 1/8 inch-27 NPT, without check valve.
      Size 3 - 1/2 inch-20 NF, without check valve.
    Style B - Swivel, 1/8 inch-27 NPT internal connecting threads (see figure 2).
  Class 2 - Pin type, external connecting threads, without check valve (see figure 3).
      Size 1 - 11/16 inch-27 NS.
      Size 2 - 1/8 inch-27 NPT, with oil seal in nozzle.
  Class 3 - Buttonhead, internal connecting threads (see figure 4).
    Style A - Large, with check valve, and 7/16-27 NS threads.
    Style B - Standard, without check valve.
      Size 1 - 1/8 inch 27-NPT.
      Size 2 - 7/16 inch 27-NS.
  Class 4 - Flush type, straight, 1/8 inch-27 NPT, internal connecting threads, without check valve (see figure 5).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: USA Belvoir Research, Development, and Engineering Center, ATTN: STRBE-TSE, Fort Belvoir, VA 22060-5606 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 4930

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

Class 5 - Shafer type, straight, 1/8 inch-27 NPT, internal connecting threads, without check valve (see figure 6).
Class 6 - Push type, 1/8 inch-27 NPT, internal connecting threads, without check valve (see figure 7).
Type II - Locking sleeve (see figure 8).
Type III - Extensions, rigid type, external connecting threads (see figures 9 and 9a).
Class 1 - Hydraulic-type coupling.
Size 1 - 6.5 inches overall length.
Size 2 - 21 inches overall length.
Class 2 - Standard buttonhead-type coupling, 6.5 inches overall length.
Type IV - Adapters.
Class 1 - Extension adapters, hydraulic-type coupling.
Style A - Rigid, swivel coupling (see figure 10).
Style B - Flexible, straight coupling (see figure 11).
Style C - Flexible, hose coupling (see figure 11a).
Class 2 - Hydraulic coupling to hydraulic-type fittings, push type (zerk), straight (see figure 12).
Size 1 - Nominal 5/16-inch.
Size 2 - Nominal 7/16-inch.
Class 3 - Hydraulic coupling to flush-type fittings (see figure 13).
Class 4 - Hydraulic coupling to pin-type fittings (see figure 14).
Class 5 - Hydraulic coupling to pin-type fittings, 45-degree fixed angle design (see figure 15).
Type V - Pump adapter, right angle and straight, 3/8 inch-18 NPT external to internal threads (see figure 16).
Type VI - Control valves (guns).
Class 1 - Nonmetering.
Style A - High pressure (grease) (see figure 17).
Style B - Low pressure (gear lubricant) (see figure 18).
Class 2 - Metering guns.
Style A - Gear lubricant (see figure 19).
Style B - Motor oil (see figure 20).
Type VII - Swivels.
Class 1 - Straight.
Style A - External connections (see figure 21).
Size 1 - 1/8 inch-27 NPT threads.
Size 2 - 3/8 inch-18 NPT to 1/2 inch-14 NPT threads.
Size 3 - 1/4 inch-18 NPT to 1/2 inch-27 NS threads.
Size 4 - 1/8 inch-27 NPT to 1/2 inch-27 NS threads.
Style B - External and internal connections (see figure 21a).
Size 1 - 7/16 inch-20 UNF external and internal threads.
Size 2 - 7/16 inch-20 UNF internal threads, 3/4 inch-16 UNF external threads.
Size 3 - 9/16 inch-16 UNF internal threads, 3/4 inch-16 UNF external threads.
Class 2 - Right-angle external connections (see figure 22).
Size 1 - 1/2 inch-14 NPT to 7/8 inch-20 UNEF threads.
Size 2 - 3/4 inch-14 NPT threads.
Class 3 - "Z", external connections (see figure 23).
Size 1 - 1/2 inch-27 NS (pipe) to 1/8 inch-27 NPT threads.
Size 2 - 1/2 inch-27 NS to 1/8 inch-27 NPT threads.
Size 3 - 3/8 inch-18 NPT to 1/2 inch-14 NPT threads.
Size 4 - 7/16 inch-20 UNF or NF threads.

Source: https://assist.dla.mil -- Downloaded: 202610-17T03:32Z
Check the source to verify that this is the current version before use.

Size 5 - 1/4 inch-18 NPT to 1/8 inch-27 NPT threads.
Size 6 - 1/2 inch-27 NS to 1/4 inch-18 NPT threads.
Size 7 - 1/4 inch-18 NPT threads.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. The following specifications and standards form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

PPP-B-601	- Boxes, Wood, Cleated-plywood.
PPP-B-636	- Boxes, Shipping, Fiberboard.
PPP-B-665	- Boxes: Paperboard, Metal Edged, and Components.

MILITARY

MIL-P-116	- Preservation, Methods of.
MIL-B-121	- Barrier Material, Greaseproofed, Waterproofed, Flexible.
MIL-F-3541	- Fittings, Lubrication.
MIL-H-3868	- Hose Assemblies, Non-metallic: Grease Gun, High and Low Pressure.
MIL-G-10924	- Grease, Automotive and Artillery.
MIL-G-23827	- Grease, Aircraft and Instrument, Gear and Actuator Screw, NATO Code Number G-354.

STANDARDS

FEDERAL

FED-STD-H28/7	- Screw-Thread Standards for Federal Services.

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-889	- Dissimilar Metals.
MS24200	- Adapter, Pump.
MS24203	- Coupling, Grease Gun; Shafer Type Nozzle.
MS24204	- Adapter, Grease Gun Coupling; Hydraulic Type Inlet Fitting, Pin Type Nozzle.
MS24205	- Coupling, Grease Gun; Flush Type Nozzle.
MS24206	- Sleeve, Locking.
MS24207	- Coupling, Grease Gun; Hydraulic Type Nozzle.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

(Unless otherwise indicated, copies of federal and military specifications, and standards are available from the Naval Publications and Forms Center, (ATIN; NPODS), 5801 Tabor Avenue, Philadelphia, PA 19120-5099.)

2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unliess otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise spedified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASIM)

ASIM D 3953	-	Strapping, Flat Steel and Seals.
AMST D 4675	-	Selection and Use of Strapping Materials.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia PA 19103.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, (except for related associated detail specifications, specification sheets or MS standards), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Description. The lubrication dispensing equipment accessories (hereinafter called "accessories") furnished under this specification shall consist of couplings, valves, fittings, nozzles, adapters, and other components for use with powered and hand-operated lubricating equipment. Typical accessories are shown in figures 1 through 23.

3.2 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 6.3) in accordance with 4.3.

3.3 Materials. Materials shall be as specified herein. Materials not specified shall be of a commercial quality entirely suitable for the purpose intended and shall be subject to all provisions of this specification.

3.3.1 Material deterioration prevention and control. The accessories shall be fabricated from compatible materials, inherently corrosion resistant or treated to provide protection against the various forms of corrosion and deterioration that may be encountered in any of the applicable operating and storage environments to which the accessories may be exposed.

3.3.1.1 Dissimilar metals. Dissimilar metals shall not be used in intimate contact with each other unless protected against galvanic corrosion. Dissimilar metals and methods of protection are defined and detailed in MIL-STD-889.

Source: https://assist.dla.mil -- Downloaded: 202610-17T03:32Z
Check the source to verify that this is the current version before use.

3.3.1.2 Identification of materials and finishes. The contractor shall identify the specific material, material finish or treatment for use with component and subcomponent, and shall make information available upon request to the contracting officer or designated representative.

3.3.2 Recycled, reclaimed, and virgin materials. For the purpose of this requirement, recycled and reclaimed materials are those materials which have been collected from solid waste and reprocessed to become a source of raw materials, as distinguished from virgin raw materials. The components, pieces and parts incorporated in the accessories may be newly fabricated from recovered materials to the maximum extent practicable, provided the accessories produced meets all other requirements of this specification. Used, rebuilt or remanufactured components, pieces and parts shall not be incorporated in the accessories.

3.4 Environmental conditions.

3.4.1 Low temperatures. The accessories shall be capable of withstanding storage without damage in a temperature of -30 °F (-34 °C) and shall operate effectively in an ambient temperature of 0 °F (-18 °C).

3.4.2 High temperatures. The accessories shall be capable of withstanding storage without damage in a temperature of 160 °F (71 °C) and shall operate effectively in an ambient temperature of 110 °F (43 °C).

3.5 Design. Accessories furnished under this specification shall be of the design specified herein, with the following exceptions:

a. NPTF threads may be substituted for NPT threads.
b. Exceptions to referenced MS standards:

(1) Nickel plating is permissible.
(2) Unless otherwise specified (see 6.2), marking with MS part number is optional.
(3) When specifically dimensioned contour is optional.

Where design is not definitely specified, accessories shall be of the manufacturer's latest design, capable of performing their intended function. All parts subject to wear, breakage, or distortions shall be accessible for adjustment and repair.

3.6 Performance. The accessories, with the exception of type VI, class 1, style B, and type VI, class 2, styles A and B, shall be capable of discharging grease conforming to MIL-G-10924 and MIL-G-23827 at the pressures, temperatures and volume specified when tested as specified in 4.5.2.

3.7 Fastening devices. All screws, pins, bolts, and similar parts shall be installed with means for preventing them from becoming loose or out of adjustment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

3.8 Threaded parts. Screw threads for all thread securing or attaching devices and threaded parts shall conform to FED-STD-H28/7 as follows:

a. Machine threads shall be of the standard national coarse or fine thread series.
b. Pipe threads shall be the standard national taper pipe thread series.

3.9 Marking. Marking shall conform to the contractor's standard practice.

3.10 Type I couplings. Type I, class 1 through class 3 couplings shall be capable of withstanding, without damage or leakage, a lubricant (burst) pressure of 10,000 pounds per square inch gauge (psig). Couplings shall be tested as specified in 4.5.2.2.

3.10.1 Class 1. Type I, class 1 couplings shall be used in effecting a connection between basic lubrication equipment and hydraulic-type lubrication fittings conforming to MIL-F-3541. The couplings shall maintain a tight seal without external assistance when coupled with the aforementioned fittings and subjected to an internal lubricant pressure, and shall maintain such seal when the centerline of the coupling is displaced at any angle up to and including 10 degrees in any direction from the vertical centerline of the fitting. The couplings shall be designed so as to grip the fitting with a pressure in proportion to the lubricant pressure being applied. Separation of the coupling from the fitting, with no applied lubricant pressure, shall require a straight pull force of not more than 85 pounds. The coupling shall also separate from the fitting when it is angularly displaced between 15 and 25 degrees from the vertical centerline of the fitting. Connection between the coupling and fitting shall be effected by a straight push over the fitting of not more than 8 lbs. The jaws shall have a thickness of not less than .050 inch. In addition, couplings shall conform to MS24207, except as specified below (see 3.10.1.1 and 3.10.1.2).

3.10.1.1 Style A. Type I, class 1, style A couplings shall be in the thread sizes as indicated in 1.2 and with or without a built-in ball check valve (see figures 1 and 1a).

3.10.1.2 Style B. Type I, class 1, style B couplings shall swivel through 360 degrees, and shall positively lock in a minimum of eight equally spaced positions (see figure 2).

3.10.2 Class 2. Type I, class 2 couplings shall conform to MS24204, except that, in place of the hydraulic fitting, external connecting threads shall be provided of the sizes indicated in 1.2 (see figure 3).

3.10.3 Class 3. Type I, class 3 couplings shall be for the large-type and standard buttonhead fittings of the sizes as indicated in 1.2 and with or without a check valve (see figure 4).

3.10.4 Class 4. Type I, class 4 couplings shall conform to MS24205 (see figure 5).

3.10.5 Class 5. Type I, class 5 couplings shall conform to MS24203 (see figure 6).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

3.10.6 Class 6. Type I, class 6 couplings shall be of a steel or rubber seat push-type (zerk) (without check valve), and shall be capable of connecting all push-type fittings. The inlet shall be 1/8 inch-27 NPT internal thread (see figure 7).

3.11 Type II locking sleeve. Type II accessories are for effecting a connection between various adapters and hydraulic couplings conforming to type I of this document and shall be similar to figure 8. Locking sleeves shall be composed primarily of a body mated with a hydraulic fitting conforming to type III of MIL-F-3541 and a sliding sleeve, and shall conform to MS24206. The hydraulic fitting shall be located so as to telescope within the sliding sleeve when the locking sleeve is in the locked position. The full sleeve movement shall be such as to telescope a distance of not less than 0.50-inch over a type I accessory coupling when snapped onto the hydraulic fitting. The locking sleeve shall be capable of withstanding a lubricant pressure of 10,000 psig without damage or leakage. The locking sleeve shall be tested as specified in 4.5.2.3.

3.12 Type III extensions.

3.12.1 Class 1. Type III, class 1 extensions shall consist of a hydraulic coupling and a pipe or tube extension. The hydraulic coupling shall conform to type I, class 1, style A, size 2 of this document. The pipe or tube extension shall be 1/8-inch diameter extra-heavy pipe or heavy-wall steel tubing, with a length such that the overall length of the extension assembly will be as specified in 1.2, with a tolerance of ±0.50 inch. Each end of the extension pipe or tube shall have 1/8 inch-27 NPT external threads. The extension shall be straight or bent, as specified (see 6.2). Bent extensions shall have a 10 to 20 degree bend at the coupling end, located as close to the coupling as practical (see figures 9 and 9a). Extensions (classes 1 and 2) shall be tested as specified in 4.5.2.4.

3.12.2 Class 2. Type III, class 2 extensions shall be identical to the class 1 extensions, except for the following:

a. The coupling shall be the standard buttonhead, in conformance to type I, class 3, style B of this document.
b. Only size 1 (6.5-inches, ±0.50 inch) shall be provided.
c. A bushing, 1/4 inch-18 NPT external to 1/8 inch-27 NPT internal, shall be provided for the inlet of the extension tube.

3.13 Type IV adapters. Type IV adapters shall be capable of withstanding, without damage or leakage, a lubricant (burst) pressure of 10,000 psig. Wherever a locking sleeve is specified, it shall conform to type II of this document (see 3.11 and figure 8). Wherever a rigid extension (or nipple) is specified, it shall be constructed of 1/8-inch diameter extra-heavy pipe or heavy-wall steel tubing. Adapters shall be tested as specified in 4.5.2.4.

3.13.1 Class 1.

3.13.1.1 Style A. Type IV, class 1, style A adapters shall be equipped with a rigid extension, swivel coupling, and a locking sleeve (see figure 10). The swivel coupling shall conform to type I, class 1, style B of this specification. The overall length of the assembled adapter shall be 6 to 8.5-inches.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

3.13.1.2 Styles B and C. Type IV, class 1, style B and C adapters shall be as specified herein:

a. Style B, flexible extension shall conform to MIL-H-3868, type I, style 1, grade B, and shall have end fittings and threads that will correctly mate with the coupling specified and with the locking sleeve (see figure 11). Unless otherwise specified (see 6.2), the coupling shall be a type I, class 1, style A, size 2 hydraulic coupling conforming to this document. The extension assembly shall be 12 to 14 inches overall in length.
b. Style C, flexible extension, shall conform to MIL-H-3868, type I, style 1, grade B, and shall have end fittings with 1/8 inch-27 NPT threads attached to both ends (see figure 11a). The couplings shall be as specified (see 6.2). The extension assembly shall be 18 to 24 inches overall in length.

3.13.2 Class 2. Type IV, class 2 adapters shall be for use in lubrication through push-type fittings where space is limited, and shall consist of a rigid extension, push-type coupling, and locking sleeve (see figure 12). The push-type coupling shall conform to type I, class 6 of this document, except that the coupling sleeve shall be size 1 or size 2, as indicated in 1.2.

3.13.3 Class 3. Type IV, class 3 adapters shall consist of a flush-type coupling, a nipple, and a locking sleeve (see figure 13). The coupling shall conform to type I, class 4 of this document.

3.13.4 Class 4. Type IV, class 4 adapters shall conform to MS24204 (see figure 14).

3.13.5 Class 5. Type IV, class 5 adapters shall conform to the requirements of 3.13.4, except that a locking sleeve conforming to type II of this document, and a 45 degree elbow shall be provided so that the axis of the hydraulic inlet and the pin-type outlet will be at a fixed 45 degree angle (see figure 15).

3.14 Type V pump adapters. Type V pump adapters are for use in effecting a connection between manually operated bucket pumps and grease gun loader attachments. This adapter shall conform to MS24200 (see figure 16).

3.15 Type VI control valves. Type VI valves shall be designed to dispense lubricant from motor-driven pumps and shall be of the classes defined herein. The ON and OFF control shall be of the grip-lever type or a comparable mechanism. All bearings, fulcrum pins, and pistons shall be of industrial size and quality. The grip span shall not exceed 3.5 inches. Control valves shall be tested as specified in 4.5.2.5.1 through 4.5.2.5.2.2, as applicable.

3.15.1 Class 1.

3.15.1.1 Style A. Type VI, class 1, style A valves shall be similar to figure 17 and shall be designed to control the flow of grease-type lubricant at high pressures up to 10,000 psig without distortion or leakage, and seal against leakage when in the OFF position and subjected to the above pressure. The extension shall be bent and conform to type III, class 1, size 1 of this document, except the grease inlet shall be 1/4 inch-18 NPT internal threads, unless otherwise specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 202610-17T03:32Z
Check the source to verify that this is the current version before use.

3.15.1.2 Style B. Type VI, class 1, style B valves shall be similar to figure 18 and shall be designed to control the flow of gear-type lubricant at low pressures up to 750 psig without distortion or leakage, and seal against leakage when in the OFF position and subjected to the above pressure. The extension shall be 1/4-inch inside diameter extra-heavy pipe or heavy-wall steel tubing approximately 8 inches in length and provided with a nondrip-type nozzle. The inlet connection shall be as specified (see 6.2).

3.15.2 Class 2.

3.15.2.1 Style A. Type VI, class 2, style A guns shall be capable of dispensing gear lubricant without distortion or leakage when subjected to a minimum of 750 psig lubricant pressure at the inlet, and shall be furnished with meters to record the amount of lubricant dispensed in units of pints with fractional increments not to exceed 0.25 pint. The meter shall be provided with a dial, reading from 0 to 8 pints, and a totalizer recording from 0 up to at least 9999 units. Units recorded on the totalizer shall not be disturbed by zero adjustments of the dial pointer. The dial pointer mechanism shall be constructed so that pointer adjustment cannot be made to increase the indicated volume. The meter dials shall be located on the body of the gun so as to be in full view of the operator while dispensing lubricant. This metering gun shall be provided with a 1/2 inch-14 NPT external swivel securely fastened within the inlet, an extension terminating in a 90 to 125 degree bend, and an antidrip-tip nozzle. The design characteristics for the swivel shall be as specified in 3.16. When specified (see 6.2), a reducer coupling, 1/2 inch-14 NPT internal to 3/8 inch-18 NPT internal shall be provided for mating with the above swivel. The accuracy of the totalizing meter for this type shall be within 0.6 ounce for the first pint and within 0.3 ounce for each additional pint (see figure 19).

3.15.2.2 Style B. Type VI, class 2, style B guns shall be designed to dispense motor oil and shall be similar to figure 20. Except as listed below, the requirements shall be identical to those specified in 3.15.2.1:

a. Unit of measure shall be in quarts with fractional increments not to exceed 0.25 quart.
b. The extension shall be 1/4-inch extra-heavy pipe or heavy-wall steel tubing with a 1/4 inch-18 NPT inch external antidrip-tip nozzle.
c. Meter accuracy shall be within 0.6 ounce for the first quart and within 0.3 ounce for each additional quart.
d. The inlet connection shall be as specified (see 6.2).

3.16 Type VII swivels. Type VII swivels are for use in lubrication hose lines to alleviate the kinking tendencies of the hose. They shall be designed and constructed so as to swivel a full 360 degrees and withstand a pressure of not less than 10,000 psig without damage or leakage. The swivels shall maintain freedom of movement while subjected to the foregoing pressure. Swivels covered by this document shall be furnished to conform to the classes, styles, and sizes in 1.2 (see figures 21, 21a, 22, and 23). Swivels shall be tested as specified in 4.5.2.6.

3.17 Workmanship. The finished accessories shall be clean, and all sharp edges and burrs shall be removed. The finished accessories shall conform to the quality and grade of product established by this document. Accessories shall not be bent, fractured, malformed, or out of alignment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

3.17.1 Castings and forgings. All castings and forgings, when used in construction of accessories shall be free from blowholes, porosity, hard spots, shrinkage defects, cracks, and other defects. Forgings shall be free from scale, enclosures, cold shuts, mismatching, and other defects that may affect the structural strength of the forgings involved. Strength and other essential physical and chemical properties of the castings and forgings shall be adequate to meet the performance requirements specified herein. In no event shall welding, brazing, soldering, peening, or plugging be used on castings or forgings for reclaiming any parts of the accessories without authorization of the contracting officer.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Component and material inspection. The contractor is responsible for insuring that components and materials are manufactured, examined, and tested in accordance with referenced specifications and standards, as applicable.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).
c. Inspection of packaging (see 4.6).

4.3 First article inspection.

4.3.1 First article examination. The first article accessories shall be examined as specified in 4.5.1, as applicable. Presence of one or more defects shall be cause for rejection.

4.3.2 First article tests. The first article accessories shall be tested as specified in 4.5.2.1 through 4.5.2.6, as applicable. Failure of any test shall be cause for rejection.

Source: https://assist.dla.mil -- Downloaded: 202640-17T03:32Z
Check the source to verify that this is the current version before use.

4.4 Quality conformance inspection.

4.4.1 Lot. Each lot shall consist of all accessories of the same type, class, style, and size, manufactured under the same conditions and at the same time, and offered to the Government at one time.

4.4.2 Sampling. Sampling of accessories for examination and test shall conform to MIL-STD-105.

4.4.3 Examination. Samples selected as specified in 4.4.2 shall be examined for the defects specified in 4.5.1, as applicable.

4.4.4 Tests. Samples selected as specified in 4.4.2 shall be tested as specified in 4.5.2.2 through 4.5.2.6, as applicable.

4.5 Inspection procedure.

4.5.1 Examination. The accessories shall be examined as specified herein for the following defects:

101. Materials not as specified (see 3.3).
102. Materials not resistant to corrosion and deterioration, or treated to be resistant to corrosion and deterioration for the applicable storage and operating environments (see 3.3.1).
103. Dissimilar metals as defined in MIL-STD-889 are not effectively insulated from each other (see 3.3.1.1).
104. Contractor does not have documentation available for identification of material, material finishes, or treatment (see 3.3.1.2).
105. Used, rebuilt or remanufactured components, pieces, or parts incorporated in the accessories (see 3.3.2).
106. Design not as specified (see 3.5).
107. Fastening devices not as specified (see 3.7).
108. Threaded parts not as specified (see 3.8).
109. Marking missing, illegible, or not as specified (see 3.9).
110. Dimensions not as specified (see 3.10 through 3.17).
111. Accessories that are not tested not in conformance to the applicable requirements (see 3.10 through 3.16).
112. Workmanship not as specified (see 3.17).
113. Castings and forgings not as specified (see 3.17.1).

4.5.2 Tests.

4.5.2.1 Test conditions. With the exceptions listed in 3.6, the first article accessories shall be tested under the following temperature conditions (see 3.4):

a. Low temperature: The accessories shall be conditioned at a temperature of -30, ±5 °F (-34, ±3 °C), for a period of 48 hours. Inspect the test item for damage. Adjust internal chamber temperature to 0, ±5 °F (-18, ±3 °C). When temperature has stabilized at the higher setting, operate the test item to conform to the applicable paragraph in section 4.
b. High temperature: The accessories shall be conditioned at a temperature of 160, ±5 °F (71, ±3 °C), for a period of 48 hours, with an induced relative humidity between 10 and 20 percent. Inspect the test item for damage. Adjust internal chamber temperature to 110,

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

±5 °F (43, ±3 °C). When the temperature has stabilized at the lower setting, operate the test item in conformance to the applicable paragraph in section 4.

4.5.2.2 Type I couplings. The hydraulic couplings, class 1, styles A and B, shall be attached to a fitting conforming to MIL-F-3541 and tested for the following requirements (see 3.10 and 3.10.1):

a. The coupling shall be subjected to a lubricant (burst) pressure of 10,000 psig, and, when displaced 10 degrees in any direction from the vertical centerline of the fitting, shall show no evidence of leakage.
b. The coupling shall be pushed onto the applicable fitting using a force of not more than 8 pounds.
c. The coupling shall then be directly pulled off the fitting, with no applied lubricant pressure, with a straight pull force of not more than 85 pounds.
d. The coupling shall be replaced on the fitting and, when angularly displaced between 15 and 25 degrees from the vertical centerline of the fitting, shall separate from the fitting.

In addition to the above, the swivel-type coupling (style B) shall be rotated 360 degrees, and the locking mechanism engaged in a minimum of 8 equally spaced locations to conform to 3.10.1.2. The class 3 couplings shall be mated with their respective fittings and shall be operated as intended, under the burst pressure specified above, without evidence of leakage. Nonconformance to 3.10 and 3.10.1 shall constitute failure of this test.

4.5.2.3 Type II, locking sleeve. The locking sleeve shall be attached to a type I hydraulic coupling and checked for proper coupling to the fitting and for movement of sleeve to determine conformance to 3.11. The locking sleeve shall then be subjected to the application of a lubricant pressure of 10,000 psig to further determine conformance to 3.11. Nonconformance to 3.11 shall constitute failure of this test.

4.5.2.4 Type III extensions, and type IV and V adapters. Extensions and adapters, except classes 4 and 5, shall be tested in conformance to the tests specified for the coupling furnished with the extension or adapter (see 4.5.2.2). Nonconformance to 3.12.1, 3.12.2, 3.13, 3.13.1 thru 3.13.5, and 3.14 shall constitute failure of this test.

4.5.2.5 Type VI control valves (guns).

4.5.2.5.1 Class 1.

4.5.2.5.1.1 Style A, nonmetering, high pressure (grease). The type VI, class 1, style A valve shall be attached to a grease-type lubricant pump developing a lubricant (burst) pressure of not less than 10,000 psig to determine conformance to 3.15.1.1. While under the above lubricant pressure, the control valve shall be turned to the OFF position and left in that position for not less than 5 minutes to further determine conformance to 3.15.1.1. Nonconformance to 3.15.1.1 shall constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 202610-17T03:32Z
Check the source to verify that this is the current version before use.

4.5.2.5.1.2 Style B, nonmetering, low pressure (gear lubricant). The type VI, class 1, style B valve shall be subjected to a pressure of not less than 750 psig in the OFF position for not less than 5 minutes to determine conformance to 3.15.1.2. Nonconformance to 3.15.1.2 shall constitute failure of this test.

4.5.2.5.2 Class 2.

4.5.2.5.2.1 Style A, metering gun, gear lubricant. The metering gun shall be connected to a pump delivering gear lubricant at a pressure of not less than 750 psig. When the gun has dispensed 2 or 3 quarts of lubricant, the control lever shall be closed with the pressure still at a minimum of 750 psig for a period of not less than 5 minutes to determine if there is any leakage. Following this test, the control lever shall be opened and 2 pints, as registered on the meter dial, shall be discharged into a container to determine accuracy in conformance to 3.15.2.1. Nonconformance to 3.15.2.1 shall constitute failure of this test.

4.5.2.5.2.2 Style B, metering gun, motor oil. The metering gun shall be tested as specified in 4.5.2.5.2.1, except that motor oil shall be used and results shall be determined in conformance to 3.15.2.2. Nonconformance to 3.15.2.2 shall constitute failure of this test.

4.5.2.6 Type VII swivels. In conformance to 3.16, swivels shall be subjected to a lubricant (burst) pressure of not less than 10,000 psig and, while under this pressure, the swivels shall be checked for freedom of movement by rotating the hose and unit to which they are attached not less than 360 degrees through the axis of rotation. Nonconformance to 3.16 shall constitute failure of this test.

4.6 Inspection of packaging.

4.6.1 Quality conformance inspection of packaging.

4.6.1.1 Unit of product. For the purpose of inspection, a completed pack prepared for shipment shall be considered a unit of product.

4.6.1.2 Sampling. Sampling for examination shall conform to MIL-STD-105.

4.6.1.3 Examination. Samples selected as specified in 4.6.1.2 shall be examined for the following defects:

114.	Accessories not preserved as specified for level A or C (see 5.1).
115.	Accessories not consolidated as specified for level A or C (see 5.1.1 and 5.1.2).
116.	Accessories of unlike description packed together for level A, B, or C (see 5.2.1, 5.2.2 and 5.2.3).
117.	Quantities packed together exceed the size or weight limitations of the box for level A, B, or C (see 5.2.1, 5.2.2 and 5.2.3).
118.	Strapping not as specified for level A (see 5.2.1).
119.	Marking missing, illegible, incorrect, or incomplete (see 5.3).

Source: https://assist.dla.mil -- Downloaded: 202610-17T03:32Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or C, as specified (see 6.2).

5.1.1 Level A. Each accessory shall be preserved to conform to MIL-P-116, method I, using type P-10 preservative oil, type I, grade 30. The preserved accessories in quantities specified in table I, shall be wrapped in a greaseproof barrier conforming to grade A, type II, class 2 of MIL-B-121 and placed into a close-fitting box conforming to class 2 of PPP-B-665 or class weather-resistant of PPP-B-636. Unless otherwise specified (see 6.2), the quantities of accessories to be consolidated together shall be as specified in table I. Box closure shall conform to the appendix to the applicable box specification.

TABLE I. Consolidation requirements.

Type	Class	Style	Size	Number of identical items in each box
I	1	A	1, 2, and 3	12
I	1	B		6
I	2		1 and 2	12
I	3	A and B	1 and 2	12
I	4			12
I	5			12
I	6			12
II				12
III	1		1 and 2	6
III	2			6
IV	1	A, B, and C		6
IV	2			6
IV	3			6
IV	4			12
IV	5			12
V				12
VI	1	A		1
VI	1	B		1
VI	2	A		1
VI	2	B		1
VII	1	A	1, 2, 3, and 4	12
VII	1	B	1, 2, and 3	12
VII	2		1 and 2	12
VII	3		1, 2, 3, 4, 5, 6, and 7	12

5.1.2 Level C. Accessories shall be preserved as specified for level A except the boxes shall be domestic class.

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

5.2.1 Level A. Accessories of like description, preserved as specified in 5.1, shall be packed in close-fitting boxes conforming to PPP-B-601, overseas type, grade B, style optional, in quantities not to exceed the size or weight limitation of the box. Box closure and strapping shall conform to the appendix to the box specification. Strapping shall conform to ASTM D 3953 and ASTM D 4675.

5.2.2 Level B. Accessories of like description, preserved as specified in 5.1, shall be packed in close-fitting boxes conforming to PPP-B-636, V3c, style optional, in quantities not to exceed the size or weight limitations of the box. Box closure and strapping shall conform to the appendix to the box specification.

5.2.3 Level C. Accessories preserved as specified in 5.1 shall be packed as specified for level B, except the boxes shall be domestic class.

5.3 Marking. In addition to any special marking specified by the contract or purchase order (see 6.2), marking shall conform to MIL-STD-129.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The accessories supplied under this specification are intended for use in the general lubrication of automotive and other equipment. The accessories covered herein are intended to facilitate the maximum use of lubricating equipment now being procured.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of the specification.
b. Specification part number of the unit required (see 1.2 and 6.4)
c. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
d. When first article is required and timeframe required for submission of first article accessories and number of accessories required (see 3.2).
e. When MS part number marking is required (see 3.5).
f. Whether type III extensions shall be straight or bent (see 3.12.1).
g. Type coupling required if other than as specified (see 3.13.1.2a).
h. Type coupling required (see 3.13.1.2b).
i. When grease inlet shall be other than as specified (see 3.15.1.1).
j. Inlet connection required (see 3.15.1.2 and 3.15.2.2).
k. When reducer coupling is required (see 3.15.2.1).
l. Level of preservation and packing required (see 5.1 and 5.2).
m. Quantity to be consolidated together when other than as specified in table (see 5.1.1).
n. Any special marking (see 5.3).

6.3 First article. When a first article inspection is required, the item(s) should be a initial production model. The first article should consist of one or more units. The contracting officer should include specific instructions in

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

acquisition documents regarding arrangements for examinations, approval of the first article test results and disposition of the first articles. Invitation for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract. Bidders should not submit alternate bids unless specifically requested to do so in the solicitation.

6.4 Part or Identifying system. The part or identifying number (PIN) of lubrication dispensing equipment accessories covered by this specification shall be designed in the following form (see 6.2).

Specification part number M 4387 - X

Prefix, inch-pound (US) units
Specification number
Type, class, style, and size code number (see table II)

Example: M4387-35 is the specification part number for straight, 7/16 inch - 20 UNF internal threads, 3/4 inch - 16 UNF external threads, swivels for lubrication dispensing equipment (4387) measured in inch-pound units (M) with external and internal connections.

6.4.1 Type, class, style, size code number. See table II.

TABLE II. Type, class, style, size and code number.

TYPE	CLASS	STYLE	SIZE	DESCRIPTION	CODE
I	1	A	1	Couplings, hydraulic, straight, 1/8 inch - 27 NPTF, with check valve.	1
I	1	A	2	Couplings, hydraulic, straight, 1/8 inch - 27 NPT, without check valve.	2
I	1	A	3	Couplings, hydraulic, straight, 1/2 inch - 20 NF, without check valve.	3
I	1	B	-	Couplings, hydraulic, Swivel, 1/8 inch - 27 NPT.	4
I	2	-	1	Couplings, pin type, 11/16 inch - 27 NS.	5
I	2	-	2	Couplings, pin type, 1/8 inch - 27 NPT with oil seal in nozzle.	6
I	3	A	-	Couplings, buttonhead, large, with check valve, and special threads 7/16 inch - 27.	7
I	3	B	1	Couplings, buttonhead, standard, 1/8 inch - 27 NPT.	8
I	3	B	2	Couplings, buttonhead, standard, 7/16 inch 27 NS.	9
I	4	-	-	Couplings, flush type, straight, 1/8 inch - 27 NPT.	10
I	5	-	-	Couplings, shafer type, straight, 1/8 inch 27 NPT.	11

Source: https://assist.dla.mil -- Downloaded: 202610-17T03:32Z
Check the source to verify that this is the current version before use.

TABLE II. Type, class, style, size and code number (Cont).

TYPE	CLASS	STYLE	SIZE	DESCRIPTION	CODE
I	6	-	-	Couplings, push type, 1/8 inch - 27 NPT.	12
II	-	-	-	Locking sleeve.	13
III	1	-	1	Extensions, hydraulic-type coupling, 6 1/2 inches.	14
III	1	-	2	Extensions, hydraulic-type coupling, 21 inches.	15
III	2	-	-	Extensions, standard buttonhead-type coupling, 6 1/2 inches.	16
IV	1	A	-	Adapters, extension, hydraulic-type coupling, rigid, swivel, coupling.	17
IV	1	B	-	Adapters, extension, hydraulic-type coupling, flexible, straight, coupling.	18
IV	1	C	-	Adapters, extension, hydraulic-type coupling, flexible, hose coupling.	19
IV	2	-	1	Adapters, hydraulic coupling to hydraulic-type fitting, Zerk, 5/16 inch.	20
IV	2	-	2	Adapters, hydraulic coupling to hydraulic-type fitting, Zerk, 7/16 inch.	21
IV	3	-	-	Hydraulic coupling to flush-type fittings.	22
IV	4	-	-	Hydraulic coupling to pin-type fittings.	23
IV	5	-	-	Hydraulic coupling to pin-type fittings, 45-degree fixed angle design.	24
V	-	-	-	Pump adapter, right angle and straight, 3/8 inch - 18 NPT.	25
VI	1	A	-	Control valves (guns), Normetering, high pressure (grease).	26
VI	1	B	-	Control valves (guns), Normetering, low pressure (gear lubricant).	27
VI	2	A	-	Control valves (guns), metering guns, gear lubricant.	28
VI	2	B	-	Control valves (guns), metering guns, motor oil.	29
VII	1	A	1	Swivels, straight, external connections, 1/8 inch - 27 NPT.	30
VII	1	A	2	Swivels, straight, external connections, 3/8 inch - 18 NPT to 1/2 inch - 14 NPT.	31
VII	1	A	3	Swivels, straight, external connections, 1/4 inch - 18 NPT to 1/2 inch - 27 NPT.	32
VII	1	A	4	Swivels, straight, external connections, 1/8 inch - 27 NPT to 1/2 inch - 27 NPT.	33
VII	1	B	1	Swivels, straight, external and internal connections, 7/16 inch - 20 NF.	34
VII	1	B	2	Swivels, straight, external and internal connections, 7/16 inch - 20 UNF internal threads, 3/4 inch - 16 UNF external threads.	35
VII	1	B	3	Swivels, straight, external and internal connections, 9/16 inch - 16 UNF internal threads, 3/4 inch - 16 UNF external threads.	36
VII	2	-	1	Swivels, right - angle external connections, 1/2 inch - 14 NPT to 7/8 inch - 20 UNEF.	37

Source: https://assist.dla.mil -- Downloaded: 202610-17T03:32Z
Check the source to verify that this is the current version before use.

TABLE II. Type, class, style, size and code number (Cont).

TYPE	CLASS	STYLE	SIZE	DESCRIPTION	CODE
VII	2	-	2	Swivels, right - angle external connections, 3/4 inch - 14 NPT.	38
VII	3	-	1	Swivels, "Z", external connections, 1/2 inch - 27 NS (pipe) to 1/8 inch - 27 NPT.	39
VII	3	-	2	Swivels, "Z", external connections, 1/2 inch - 27 NS to 1/8 inch - 27 NPT.	40
VII	3	-	3	Swivels, "Z", external connections, 3/8 inch - 18 NPT to 1/2 inch - 14 NPT.	41
VII	3	-	4	Swivels, "Z", external connections, 7/16 inch - 20 UNF or NF.	42
VII	3	-	5	Swivels, "Z", external connections, 1/4 inch - 18 NPT to 1/8 inch - 27 NPT.	43
VII	3	-	6	Swivels, "Z", external connections, 1/2 inch - 27 NS to 1/4 inch - 18 NPT.	44
VII	3	-	7	Swivels, "Z", external connections, 1/4 inch - 18 NPT.	45

6.5 Information figures. Figures 1 through 23 show accessories which have been found acceptable; however, the figures are included for illustration only and are not intended to preclude the furnishing of other types of accessories which conform to this specification.

6.6 Subject term (key word) listing.

Accessories, lubrication dispensing
Adapters, extension
Adapters, hose coupling, flexible
Adapters, hydraulic coupling to flush-type fittings
Adapters, hydraulic coupling to hydraulic-type fittings
Adapters, hydraulic coupling to pin-type fittings
Adapters, pump
Adapters, straight coupling, flexible
Adapters, swivel coupling, rigid
Couplings, buttonhead
Couplings, flush-type
Couplings, hydraulic
Couplings, pin-type
Couplings, push-type
Couplings, shafer-type
Extensions, button-type coupling
Extensions, hydraulic-type coupling
Sleeve, locking
Swivels, right-angle
Swivels, straight
Swivels, "Z"
Valves, control (metering guns)
Valves, control (nonmetering guns)

Source: https://assist.dla.mil -- Downloaded: 202610-17T03:32Z
Check the source to verify that this is the current version before use.

6.7 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodians:
Army - ME
Navy - YD
Air Force - 99

Review activity:
DLA - CS

User activities:
Army - SM
Navy - MC, OS, SH

Preparing activity:
Army - ME

Project 4930-0318

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

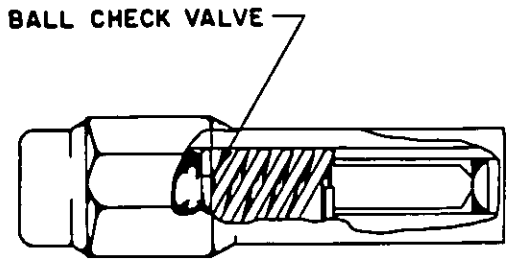


FIGURE 1. Type I, class I, style A, hydraulic coupling with ball check valve.

X-3238

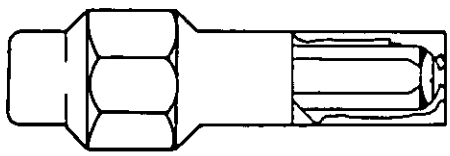


FIGURE 1a. Type I, class I, style A, hydraulic coupling without ball check valve.

X-3239

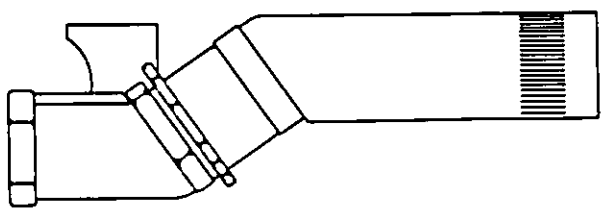


FIGURE 2. Type I, class I, style B, hydraulic coupling, swivel.

X-3240

Source: https://assist.dla.mil -- Downloaded: 202610-17T03:32Z
Check the source to verify that this is the current version before use.

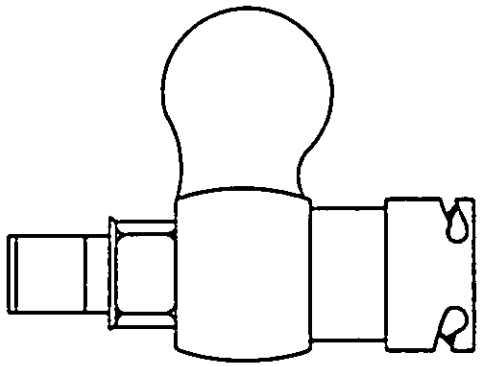


FIGURE 3. Type 1, class 2, pin-type coupling.

X-3241

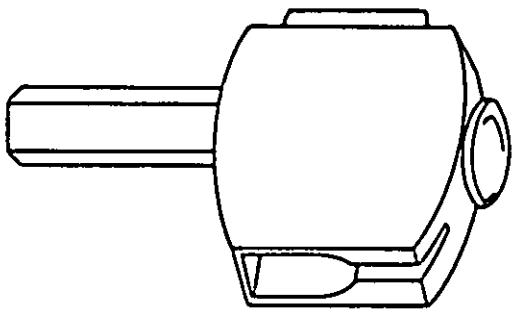


FIGURE 4. Type 1, class 3, buttonhead coupling.

X-3242

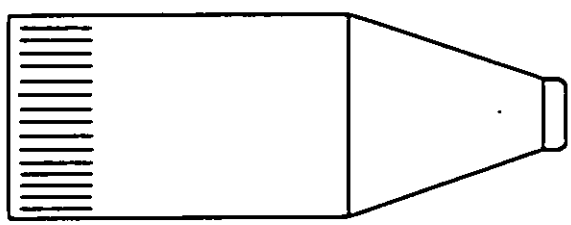


FIGURE 5. Type 1, class 4, flush-type coupling.

X-3243

Source: https://assist.dla.mil -- Downloaded: 202610-17T03:32Z
Check the source to verify that this is the current version before use.

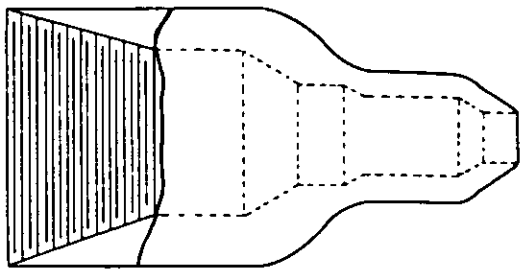


FIGURE 6. Type I, class 5, shafer-type coupling.

X-3244

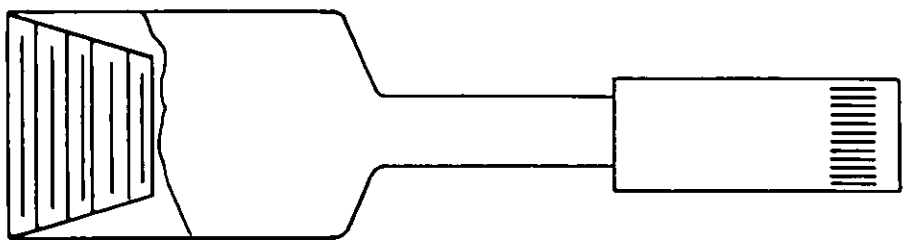


FIGURE 7. Type I, class 6, push-type coupling.

X-3245

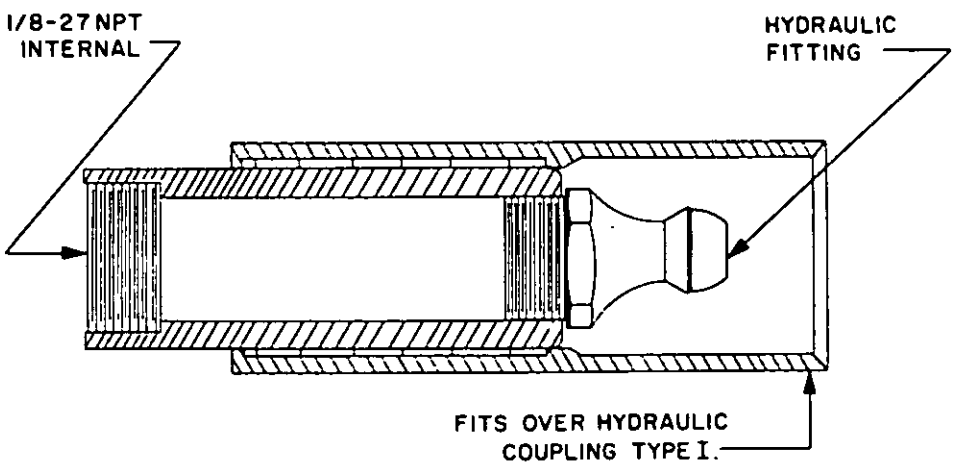


FIGURE 8. Type II, locking sleeve.

X-3246

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

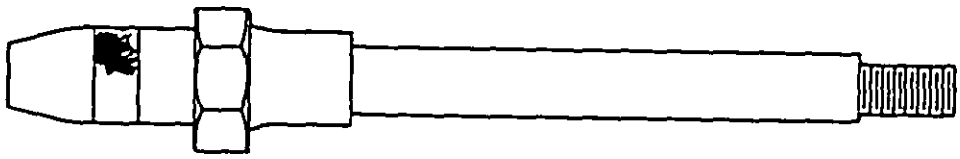


FIGURE 9. Type III, extension, rigid, straight.

X-3247

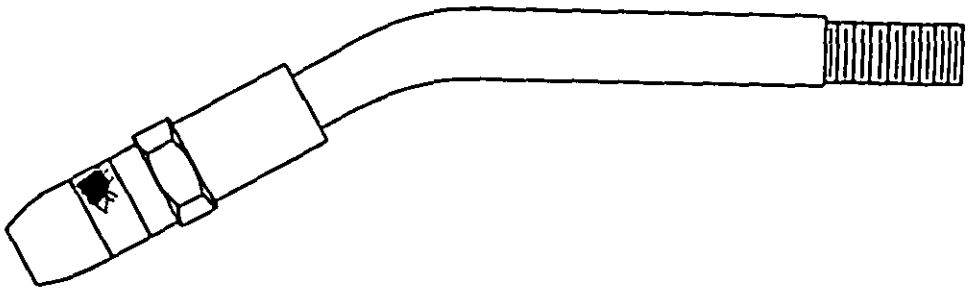


FIGURE 9a. Type III, extension, rigid, bent.

X-3248

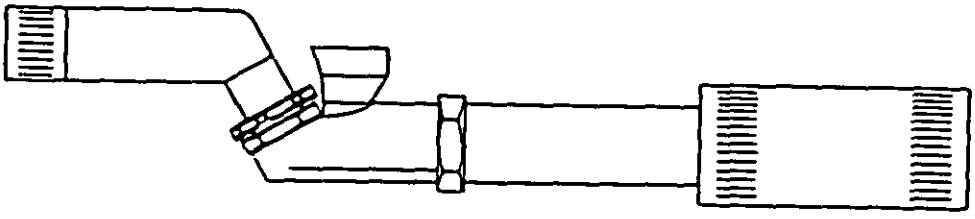


FIGURE 10. Type II, class I, style A, extension adapter, hydraulic swivel coupling.

X-3249

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.




FIGURE 11. Type IV, class 1, style B, extension adapter flexible, hydraulic straight coupling.

X-3250




FIGURE 11a. Type IV, class 1, style C, extension adapter flexible, with hose coupling.

X-3251




FIGURE 12. Type IV, class 2, extension adapter push-type, straight.

X-3252

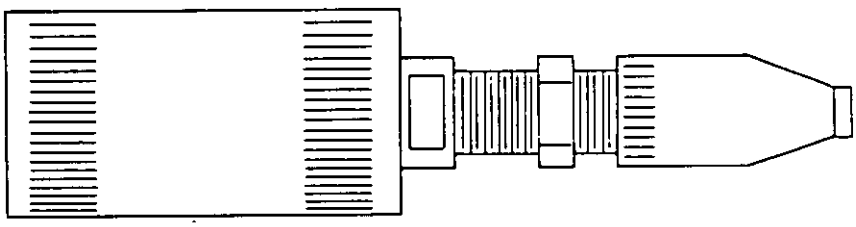


FIGURE 13. Type IV, class 3, hydraulic coupling to flush-type fitting.

X-3253

Source: https://assist.dla.mil -- Downloaded: 202610-17T03:32Z
Check the source to verify that this is the current version before use.

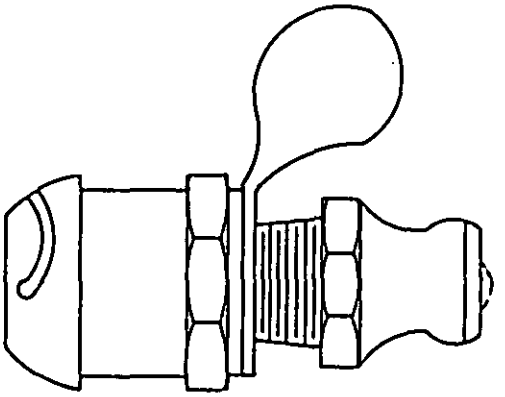


FIGURE 14. Type IV, class 4, hydraulic coupling to pin-type fitting.

X-3254

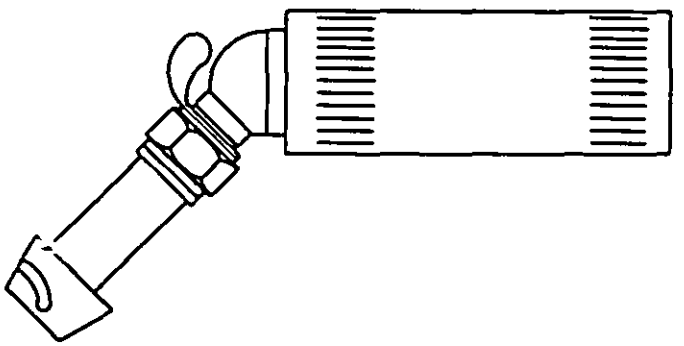


FIGURE 15. Type IV, class 5, hydraulic coupling to pin-type fitting, 45 degree fixed-angle design.

X-3255

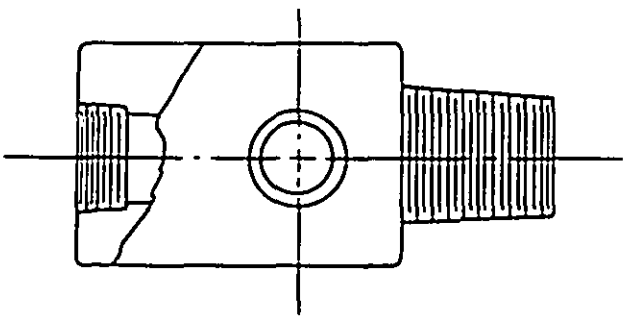


FIGURE 16. Type V, pump adapter, right angle and straight, 3/8 inch -18NPT external to internal threads.

X-3256

Source: https://assist.dla.mil -- Downloaded: 202610-17T03:32Z
Check the source to verify that this is the current version before use.

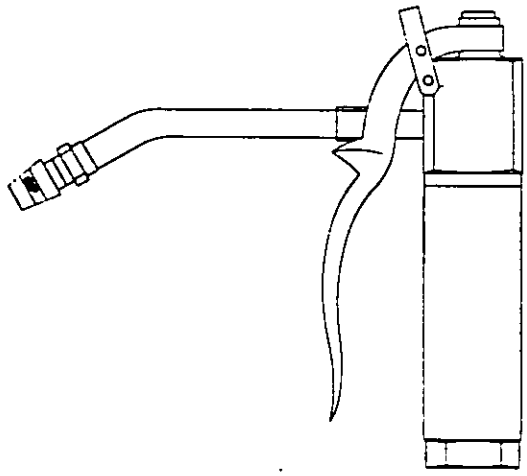


FIGURE 17. Type VI, class I, style A, control valve, high pressure (grease).

X-3257

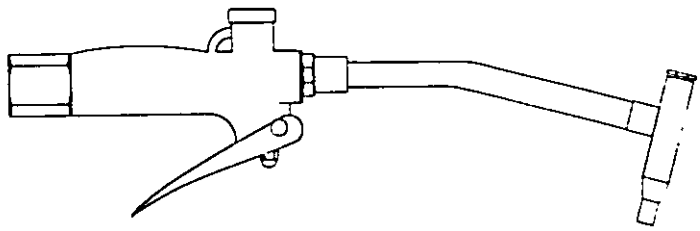


FIGURE 18. Type VI, class I, style B, control valve, low pressure (gear lubricant).

X-3258

Source: https://assist.dla.mil -- Downloaded: 202610-17T03:32Z
Check the source to verify that this is the current version before use.

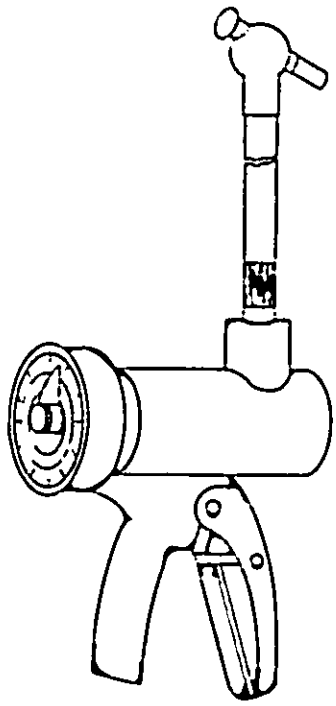


FIGURE 19. Type VI, class 2, style A, metering gun, gear lubricant.

X-3259

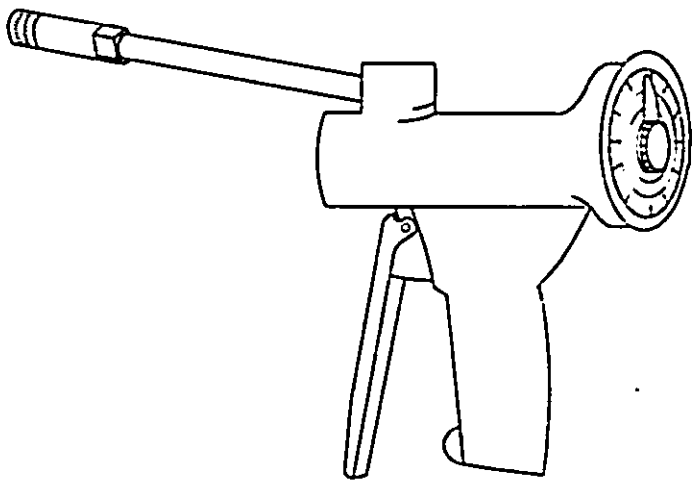


FIGURE 20. Type VI, class 2, style B, meter gun, motor oil.

X-3260

Source: https://assist.dla.mil -- Downloaded: 202610-17T03:32Z
Check the source to verify that this is the current version before use.

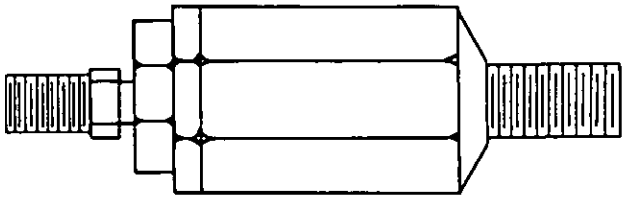


FIGURE 21. Type VII, class 1, style A, swivels, straight external threads.

X-3261



FIGURE 21a. Type VII, class 1, style B, swivels, external and internal threads.

X-3262




FIGURE 22. Type VII, class 2, right-angle swivel.

X-3263

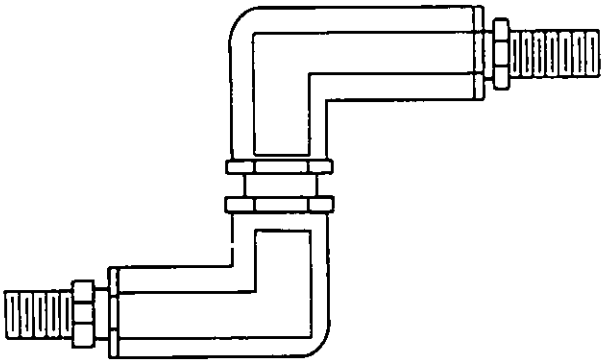


FIGURE 23. Type VII, class 3, "Z" swivel.

X-3264

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:32Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MIL-L-4387D	2. DOCUMENT DATE (YYMMDD) 900116

3. DOCUMENT TITLE
Lubrication Dispensing Equipment Accessories

4. NATURE OF CHANGE (*Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.*)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code) (1) Commercial	(2) AUTOVON
	(703) 664-5717	354-5717
c. ADDRESS (Include Zip Code) US Army Belvoir RDE Center ATTN: STRBE-TSE Ft. Belvoir, VA 22060-5606	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil -- Downloaded: 2022-04-27T03:32:27
Check the source to verify that this is the current version before use.