MIL-S-42430
6 April 1965
Superseding
MIL-S-4243B
10 January 1958

MILITARY SPECIFICATION

SHAVER, RIVET HEAD, PORTABLE, PNEUMATIC, MICROMETER ADJUSTMENT

(This specification is mandatory for use by all Departments and Agencies of the Department of Defense.)

1. SCOPE

1.1 This specification covers portable pneumatic rivet-head shavers for general utility maintenance usage on aircraft and missiles.

1.2 Classification. Shavers covered by this specification shall be of the following types and classes, as specified (see 6.2):

Type I - Multi-rotation shaver for shaving all rivets with head diameters up to ½ in O.D., including high strength rivets

Type II - Single rotation shaver for mild rivets (aluminum, aluminum alloy, copper, brass, and mild steel)

Class 1 - Shaver for shaving rivets with head diameters up to ½ in O.D.

Class 2 - Shaver for shaving rivets with head diameters up to 1-1/8 in O.D.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein.

FSC 5130

Source: https://assist.dla.mil -- Downloaded: 202640-17T03:27Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

Federal

FF-B-171	Bearings, Ball, Annular (General Purpose)
FF-B-185	Bearings, Roller, Cylindrical, and Bearings, Roller, Self-Aligning
FF-B-187	Bearing, Roller, Tapered
QQ-P-416	Plating, Cadmium (Electro-deposited)
TT-C-490	Cleaning Methods and Pretreatment of Ferrous Surfaces for Organic Coatings
TT-E-489	Enamel, Alkyd, Gloss (For Exterior and Interior Surfaces)
TT-P-636	Primer Coating, Synthetic, Wood and Ferrous Metal

Military

MIL-M-3171	Magnesium Alloy, Processes for Corrosion Protection of
MIL-L-6086	Lubricating Oil, Gear Petroleum Base
MIL-A-8625	Anodic Coatings, for Aluminum and Aluminum Alloys
MIL-P-12829	Packaging of Pneumatic Hand Tools with Attachments and Accessories

STANDARDS

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	Marking for Shipment and Storage
MIL-STD-130	Identification Marking of U S Military Property
MIL-STD-831	Test Reports, Preparation of
MS20426	Rivet, Solid, Countersunk 100° Precision Head, Aluminum and Aluminum Alloy
MS20427	Rivet, Solid-100° Countersunk Head, Carbon Steel, Corrosion Resistant Steel, Monel and Copper

Source: https://assist.dla.mil -- Downloaded: 202640-17T03:27Z
Check the source to verify that this is the current version before use.

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. - The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

National Bureau of Standards

Handbook H28	Screw-Thread Standards for Federal Services

(Application for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington 25, D C).

3. REQUIREMENTS

3.1 Preproduction. - This specification makes provisions for preproduction testing.

3.2 Components. - Shavers shall consist of the following major components:

a. Motor

b. Micrometer adjustment

c. Stop piece

d. Cutter

e. Stabilizer

f. Handle

g. Carrying case

3.3 Materials. - Materials used in the construction of the shavers shall be of uniform quality and condition and shall be free from seams, cracks, and other defects which may adversely affect the appearance, strength, endurance, or wear resistance of the shavers. Materials shall not be hammered, filed, nor otherwise treated to conceal defects therein.

Source: https://assist.dla.mil -- Downloaded: 20261O-17T03:27Z
Check the source to verify that this is the current version before use.

3.4 Commercial parts. - Commercial parts having suitable properties may be used where, on the date of invitation for bids, there are no suitable standard parts. In any case, commercial utility parts such as screws, bolts, nuts and cotter pins having suitable properties may be used provided:

a. They can be replaced by the standard parts (Military Standards - MS or Air Force - Navy Standards - AN) without alteration.

b. The corresponding standard part numbers are referenced in the parts list and, if practical, on the contractor's drawings.

3.4.1 Standard parts. - With the exception specified in 3.4, MS, and AN standard parts shall be used where they suit the purpose. They shall be identified on the drawing by their part numbers.

3.5 Design and construction. - The Type I shavers shall be substantially in accordance with Figure I. The Type II shavers shall be designed substantially in accordance with Figure II. The shavers shall be designed and constructed so that no parts will work loose in service and shall be built to withstand the strains, jars, vibrations, and other conditions incident to operation, shipment, storage and service.

3.5.1 Adjustment and repairs. - The shavers shall be constructed so that adjustments and repairs can be easily made. Any special tools required for maintenance or adjustment shall be furnished with each tool.

3.6 Motor. - The motor shall be of the pneumatic rotor type and shall have power and speed sufficient to shave the specified rivets without chatter or stall-out.

3.6.1 Motor bearings. - The motors shall have seal-type ball or roller bearings conforming to FF-B-171, FF-B-185, or FF-B-187, as applicable.

3.7 Cutter. - The cutter shall be made of good quality tool steel, with tungsten-carbide or tungsten-vanadium-carbide cutting tips precision ground to give the desired finish on shaved rivet heads. The width of the cutting surface shall be legibly and permanently marked in fractions of an inch. Cutters shall be furnished with the shavers in the sizes, types and quantities specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 20260-17T03:27Z
Check the source to verify that this is the current version before use.

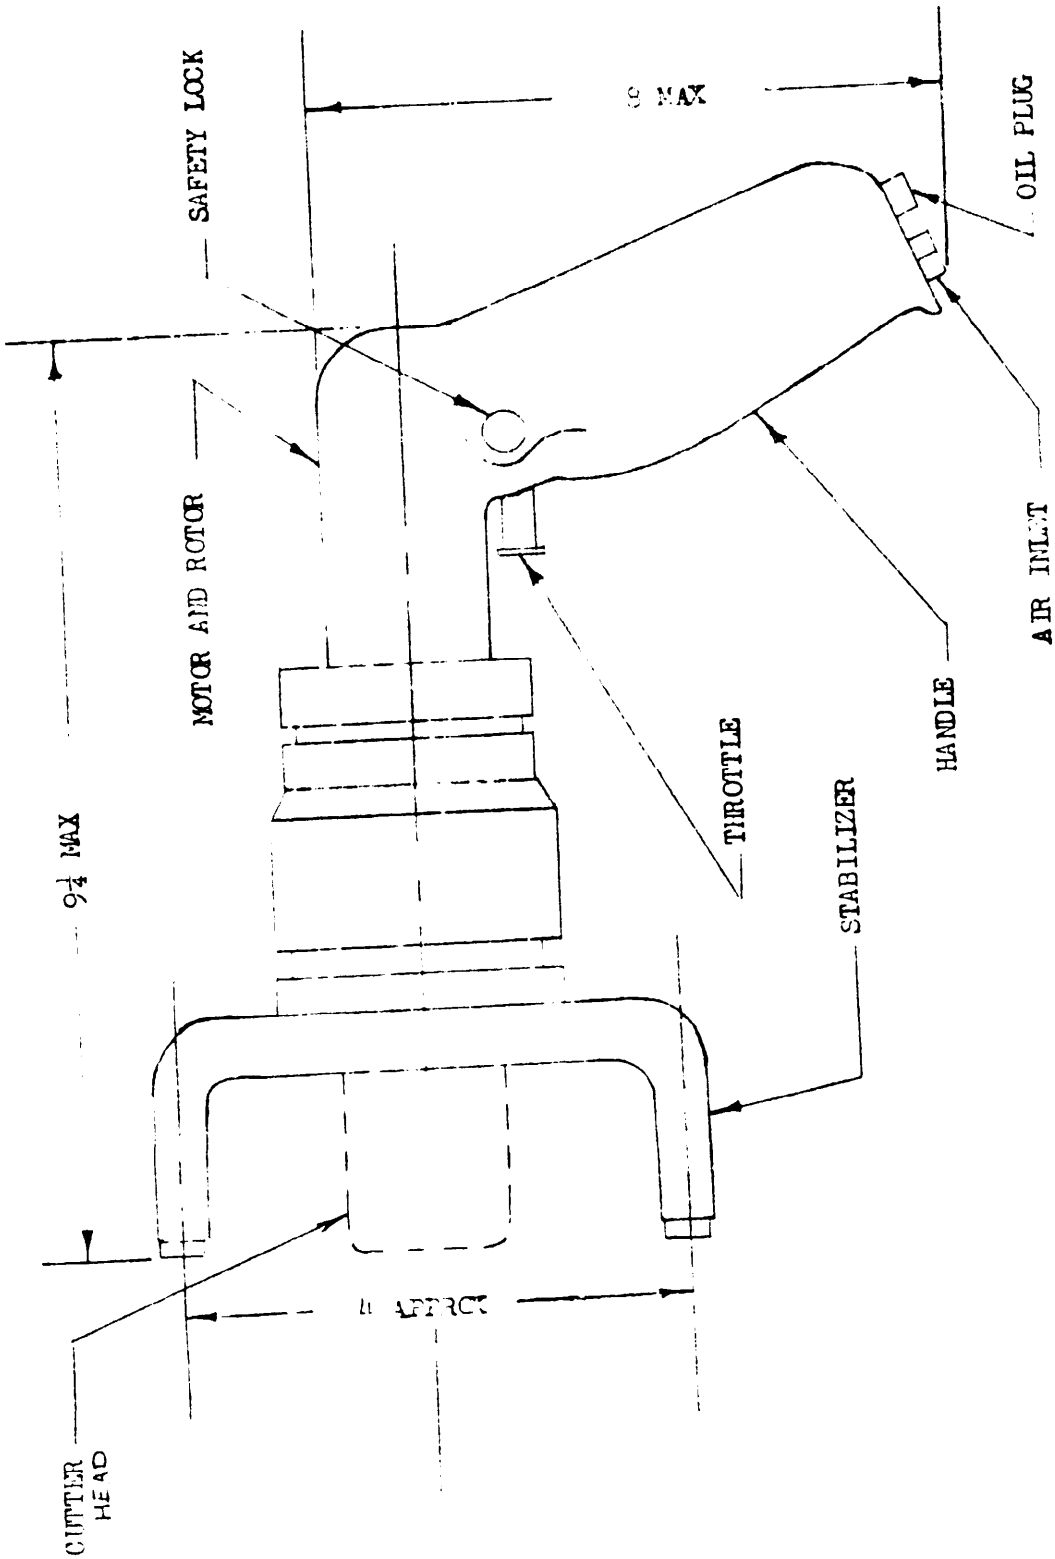


FIGURE 1 - TYPE 1 SHAVER

Source: https://assist.dla.mil -- Downloaded: 20261[illegible]-17T03:27Z
Check the source to verify that this is the current version before use.

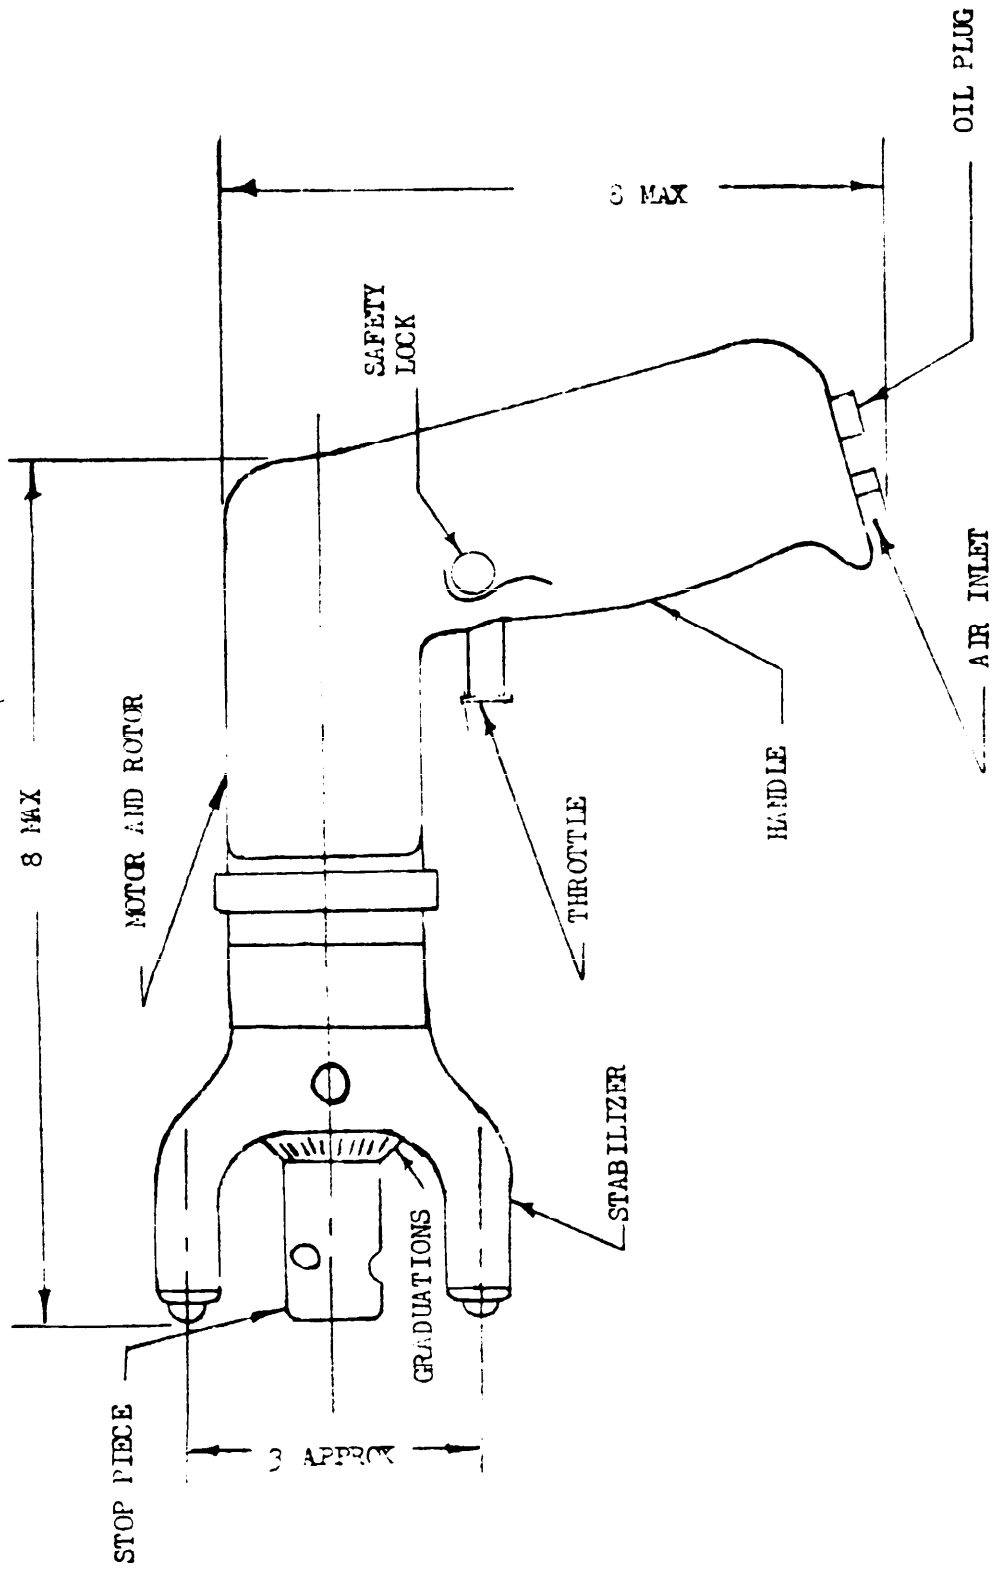


FIGURE 2 - TYPE 2 SHAVER

Source: https://assist.dla.mil -- Downloaded: 202610-17T03:27Z
Check the source to verify that this is the current version before use.

3.7.1 Type I Cutters. - The cutters for the Type I shavers shall be substantially in accordance with Figure III. The cutting surface of the cutter shall be concentric within 0.003 inch TIR of the bore diameter of the cutter.

3.7.2 Type II Cutters. - The cutters for the Type II shavers shall be designed in accordance with Figure IV.

3.8 Lubrication. - Shavers shall be provided with a built-in oil reservoir of a capacity sufficient to supply lubrication to the rotor, cylinder, and other moving parts in the path of the air stream, so that effective spindle or shaving speed will be maintained for at least 8 hours of actual operation. The shaver shall operate satisfactorily when lubricated with low-temperature oil in accordance with MIL-L-6086.

3.9 Type I Performance. - The Type I shaver shall be capable of shaving aluminum, aluminum alloy, copper, brass, monel, stainless steel, mild steel, and titanium rivets (including Jo-Bolts) with minimum protrusions of 0.02 inch without stalling or chattering when operated on a line pressure of 90 psi. Different cutters may be used for rivets of different materials.

3.9.1 Multi-rotation. - The Type I shaver shall rotate the cutter about more than one axis in such fashion as to largely eliminate forces which tend to translate the cutter laterally away from the work.

3.9.2 Type I Endurance. - The Type I shaver shall be capable of shaving 500 3/16 inch diameter FA200 Jo-Bolts at a rate of not less than six (6) Jo-Bolts per minute without changing or regrinding the cutter.


3.10 Type II Performance. - The Type II shavers shall be capable of shaving aluminum, aluminum alloy, copper, brass, and mild steel rivets with minimum protrusions of 0.02 inch without stalling or chattering when operated on a line pressure of 90 psi.

3.11 Rivet head finish. - The shavers shall produce a maximum rivet head surface roughness of 125 microinches rms.

3.12 Stop piece. - A spring-loaded, retractable, micrometrically adjustable stop piece shall be provided to permit constant spring loading against the surface adjacent to the rivet being shaved.

3.12.1 Quantity. - Stop pieces shall be furnished in the sizes and quantities necessary to accommodate the cutter size range of the individual class of shaver (see 6.2).


Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:27Z
Check the source to verify that this is the current version before use.

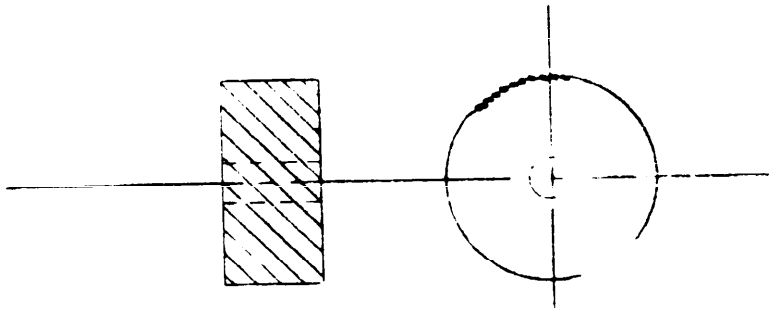


GENERAL CONFIGURATION

FIGURE 3 - CUTTER FOR TYPE 1 SHAVER

Source: https://assist.dla.mil -- Downloaded: 202610-17T03:27Z
Check the source to verify that this is the current version before use.

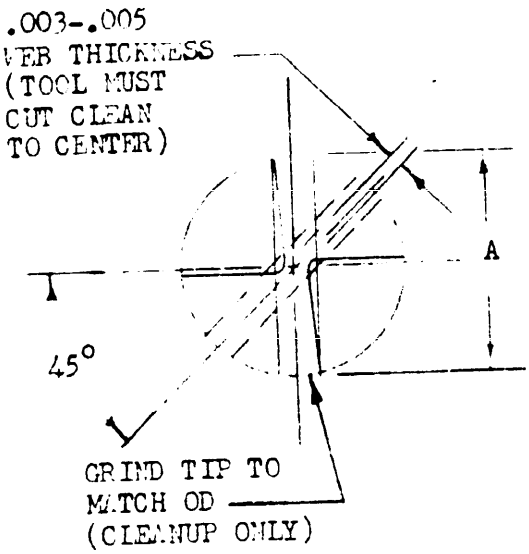

NOM SIZE A DIA	CARBIDE TIP BLANK SIZE	REQUIRED FOR SHAVER CLASS 1	2
5/16	1/8 x 1/4 x 5/16	X	X
3/8	1/8 x 1/4 x 3/8	X	X
7/16	1/8 x 1/4 x 7/16	X	X
1/2	1/8 x 1/4 x 1/2	X	X
9/16	1/8 x 1/4 x 9/16		X
5/8	1/8 x 1/4 x 5/8		X
3/4	1/8 x 1/4 x 3/4		X
7/8	1/8 x 1/4 x 7/8		X
1	1/8 x 1/4 x 1		X
1-1/8	1/8 x 1/4 x 11/8		X

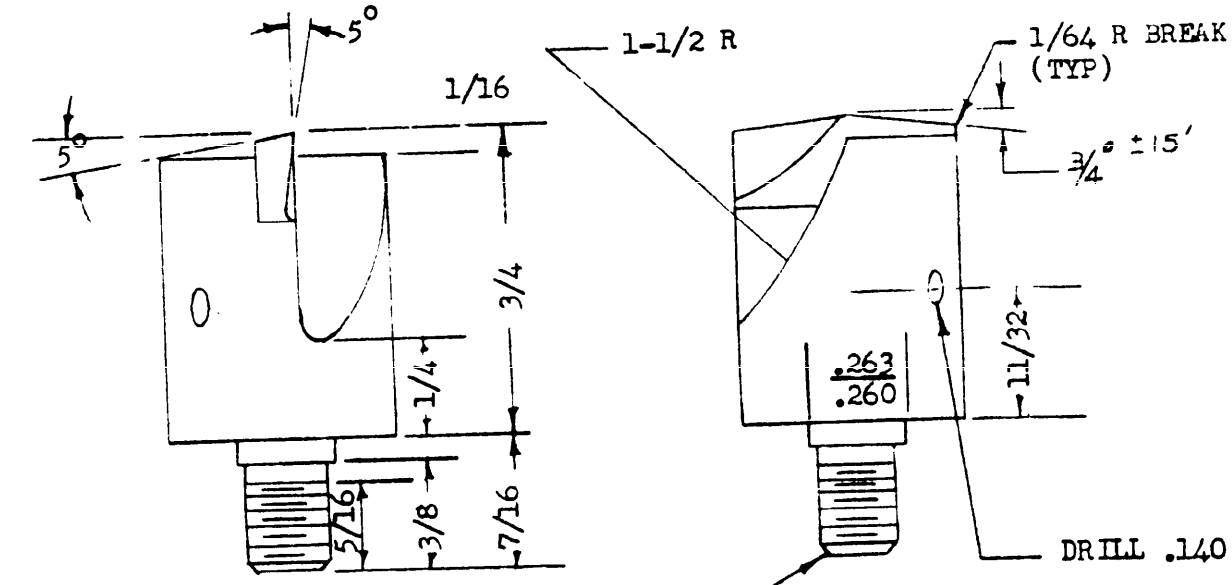

DIMENSIONS IN INCHES
TOLERANCES: FRACTIONS = 1/64
DECIMALS = .005
ANGLES = 1/2°
*DIMENSIONS ARE APPROXIMATE

FIGURE 4 - CUTTER FOR TYPE 2 SHAVER

Source: https://assist.dla.mil -- Downloaded: 202610-17T03:27Z
Check the source to verify that this is the current version before use.

3.12.2 Surface. - The surface of the stop piece shall be finished in such a manner that scratching or marking of the surface against which it is being used will be held to a minimum.

3.12.3 Venting and marking. - The stop pieces shall be properly vented to allow the escape of chips and dust produced by the cutter. The Type I shaver shall have a positive flow of air of sufficient quantity and velocity to blow out chips and dust and keep the cutter from excessive heating. The stop piece shall be permanently and legibly marked to show the nominal size of the cutter with which it is to be used.

3.13 Micrometer adjustment. - A clearly and permanently marked micrometer adjustment shall be located on or near the stop piece. This adjustment shall be marked in increments of 0.001 inch or less, and shall be capable of being adjusted in increments 0.0005 inch or less. To prevent movement as a result of vibration, it shall provide easy adjustment and positive locking of the stop piece.

3.14 Stabilizer. - The stabilizer, which shall act as a tool rest against the work during shaving operations, shall consist essentially of a frame and two telescoping, spring-loaded legs. The Type I and Type II shavers shall have approximately 4 inch and 3 inch spreads respectively and suitable friction pads on the feet. The stabilizer shall be removable.

3.15 Handle. - The handle shall be of the pistol grip type, knurled where necessary to provide suitable gripping qualities. The handle shall incorporate a trigger-type throttle control equipped with a device for locking it in the open position.

3.15.1 Air inlet. - The air inlet connection shall be located at the base of the handle and shall have 1/4-18 internal American Standard pipe threads. The inlet shall be provided with a fine mesh screen to prohibit the entrance of any foreign bodies or materials. The screen shall be removable for cleaning or replacement.

3.16 Springs. - Springs shall be fabricated from corrosion-resistant spring steel and shall be of a design that will ensure the greatest resistance to fatigue and failure.

3.17 Carrying case. - When specified in 6.2 the shaver shall be provided with a well-constructed, portable, metal carrying case, divided into compartments of ample size to house the shaver and accessories. The carrying case shall have a folding handle, a hinged lid, and an adequate drawbolt.

Source: https://assist.dla.mil -- Downloaded: 20260-17T03:27Z
Check the source to verify that this is the current version before use.

3.18 Interchangeability. - All parts shall be interchangeable, without modification with like parts of any other shaver of the manufacturer's basic model. Selective fitting of component parts, such as gears, bearings, and shafts, shall not be permitted.

3.19 Dimensions. - The dimensions shall be substantial as shown in Figures I, II, III and IV as applicable.

3.20 Weight. - The weight shall be the minimum commensurate with good design and performance. The weight of the shaver shall be comparable to that of commercially available shavers but shall not exceed 6 pounds.

3.21 Threads. - All screw threads shall conform to Handbook H28.

3.22 Finishes and protective coatings

3.22.1 Surface finishes. - Unpainted surfaces, except aluminum or magnesium, shall be blued or cadmium plated in accordance with QQ-P-416. Aluminum alloy surfaces shall be anodized in accordance with MIL-A-8625. Magnesium alloy surfaces shall be treated in accordance with MIL-M-3171. This requirement does not apply to the cutter.

3.22.2 Internal protective finish. - Unless otherwise specified (see 6.2), internal steel parts shall be protected from corrosion in accordance with TT-C-490, Type I, or treated with an equivalent protective coating where a nongalling finish is required.

3.22.3 Painting. - The carrying case shall be painted inside and outside with one coat of primer conforming to TT-P-636 and two coats of enamel conforming to TT-E-489.

3.22.3.1 Surfaces of the shaver not otherwise finished or plated, and for which a painted surface will be suitable, shall be painted with one or more coats of primer having good adhesive and rust resistant properties and finished with not less than two coats of good quality high-gloss enamel or lacquer. Unless otherwise specified (see 6.2), the shaver shall have a pebble, crackle, smooth, or equally suitable surface finish. If necessary, a suitable filler and sealer may be applied before the final finish.

3.22.3.2 Gear cases. - Interiors of gear cases, or similar compartments, and case-in reservoirs shall be protected by a sealer capable of withstanding immersion in lubricating oil, hydraulic fluids, and cutting compounds used under normal working temperatures and atmospheric conditions.

Source: https://assist.dla.mil -- Downloaded: 202640-17T03:27Z
Check the source to verify that this is the currentversion before use.

3.23 Identification of product. - Equipment, assemblies, and parts shall be marked for identification in accordance with MIL-STD-130.

3.24 Spare parts. - Spare parts shall be provided as specified by the procuring activity (see 6.2).

3.25 Workmanship. - Castings, forgings, and molded or welded parts shall be thoroughly cleaned and free of sand, dirt, sprues, scale, flux, and other harmful or extraneous materials. External surfaces shall be smooth and all edges rounded or beveled.

3.25.1 Bearing surfaces. - Bearing surfaces between matching parts shall be machine finished to provide accuracy and stability in operation. Roughness of bearing surfaces shall be limited so that the effective area will not be reduced below that which is required.

3.25.2 Bolted connections. - Bolt holes shall be accurately drilled or punched and burrs shall be removed. All bolts, nuts, and screws shall be secured.

3.26 Type II Spindle. - The Type II Spindle shall be of a strength proportional to the horsepower of the motor and shall be tapped with 1/4-28 UNF 2B internal threads to accommodate the cutters.

3.27 Operating and maintenance instructions. - Each shaver will be accompanied by a complete set of printed operating and maintenance instructions.

4. QUALITY ASSURANCE PROVISIONS

4.1 Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Preproduction sample inspection. - Testing of the preproduction sample shall be made on a completely fabricated item for all provisions of this specification applicable to testing.

Source: https://assist.dla.mil -- Downloaded: 20260-17T03:27Z
Check the source to verify that this is the current version before use.

4.3 Sampling for inspection and acceptance. - Sampling for inspection and acceptance shall be performed in accordance with the provisions set forth in Standard MIL-STD-105.

4.3.1 Inspection of material and components. - The supplier is responsible for insuring that components and materials used were manufactured, tested and inspected in accordance with the requirements of referenced subsidiary specifications and standards.

4.3.2 Intermediate visual and dimensional examination. - The intermediate product or assemblies which cannot be checked or measured after final assembly shall be examined at various stages of manufacture for compliance with this specification. The examination will be made at an appropriate intermediate station for defects in construction, workmanship, dimensions and material. Any deviation from specified requirements shall constitute a defect. The inspection level shall be Level II with an acceptable quality level of 2.5 defects per hundred units.

4.3.3 Inspection of the end item. - Inspection of the end item shall be performed in accordance with the following paragraphs. A lot shall consist of shavers of one type and size. The sample unit shall be one completely fabricated and assembled shaver.

4.3.3.1 Visual examination. - Each sample unit shall be examined for the defects listed below. The inspection level shall be Level II with an acceptable quality level of 4.0 defects per hundred units.

Examine	Defect
Finish	Finish not as specified; Plating (when applicable) not smooth, peeling, scratches or non-adherent.
	Painted surfaces (when applicable) not complete coverage, blisters, sags or tacky.
Material	Not of uniform quality, cracks, seams, or other defects which may affect appearance, strength, endurance or wear resistance.
Design	Not type or size specified.
	Not similar to referenced figures.
Construction and Workmanship	Component part missing, damaged, or not properly assembled.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:27Z
Check the source to verify that this is the current version before use.

Construction and Workmanship	Castings, forging, molded or welded parts not free of sand, dirt, sprues, scale or other foreign material.
	Provision for lubrication not supplied as specified.
	Spring loaded micrometrically adjustable stop piece binds, sticks or excessively loose, surface not smooth, not vented to allow escape of chips.
	Case not painted inside and outside as specified.
Identification Marking	Identification marking missing, incomplete, illegible, not permanent.

4.3.3.2 Dimensional and weight examination. - Each sample unit shall be examined to determine compliance with the dimensional and weight requirements of applicable paragraphs and referenced figures. Any noncompliance shall constitute a defect. The inspection level shall be L 6 with an acceptable quality level of 2.5 defects per hundred units.

4.4 Inspection of preparation for delivery. - Inspection to determine compliance with preparation for delivery requirements shall be as follows:

4.4.1 Preservation and packaging. - An examination shall be made at appropriate intermediate stations for determination of cleanliness, preservation, packaging and marking. Any nonconformance with specified requirements shall constitute a defect. The inspection level shall be L 6 with an acceptable quality level of 6.5 defects per hundred units.

4.4.2 Packing. - An examination shall be made to determine that packing and marking of the shipping container is complied with. Defects will be scored in accordance with table below. The inspection level shall be L 4 with an acceptable quality level of 6.5 defects per hundred units.

Examine	Defect
Marking	Missing, incorrect or illegible.
Material	Component missing, damaged or otherwise defective.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:27Z
Check the source to verify that this is the current version before use.

Examine	Defect
Material	Inadequate closure of container, loose strapping or banding.
	Container bulged or distorted.
	Gross weight exceeds specified limits.

4.5 Test methods

4.5.1 Tests shall be performed using a compressed air pressure of 90 psi, gaged at the air inlet of the shaver.

4.5.2 Operational tests. - The Type I Shaver shall shave one each 1/16, 3/32, 1/8, 5/32, 3/16 and 1/4 monel and corrosion resistant steel rivets without stalling or chattering to determine compliance with 3.9.

4.5.2.1 The Type II Shavers shall shave 10 different sizes of both mild ferrous and non-ferrous rivets without stalling or chattering to determine compliance with 3.10.

4.5.3 Five 1/4 inch diameter solid rivets shall be bucked down into a 100° countersink for the test specified in 4.5.4. Corrosion resistant steel rivets in accordance with MS20427 shall be used for Type I Shavers. 2024-T4 aluminum alloy rivets in accordance with MS20426 shall be used for Type II, Class 1. 7/8 inch diameter aluminum rivets shall be used for Type II, Class 2.

4.5.4 The stabilizer shall be removed and the shaver operated on five rivets in accordance with 4.5.3. The shaver shall not stall nor chatter and shall not scratch nor mar the surface adjacent to the rivet.

4.5.5 The shaver shall be checked for each stop piece adjustment and ability to shave in close quarters such as flanges and contour surfaces.

4.5.6 Surface roughness. - The surface roughness of every other rivet shaved in accordance with 4.5.2, 4.5.2.1 and 4.5.4 shall be measured to determine compliance with 3.11.

4.6 Endurance test. - The Type I Shavers shall shave 500 3/16 inch diameter FA200 Jo-Bolts installed in flat plates at a rate of not less than six (6) Jo-Bolts per minute without changing cutters. The surface roughness of every 10th Jo-Bolt shall then be measured to determine compliance with 3.11.

Source: https://assist.dla.mil -- Downloaded: 202640-17T03:27Z
Check the source to verify that this is the current version before use.

4.7 Preproduction tests

4.7.1 Preproduction test sample. - The preproduction test sample shall consist of two shavers of the type and class specified in the order or contract and shall be representative of the production shaver. They shall be tested at a laboratory acceptable to the procuring activity or, when specified in the contract (see 6.2), at the contractor's plant under the supervision of the procuring activity.

4.7.2 Preproduction tests. - Preproduction tests shall consist of all of the tests described under 4.5 and 4.6, as applicable.

4.7.3 Preproduction test report. - The contractor shall prepare a preproduction test report in accordance with Specification MIL-STD-831 and furnish three (3) copies of the report to the procuring activity. When specified (see 6.2), the contractor shall submit for approval, a proposed test procedure at least 20 days before start of the preproduction tests, to the prime engineering activity.

4.8 Preparation for shipment. - Examination of the packing and marking for shipment shall be made for conformance with the requirements of Section 5.

5. PREPARATION FOR DELIVERY

5.1 Preservation, packaging and packing. - The shaver shall be cleaned, preserved, packaged, packed and marked for shipment in accordance with the provisions of Specification MIL-P-12829. Levels of preservation, packaging, and packing shall be as specified in the contract or order (see 6.2).

5.2 Marking. - Interior and exterior containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. - The shavers covered by this specification are intended for use in removing the protruding portions of rivet heads on exterior aircraft and missile surfaces.

6.2 Ordering data. - Procurement documents should specify the following:

a. Title, number, and date of this specification.

b. Type and class of shaver required (see 1.2).

Source: https://assist.dla.mil -- Downloaded: 20260-17T03:27Z
Check the source to verify that this is the current version before use.

c. Types, sizes, and quantities of cutters required (see 3.7).

d. Number of samples required, if different, and point of inspection (see 3.1 and 4.7.1).

e. If proposed test procedures are required (see 4.7.3).

f. Whether carrying case is to be provided (see 3.17).

g. Special internal or external finishes, if applicable (see 3.22.2 and 3.22.3.1).

h. Spare parts required (see 3.24).

Custodians:

Army - MO
Navy -WP
Air Force - 69

Review Activities:

Army - MO, GL
Navy - WP
Air Force - 69

User Activities:

Navy - SH, MC

Preparing Activity:

Air Force - 69
(Project 5130-0046)

"Review/user information is current as of this date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

Source: https://assist.dla.mil -- Downloaded: 202610-17T03:27Z
Check the source to verify that this is the currentversion before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:27Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. [illegible]

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity (as indicated on reverse hereof).

SPECIFICATION

ORGANIZATION (Of submitter)	CITY AND STATE

CONTRACT NO	QUANTITY OF ITEMS PROCURED	DOLLAR AMOUNT
		$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)*	DATE

DD FORM 1 APR 63 1426 REPLACES NAVSHIPS FORM 4863, WHICH IS OBSOLETE C-92TH

Source: https://assist.dla.mil -- Downloaded: 20261O-17T03:27Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
Depart ment of the Air Forçe

OFFICIAL BUSINESS

Mobile Air Materiel Area
Standardization Branch (MONSS)
Brookley AFB, Alabama 36615

FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-17T03:27Z
Check the source to verify that this is the current version before use.