NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.

IINCH-POUND

MIL-PRF-6106/19E
AMENDMENT 3
10 July 1999
SUPERSEDING
AMENDMENT 2
15 June 1999

PERFORMANCE SPECIFICATION SHEET

RELAYS, ELECTROMAGNETIC, PERMANENT MAGNET DRIVE,
25 AMPERES, SPDT, HERMETICALLY SEALED

This amendment forms a part of MIL-PRF-6106/19E, dated 24 October 1990, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 1

* FIGURE 1, Configuration A: delete and substitute the following to correctly show the mounting flange width.

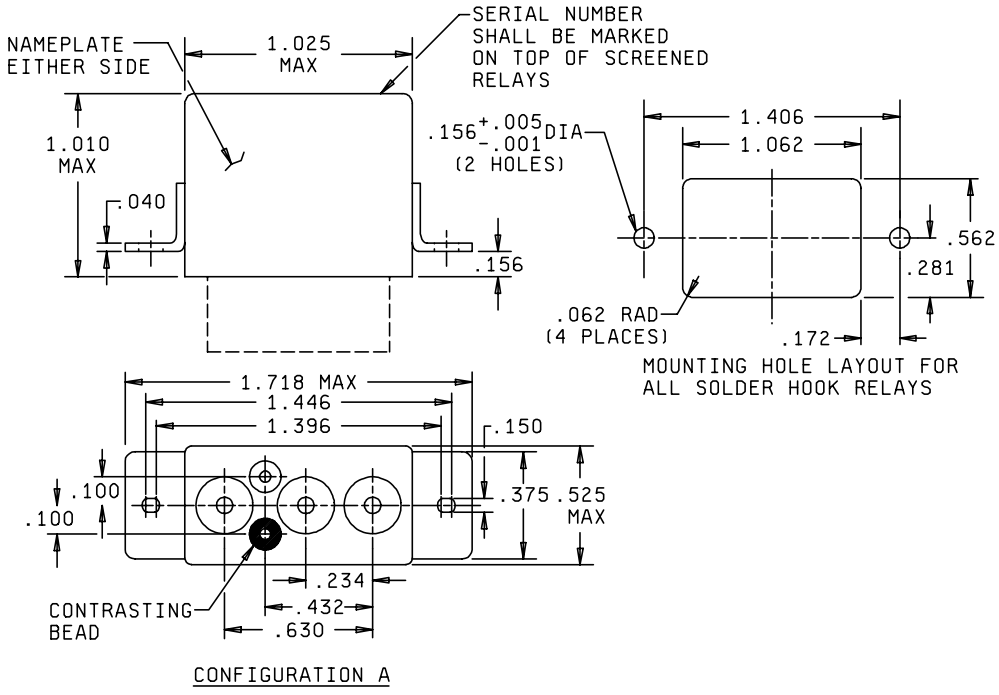

FIGURE 1. Relay, outline drawing.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:25Z
Check the source to verify that this is the current version before use.

PAGE 3

* FIGURE 1, socket pin terminal: delete and substitute

"

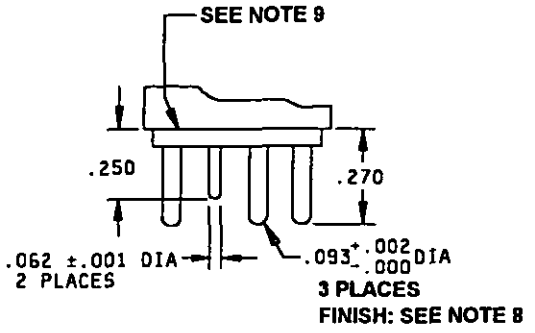

SOCKET PIN TERMINAL

"

PAGE 4

* Add a Note 8, "8. Socket pin terminals shall provide the operational, environmental, and interface characteristics to provide a reliable interconnect to gold-plated contacts. Terminals shall be gold plated. Gold plating of the polarizing pin is optional. One system for gold plating that may be used is ASTM B488, type 3, class 1.25 with a nickel underplate of 50 to 150 microinches thick. The gold plating system shall enable the product to meet the performance requirements of this specification and shall be approved by the qualifying activity."

* Add a Note 9, "9. Gasket shall provide a reliable seal between the relay and mating socket that will meet the environmental, operational, and interface requirements of the relay with the mating socket. The gasket shall have shore hardness 20 ±5, thickness .050 ±.005. Gasket material according to AMS 3332 has been considered acceptable."

PAGE 5

TABLE 1, Delete "Mating Socket" column.

PAGE 8

Weight, Delete "4.1 grams" and substitute "41 grams."

Altitude rating, Delete "80,000" and substitute "300,000."

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:25Z
Check the source to verify that this is the current version before use.

The margins of this amendment are marked with asterisks to indicate where changes from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Custodians:
Air Force - 11
DLA - CC

Preparing activity:
DLA - CC

(Project 5945-1058-06)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:25Z
Check the source to verify that this is the current version before use.