INCH-POUND
MIL-R-6106/25J(USAF)
20 January 1989
SUPERSEDING
MIL-R-6106/25H(USAF)
28 July 1986

MILITARY SPECIFICATION SHEET

RELAYS, ELECTROMAGNETIC, BRACKET MOUNT

This specification is approved for use by the Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the mounting track described herein shall consist of this specification and the latest issue of MIL-R-6106.

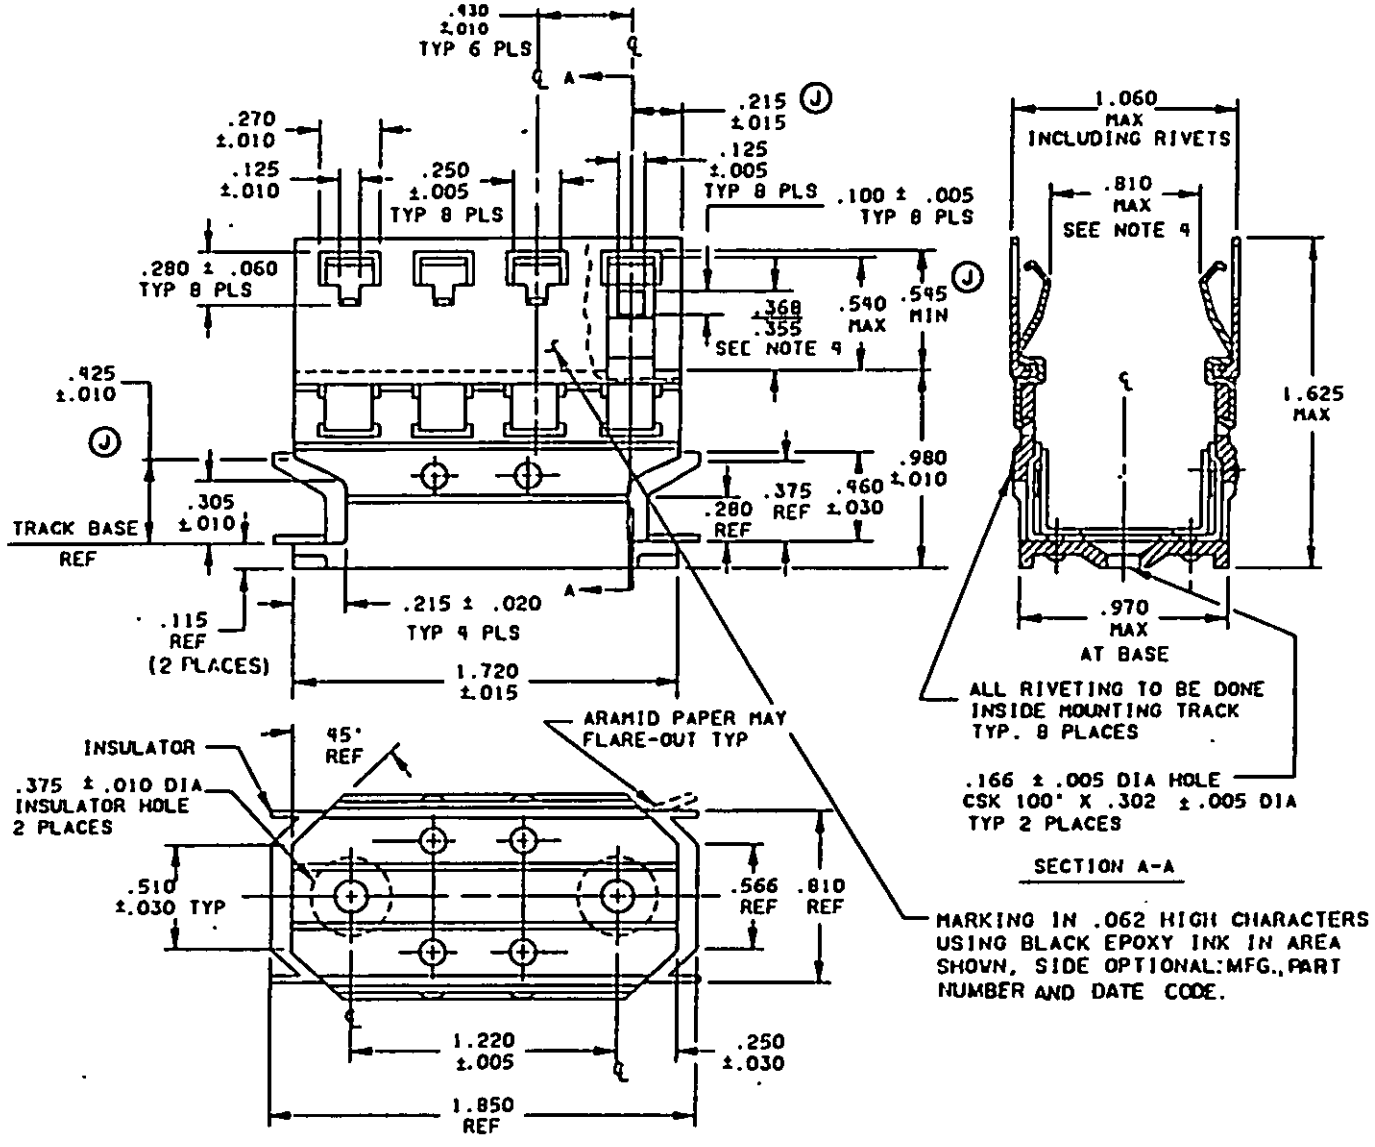


FIGURE 1. Mounting track.

(J) denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:27Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm
.005	0.13	.270	6.86	.510	12.92
.015	0.38	.302	7.67	.540	13.72
.020	0.51	.035	7.75	.545	13.84
.100	2.54	.34	8.6	.810	20.84
.125	3.18	.355	9.02	.970	24.64
.154	3.91	.368	9.35	.980	24.89
.185	4.70	.375	9.53	1.060	26.92
.215	5.46	.425	10.80	1.220	30.99
.22	5.6	.430	10.92	1.625	41.28
.250	6.35	.460	11.68	1.720	43.69

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.010 (0.25 mm) for three-place decimals and ±.03 (0.8 mm) for two-place decimals.
4. When measured at .810 (20.57 mm) openings of clips.
5. Outer track. The material shall be aluminum alloy (extruded) per QQ-A-225/0 or equivalent; finish, irridite chemical conversion coating per MIL-C-5541, class 3.
6. Inner bracket and rivets. The material shall be corrosion resistant steel per QQ-S-766 or equivalent; finish, passivate per QQ-P-35, QQ-P-5002, MIL-F-14072 E300 or equivalent.
7. Latch. The material shall be beryllium copper alloy number 172 per QQ-C-533. Heat treated to a minimum temper of 1/4 HT. finish, none.
8. Wiring protector. The material shall be an aramid paper, per MIL-I-24202, type II .010 inch (0.25 mm) thickness; finish, none.
9. Inner bracket and outer track shall be riveted together at eight places (4 side, 4 bottom). The rivet projection shall not extend beyond the edges of the track (1.060 maximum).
10. Wiring protector shall extend beyond all metal edges as shown .05 inch (1.27 mm) minimum, .08 inch (2.03 mm) maximum and shall be bonded to the inner bracket with an adhesive that will meet the temperature range indicated in MIL-R-6106.

FIGURE 1. Mounting track - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:27Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Mating sockets: M6106/23-001, -002, and -003.

Operating temperature: -70°C to +125°C.

Weight: .845 ounce maximum (24 grams).

Application data:

With relays mated to sockets and attached to the mounting track assembly, the assembly shall meet the applicable mechanical, environmental, and electrical requirements of the applicable relay specifications.

Use tool M6106/32-001 to install and remove M6106/23 sockets.
Use tool M6106/31-001 to remove relays from this mounting bracket.

Part number: M6106/25-003.

TABLE I. Supersession data.

Dash number	Superseded dash number
-003	-001 -002

Custodian:
Air Force - 85

Review activities:
Air Force - 99
DLA - ES

Preparing activity:
Air Force - 85

(Project 5945-F694)

☆U.S. GOVERNMENT PRINTING OFFICE: 1988 — 508-038/44189

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:27Z
Check the source to verify that this is the current version before use.