MIL-P-12940 (Ord)
4 August 1953
SUPERSEDING
AFPS 169
8 February 1945

MILITARY SPECIFICATION

PACKAGING OF MOUNT, TELESCOPE, M71

1. SCOPE

1.1 This specification covers the packaging, packing and marking for domestic shipment and storage, overseas shipment and interplant shipment of Telescope Mount M71, with or without Instrument Light M36.

2. APPLICABLE SPECIFICATIONS, STANDARDS, DRAWINGS, AND PUBLICATIONS

2.1 The following specifications and standard of the issue in effect on date of invitation for bids, form a part of this specification:

SPECIFICATIONS

Federal

NN-B-601	- Boxes, Wood-Cleated-Plywood, For Domestic Shipment.
NN-B-621	- Boxes, Wood, Nailed and Lock Corner.
NN-B-631	- Boxes; Wood, Wirebound, For Domestic Shipment.
UU-T-111	- Tape, Paper, Gummed (Sealing and Securing).
LLL-B-631	- Boxes; Fiber, Corrugated for Domestic Shipment.
LLL-B-636	- Boxes; Fiber, Solid for Domestic Shipment.
LLL-F-291	- Fiberboard, Corrugated, Single Face (Flexible).

Military

JAN-P-100	- Packaging and Packing for Overseas Shipment - General Specification.
MIL-A-101	- Adhesive, Water-Resistant, For Sealing Fiberboard Boxes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:52Z
Check the source to verify that this is the current version before use.

Military (Contd)

JAN-P-105 - Packaging and Packing for Overseas Shipment - Boxes, Wood, Cleated, Plywood.
JAN-P-106 - Boxes; Wood, Nailed (Overseas Type)
JAN-P-108 - Packaging and Packing for Overseas Shipment - Boxes, Fiberboard (V-Board and W-Board) Exterior and Interior.
MIL-P-116 - Preservation, Methods of.
JAN-P-117 - Packaging and Packing for Overseas Shipment - Bags, Interior Packaging.
JAN-B-121 - Barrier, Materials, Greaseproof.
JAN-P-125 - Packaging and Packing for Overseas Shipment - Barrier Material, Waterproof, Flexible.
JAN-P-127 - Packaging and Packing for Overseas Shipment - Tape, Adhesive, Pressure Sensitive, Water-Resistant.
JAN-P-139 - Packaging and Packing for Overseas Shipment - Plywood, Container Grade.
MIL-L-3150 - Lubricating Oil, Preservative, Medium.
MIL-P-11445 - Packaging of Lights, Aiming Post and Lights, Instrument.
MIL-C-11796 - Compound, Corrosion Preventive, Petrolatum Type, Hot Application.

Ordnance Corps Tentative

AXS-1472 - Adhesive, Label (Water-Resistant).

STANDARD

Military

MIL-STD-129 - Marking of Shipments.

(Copies of specifications and standards required by contractors in connection with specific procurement functions should be obtained from the procuring agency or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Materials - The following shall apply wherever packaging materials are referred to in this specification by name only:

Reference	Full Identification
Flexible single face corrugated fiberboard.	Type I of Specification LLL-F-291.
Greaseproof barrier material.	Type I of II, grade C, class 1 or 2 of Specification JAN-B-121.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:52Z
Check the source to verify that this is the current version before use.

Reference (contd)	Full Identification
Gummed tape	Class 2 of Specification UU-T-111.
Pressure sensitive tape	Any type and grade of Specification JAN-P-127.

3.2 Cleaning - The mount shall be cleaned so as to be free from dirt, smudges, fingerprints and other foreign substances in accordance with cleaning methods C-1 and C-4 of Specification MIL-P-116. Cleaning Method C-4 shall be used to clean unprotected metal surfaces. The instrument light shall be cleaned in accordance with Specification MIL-P-11445.

3.3 Preserving - Preservative conforming to Specification MIL-L-3150 shall be applied on the mounting hardware and locating pins. All exposed unprotected surfaces of the mount shall be coated with a preservative conforming to class 2 of Specification MIL-C-11796.

3.4 Packaging.- The telescope mount shall be packaged method I, and the locating pins and mounting hardware shall be packaged method IC-1 as specified herein and shown in figures 1 and 2. The instrument light shall be packaged method IA-8 as specified in Specification MIL-P-11445, except that the box shall not be required.

3.4.1 Prepackaging the mount without the instrument light.

3.4.1.1 The preservative coated pins shall be wrapped with greaseproof barrier material and then placed with the screws and washers in a greaseproof bag conforming to type I or II, grade A, class a of Specification JAN-P-117. The bagged items shall be secured to the mount with pressure sensitive tape. The preservative coated surfaces and other unpainted surfaces of the mount shall then be wrapped or covered with greaseproof barrier material. The barrier material shall be secured in place with pressure sensitive tape.

3.4.1.2 The telescope holder shall be rotated 90° to the position on the mount as shown in figures 1 and 2. The mount shall then be wrapped with two layers or thicknesses of flexible single face corrugated fiberboard. The wrap shall be secured with gummed tape.

3.4.2 Prepackaging the mount with the instrument light.

3.4.2.1 The instrument light shall be packaged as specified in Specification MIL-P-11445, except that the box in which the bagged light is placed may be omitted if the bagged light is wrapped with flexible single face corrugated fiberboard, which is secured with gummed tape.

3.4.2.2 The mount shall be prepackaged as specified in 3.4.1, except that the packaged instrument light shall be secured to the mount prior to wrapping the mount with flexible single face corgugated fiberboard.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:52Z
Check the source to verify that this is the current version before use.

3.4.3 Unit package - Each prepackaged telescope mount, with or without an instrument light, shall be immobilized in a fiberboard box conforming to compliance symbol V1, V2 or V3, any style, except FTC, of Specification JAN-P-108. Each fiberboard box shall be closed as specified in the box specification. However, water-resistant adhesive, conforming to Specification MIL-A-101, shall be applied over all areas of contact on the flaps and water-resistant pressure sensitive tape, conforming to type II or III, grade A or B (at least 2 inches wide) of Specification JAN-P-127, may be used to cover all seams, including the manufacturer's joint.

3.5 Packing

3.5.1 Domestic shipment and storage

3.5.1.1 Unit packages shall be immobilized in a shipping container conforming to one of the following specifications:

NN-B-601, style A or B, type B or C
NN-B-621, style 2 or 4
NN-B-631

3.5.1.2 Nailed wood boxes shall be strapped with steel straps as specified in Specification NN-B-621. Where the gross weight exceeds 100 pounds, plywood boxes shall be strapped with steel straps in accordance with Specification JAN-P-105. Straps shall not be stapled. The gross weight of each shipping container shall not exceed the limits of the box specification; however, in no instance shall the gross weight exceed 150 pounds.

3.5.2 Overseas shipment

3.5.2.1 The shipping container shall conform to either of the following specifications:

JAN-P-105, Style A or B. Plywood shall conform to type A or B, condition I of Specification JAN-P-139.
JAN-P-106, Style 2 or 4. Minimum thickness of lumber for sides, top and bottom shall be 11/16 inch when shipment is to be made by an ocean going vessel.

3.5.2.2 Two unit packaged mounts, with or without instrument lights, shall be immobilized in a shipping container for shipment to a combat area. Four unit packaged mounts, with or without instrument lights, shall be immobilized in a shipping container for shipment to a non-combat area.

3.5.2.2.1 The following inside dimensions, cubage and gross weight are approximate for 2 unit packages packed in a nailed wood box:

Inside dimensions - 18 inches long x 10 inches wide x 10 inches deep
Cubage - 1.6 cubic feet
Gross weight - 63 pounds

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:52Z
Check the source to verify that this is the current version before use.

3.5.2.2.2 The following inside dimensions, cubage and gross weight are approximate for 4-unit packages packed in a nailed wood box:

Inside dimensions	- 20 inches long x 18 inches wide x 10 inches deep
Cubage	- 3 cubic feet
Gross weight	118 pounds

3.6 Marking.

3.6.1 Unit container.- The identification data required in Standard MIL-STD-129 for interior packages shall be added on each unit package by printing or marking either directly on the exterior surface or on a label affixed to the exterior surface. The serial number of the mount shall be added in the identification data. (See 6.2 for the stock number (or numbers) to be added in the identification data.)

3.6.2 Shipping container.- The information to be placed on each container shall be in accordance with Standard MIL-STD-129. The identification data shall be stencilled or printed on the container. Packing lists containing the serial numbers of the mounts in the container shall be required. (See 6.2 for the stock number (or numbers) to be added in the identification data.)

3.6.3 Coating labels.- If labels are used, they shall be affixed and coated with water-resistant label adhesive conforming to Specification AXS-1472.

3.7 Interplant shipment.- Where an interplant shipment is involved, the following cleaning, preserving, packaging, packing and marking requirements shall apply:

3.7.1 Cleaning.- Cleaning shall be in accordance with 3.2.

3.7.2 Preserving.- The preservative specified in 3.3 may be omitted, except on the locating pins.

3.7.3 Packaging.- Packaging shall be as specified in 3.4, except as follows:

3.7.3.1 The instrument light shall be packaged for interplant shipment as specified in Specification MIL-P-11445.

3.7.3.2 A fiberboard box conforming to style RSC or OLC (full overlap) of Specification LLL-B-631 or LLL-B-636 may be used in lieu of the box specified in 3.4.3. The box shall be closed as specified in the box specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:52Z
Check the source to verify that this is the current version before use.

3.7.4 Packing.

3.7.4.1 The shipping container shall conform to Specification NN-B-601, NN-B-621 or NN-B-631.

3.7.4.2 The gross weight of each shipping container shall not exceed the limits of the box specification; however, in no instance shall the gross weight exceed 200 pounds.

3.7.4.3 Inside surfaces of each wood shipping container shall be lined with flexible waterproof barrier material conforming to Specification JAN-P-125.

3.7.5 Marking.- Marking shall be as specified in 3.6, except that the serial number in the identification data on the unit package and the packing list on the shipping container may be omitted.

3.8 Sample pack.- A preproduction pack shall be made in accordance with this specification.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 Sampling.- The preproduction pack shall be inspected and approved by a Government inspector prior to packaging and packing the items for shipment. Production packs shall be tested at random where the Government inspector considers it necessary to conduct tests to assure conformance with the requirements of this specification.

4.2 Inspection.- All methods and materials shall be subject to inspection by a Government inspector.

4.3 Test procedures.- Interior packages, the preproduction pack and any production packs selected for test shall, at the discretion of the Government inspector, be tested in accordance with Specification MIL-P-116 and Specification JAN-P-100.

5. PREPARATION FOR DELIVERY

(Not applicable.)

6. NOTES

6.1 Ordering data.- Invitation for bids and contracts or orders should specify the title, number and date of this specification, the type of shipment involved and type of packaging and packing required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:52Z
Check the source to verify that this is the current version before use.

6.2 The following indicates the stock number (or numbers) to be added in the identification data:

Item	Stock number
Telescope Mount M71 Including Mounting Hardware 3 Screws 3 Lock Washers 2 Pins	F001-7597741
Instrument Light M36	F205-7690564


Note: Where the mount and instrument light are packaged together, the stock number for the mount and the stock number for the instrument light should be added in the identification data on the unit package and shipping container.

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Custodian:

Army - Ordnance Corps

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:52Z
Check the source to verify that this is the current version before use.

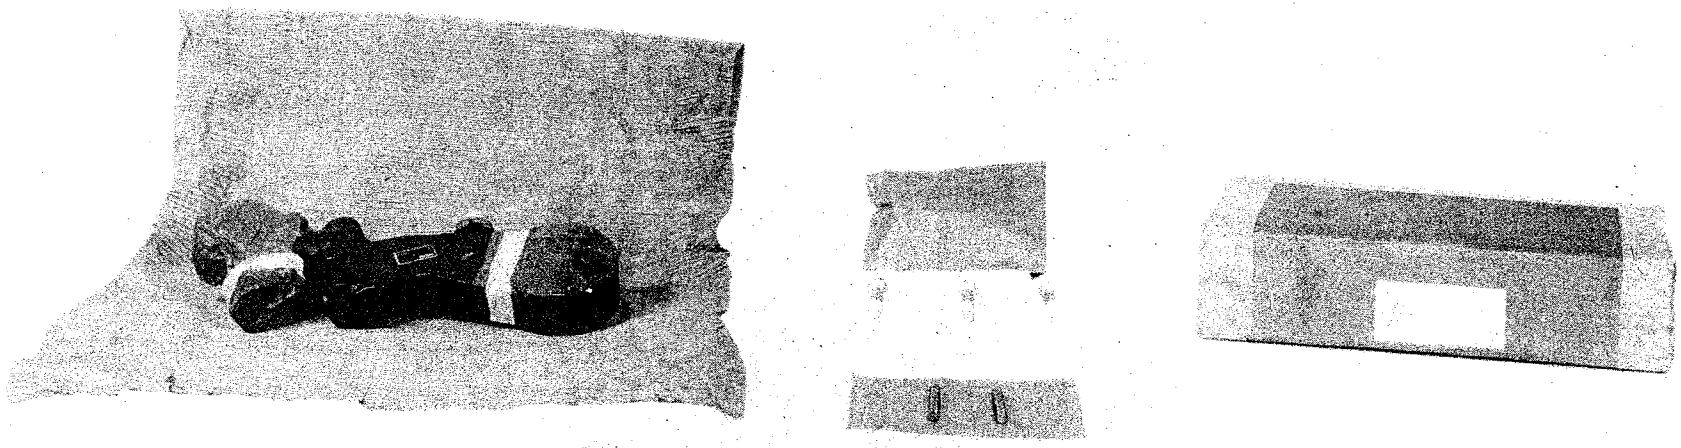

Neg. #22981-1 9/16/52 FRANKFORD ARSENAL ORD. CORP

MOUNT, TELESCOPE, M71 - Packaging the mount, locating pins and mounting hardware.
FIGURE 1

MIL-P-12940 (Ord)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:52Z
Check the source to verify that this is the current version before use.

NEG. #22981-2 9/16/52 FRANKFORD ARSENAL ORD. CORPS

MOUNT, TELESCOPE, M71 W/INSTRUMENT LIGHT M36 - Packaging the mount, locating pins, mounting hardware and instrument light.

FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:52Z
Check the source to verify that this is the current version before use.