MIL-P-12984A(Ord)
6 April 1960
SUPERSEDING
MIL-P-12984 (Ord)
24 August 1953

MILITARY SPECIFICATION

PERISCOPE SUBASSEMBLY: 7622074; PACKAGING OF

1. SCOPE

1.1 This specification covers the packaging and packing of Periscope Subassembly, 7622074.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids, shall form a part of this specification:

SPECIFICATIONS

Federal

NN-P-515	Plywood, Container Grade
UU-T-111	Tape; Paper, Gummed (Sealing and Securing)
PPP-B-601	Boxes, Wood, Cleated Plywood
PPP-B-621	Boxes, Wood, Nailed and Lock-Corner
PPP-B-636	Boxes, Fiber
PPP-C-843	Cushioning Material, Cellulosic
PPP-T-60	Tape; Pressure Sensitive Adhesive, Waterproof-for Packaging and Sealing

FSC 1240

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:55Z
Check the source to verify that this is the current version before use.

Military

MIL-P-116	Preservation, Methods of
MIL-B-131	Barrier Material; Water-vaporproof, Flexible
MIL-D-3464	Desiccants, Activated, Bagged, Packaging Use and Static Dehumidification
MIL-C-7769	Cushioning Material, Bound
MIL-P-14232	Parts Equipment and Tools for Ordnance Materiel, Packaging of

STANDARDS

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	Marking for Shipment and Storage
MS-20003	Indicator-Humidity, Card, Three Spot Impregnated Areas

(Copies of specifications and standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Preservation and packaging.

3.1.1 Level A.

3.1.1.1 Cleaning. - The assembly will normally be received in the packaging area with the optical glass surfaces covered with lens tissue. Such coverings shall be left in place and the remainder of the assembly shall be cleaned in accordance with process C-1 of Specification MIL-P-116. The covered optical surfaces shall be further covered by cellulosic cushioning material conforming to Specification PPP-C-843, 1/4 inch thick. The cushioning shall be secured with pressure-sensitive tape conforming to Specification PPP-T-60, any type, any class. If the optical surfaces have not been previously cleaned and covered, cleaning of the optical surfaces shall be in accordance with Specification MIL-P-14232.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:55Z
Check the source to verify that this is the current version before use.

3.1.1.2 Drying.- Uncovered surfaces shall be dried in accordance with procedure D-4 of Specification MIL-P-116.

3.1.1.3 Unit packaging.- The assembly shall be packaged method IIb as specified herein.

3.1.1.3.1 Immobilizing.- The assembly shall be immobilized between two plywood bases as shown in Figure 1. The bases, cleats, and blocks shall conform to the wood and plywood requirements as follows:

Wood	PPP-B-621
Plywood	NN-P-515

The cleated plywood panels shall be large enough to provide 1/2 inch clearance between the assembly and the sides and ends of the fiberboard box in which the unit shall be immobilized. The cleats and blocks shall be secured to the base panels by nailing.

3.1.1.3.2 Fiberboard box.- The mounted assembly shall be positioned in a snugly fitting fiberboard box. The box shall conform to Specification PPP-B-636, type 1, class 1, 350 pound test, style RSC.

3.1.1.3.3 Desiccant.- The required units of desiccant, conforming to Specification MIL-D-3464, computed according to Formula I of Specification MIL-P-116, shall be secured to the assembly.

3.1.1.3.4 Closure of fiberboard container.- The fiberboard box shall be closed with gummed tape conforming to Specification UU-T-111.

3.1.1.3.5 Humidity indicator.- A humidity indicator, in accordance with Standard MS-20003, shall be secured to the top surface of the fiberboard box.

3.1.1.3.6 Barrier.- Corners of box shall be blunted and the box shall be sealed within a barrier fabricated of material conforming to Specification MIL-B-131, class 1. The time lapse between securing the desiccant and the closure of the barrier shall be held to an absolute minimum.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:55Z
Check the source to verify that this is the current version before use.

3.1.1.3.7 Cushioning.- The item shall be cushioned within a wood shipping container. The wood box shall be selected from 3.2 in accordance with the prescribed level of packing. Cushioning material shall be a minimum of two inches thick on all surfaces and shall conform to type II of Specification MIL-C-7769.

3.1.2 Level C.

3.1.2.1 Cleaning.- Cleaning shall be as specified in 3.1.1.1.

3.1.2.2 Drying.- Drying shall be as specified in 3.1.1.2.

3.1.2.3 Unit packaging.- The assembly shall be packaged Method IA-14, in accordance with Specification MIL-P-116. Packaging shall be similar to requirements of 3.1.1.3, except that desiccant and humidity indicator shall be omitted.

3.2 Packing.

3.2.1 Level A.

3.2.1.1 Shipping container.- The shipping container shall conform to either of the following specifications:

PPP-B-621, class 2, style 2 or 4
PPP-B-601, oversea type

3.2.2. Level B.

3.2.2.1 Shipping container.- The shipping container shall conform to either of the following specifications:

PPP-B-621, class 1, style 2 or 4
PPP-B-601, domestic type

3.2.3 Level C.

3.2.3.1 Shipping container.- The shipping container shall be as specified in 3.2.2.1.

4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:55Z
Check the source to verify that this is the current version before use.

3.3 Marking. - Unit packages and shipping containers shall be marked in accordance with the requirements of Standard MIL-STD-129.

3.4 Pilot pack. - Prior to quantity packaging, a pilot pack shall be inspected to determine conformance with the applicable requirements of this specification. The pilot pack shall be a completely packed shipping container. Inspection may be performed either in process or after completion of the pilot pack.

3.5 Workmanship. - All operations involved in accomplishing corrosion prevention, preservation, packaging, and packing by the procedures specified herein shall be in accordance with the highest grades of practice associated with this type of work.

4. QUALITY ASSURANCE PROVISIONS

4.1 General quality assurance provisions.

4.1.1 Contractor inspection. - Unless otherwise specified herein, the supplier is responsible for the performance of all inspection requirements prior to submission for Government inspection and acceptance. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. Inspection records of the examinations and tests shall be kept complete and available to the Government as specified in the contract or order.

4.1.2 Contractor quality assurance system. - The contractor shall provide and maintain an effective quality assurance system acceptable to the Government covering the supplies under this contract. A current written description of the system shall be submitted to the contracting officer prior to initiation of production. The written description will be considered acceptable when, as a minimum, it provides the quality assurance required by the specification and other documents referenced in this specification. The contractor will not be restricted to the inspection station or to the method of inspection listed provided that the substitute procedures will provide, as a minimum, the quality assurance required in the contractual documents. In cases of dispute as to whether certain procedures of the system provide equal assurance, the comparable procedure of this specification shall be used. The contractor shall notify the Government of, and obtain approval for, any change to the written procedure that affects the degree of assurance required by this specification or other documents referenced therein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:55Z
Check the source to verify that this is the current version before use.

4.1.3 Government verification. - All quality assurance operations performed by the contractor will be subject to Government verification at unscheduled intervals. Verification will consist of surveillance of the operations to determine whether the practices, methods, and procedures of the written inspection plan are being properly applied, and Government product inspection, when deemed necessary by the Government to measure quality product offered for acceptance. Deviation from the prescribed or agreed-upon procedures, or instances of poor practices which might have an affect upon the quality of the product will immediately be called to the attention of the contractor. Failure of the contractor to promptly correct deficiencies discovered will be cause for suspension of acceptance until correction has been made or until conformance of product to prescribed criteria has been demonstrated. To avoid interference with operations, the contractor will designate a responsible official or officials to whom the Government inspector will report such instances.

4.1.4 Control of materials. - Materials shall be tested to determine conformance to contractually applicable specifications. Such tests may be conducted in the prime contractor's or subcontractor's facilities, or in other suitably equipped laboratories. The test results shall be available to the Government inspector for review. Certified test reports, identifiable with the material, may be acceptable in lieu of repeated tests. The Government reserves the right, in any case, to require retests to assure that the materials are acceptable.

4.2 Lot formation. - Unless otherwise specified by the contracting officer, or his representative, inspection lot sizes and lot formation shall be in accordance with Standard MIL-STD-105.

4.2.1 Examination. - The classification of defects in Table I shall constitute the minimum inspection requirements to be performed prior to acceptance or rejection by lot. The Government reserves the right to inspect for any applicable requirements, and to reject individual nonconforming items.

4.2.1.1 All rejected lots shall be screened for all defective characteristics. After corrections have been made and the Government inspector informed of the corrected action taken, the lot shall be resubmitted for acceptance inspection as outlined in Standard MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:55Z
Check the source to verify that this is the current version before use.

TABLE I - CLASSIFICATION OF DEFECTS

Use Inspection Level II, and Sampling Plan Table IV-A
of Standard MIL-STD-105
AQL values are expressed in percent defective

MAJOR: AQL 1.5	Req't Par.	Test Method
1. Improper cleaning, surfaces not covered, coverings not as specified, cushioning not secured (Level A, C)	3.1.1.1 3.1.2.1	Visual MIL-P-116
2. Improper drying (Level A, C)	3.1.1.2 3.1.2.1	Visual
3. Unit packaging, incorrect method (Level A, C)	3.1.1.3 3.1.2.3	MIL-P-116 Visual
4. Unit not immobilized, not as illustrated, not conforming to specifications, insufficient clearance, improperly secured (Level A)	3.1.1.3.1 Figure 1	Visual PPP-B-621
5. Unit improperly positioned, box not conforming to specification (Level A)	3.1.1.3.2	Visual PPP-B-636
6. Desiccant missing, inadequate, not as specified, not secured, (Level A)	3.1.1.3.3	MIL-P-116 Visual
7. Humidity indicator missing, incorrect, not secured (Level A)	3.1.1.3.5	Visual
8. Box corners not blunted, improperly sealed, barrier material not conforming to specification, improper closure (Level A)	3.1.1.3.6	Visual
9. Cushioning inadequate, not conforming to specification (Level A)	3.1.1.3.7	Visual
10. Shipping container not conforming to specifications (Level A, B, C)	3.2.1.1 3.2.2.1 3.2.3.1	Standard Measuring Equipment (SME) PPP-B-621
11. Markings illegible, incorrect, missing (Level A, B, C)	3.3	MIL-STD-129 Visual

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:55Z
Check the source to verify that this is the current version before use.

TABLE I - CLASSIFICATION OF DEFECTS (Cont'd)

MINOR: AQL 4.0	Req't Par.	Test Method
41. Improper closure, not conforming to specification (Level A)	3.1.1.3.4	Visual
42. Workmanship	3.5	Visual

TABLE II - CLASSIFICATION OF DEFECTS

Use Inspection Level L7, and Sampling Plan Table IV-A
of Standard MIL-STD-105A
AQL values are expressed in percent defective

MAJOR: AQL 4.0	Method of Protection	Test Method
1. Heat seal	IIB IA-14	MIL-P-116
2. Quick leak	IIB IA-14	MIL-P-116

4.3 Test methods and procedures.

4.3.1 Pilot pack.- The pilot pack specified in 3.4 shall be inspected 100 percent by the contractor or his representative, and witnessed by the Government to determine conformance with the requirements of this specification for Level "A".

4.3.1.1 Pilot pack failure.- Should the pilot pack fail to pass the test for Government acceptance, packaging operations will cease until the defective characteristics have been corrected in the process used to produce the pilot pack. When corrections in the process have been made, a new pilot pack shall be completely inspected by the contractor and witnessed by the Government inspector.

4.3.2 Sample packs.- Sample packs for heat seal and quick leak tests shall be selected from acceptable packs of the samples that have met the minimum inspection requirements listed in Table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:55Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 There are no applicable requirements.

6. NOTES

6.1 Ordering data. - Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) Applicable stock number
(c) Selection of applicable levels of packaging and packing.

6.2 Definitions.

6.2.1 Standard measuring equipment (SME). - Standard measuring equipment (SME) includes the common hand-type measuring devices which are usually stocked by commercial supply houses for ready supply (shelf items), and which are normally used by an inspector to perform dimensions inspection of items under procurement. This category also includes commercial testing equipment.

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any invention that may in any way be related thereto.

Custodian:

Army - Ordnance Corps

Preparing Activity:

Army - Ordnance Corps

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:55Z
Check the source to verify that this is the current version before use.

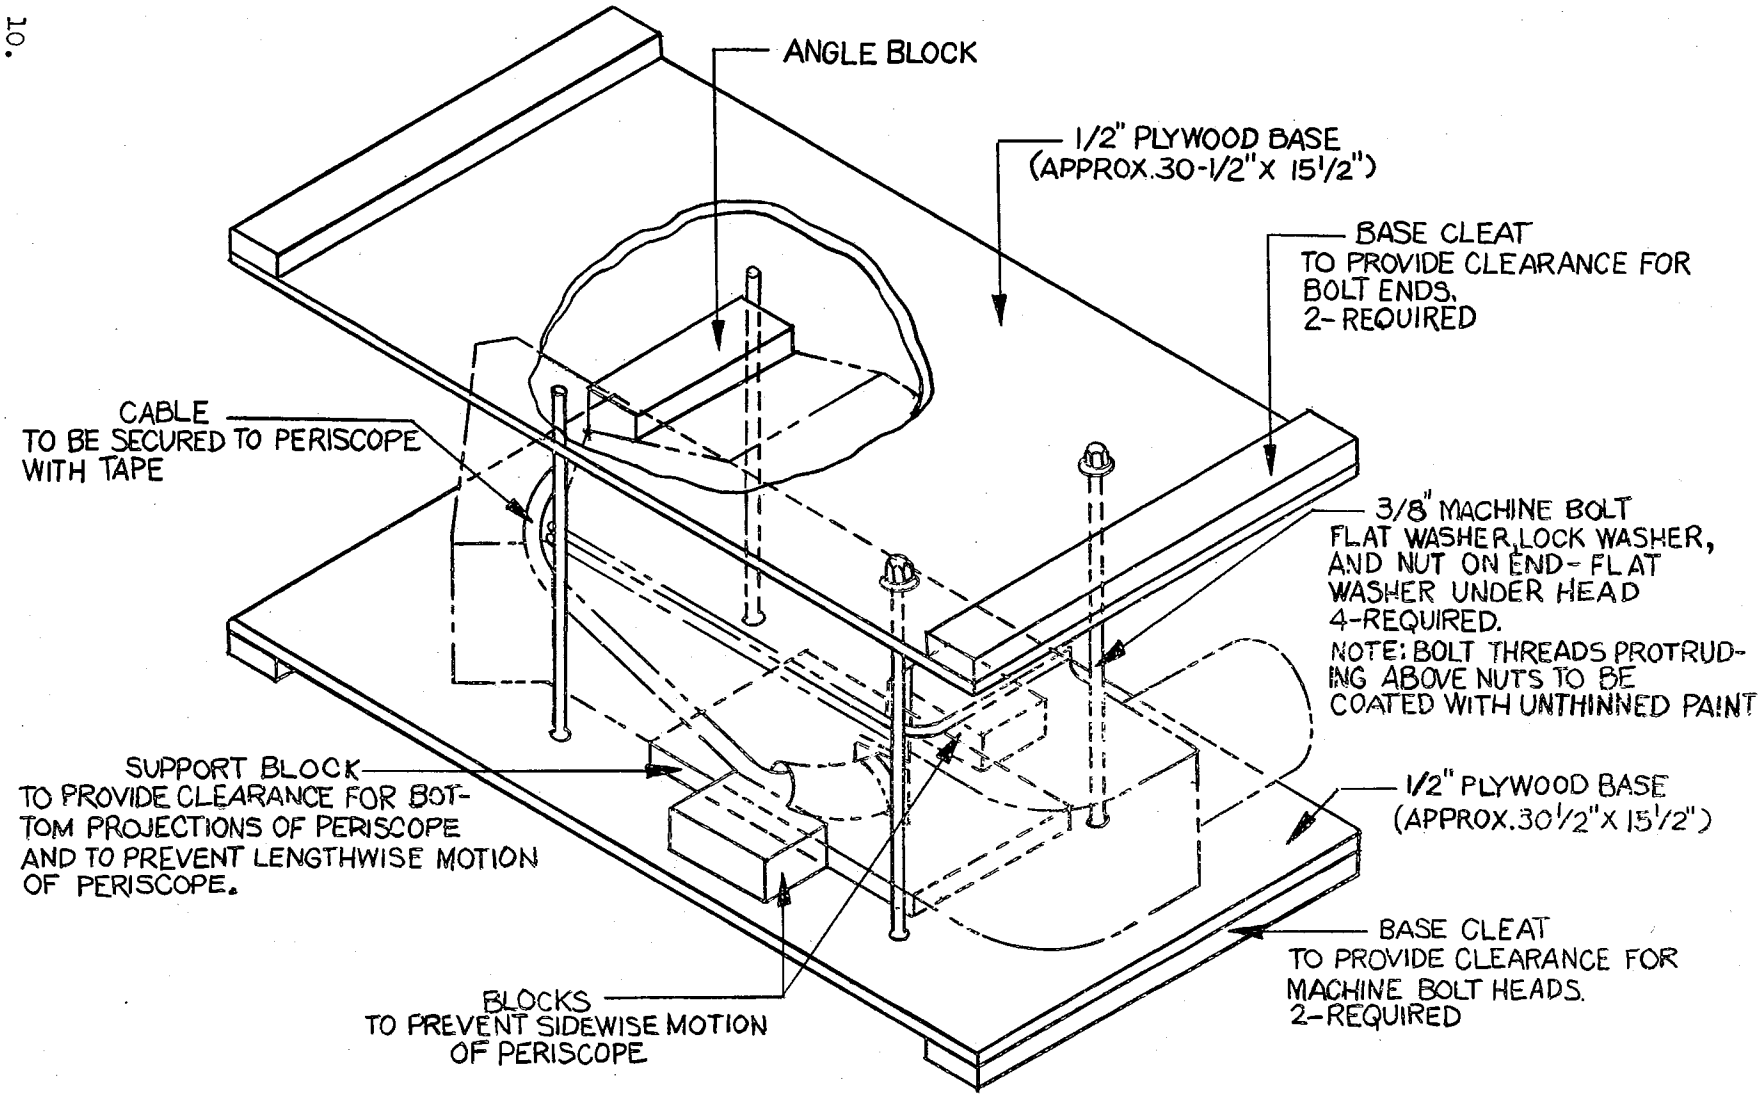


FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:55Z
Check the source to verify that this is the current version before use.