
MILITARY SPECIFICATION SHEET

CRYSTAL UNIT, QUARTZ, CR-135/U

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the crystal unit, quartz, described herein shall consist of this document and the latest issue of Military Specification MIL-C-3098.

Pertinent characteristics: 10 to 12 MHz; fundamental; controlled; antiresonance.

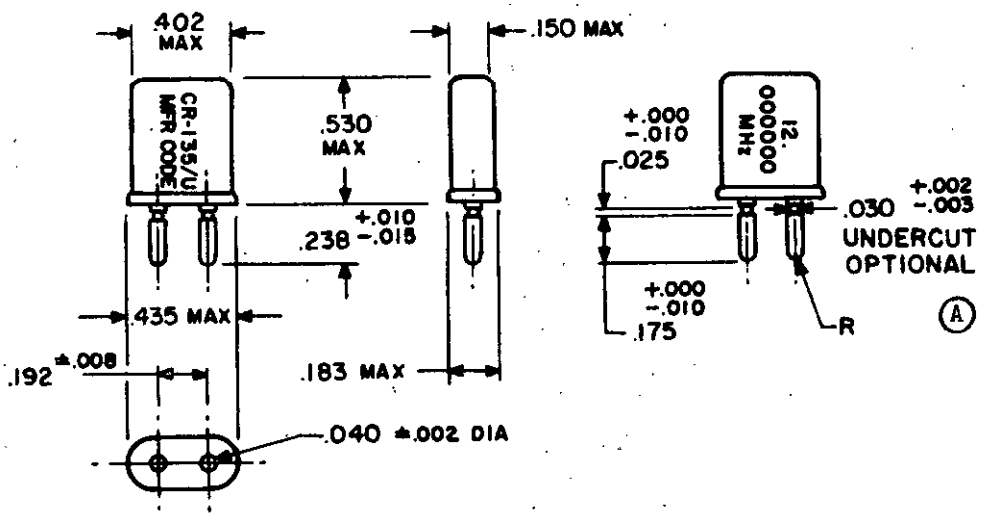

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.002	.05	.015	.38	.150	3.81	.238	6.05
.003	.08	.025	.64	.175	4.45	.402	10.21
.008	.20	.030	.76	.183	4.65	.435	11.05
.010	.25	.040	1.02	.192	4.88	.530	13.46

NOTES:
1. ALL DIMENSIONS ARE IN INCHES.
2. METRIC EQUIVALENTS ARE GIVEN FOR GENERAL INFORMATION ONLY. AND ARE BASED UPON 1 INCH = 25.4 mm TO THE NEAREST .01 mm.

(A) DENOTES CHANGE

FSC 5955

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:54Z
Check the source to verify that this is the current version before use.

TABLE I. Requirements

Requirement	Specified Value or Condition
Holder	HC-25/U (MIL-H-10056/11)
(A) Dimensions, marking and configuration	See Figure
Frequency range	10 to 12 MHz, inclusive
Capacitance, shunt	7.0 pf, maximum
Mode of oscillation	Fundamental
Government reference standard test set	TS-330/TSM
Rated drive level	2.5 ±0.5 mw
Calibration values	
Equivalent resistance	11 ohms
Crystal current	15 ma
Antiresonance, load capacitance	32.0 ±0.5 pf
Reference temperature	85° ±2°C
Operating temperature range	80°C to 90°C, inclusive
Frequency tolerance	±0.002 percent
Equivalent resistance	22 ohms, maximum
Frequency stability	±0.0001 percent
Operable temperature range	-55°C to +80°C, inclusive
Shock:	
Frequency change permitted	4 hertz, maximum
Equivalent resistance	±10 percent
Vibration: 1/	
Frequency change permitted	4 hertz, maximum
Equivalent resistance change permitted	±10 percent
Temperature cycling:	
Frequency	Within ±0.002 percent of normal frequency
Equivalent resistance	Shall not exceed 22 ohms, maximum
Aging:	
Frequency change permitted	0.0005 percent

1/ Method 204 of MIL-STD-202, Test condition A.

NOTE:

A. These crystal units were previously fabricated to the requirements specified in Electronic Communications, Inc., Drawing No. 13-00040.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:54Z
Check the source to verify that this is the current version before use.

Custodian:

Air Force - 84

Review activities:

Air Force - 11, 19, 85

User activities:

Air Force - 17

Preparing activity:

Air Force - 84

Project No. (5955-F171-13)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:54Z
Check the source to verify that this is the current version before use.