INCH-POUND
MIL-PRF-3098/114B
1 October 1997
SUPERSEDING
MIL-C-3098/114 A (USAF)
21 April 1975

PERFORMANCE SPECIFICATION SHEET

CRYSTAL UNIT, QUARTZ, CR135/U

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-PRF-3098.

Pertinent characteristics: 10 MHz to 12 MHz; fundamental; controlled; antiresonance.

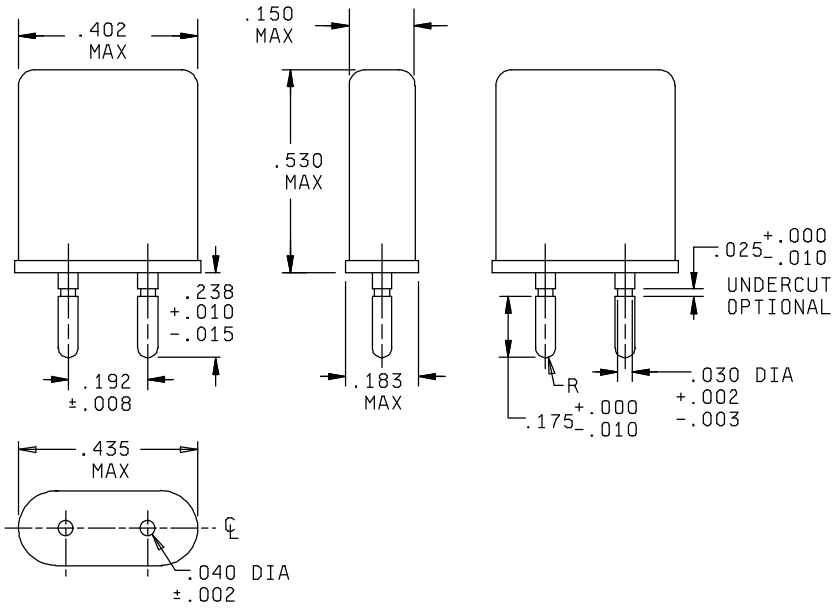

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.002	.05	.015	.38	.150	3.81	.238	6.05
.003	.08	.025	.64	.175	4.45	.402	10.21
.008	.20	.030	.76	.183	4.65	.435	11.05
.010	.25	.040	1.02	.192	4.88	.530	13.46

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for gen eral information only.
3. Marking to be in accordance with MIL-PRF-3098.

FIGURE 1. Crystal unit - CR135/U.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:54Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions, marking, and configuration: See figure 1.

Frequency range: 10 MHz to 12 MHz, inclusive.

Capacitance, shunt: 7.0 pF, maximum.

Mode of oscillation: Fundamental.

Rated drive level: 1.0 mW, maximum.

Calibration values:

Equivalent resistance: 11 ohms.

Crystal current: 15 mA.

Antiresonance, load capacitance: 32.0 pF ±0.5 pF.

Reference temperature: +85°C ±2°C .

Operating temperature range: +80°C to +90°C, inclusive.

Frequency tolerance: ±0.002 percent.

Equivalent resistance: 22 ohms, maximum.

Frequency stability: ±0.0001 percent.

Operable temperature range: -55°C to +80°C, inclusive.

Shock:

Frequency change permitted: 4 Hz, maximum.

Equivalent resistance: ±10 percent.

Vibration: Method 204, MIL-STD-202, test condition A.

Frequency change permitted: 4 Hz, maximum.

Equivalent resistance change permitted: ±10 percent.

Temperature cycling:

Frequency: Normal frequency ±0.002 percent.

Equivalent resistance: 22 ohms, maximum.

Aging:

Frequency change permitted: ±0.0005 percent.

Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:54Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - EC
Air Force -85

Review activities:
Air Force - 11, 17, 19, 99

Preparing activity:
DLA - CC

(Project 5955-0697-76)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:54Z
Check the source to verify that this is the current version before use.