INCH POUND

MIL-C-3098/1168
24 September 1992
SUPERSEDING
MIL-C-3098/116A
2 November 1983


MILITARY SPECIFICATION SHEET

CRYSTAL UNIT, QUARTZ, CR137/U

This specification is approved for use by all Department and Agencies of the Department of Defense.

The requirement for the acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-3098.

Pertinent characteristics: 8.5 to 19.0 MHz; fundamental; noncontrolled; antiresonance.

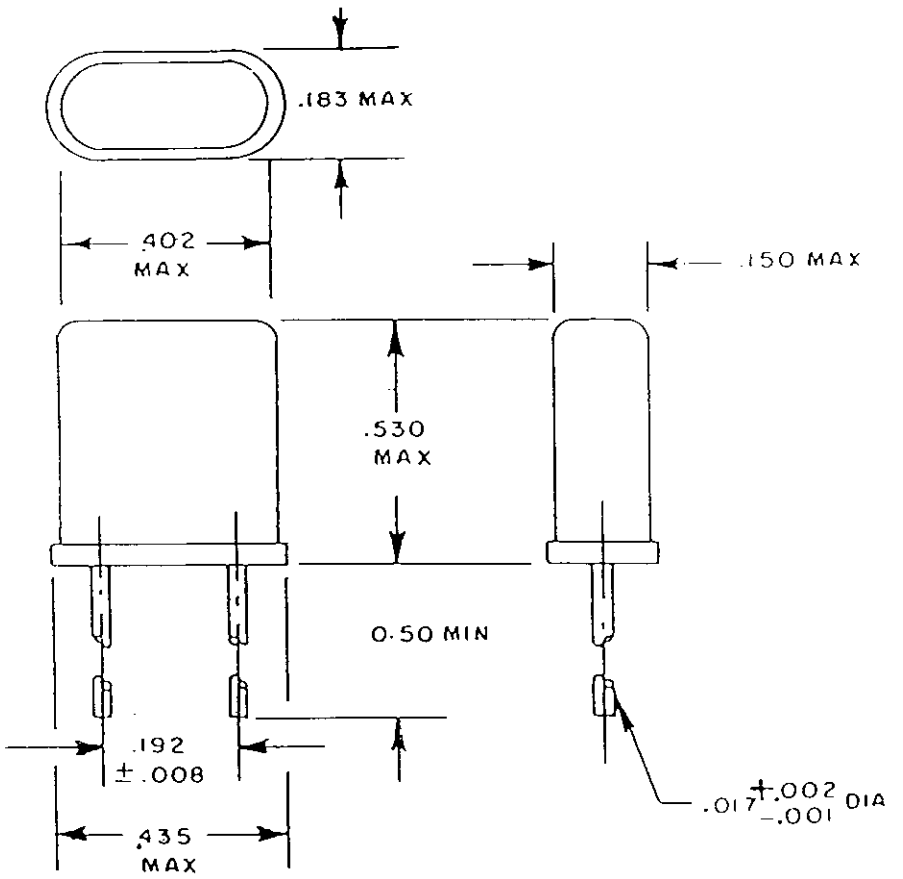

Inches	mm
.001	0.03
.002	0.05
.008	0.20
.017	0.43
.150	3.81
.183	4.65
.192	4.88
.402	10.21
.435	11.05
.50	12.7
.530	13.46

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Marking to be in accordance with MIL-C-3098.

FIGURE 1. Crystal unit - CR137/U.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:55Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Holder: HC-18/U or HC-43/U (MIL-H-10056/9).

Dimensions, marking, and configuration: See figure 1.

Frequency range: 8.5 to 19.0 MHz, inclusive.

Frequency tolerance:

Operating temperature range: ±25 ppm of the frequency measured at reference temperature.

Reference temperature: ±25 ppm.

Equivalent resistance:

Frequency range inclusive	Maximum resistance
8.5 to 9.99999 MHz	35 ohms
10.0 to 19.0 MHz	25 ohms

Mode of oscillation: Fundamental.

Reference temperature: 40°C ±2°C.

Operating temperature range: +20°C to +70°C, inclusive.

Drive level: 2.5 ±0.5 mW.

Capacitance, shunt: 7.0 pF, maximum.

Antiresonance load capacitance: 32.0 ±0.5 pF.

Shock:

Frequency change permitted: ±5 ppm.

Equivalent resistance change permitted: ±10 percent.

Vibration: Method 201 of MIL-STD-202.

Frequency change permitted: ±5 ppm.

Equivalent resistance change permitted: ±10 percent.

Thermal shock:

Frequency change permitted: ±5 ppm.

Equivalent resistance change permitted: ±10 percent.

Aging:

Frequency change permitted: ±5 ppm.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:55Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activity:
DLA - ES

User activities:
Air Force - 17, 19

Preparing activity:
Army - ER

Agent:
DLA - ES

(Project 5955-0672-01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:55Z
Check the source to verify that this is the current version before use.