INCH-POUND
MIL-DTL-10911/2B
20 November 2012
SUPERSEDING
MIL-L-10911/2A
20 October 1982

DETAIL SPECIFICATION SHEET

LOUDSPEAKERS, PERMANENT MAGNET, (UNENCASED, 6-INCH DIAMETER CONE)

Inactive for new design after March 30, 1999.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-10911.

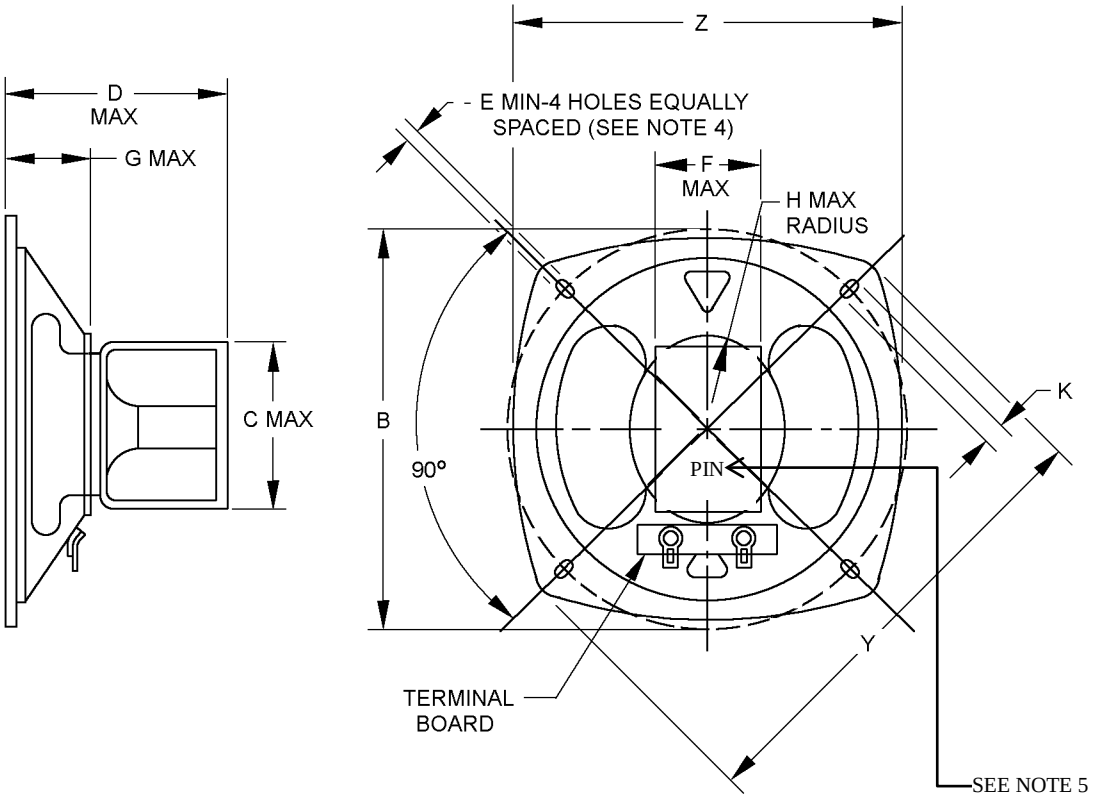

PINCUSHION

FIGURE 1. Loudspeaker.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:34Z
Check the source to verify that this is the current version before use.

PIN M10911/2	Dimensions									
	B 1/	C	D	E	F	G	H	K	Y	Z
-01 & -02	6.12	2.75	3.38	.200	1.75	1.31	1.50	.375 ±.003	6.94	6.25

1/ Dimension B = Mounting diameter.

Inches	mm
.003	.08
.200	5.08
.375	9.53
1.31	33.27
1.50	38.10
1.75	44.45
2.75	69.85
3.38	85.85
6.12	155.45
6.25	158.75
6.50	165.10
6.62	168.15
6.94	176.28

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are ± .005 (.13 mm) for three place decimals, ± .02 (.51 mm) for two place decimals, and ± 0° 30’ on angles.
4. Configuration, other than mounting dimensions, is optional.
5. All Part or Identifying Numbers (PIN) shall be as specified in MIL-DTL-10911.

FIGURE 1. Loudspeaker – Continued.

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figure 1.

Testing enclosure for measuring frequency response, harmonic distortion, and vibration: 14 x 14 x 7-inch test cabinet.

Power capacity: 5 watts, rms.

Peak power capacity: 8 watts, rms.

Maximum weight: 2 lbs.

Voice coil impedance:

Dash number 01: 4-8 ohms.

Dash number 02: 45 ohms.

NOTE: Impedance variations may be accomplished by either the use of voice coils wound to meet the specified impedance, or the installation of impedance matching transformers, providing other performance characteristics are not adversely affected.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:34Z
Check the source to verify that this is the current version before use.

Frequency response range: 150 to 7,000 Hz.

Frequency response: 106 dB minimum within 150 to 7,000 Hz.

Marking:

PIN: See figure 1.

The margins of this specification sheet are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based upon the entire content, regardless of the marginal notations and relationship to the last previous issue.

Referenced document. This document references MIL-DTL-10911.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy – EC
Air Force – 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5965-2012-033)

Review activity:
Air force – 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:34Z
Check the source to verify that this is the current version before use.