INCH-POUND
MIL-DTL-10911/3C
20 November 2012
SUPERSEDING
MIL-L-10911/3B
20 October 1982


DETAIL SPECIFICATION SHEET

LOUDSPEAKER, PERMANENT MAGNET, (UNENCASED, 8-INCH DIAMETER CONE)

Inactive for new design after March 30, 1999.

This specification is approved for use by all Departments and Agencies of the Department of Defense.


The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-10911.

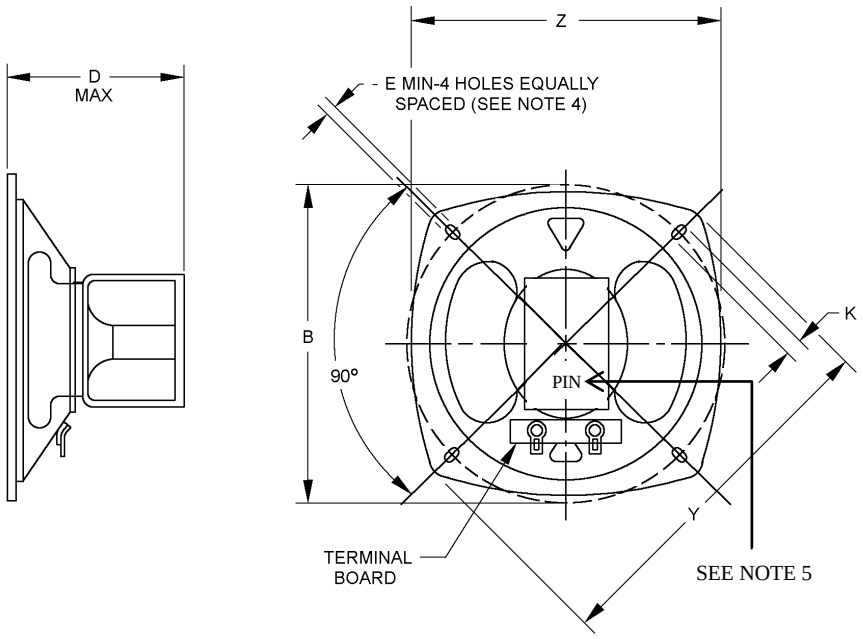

PINCUSHION

FIGURE 1. Loudspeakers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:34Z
Check the source to verify that this is the current version before use.

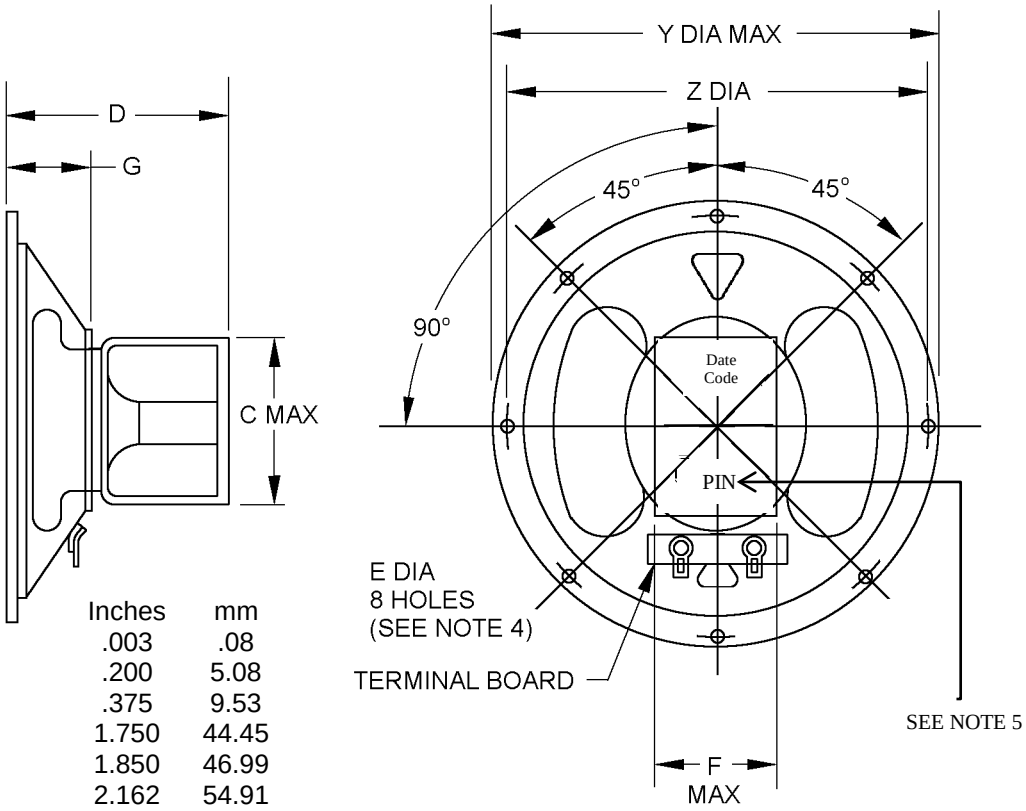

Inches	mm
.003	.08
.200	5.08
.375	9.53
1.750	44.45
1.850	46.99
2.162	54.91
5.00	127.0
7.625	193.68
7.66	194.56
7.69	195.33
8.25	209.55
8.44	214.38

ROUND

FIG	PIN M 10911/3	Dimensions									Maximum weight
		Y	B 1/	C(max)	Z 2/	D(max)	E(min)	F	G(max)	K	
1A	-02 & -03	8.44	7.625		7.69	5.00	.200			.375 ± .003	3 1/2 lb
1B	-01 & -04	8.25		2.162	7.66	5.00	.200	1.850	1.750		1 1/2 lb

1/ Dimension B = Mounting diameter for Pincushion type only.
2/ Dimension Z = Mounting diameter for Round type only.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are ± .005 (.13 mm) for three place decimals, ± .02 (.51 mm) for two place decimals, and ± 0° 30’ on angles..
4. Configuration, other than mounting dimensions, is optional. Radial mounting slots may be substituted for the circular holes provided that the centerlines of the slots coincide with the centerline of the holes and the slots include the circular holes specified.
5. All Part or Identifying Numbers (PIN) shall be as specified in MIL-DTL-10911.

FIGURE 1. Loudspeakers – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:34Z
Check the source to verify that this is the current version before use.

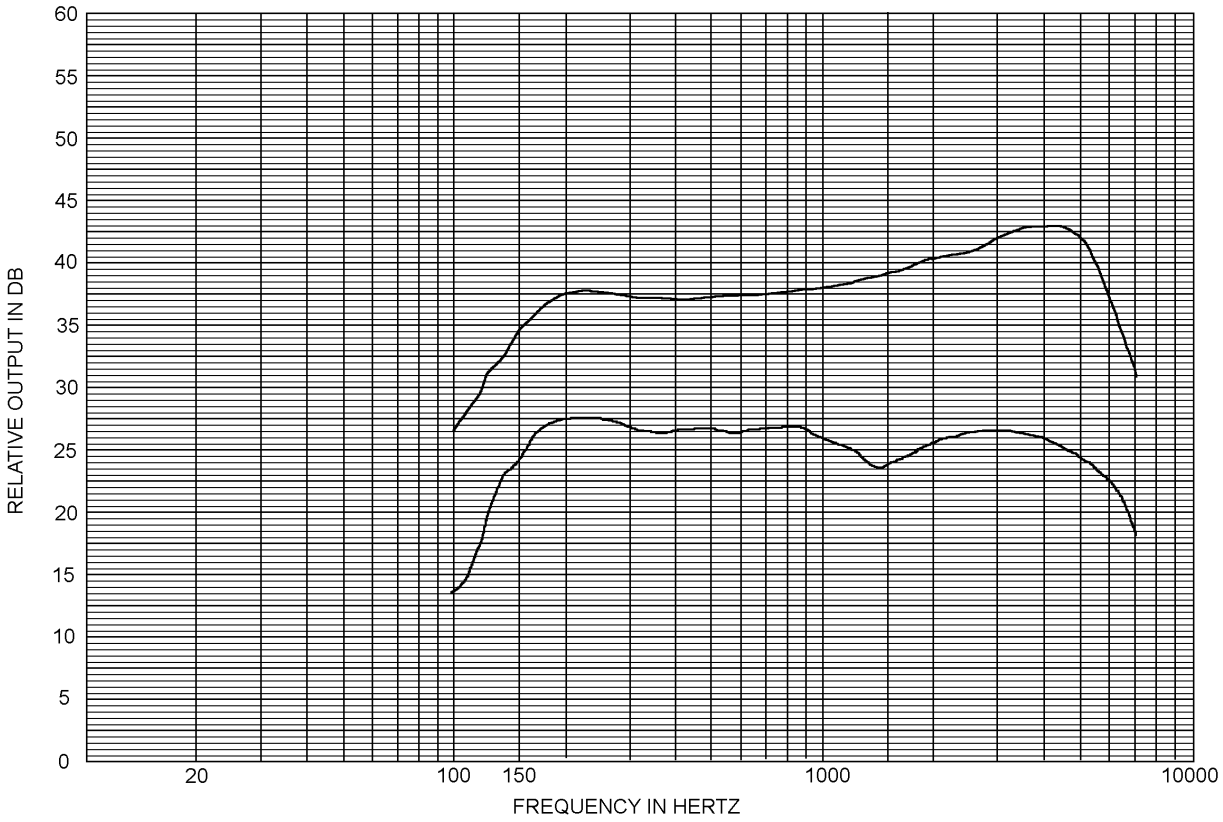


FIGURE 2. Frequency response limits, M10911/3-02.

REQUIREMENTS:

Design and construction:

Dimensions and configuration:

Dash number 01 and 04: See figure 1 (Pincushion).

Dash number 02 and 03: See figure 1 (Round).

Testing enclosure for measuring frequency response, harmonic distortion, vibration, and shock (common to all part numbers): 14 x 14 x 7-inch test cabinet.

Power capacity:

Dash number 01 and 04: 8 watts, rms.

Dash number 02 and 03: 5 watts, rms.

Peak power capacity:

Dash number 01 and 04: 11.3 watts.

Dash number 02 and 03: 10 watts, rms.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:34Z
Check the source to verify that this is the current version before use.

Voice coil impedance:

Dash number 01 and 02: 4-8 ohms.

Dash number 03: 45 ohms (8 ohms nominal).

Dash number 04: 45 ohms nominal.

Voice coil size (dash number 01): .750 inch.

Frequency response range (common to all part numbers): 150 to 7,000 Hz.

Frequency response:

Dash number 01: 90 dB minimum at 1 kHz.

Dash number 02:

105 dB minimum within 150 to 1,000 Hz.
107 dB minimum within 1,000 to 7,000 Hz.

Dash number 03 and 04: 95 dB minimum at 1 kHz.

Magnet type (dash number 01): Alnico V, or equal.

Magnet weight (dash number 01): 3.2 ounces.

Solderability (dash number 01): Applicable.

Marking:

Part number: See figure 1.

Date code (dash number 01): Applicable.

Interchangeability: PIN M10911/3-02 is completely interchangeable with the LS-180/U.

Revision letters are not used to denote changes due to the extensiveness of the changes.

NOTE: Impedance variations may be accomplished by either the use of voice coils wound to meet the specified impedance, or the installation of impedance matching transformers providing other performance characteristics are not adversely affected.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:34Z
Check the source to verify that this is the current version before use.

The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based upon the entire content, regardless of the marginal notations and relationship to the last previous issue.

Referenced document. This document references MIL-DTL-10911.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy – EC
Air Force – 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5965-2012-034)

Review activity:
Air Force – 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:34Z
Check the source to verify that this is the current version before use.