MIL-S-10858H
7 January 1983
SUPERSEDING
MIL-S-10858G
9 December 1976

MILITARY SPECIFICATION

SHIRT, COLD WEATHER, FIELD, WOOL/NYLON, OLIVE GREEN 108

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This document covers the requirements for a wool/nylon, cold weather field shirt.

1.2 Classification. The shirt shall be of one type in the following sizes as specified (see 6.2).

Schedule of sizes

Extra small	Large
Small	Extra large
Medium	

2. APPLICABLE DOCUMENTS

2.1 Government documents. Unless otherwise specified, the following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this document to the extent specified herein.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Natick Research and Development Laboratories, Natick, MA 01760 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8415

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:29Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

V-B-871	-	Button, Sewing Hole, and Button, Staple, (Plastic)
V-T-280	-	Thread, Gimp, Cotton, Buttonhole
UU-P-268	-	Paper, Kraft, Wrapping
DDD-L-20	-	Label: for Clothing, Equipage and Tentage (General Use)
PPP-B-636	-	Boxes, Shipping, Fiberboard

MILITARY

MIL-C-508	-	Cloth, Oxford, Nylon, 3 Ounce
MIL-C-11065	-	Cloth, Flannel, Wool and Nylon, 16-Ounce, Shrink Resistant
MIL-T-43548	-	Thread, Polyester, Cotton-Covered and Rayon-Covered
MIL-T-43566	-	Tape, Textile, Cotton, General Purpose, Natural or in Colors

STANDARDS

FEDERAL

FED-STD-751	-	Stitches, Seams, and Stitching

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage
MIL-STD-1492	-	Provisions for Evaluating Quality of Men's Shirts
MIL-STD-1188	-	Commercial Packaging of Supplies and Equipment

(Copies of documents required by manufacturers in connection with acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

* 2.2 Other publications. Unless otherwise specified, the following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this document to the extent specified herein.

TEXTILE COLOR CARD ASSOCIATION

Standard Color Card of America

(Application for copies should be addressed to the Textile Color Card Association of the United States, Inc., 24 East 38th Street, New York, NY 10016.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:29Z
Check the source to verify that this is the current version before use.

AMERICAN IRON AND STEEL INSTITUTE (AISI)

Type number 304 - Stainless and Heat Resistant Steel
Type number 316 - Stainless and Heat Resistant Steel

(Application for copies of Steel Product Manual should be addressed to the American Iron and Steel Institute, 150 East 42nd Street, New York, NY 10017.)

(Technical society and technical association documents are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

* 2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document shall take precedence.

3. REQUIREMENTS

3.1 Guide sample. Guide samples, when furnished, are solely for the guidance and information to the contractor (see 6.3). Variation from this document may appear in the sample, in which case the document shall govern.

3.2 Materials (see 6.4).

3.2.1 Basic material. The basic material shall be wool and nylon cloth, Olive Green 108, 16-ounce, shrink resistant, conforming to MIL-C-11065.

* 3.2.1.1 Collar lining and pencil pocket material. The material for lining the collar and pencil pocket shall be nylon oxford cloth, Olive Green 106, conforming to type I, class 2 of MIL-C-508.

3.2.2 Labels. Each shirt shall have an identification label, a size label (or combination size and identification label) and an instruction label conforming to DDD-L-20. The colorfastness requirements to laundering shall apply.

* 3.2.2.1 Identification label. The identification label shall conform to type VI, class 1.

* 3.2.2.2 Size label. The size label shall conform to type VI, class 2, and contain the following information for each respective size. Descriptive information shall be printed in letters not less than a minimum of 10 points.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:29Z
Check the source to verify that this is the current version before use.

X-Small
Chest: Up to 33 inches
Stock No:
NATO Size: 7484

Small
Chest: From 33 to 37 inches
Stock No:
NATO Size: 8494

Medium
Chest: From 37 to 41 inches
Stock No:
NATO Size: 9404

Large
Chest: From 41 to 45 inches
Stock No:
NATO Size: 0414

X-Large
Chest: From 45 inches and up
Stock No:
NATO Size: 1424

* 3.2.2.3 Instruction label. The instruction label shall conform to type VI, class 3 and shall contain the following information:

SHIRT, COLD WEATHER, FIELD, WOOL/NYLON,

OLIVE GREEN 108

1. Shirt may be worn either inside or outside of trousers.

2. This shirt can be laundered or dry cleaned.

DO NOT REMOVE THIS LABEL

* 3.2.2.4 Combination size and identification label. The size and identification labels may be combined into one label and shall conform to type VI, classes 1 and 2 combined.

3.2.2.5 Combination size, identification, and instruction label. The size, identification, and instruction labels may be combined into one label conforming to class 14.

3.2.3 Thread. The thread shall be cotton-covered and rayon-covered polyester thread dyed Olive Drab S-1, C.A. 66022 and shall conform to MIL-T-43548, ticket numbers 50-2 or 3 ply and 70-2 for seaming and stitching, 70-2 for overedging, and 30-2 or 3 ply for machine sewn buttons.

3.2.3.1 Colorfastness. The dyed thread shall show colorfastness to laundering, wet drycleaning, perspiration and light equal to or better than the standard sample. When no standard sample is available, the dyed thread shall show "good" fastness to laundering, wet drycleaning and light.

3.2.4 Gimp. The gimp for reinforcing buttonholes shall be dyed Olive Drab S-1, C.A. 66022 and conform to type I or II, size No. 8 of V-T-280.

3.2.4.1 Colorfastness. The dyed gimp shall show fastness to laundering and wet drycleaning equal to or better than the standard sample. When no standard sample available, the dyed gimp shall show "good" fastness to laundering and wet dry-cleaning.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:29Z
Check the source to verify that this is the current version before use.

3.2.5 Buttons. The buttons for the shirt shall be shade Olive Green BP cable 62016, dull finish, and shall conform to type II, class D, style 26, size 30 line of V-B-871.

3.2.6 Tape. The cotton tape for reinforcing the name tags shall be type I, class 3, 1-1/2 inches in width, dyed Olive Drab 7, conforming to MIL-T-43566.

3.3 Design. The shirt has grown-on facings, two chest patch pockets with flaps, a double-ply collar, and one button and buttonhole on each sleeve cuff (see figure 1).

* 3.4 Patterns. Standard patterns, which provide an allowance of 1/2-inch for the shoulder, armhole, side seam, back arm and breast pocket seams, and 3/8-inch for all other seams, except for the top and undercollars which provide a 1/4-inch seam allowance, will be furnished by the Government to the contractor for cutting working patterns. The working patterns shall be duplicates of the Government patterns, which shall not be altered in any way.

3.4.1 Pattern parts. The components of the shirt shall be cut from the materials below in accordance with pattern parts indicated.

List of pattern parts

Material	Pattern nomenclature	Cut parts
Wool and nylon cloth	Front	2
	Back	1
	Breast patch pocket	2
	Breast pocket flap 1/	2
	Collar	2
	Cuff	4
	Top sleeve	2
	Under sleeve	2
	Shaper	
	Breast patch pocket	
Nylon cloth	Collar lining	1
	Pencil pocket	1

1/ NOTE: Flaps may be cut in 4 parts, see (operation 7E).

3.5 Construction. The construction shall conform in all respects to the requirements specified in table I and herein. Figure 1 is furnished solely for guidance and information. Should variation from the document appear in figure 1, the document shall govern.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:29Z
Check the source to verify that this is the current version before use.

3.5.1 Stitches, seams and stitching. All stitches, seams and stitching shall conform to FED-STD-751. The type of seam, stitching and stitches per inch shall be as specified in table I. Seam allowances shall be maintained with seams sewn so that no raw edges, run-offs, pleats, puckers or open seams occur. When two or more methods of seams or stitches are given for the same operation, any one may be used. Where stitch type 401 is used, the chain or underside of the stitch shall be on the inside of the shirt.

3.5.1.1 Type 301 stitching. Ends of all stitching shall be backstitched or overstitched not less than 1/4 inch except where ends are turned under or caught in other seams or stitching. Ends of a continuous line of stitching shall overlap not less than 1/2 inch. Thread tensions shall be maintained so that there will be no loose stitching resulting in loose bobbin or top thread or excessively tight stitching resulting in puckering of the materials sewn. The lock shall be imbedded in the materials sewn.

3.5.1.1.1 Repairs of type 301 stitching.

a. When thread breaks, skipped stitches, run-offs, or bobbin runouts occur during sewing, except prestitching, the stitching shall be repaired by restarting the stitching a minimum of 1/2 inch in back of the end of the stitching. 1/

b. Except for prestitching, thread breaks, or two or more consecutive skipped or run-off stitches noted during inspection of the item shall be repaired by overstitching. The stitching shall start a minimum of 1/2 inch in back of the defective area, continue over the defective area, and continue a minimum of 1/2 in beyond the defective area onto the existing stitching. Loose or excessively tight stitching shall be repaired by removing the defective stitching without damaging the materials, and restitching in the required manner. 1/

1/ When making the above repairs, the ends of the stitching are not required to be backstitched.

3.5.1.2 Type 401, 502, 503, 515, 516 and 519 stitching. Thread tension shall be maintained so that there will be no loose or excessively tight stitching. All repairs shall be in accordance with 3.5.1.1.1a and b. Repairs to stitch type 401 may be accomplished by use of stitch type 301.

3.5.2 Repairs. Repairs such as mends, darns, patches or splices are not permitted on the shirts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:29Z
Check the source to verify that this is the current version before use.

3.5.3 Automatic stitching. Automatic machines may be used to perform any of the stitch patterns provided the requirements for the stitch pattern, stitches per inch, and size and type of thread are met; and at least three tying, overlapping or back-stitches are used to secure the ends of the stitching.

3.5.4 Thread ends. All thread ends shall be trimmed to 1/4 inch maximum length.

3.6 Manufacturing operations requirements. The shirts shall be manufactured in accordance with operations requirements specified in table I. The contractor is not required to follow the exact sequence of operations listed. Any additional basting or holding stitching to facilitate manufacture is permissible provided the thread is removed or does not show on the finished shirt.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:29Z
Check the source to verify that this is the current version before use.

TABLE I

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cutting.						
	a. Cut the shirt in strict accordance with patterns, which show size, shape, placement of pockets and flaps, warp directional lines, and notches for the proper assembling of all parts.						
	b. Cut all component parts out of one piece of material except flap linings, when two-piece construction is used. Cuff linings and undercollar may be cut from ends. The cut parts from the top and bottom plies of the lay shall match the pattern part.						
	c. Fronts may be cut on the selvage. Cut top collar and sleeves in either the warp or filling direction of the cloth.						
*	d. Cut reinforcement tape for name tag to finish 5-1/2 ± 1/8 inches in length (see operation 11f).						
	e. Cut collar lining piece from nylon oxford cloth.						
*2.	Replacement of defective components.						
	During the spreading, cutting and manufacturing process, components having material defects or damages that are classified as defects in 4.2.2 shall be removed from production and replaced with non-defective and properly matched components.						

NATICK Form 903
1 Dec 7[illegible] EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-1T14:29Z
Check the source to verify that this is the current version before use.

NO.	TABLE I. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
3.	Component marking. Mark, ticket or bundle all parts, to insure a uniform shade, size and proper assembly throughout the shirt. Any method of marking may be used except: a. Corrosive metal fastening devices. b. Sew-on tickets. c. Adhesive tickets which leave any impression or traces of paper or adhesive on the material after removal of the ticket.						
4.	Labeling. Position labels as follows and seam on all four sides not more than 3/16 inch from edges. (1) The size label at the center back (1 inch tolerance) on the inside of shirt, 1/2 to 1 inch below the collar seam. (2) The identification and instruction labels on inside of shirt centered (1/2 inch tolerance) on the right breast patch pocket marking. The label stitching shall be concealed under the patch pocket. (3) The top edge of the instruction label shall be caught in the bottom stitching of the identification label.	301	LSbj-1	10-14	50	50	

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:20Z
Check the source to verify that this is the current version before use.

NO.	TABLE I. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
4.	Labeling. (cont'd)						
*	NOTE: When a combination size and identification label is used, it shall be positioned as in (1) above and the instruction label shall be positioned as in (2) above. When a combination size, identification, and instruction label is used position the top of the label as specified in (1) above.						
5.	Make cuffs. Finished appearance. The cuffs shall be finished with rounded corners and the buttonholes correctly positioned, clean cut, and with stitching securely caught in the fabric.						
	a. Seam the plies of the cuff. Turn, force out edges and single stitch 3/16 to 1/4 inch from edge. The edge stitching shall finish 1/2 ± 1/8 inch from top edge of finished cuff. The edge stitching may taper to edge of cuff at ends of stitching and need not be backstitched.	301 or 401 and 301	SSe-2(a) SSe-2(a) SSa-2(b)	10-14 10-14 10-14	50 50 50	50 70 50	
	b. Make a horizontal buttonhole in the center of each cuff (1/4 inch tolerance off center permitted) with the inside cut edge of eyelet 3/8 to 1/2 inch from front edge of cuff.	Buttonhole	-	52-56 per buttonhole including tack	50	50	

Source: https://assist.dla.mil - Downloaded: 2026-10-17T14:29Z
Check the source to verify that this is the current version before use.

NO.	TABLE I. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
*6.	Make collar.						
	Finished appearance. The collar and lining shall finish smooth, flat, and uniform in shape and the collar points shall be equal lengths.						
	a. (1) Turn under raw edges of collar lining 1/4 to 3/8 inch, except for bottom raw edge, center lining on collar, with bottom raw edges matching, and single stitch 1/16 to 1/8 inch from turned edge. The lining shall finish 2 ± 1/8 inches wide at center back of collar and taper to nothing at ends.	301	LSd-1	10-14	50	50	
	a. (2) Seam collar edges together along outside edges.	301 or 401	SSe-2(a)	10-14	50	50	
	b. Trim corners, turn, work out edges and points, and edge stitch 1/8 to 3/16 inch from turned edges.	301	SSe-2(b)	10-14	50	50	
	c. Overedge the collar lining and the two plies of the collar together along the bottom edge.	502 or 503	EFd-1 EFd-1	6-10 6-10	70 70	70 70	
7.	Make pocket flaps.						
	a. Fold the flap in half; turn sides, mitered corners and bottom edge to the inside; and single stitch 1/16 to 1/8 inch from turned edges.	301	SSc-1	10-14	50	50	
	b. The edges of flaps may be turned on a creasing machine to insure uniform shape.						
	- or -						

Source: https://assistdocs.mil -- Downloaded: 2020-10-17T14:29Z
Check the source to verify that this is the current version before use.

NO.	TABLE I. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
7.	Make pocket flaps. (cont'd)						
	c. Fold the flap in half. Stitch sides, mitered corners and bottom, leaving center of bottom edge open for turning.	301 or 401	SSe-2(a) SSe-2(a)	10-14 10-14	50 50	50 70	
	d. Trim corners, turn flap through opening, work out corners and stitch edge 3/16 to 1/4 inch from edge.	301	SSe-2(b) and SSc-1	10-14 10-14	50 50	50 50	
	- or -						
	e. Make flaps from two pieces of the shirt material; but when so made, a sufficient seam shall be allowed for setting flap. The contractor shall cut his own pattern to conform to the size and shape of the finished one piece flap.						
	f. Seam the flap pieces along the sides, mitered corners, and bottom edges. Trim corners, turn flap and single stitch 3/16 to 1/4 inch from edge.	301 or 401 and 301	SSe-2(a) SSe-2(a) SSe-2(b)	10-14 10-14 10-14	50 50 50	50 70 50	
	g. Make a vertical buttonhole in the center of each flap (1/4 inch tolerance off center permitted) with the inside edge of eyelet 3/8 to 1/2 inch from bottom edge of flap.	Buttonhole	-	52-56 per buttonhole including tack	50	50	
8.	Make sleeves.						
	Finished appearance. The sleeve openings shall be uniformly finished with the bartack correctly positioned. The top sleeve shall lap the under-sleeve.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:29Z
Check the source to verify that this is the current version before use.

NO.	TABLE I. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
8.	Make sleeves. (cont'd)						
	a. Hem the edges of sleeve openings from notch to bottom of sleeve, as indicated on patterns, with the raw edges turned in and single stitched. Hem shall measure 1/4 to 5/16 inch in width.	301	EFb-1	10-14	50	50	
	- or -						
	b. Form the hem by overedge stitching the raw edges; turn and single stitch adjacent to the overedging. Hem shall measure 3/8 to 1/2 inch in width.	502 or 503 and 301	EFd-1 EFd-1 EFa-1	6-10 6-10 10-14	70 70 50	70 70 50	
	c. Join back arm seam of sleeves with a double-lapped and double-stitched seam.	301 or 401	LSc-2 LSc-2	10-14 10-14	50 50	50 70	
	- or -						
	d. Stitch and overedge stitch back arm seams in one operation. The bite of overedge stitching shall be 3/16 to 1/4 inch gage.	515 or	LSbm-3(a)	10-14	50 chain stitching 70 overedge stitching	70 70	
		516 or 519	LSbm-3(a) LSbm-3(a)	10-14	50 chain stitching 70 overedge stitching	70 70	
	e. Turn seam allowance and raise stitch 1/4 to 5/16 inch from seam.	301 or 401	LSbm-3(b) LSbm-3(b)	10-14 10-14	50 50	50 70	

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:29Z
Check the source to verify that this is the current version before use.

TABLE I. (cont'd)
MANUFACTURING OPERATIONS REQUIREMENTS

NO.		STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
8.	Make sleeves. (cont'd)						
	- or -						
	f. Overedge stitch the raw edge of the undersleeves.	502 or 503	EFd-1 EFd-1	6-10 6-10	70 70	70 70	
	g. Join the back arm seam of sleeves with the top raw edge turned in and double stitch.	301 or 401	LSb-2 LSb-2	10-14 10-14	50 50	50 70	
9.	Make fronts.						
	Finished appearance. The front edges shall be evenly formed.						
	a. Overedge stitch front edges if not selvage.	502 or 503	EFd-1 EFd-1	6-10 6-10	70 70	70 70	
10.	Make and set pencil pocket.						
	Finished appearance. The top edge of the pencil pocket shall be in line with or not more than 1/8 inch below top edge of front breast pocket.						
	a. Turn down top edge of pencil pocket as indicated by marks on pattern and stitch 1/8 to 3/16 inch from raw edge.	301	EEa	10-14	50	50	
	b. Turn in the side and bottom edges of the pencil pocket as indicated on patterns. Position the pencil pocket to the left front of shirt 1/4 to 5/8 inch in from pocket marker and single needle stitch down sides and across bottom 1/16 to 1/8 inch from edge. The turned raw edge shall finish to the inside of the pencil pocket.	301	LSd-1	10-14	50	50	

Source: https://assist.dla.mil - Downloaded: 2026-10-17T14:29Z
Check the source to verify that this is the current version before use.

NO.	TABLE I. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
11.	Make and set breast pockets and flaps.						
	Finished appearance. The pockets shall be in alignment and uniform in width and depth. There shall be no raw edges or pleats. The flaps shall be uniform in placement, shape and size.						
	a. Overedge top raw edge of pockets. Fold top as indicated by marks on patterns, and press, forming hem.	502 or 503	EFd-1	6-10	70	70	
	b. The edges of the pockets may be creased in an edge-creasing machine to insure uniformity of shape.						
	c. Position pockets on shirt front, at marks indicated on patterns, and single stitch 3/16 to 1/4 inch from turned edges. The ends of stitching shall be continued across top edge and down sides to line of stitching forming the pocket hem with the stitching 1/16 to 1/8 inch from edges.	301	LSd-1	10-14	50	50	
*	d. Position the flaps on fronts of shirt, 5/8 to 3/4 inch above tops of pockets and single stitch 1/8 to 3/16 inch from folded edge leaving the seam open on the left flap for a distance of 1 to 1-1/4 inches beginning 1/2 to 3/4 inch back from front edge of flap to form pencil pocket opening. Ends of all stitching shall be securely backstitched.	301	LSbj-1	10-14	50	50	
	- or -						

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:29Z
Check the source to verify that this is the current version before use.

TABLE I. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD NEEDLE	THREAD BOBBIN/ LOOPER	THREAD COVER
11.	Make and set breast pockets and flaps. (cont'd)						
*	e. If two piece flaps are used, position raw edge of flaps, 3/4 to 7/8 inch above tops of pockets and stitch to shirt with a 1/8 to 3/16 inch seam, leaving the seam open on the left flap for a distance of 1 to 1-1/4 inches beginning 1/2 to 3/4 inch back from right front side edge of flap to form the pencil pocket opening. Turn flap down and raise stitch 1/4 to 5/16 inch from edge leaving the pencil pocket opening for a distance of 1 to 1-1/4 inches. The raw edge of flap shall not be exposed on the underside.	301	LSb1-2	10-14	50	50	
	f. Center (1/4 inch tolerance) the reinforcement tape for name tag above and parallel to right breast pocket flap 1/16 to 1/8 inch from edge of flap; turn in raw ends of tape and stitch to front 1/16 to 1/8 inch from four edges.	301	LSbj-1 and EFa-1	10-14	50	50	
12.	Join fronts to back at shoulders.						
	a. Join the fronts to back with a double-lapped double-stitched seam with the back over the fronts.	301 or 401	LSc-2 LSc-2	10-14 10-14	50 50	50 70	
	- or -						
	b. Stitch and overedge stitch shoulder seams in one operation. The bight of overedge stitching shall be 3/16 to 1/4 inch gage.	515 or 516 or 519	LSbm-3(a)	10-14	50 chain stitching 70 overedge stitching	70 70	

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:29Z
Check the source to verify that this is the current version before use.

TABLE I. (cont'd)
MANUFACTURING OPERATIONS REQUIREMENTS

NO.		STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
12.	Join fronts to back at shoulders. (cont'd)						
	c. Turn seam allowance and raise stitch 1/4 to 5/16 inch from seam. The back shall lap fronts.	301 or	LSbm-3(b)	10-14	50	50	
		401	LSbm-3(b)	10-14	50	70	
	- or -						
	d. Overedge stitch the raw edge of shoulder seam of fronts.	502 or	EFd-1	6-10	70	70	
		503	EFd-1	6-10	70	70	
	e. Join the shoulder seams with the top raw edge of back turned in and double-stitch. The back shall overlap fronts.	301 or	LSb-2	10-14	50	50	
		401	LSb-2	10-14	50	70	
13.	Join collar to shirt and finish facing.						
	Finished appearance. The collar shall be joined to shirt with slight fullness to prevent collar curling. The collar points and top of lapel steps shall be of equal length.						
	a. Position bottom edge of collar to neck of shirt on the outside, with notches matching, and stitch 1/4 to 3/8 inch from edge.	301 or	LSak-2(a)	10-14	50	50	
		401	LSak-2(a)	10-14	50	70	
	b. Stitch seam allowance of collar to shirt 3/16 to 1/4 inch from collar joining seam.	301	LSak-2(b)	10-14	50	50	
	c. Turn facings to outside of shirt. Stitch across top of facing 1/4 to 3/8 inch from edge, catching collar in seam.	301 or	SSe-2(a)	10-14	50	50	
		401	SSe-2(a)	10-14	50	70	

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:29Z
Check the source to verify that this is the current version before use.

NO.	TABLE I. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
13.	Join collar to shirt and finish facing. (cont'd)						
	d. Trim, turn facing to inside shirt, force out points and edge stitch 1/16 to 1/8 inch from edge. Continue stitching along back edge of facing through front 1/16 to 1/8 inch from edge to bottom of shirt.	301 and 301	SSe-2(b) EFa-1	10-14 10-14	50 50	50 50	
	- or -						
	e. Position bottom edge of collar to neck of shirt on the outside with notches matching. Turn facing to outside shirt and stitch, 1/4 to 3/8 inch from edge across tops of facings, securely catching the collar in seaming; continue the stitching across the bottom edge of collar through neck of shirt.	301 or 401	LSak-2(a) LSak-2(a)	10-14 10-14	50 50	50 70	
	f. Repeat operations 13b and d.						
14.	Join sleeves to shirt.						
	Finished appearance. The sleeves shall be set in the armholes with fullness equally distributed and without puckers or pleats. The fronts and backs shall lap the sleeves.						
	a. Join sleeves to the armholes of shirt with double-lapped, double-stitched seams.	301 or 401	LSc-2 LSc-2	10-14 10-14	50 50	50 70	
	- or -						

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:29Z
Check the source to verify that this is the current version before use.

TABLE I. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
14.	Join sleeves to shirt. (cont'd)						
	b. Stitch and overedge stitch sleeves or armholes in one operation. The bight of overedge stitching shall be 3/16 to 1/4 inch gage.	515 or	LSbm-3(a)	10-14	50 chain stitching	70	
					70 overedge stitching	70	
		516 or	LSbm-3(a)	10-14	50 chain stitching	70	
		519	LSbm-3(a)	10-14	70 overedge stitching	70	
	c. Turn seam allowance and raise stitch 1/4 to 5/16 inch from seam.	301 or	LSbm-3(b)	10-14	50	50	
		401	LSbm-3(b)	10-14	50	70	
	- or -						
	d. Overedge stith the top edge of the sleeves.	502 or	EFd-1	6-10	70	70	
		503	EFd-1	6-10	70	70	
	e. Seam sleeves to shirt with the raw edges of the armholes turned in and double-stitch.	301 or	LSb-2	10-14	50	50	
		401	LSb-2	10-14	50	70	
15.	Close sides and sleeves.						
	Finished appearance. The joining seams shall be smooth without pleats, puckers or twists. The ends of armhole seams shall be staggered at base of armholes indicated by patterns (see figure 1). The fronts shall lap the back.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:29Z
Check the source to verify that this is the current version before use.

NO.	TABLE I (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
15.	Close sides and sleeves. (cont'd)						
	a. Join the side seams of shirt and underarm seams of sleeves with double-lapped, double-stitched seams.	301 or 401	LSc-2 LSc-2	10-14 10-14	50 50	50 70	
	- or -						
	b. Stitch and overedge stitch side and underarm seams in one continuous operation. The bight of overedge stitching shall be 3/16 to 1/4 inch gage.	515 or	LSbm-3(a)	10-14	50 chain stitching 70 overedge stitching	70 70	
		516 or 519	LSbm-3(a) LSbm-3(a)	10-14 10-14	50 chain stitching 70 overedge stitching	70 70	
	c. Turn seam allowances and raise stitch 1/4 to 5/16 inch from seam.	301 or 401	LSbm-3(b) LSbm-3(b)	10-14 10-14	50 50	50 70	
	- or -						
	d. Overedge stitch the underply of side seams of shirt and underarm seams of sleeves.	502 or 503	EFd-1 EFd-1	6-10 6-10	70 70	70 70	
	e. Join the side seams of shirt and join the underarm seams of sleeves wth the raw edges turned in and double-stitch.	301 or 401	LSb-2 LSb-2	10-14 10-14	50 50	50 70	

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:29Z
Check the source to verify that this is the current version before use.

TABLE I. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
16.	Hem bottom of shirt.						
	a. Hem the bottom of shirt with the raw edge turned in and single stitch 1/16 to 1/8 inch from edge. Hem shall measure 3/4 ± 1/4 inch in width.	301	EFb-1	10-14	50	50	
	- or -						
	b. Form the hem by overedge stitching the bottom raw edge; turn up bottom of shirt and single stitch through shirt adjacent to the overedge stitching.	502 or 503 and 301	EFd-1 EFd-1 EFa-1	6-10 6-10 10-14	70 70 50	70 70 50	
17.	Setting cuffs.						
	Finished appearance. The ends of cuffs shall not finish beyond the edges of the sleeve openings.						
	a. Join under part of cuff to sleeve.	301 or 401	SSa-1 SSa-1	10-14 10-14	50 50	50 70	
	b. Turn in top edge of outer part of cuff and stitch to sleeve 1/16 to 1/8 inch from edge.	301	LSb-1	10-14	50	50	
18.	Bartacking.						
	Bartack the top of each sleeve opening (across seam) with a 3/8 to 1/2 inch bartack.	Bartack	-	28 per bartack	50	50	
19.	Make front buttonholes.						
	Make six horizontal buttonholes in the left front positioned as indicated by patterns with the inside edge of eyelet 1/2 ± 1/8 inch from front edge.	Buttonhole	-	52-56 per buttonhole including tack	50	50	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil - Downloaded: 2026-10-17T14:29Z
Check the source to verify that this is the current version before use.

TABLE I. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
20.	Sew on buttons.						
	a. Sew six buttons on right front to conform with buttonholes. The top button shall be 1-1/4 ± 1/8 inches from front edge; the remaining buttons shall be 1 ± 1/8 inch from front edge (measurements taken at center of buttons).	101 or	-	14-16 per button	30	-	
		301		14-16 per button	30	30	
	b. Sew a button on each pocket to correspond with buttonhole in flap. Flaps, when buttoned, shall lie smooth without distortion.	101 or	-	14-16 per button	30	-	
		301		14-16 per button	30	30	
	c. Sew a button centered on each cuff to correspond with buttonhole in cuff.	101 or	-	14-16 per button	30	-	
		301		14-16 per button	30	30	
21.	Clean shirt.						
	a. Trim all ends of thread to 1/4 inch maximum length and remove loose threads.						
	b. Remove all spots, stains and markings.						
22.	Press shirt.						
	a. Press collar flat and smooth.						
	b. Press entire shirt smooth and flat.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil - Downloaded: 2026-10-17T14:29Z
Check the source to verify that this is the current version before use.

3.7 Finished measurements. The shirts shall conform to the finished measurements for each respective size, as shown in table II.

TABLE II. Finished measurements

	One-half breast 1/	Sleeve length 2/	Back length 3/
	Inches	Inches	Inches
X-small	18	34	29
Small	20	35	29-1/2
Medium	22	36	30
Large	24	37	30-1/2
X-large	26	38	31
Tolerance:			
Plus	1/2	3/4	3/4
Minus	1/2	3/4	3/4

1/ One-half breast measurement taken, with shirt buttoned, from folded edge to folded edge in line with base of armhole of back part.

2/ Sleeve length shall be measured from center back at collar seam, diagonally across back and down sleeve to bottom edge of cuff.

3/ Back length shall be measured at center back from collar seam line to bottom of shirt.

3.8 Workmanship. The finished shirts shall conform to the quality of product established by this document. The occurrence of defects shall not exceed the applicable acceptable quality level.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the document where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Quality conformance inspection. Unless otherwise specified, inspection shall be in accordance with MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:29Z
Check the source to verify that this is the current version before use.

* 4.2.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this document or applicable purchase document.

4.2.2 Point count inspection. Sampling and inspection provisions for end item examination of semi-dress "SD" shirts, dimensional examination, and packaging inspection shall be performed in accordance with MIL-STD-1492.

5. PACKAGING

* 5.1 Preservation. Preservation shall be level A or Commercial as specified (see 6.2).

5.1.1 Level A. Each shirt shall be folded to approximately 15 by 11-1/2 inches and secured with stainless steel (AISI type 304 or type 316) pins, tin or nickel plated brass pins, aluminum clips, or plastic fasteners. Each folded shirt shall be uniformly dusted with napthalene flakes (see 6.2.1), and inserted in a snug-fitting flat style clear polyethylene film bag of 0.00125 inch thickness (+ 25 percent tolerance). The polyethylene bag shall be formed with heat-sealed seams that are straight, continuous, and parallel to each other and the formed edges of the bag. The bag closure shall be effected by heat-sealing with the heat-seal made as close as possible to the open end. A 1/4 inch diameter hole shall be made at one corner of each bag to allow excess air to escape. Alternatively, the final closure of the bag may be accomplished by means of a tuck or reverse flap.

* 5.1.2 Commercial. The shirts shall be preserved in accordance with MIL-STD-1188.

5.2 Packing. Packing shall be level A, B or Commercial as specified (see 6.2).

5.2.1 Level A packing. Twelve shirts, preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC-L, grade V2s of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-B-636. Level A bagged shirts shall be packed flat, two in length, one in width, and six in depth within a shipping container. Inside dimensions of each shipping container shall approximate 23-1/2 inches in length, 15 inches in width, and 15 inches in depth. Approximate dimensions are furnished as a guide only. Each fiberboard container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to type I, grade B of UU-P-268. Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V and reinforced as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.2.2. Toward the end of the contract, or when there is less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:29Z
Check the source to verify that this is the current version before use.

* 5.2.2 Level B packing. Twelve shirts, preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC-L, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class domestic, variety DW, grade 275 of PPP-B-636. Level A bagged shirts shall be packed flat, two in length, one in width, and six in depth within a shipping container. Inside dimensions of each shipping container shall approximate 23-1/2 inches in length, 15 inches in width, and 15 inches in depth. Approximate dimensions are furnished as a guide only. Each fiberboard container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to type I, grade B of UU-P-268. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.2.2. Toward the end of the contract or when there is less than the required amount per container of the same size, mixed sizes may be packed within the same container.

5.2.2.1 Weather-resistant containers. When specified (see 6.2), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636, and closed in accordance with method III as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.2.2.

5.2.3 Commercial packing. Shirts, preserved as specified in 5.1, shall be packed in accordance with MIL-STD-1188.

5.3 Marking. In addition to any special marking required by the contract or purchase order, shipping containers shall be marked in accordance with MIL-STD-129 or MIL-STD-1188, as applicable.

5.3.1 Polyethylene bagged shirts. Polyethylene bagged shirts shall have the required identification information legibly printed or stamped in black directly on the bag across the center face, or on a white paper label inserted within the bag so as to permit ready identification.

5.3.2 Labels, mixed sizes. Each shipping container, packed with mixed sizes only, shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 5 by 4 inches with the words "MIXED SIZES" plainly stamped or printed thereon and under these words shall be legibly stamped or printed the correct quantity and sizes contained therein.

6. NOTES

6.1 Intended use. The shirt is intended for wear by male military personnel of the Department of Defense as a component of the wet-cold and cold-dry uniforms for temperate and cold areas.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:29Z
Check the source to verify that this is the current version before use.

* 6.2 Ordering data. Acquisition document should specify the following:

(a) Title, number and date of this document.
(b) Size required (see 1.2).
(c) Selection of applicable levels of preservation and packing (see 5.1 and 5.2).
(d) When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2).

6.2.1 Mothproofing. The napthalene flakes requirement is not applicable when Government furnished material of wool or part wool content has been mothproofed treated (see 5.1.1).

6.3 Samples. For access to samples, address the contracting activity issuing the invitation for bids.

6.4 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of the document (see 3.2).

6.5 Changes from previous issue. The margins of this document are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - GL
Navy - NU
Air Force - 99

Preparing activity:

Army - GL

Project No. 8415-0304

Review activities:

Army - MD
Navy - MC
Air Force - 82
DSA - CT

User activity:

Air Force - 45

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:29Z
Check the source to verify that this is the current version before use.

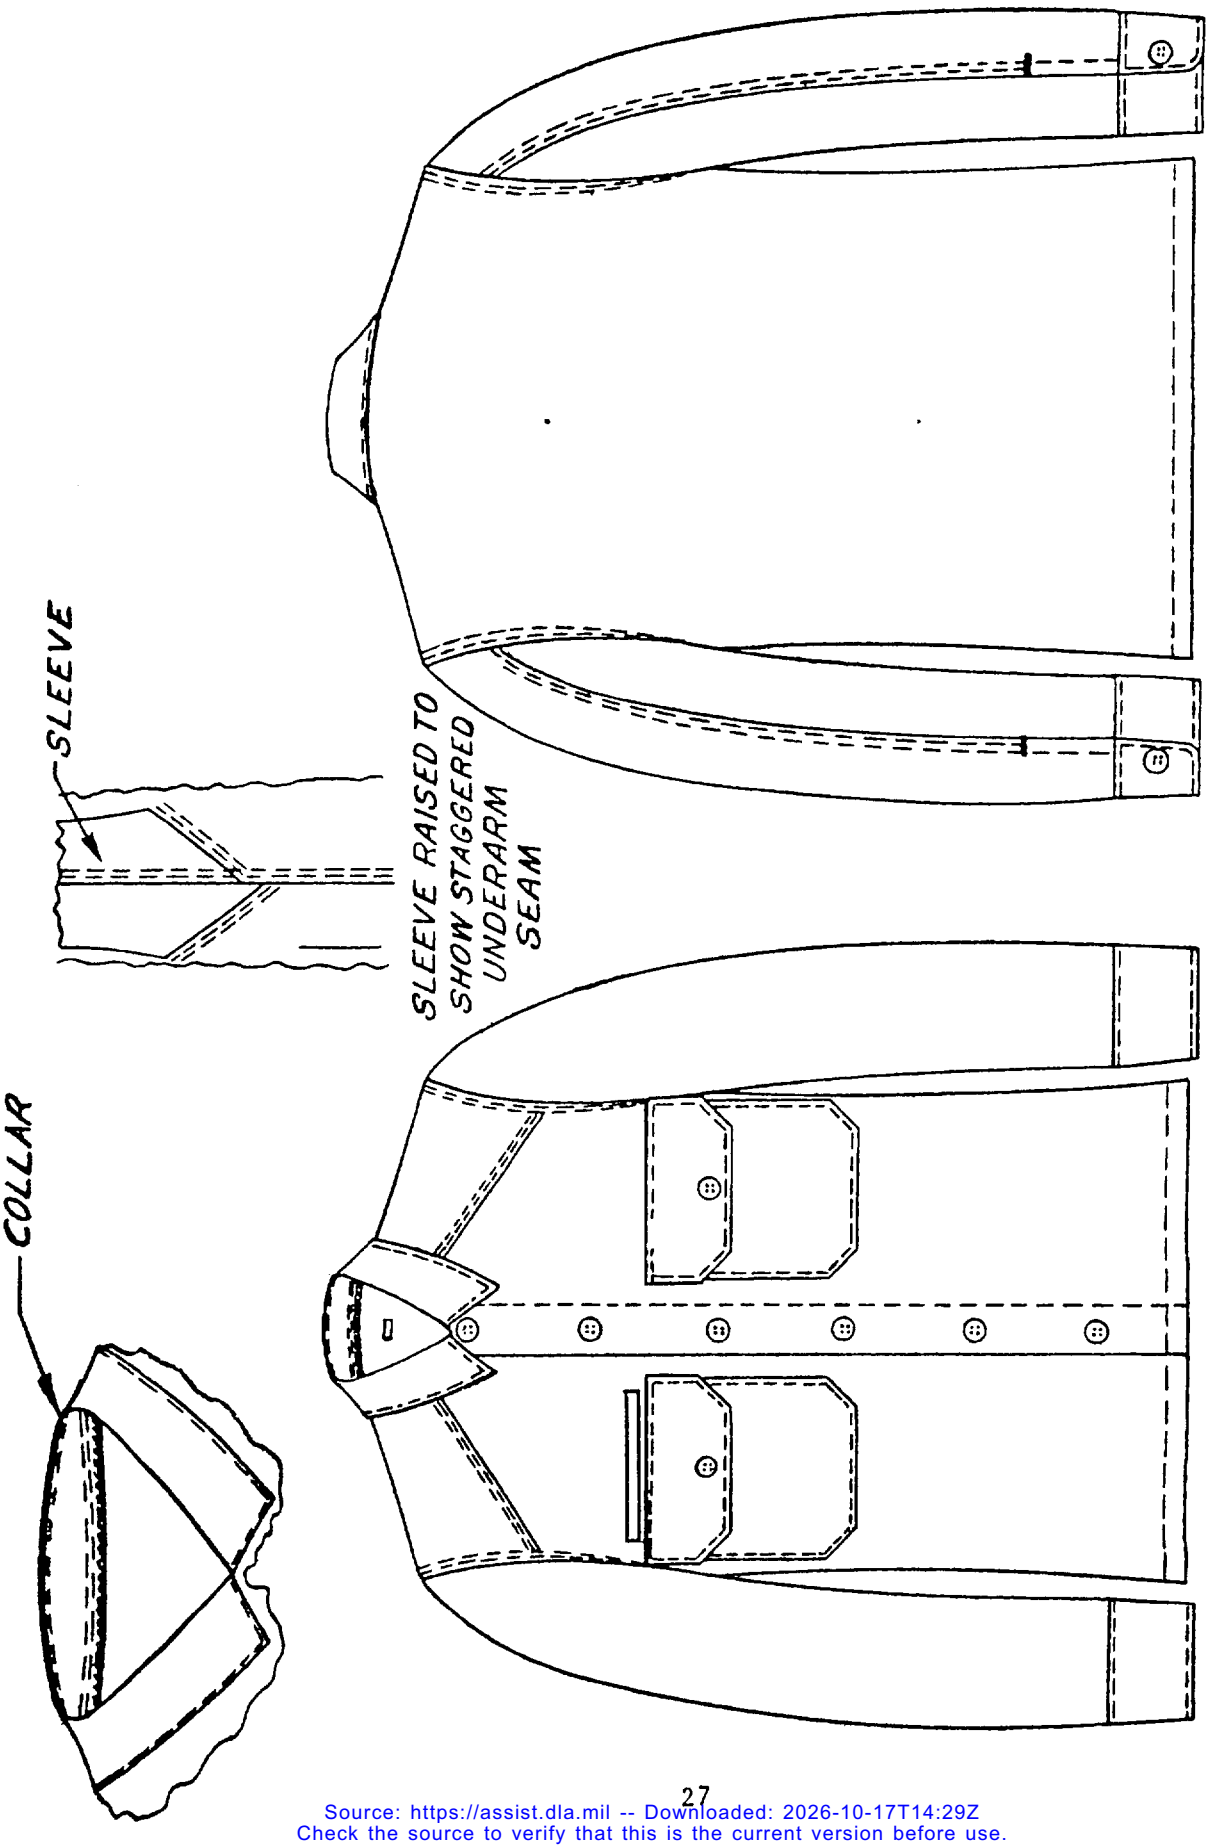


FIG. 1 SHIRT, COLD WEATHER FIELD, WOOL/NYLON, OLIVE GREEN 108

2-1-463F

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:29Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:29Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE
MIL-S-10858H Shirt, Cold Weather, Field, Wool/Nylon, Olive Green 108

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1426 1 OCT 76 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:29Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY CARD

FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Natick Research and Development Laboratories
ATTN: DRDNA-ES
Natick, MA 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:29Z
Check the source to verify that this is the current version before use.