MIL-C-29366A(MC)
AMENDMENT 2
22 December 1980
SUPERSEDING
AMENDMENT 1
15 July 1980

MILITARY SPECIFICATION

CAP, UTILITY, CAMOUFLAGE

This amendment forms a part of Military Specification MIL-C-29366A(MC) dated 25 January 1980.

PAGE 1

1.2: Under "Schedule of Sizes", add "XX Small".

PAGE 2

*2.1:

Under "SPECIFICATION FEDERAL", add "PPP-B-636-Boxes, Shipping, Fiberboard".

Under "SPECIFICATIONS MILITARY", delete "MIL-B-17757 - Box, Shipping, Fiberboard (Modular Sizes)".

PAGE 4

3.7: Under "Size", add "XX Small" and under "Head measurement", add "20-1/2".

PAGE 13

Table I:

Opr. 11.a, line 4: After band, delete remainder of sentence and substitute "joining seam of sweatband and notch at the center back crown matching".

Oprs. 11.d, e, f, and g: Delete in entirety and substitute the following:

"d. Mark the outside band at the center front after the band is set to the crown to determine the center front of the cap.

"e. Position the hemmed lower edge of the outside band on the visor, with the mark on the front of the band in line with the notch on the visor and with the hemmed edge abutted against the back edge of the inner visor.

FSC 8405

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:35Z
Check the source to verify that this is the current version before use.

"f. Stitch outside band to visor along the back edge of visor, not more than 1/16 inch from the hemmed lower edge. The line of stitching shall extend from end to end of the visor. The inner visor shall not be caught in the stitching.

301	SSc-1	10-14	40/3	40/3

"g. Turn cap on the inside.

"h. Position the outside band and the sweatband, with the center back seams even and stitch together 1/16 inch from the lower hemmed edges. The line of stitching shall be from the center back seam to one end of the visor. From that point, lap the hemmed edge of sweatband to the back edge of visor and stitch 1/16 inch from the hemmed edge, the length of the visor. Continue to stitch the two bands together 1/16 inch from hemmed edges to complete the cap.

301	LSb-1	10/14	40/3	40/3"

*4.5.2.1, Visor defect d: Delete last 3 lines and substitute "-more than 1/4 inch X Major."

PAGE 28

*5.2.1.1:

Line 3: After "conforming to", delete remainder of sentence and substitute "type CF, weather resistant, SW, V3C of PPP-B-636 and assembled, closed and reinforced as specified in the box specification."

At end of paragraph, add new sentence " Inside dimensions shall be 23-1/2 inches in length, 15 inches in width and 18 inches in height with the fiberboard minimum bursting strength of 200 pounds per square inch."

PAGE 29

*5.2.1.2,

Line 4: Delete "size 4 of MIL-B-17757" and substitute "of PPP-B-636 in size to fit the contents."

*5.2.2, line 4: After "class domestic", delete remainder of sentence and substitute "SW, of PPP-B-636 and assembled, closed and reinforced as specified in the box specification."

* Figures 1 through 3: Delete in entirety and substitute the attached new Figures 1 through 3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:35Z
Check the source to verify that this is the current version before use.

The margins of this amendment are marked with an asterisk to indicate where changes (additions, modification, corrections, deletions) from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are coutioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.


Preparing Activity:
Navy-MC
Project No. 840-5-N876

Custodians:
Navy-MC


Review Activities:
Navy-SA

User Activities:
Navy-YD

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:35Z
Check the source to verify that this is the current version before use.

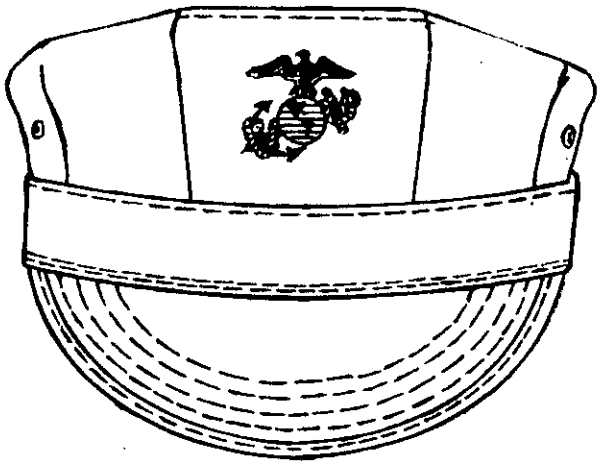

TYPE I

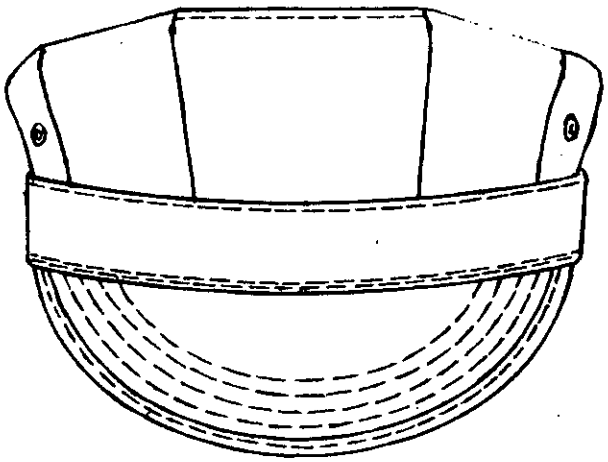

TYPE II

FIGURE 1. CAP, UTILITY, CAMOUFLAGE

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:35Z
Check the source to verify that this is the current version before use.



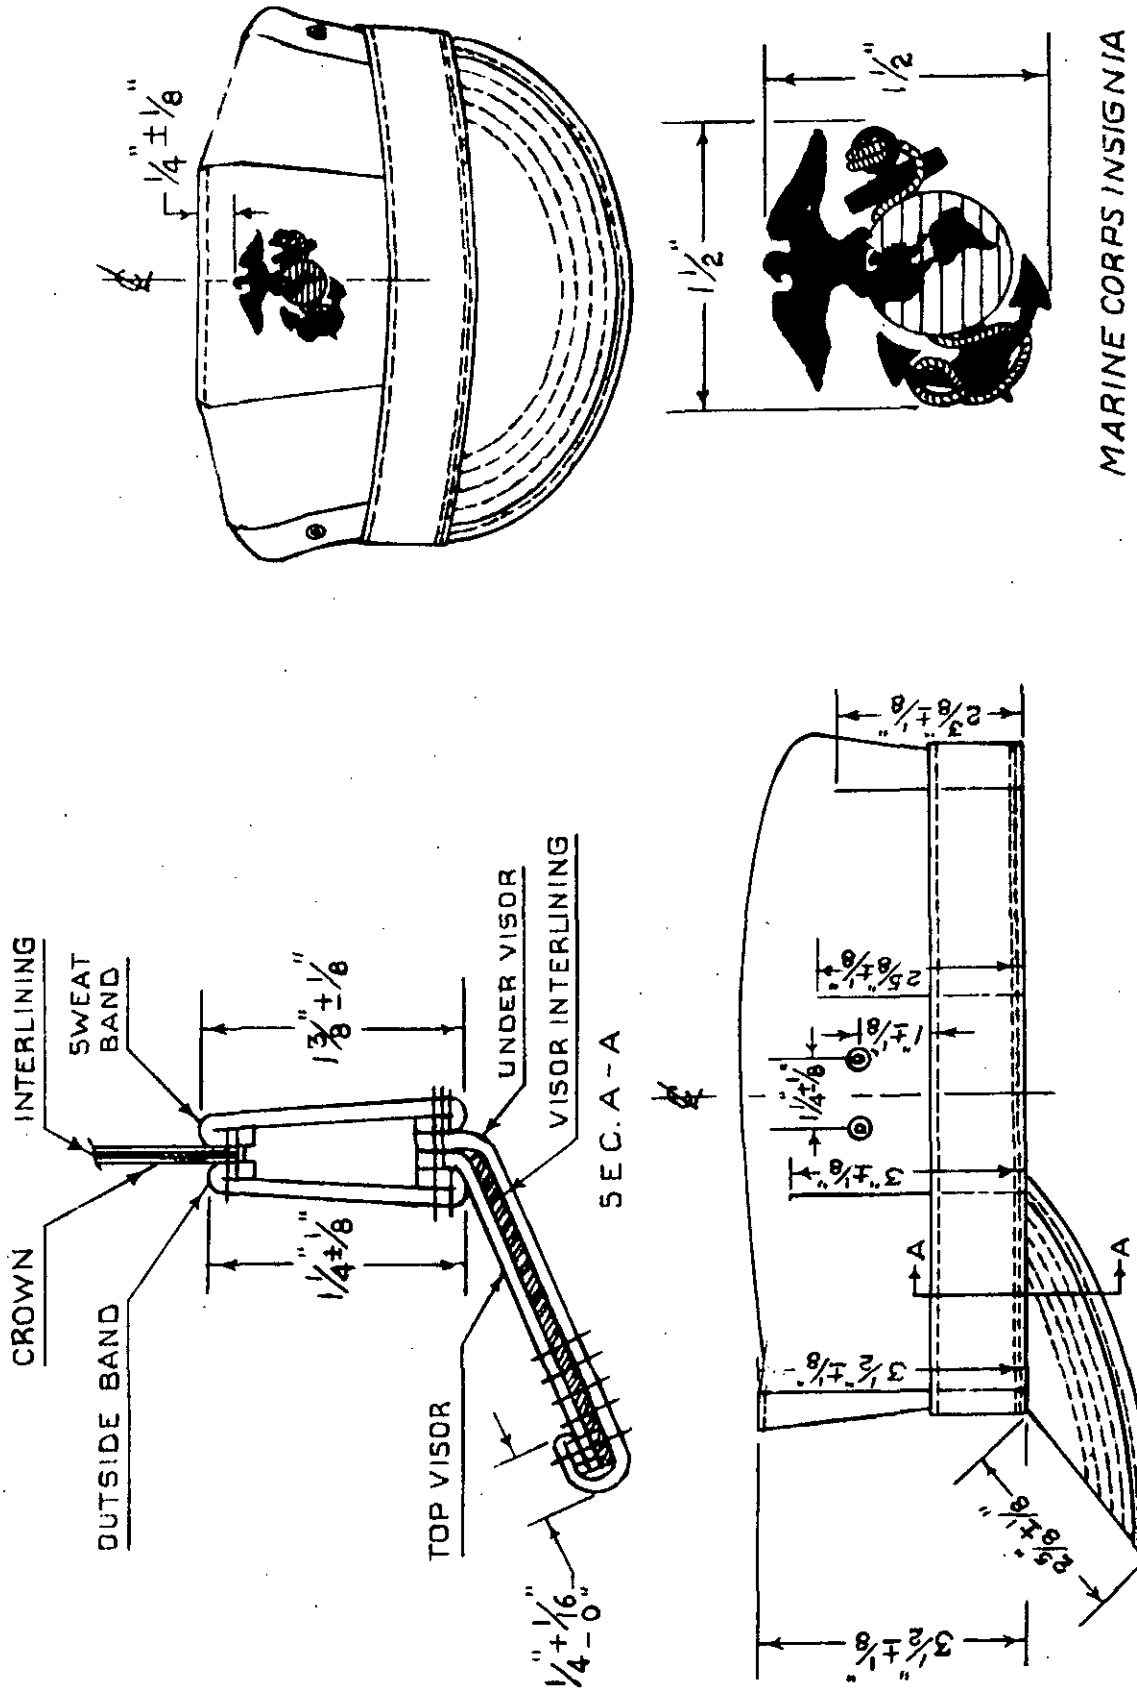


FIGURE 2. CAP, UTILITY, CAMOUFLAGE


Source: https://assist.dla.mil -- Downloaded: 20261O-20T22:35Z
Check the source to verify that this is the current version before use.

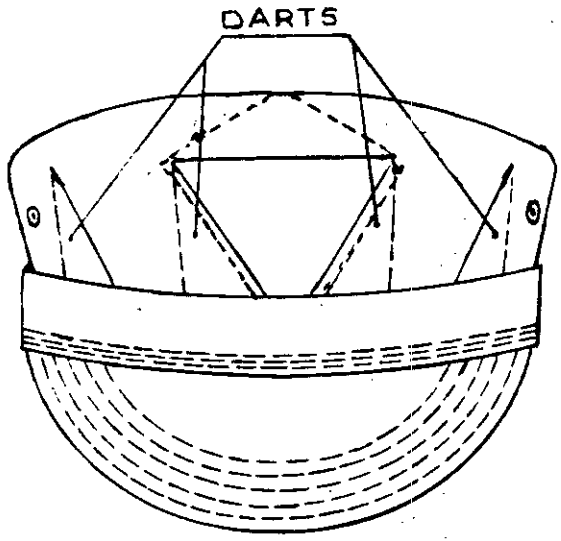

FRONT-INSIDE VIEW

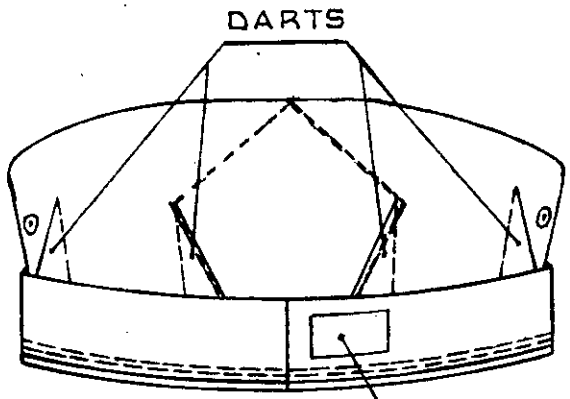

BACK-INSIDE VIEW

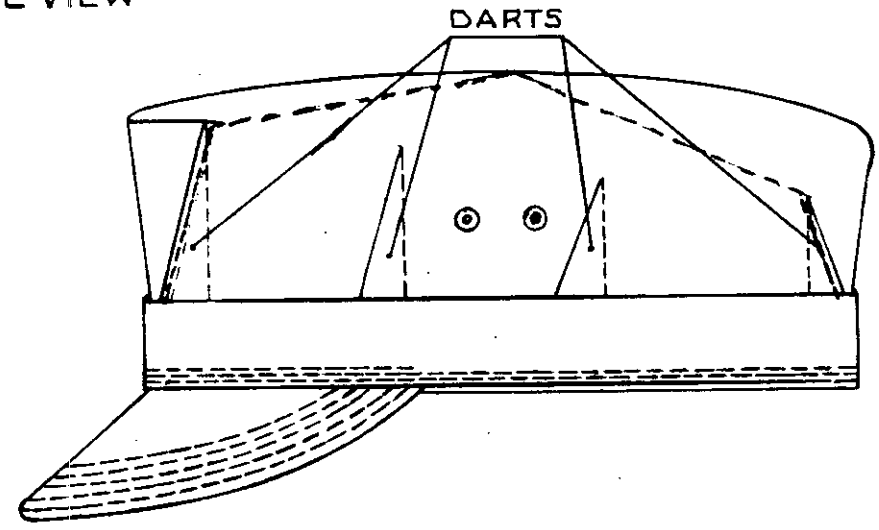

RIGHT-INSIDE VIEW

FIGURE 3. CAP, UTILITY, CAMOUFLAGE

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:35Z
Check the source to verify that this is the current version before use.