MIL-C-29366B(MC)
20 December 1985
SUPERSEDING
MIL-C-29366A(MC)
25 January 1980

MILITARY SPECIFICATION

CAP, UTILITY: CAMOUFLAGE

This specification is approved for use by U.S. Marine Corps, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers requirements for camouflage utility caps.

1.2 Classification. The caps shall be of the following types and sizes as specified (see 6.2):

Type I - With Marine Corps insignia
Type II - without insignia

Schedule of Sizes

Extra-Extra Small
Extra Small
Small
Medium
Large
Extra Large

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. The following specifications and standards handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to the Commanding General (PSE-C), Marine Corps Research, Development, and Acquisition Command, Washington, D.C. 20380, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8405

AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 20260410-20T22:35Z
Check the source to verify that this is the current version before use.

listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

V-T-276	-Thread, Cotton
UU-P-31	-Paper; General Specification and Methods of Testing
UU-P-268	-Paper; Kraft, Wrapping
DDD-L-20	-Label, For Clothing, Equipage and Tentage (General Use)
PPP-B-636	-Boxes, Shipping, Fiberboard

MILITARY

MIL-E-20652	-Eyelets, Metallic, and Eyelet Washers, Metallic, General Specification For
MIL-C-43468	-Cloth, Camouflage Pattern, Wind Resistant, Poplin, Cotton
MIL-T-43548	-Thread, Polyester, Cotton-covered and Rayon-covered
MIL-C-43594	-Cloth, Interlining, Polyester

STANDARDS

FEDERAL

FED-STD-191	-Textile, Test Methods
FED-STD-751	-Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	-Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-Marking for Shipment and Storage
MIL-STD-147	-Palletized Unit Loads

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Naval Publications and Forms Center (Attn: NPODS), 5801 Tabor Avenue, Philadelphia, PA 19120-5099.)

2.1.2 Other Government documents and publications. The following other Government documents and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

LAWS AND REGULATIONS

U.S. POSTAL SERVICE MANUAL

(Application for copies should be addressed to the Superintendent of Documents, U.S. Government Printing Office, Washington D.C. 20402.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:35Z
Check the source to verify that this is the current version before use.

Department of Defense (DoD) Standard Color Card of
Official Standardized Shades for Sewing Thread 1968

(Application for copies should be addressed to the Color Association of the United States, Inc., 200 Madison Avenue, New York, NY 10016.)

2.2 Non-Government Publications. The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in DODISS are the issues of the documents cited in the solicitation (see 6.2).

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Attn: Tariff Order Section, 1616 P Street, N.W., Washington D.C. 20036.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein (except for related associated detail specifications, specification sheets or MS standards), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Standard sample. Standard samples are furnished solely for guidance and information to the contractor (see 6.4). Variation from the specification may appear in the sample, in which case this specification shall govern.

3.2 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 6.3) in accordance with 4.4.

3.3 Materials.

3.3.1 Basic fabric. The basic material for the caps, including the sweatband shall be cloth, camouflage pattern, wind resistant, poplin, cotton, conforming to type III of MIL-C-43468. The inside crown and sweatband shall be the basic material required by the contract or the cloth may be dyed the ground shade or the cloth may be printed seconds. Printed seconds shall be cloth which has been rejected only for defects cited in applicable basic cloth

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:35Z
Check the source to verify that this is the current version before use.

specification pertaining to color, infrared reflectance or pattern of camouflage print. If printed seconds are used, they must be marked on the face side with stripes at 3 inch intervals across the full width, running in the warpwise direction for the length of the entire roll. The stripes shall be 1/8 inch to 1/2 inch wide and shall be applied by the cloth finisher. The color of the stripes shall approximate any one of the camouflage print colors, and colorfastness to crocking shall be no lower than 6.5 (Munsel Scale).

3.3.2 Interlining. The cloth for interlining the crown and outside band shall be cloth, interlining, polyester conforming to MIL-C-43594.

3.3.3 Thread. The cotton thread shall conform to V-T-276, soft finish, type 1A3, ticket No. 40, 3 ply for all seaming and stitching or as an alternate, cotton-covered polyester thread conforming to ticket No. 50, 2 or 3 ply of MIL-T-43548, may be used.

3.3.3.1 Color and colorfastness. The thread shall be dyed olive drab shade S-1, Cable No. 66022. (See DoD Standard Color Card for Official Standardized Shades for Sewing Thread, 1968). The thread shall show fastness to perspiration, combined laundering and bleaching, and light equal to or better than the standard sample. When no standard sample is available, the dyed thread shall show good fastness to perspiration, combined laundering and bleaching and light.

3.3.4 Inner visor. The inner visor shall be made out of a non-woven material produced from a highly purified alpha cellulose vegetable fiber, wet web impregnated with approximately 26 + 6 percent compounded neoprene and shall conform to the following physical requirements, when tested as specified in section 4, Table II.

Requirement	Machine Direction	Crosswise Direction
Stiffness (load lb., min.)		
Original	2.4	1.5
After laundering	2.4	1.5
After wet (dry) cleaning	2.2	1.4
Tensile strength (lb. per in., min.)	156	103
Stretch (percent max)	17	26
Tearing strength (gms. min.)	1600	1840
Weight (lb. per sq. yd.) 2.25 + 8 percent		
Thickness 0.075 ± 0.003 in.		

3.3.4.1 Water absorption. The material shall not absorb more than 30 percent water when tested as specified in section 4, Table II.

3.3.4.2 Resistance to perspiration. The material shall show no embrittlement, development of stickiness, or delamination when subjected to the perspiration test specified in section 4, Table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:35Z
Check the source to verify that this is the current version before use.

3.3.4.3 Accelerated aging. The material shall remain flexible and show no embrittlement, development of stickiness, or delamination after 15 days in an oven with circulating air at 100°C when tested as specified in section 4, Table II.

3.3.4.4 Resistance to water. The material shall not shrink or warp after soaking in water 24 hours when tested as specified in section 4, Table II.

3.3.4.5 Directional marking. The finished alpha cellulose material shall be marked by directional symbols to designate the greater flexibility of the material. The marking shall be legibly and clearly designated on the textured side of the material.

3.3.5 Eyelets. The eyelets shall be brass, rolled flange type, with the barrel scored 6 to 8 scores. The eyelets shall conform to MIL-F-20652, sheet 1A-BE108 and be enameled a green shade to closely match the dark green shade of the basic fabric.

3.3.6 Labels. Each cap shall have an identification label and a size label as follows. The label color shall be medium green, Cable No. 70034, 70130, or 70131 and shall show fastness to laundering in accordance with DDD-L-20 requirements.

3.3.6.1 Identification label. The identification label shall conform to type VI class 1 of DDD-L-20. The content and form shall be as follows:

Nomenclature (Item description)
Contract Number
Name of Contractor

3.3.6.2 Size label. The size label shall conform to type VI, class 2 of DDD-L-20. The label shall show the size designation specified in 1.2 and the stock number as shown by the following example:

Small
Stock Number

3.3.6.3 Combination identification and size label. The identification and size label may be combined and the label shall be not less than 1 inch by 1-3/4 inches. The combination identification and size label shall conform to type VI, class 4 of DDD-L-20.

3.3.7 Insignia (type I cap). The Marine Corps insignia for the front of the type I cap shall conform to the design and dimensions shown on figures 1 and 2. The insignia shall be applied by decalcomania marking, transferred by heat and pressure. The transfer shall produce an imprint on the basic material which is clear and distinct with sharp outlines, the filled-in areas a solid black and the open areas of rope and globe clearly visible. The transferred marking shall be clearly visible after being subjected to three launderings which tested as specified in section 4, Table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:35Z
Check the source to verify that this is the current version before use.

3.4 Design. The cap shall be the design shown on figures 1 through 4, having a lined two-piece crown shaped with eight evenly shaped folded and stitched darts; two metal eyelets at each side of the crown for ventilation; a lined outside band and a sweatband made from one ply of basic material; and a flexible, quilted hinge type visor.

3.5 Patterns. The standard patterns furnished by the Government shall not be altered in any manner and shall be used only as a guide for cutting working patterns. The patterns show size and are marked or notched for proper cutting, placement, and assembly of component parts.

3.5.1 Pattern parts. Caps shall be cut from materials specified herein in accordance with the pattern parts indicated below:

Item	Pattern Nomenclature	No. of cut parts
	Material: Cloth, Camouflage	
1.	Crown	2
2.	Top visor cover	1
3.	Under visor cover	1
4.	Outside band	1
5.	Sweatband	1
	Material: Cloth Interlining	
6.	Crown	1 1/
7.	Outside band	1
	Material: Alpha Cellulose Fiber	
8.	Inner visor	1
	Marker	
9.	Crown	

1/ Crown interlining may be cut 1/8 inch smaller than crown all around entire periphery.

3.6 Construction. The caps shall be manufactured in accordance with the operation requirements specified in Table I. The manufacturer is not required to follow the exact sequence of operations as listed.

3.6.1 Stitches, seams, and stitchings. The stitch, seam, and stitching types specified in Table I shall conform to FED-STD-751. Whenever two or more stitch or seam types are specified for the same operation, any one of them may be used. Where stitch type 401 is used, the looper (under thread) shall be on the inside of the cap. The number of stitches per inch as specified in Table I indicates the minimum and maximum number permitted. Ends of seams and stitching, produced with 301 type stitch, when not caught in other seams or stitching shall be backstitched not less than 1/4 inch. Thread breaks (all stitch types) shall be secured by stitching back of break not less than 1/2 inch. When stitch type 401 is used, ends of seams and stitching shall be

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:35Z
Check the source to verify that this is the current version before use.

caught in other seams of stitching, and skipped stitches and thread breaks may be repaired using stitch type 301 backstitched not less than 1/2 inch on each side of the skip or break.

3.6.2 Shade marking. The component parts shall be marked to insure a uniform shade pattern and size throughout the cap. Any method of shade marking may be used except:

a. Corrosive metal devices.

b. Adhesive-type tickets which show discoloration and the adhesive mass which adheres to the material upon removal of the tickets.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:35Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
1.	Cutting. a. Cut cap in strict accordance with patterns furnished by the Government. b. Cut parts in the direction of warp as indicated by directional lines of pattern. c. Cut component parts of cap from one piece of basic material, except sweatband and underply crown, which may be cut from ends. Cloth shall be cut with the face of the cloth to finish on outside of cap. (See 3.3.1 for use of ground shade or printed seconds for some components.) d. Cut inner visor with pattern placed side to side across the width (crosswise direction) of material specified in 3.3.4, so that the greater flexibility of the cut visor is from side to side (see figure 4). e. Cut interlining for crown and outside band in accordance					

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:35Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
1.	Cutting. (cont'd) with patterns. The interlining for the outside band shall be cut 1/4 inch narrower than the outside band fabric.					
2.	Replacement of damaged parts. a. Replace at time of cutting any parts of the cap containing holes, seriously weakening defects such as smashed, multiple floats, loose or weakening slubs, etc. expected to develop into holes, shade bars and dye streaks or unsightly slubs, etc. affecting appearance. b. Replace any part damaged during manufacturing process by needle chews which may develop into holes, scissors, or knife cuts, tears, holes, mends, burns, and large drill holes in the material affecting appearance.					
3.	Shade marking. a. Mark, ticket, or bundle all component parts (see 3.6.2) cut from one piece of basic material, except those parts cut from ends, ground shade, or printed seconds (see 1.c) to insure uniform shade and size throughout the cap. Any size part cut from ends shall be identified as to size.					
4.	Make crown. Finished appearance. Darts shall finish without gathers, puckers, or pleats. The height of the center front panel shall finish evenly with					

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:35Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
4.	Make crown. (cont'd)					
	the height of the top finished points of the front darts.					
	a. Position the crown interlining on inside ply of crown with all edges even and stitch together across full width with single rows of stitches, perpendicular to each other forming an X at the center. Position the top ply of the crown on top of the interlining with edges even and seam 1/4 inch from edge.	301	SSa-1	10-14	40/3	40/3
	b. Mark position of darts and eyelets in accordance with the pattern marker.					
	c. Fold and stitch crown darts in accordance with marks, tapering upper end of darts to a point. The point shall be securely tacked or backstitched.	301	OSf-1	10-14	40/3	40/3
	d. Fold crown at upper edge of front panel formed by the two darts and stitch 1/16 inch from folded edge.	301	OSf-1	10-14	40/3	40/3
	e. Apply Marine Corps insignia decal (type I cap) to center front of crown with heat and pressure. The decal shall be clear and distinct and shall be centered between the two center front darts and 1/4 $\pm$ 1/8 inch below stitched upper edge of center front panel, or apply Marine Corps insignia decal to center front panel with heat and pressure prior to making darts as long as decal is centered between completed darts.					

Source: https://assist.dla.mil -- Downloaded: 202640-20T22:35Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
5.	Attach eyelet to crown. Finished appearance. Eyelet shall be positioned and securely attached through each side of crown and securely clinched on inside without distorting and cutting material or splitting the flange of the eyelet. In the finished cap, the eyelets shall be centered 1 ± 1/8 inch above top edge of outside band. a. Attach two metal eyelets through each side of crown. Eyelets shall be centered 1-1/4 ± 1/8 inches apart and equidistant from back and front side darts.					
6.	Stitch darts around crown.					
	a. Stitch around crown 1/8 to 1/4 inch from lower edge. When stitching, turn the fold of all darts, except the two at the back, towards the front of crown. Turn the fold of the two back darts toward the center back of crown.	101 or 301 or 401	SSa-1 SSa-1 SSa-1	6-8 6-8 6-8	40/3 40/3 40/3	40/3 40/3 40/3
7.	Make outside band.					
	a. Position the interlining on the underside of the outside band with top edges even and stitch together 1/8 inch from the edge for the entire length of the band.	101 or 301	SSa-1 SSa-1	6-8 10-14	40/3 40/3	40/3 40/3
	b. Join ends of band with a 1/4 inch seam and securely backstitch lower ends of stitching. c. Press seam open or manually spread open seam.	301	SSa-1	10-14	40/3	40/3
	d. Fold under lower edge of band 1/4 to 5/16 inch and	301 or	EFa-1	10-14	40/3	40/3

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:35Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
7.	Make outside band. (cont'd)					
	stitch 1/8 inch from folded edge catching the interlining in the stitching.	401	EFa-1	10-14	40/3	40/3
	-or-					
	If operation 7d is performed before operations 7b, the ends of the seam allowance on outside band and sweatband shall be trimmed on a diagonal to reduce bulkiness and eliminate exposure of the interlining when the sweatband and outside band are joined together (see operations 10g).					
8.	Make sweatband.					
	a. Join ends of band with a 1/4-inch seam and securely backstitch lower ends of the stitching. The ends of the seam allowance shall be trimmed diagonal to reduce bulkiness.	301	SSa-1	10-14	40/3	40/3
	b. Press seam open or manually spread open seam.					
	c. Fold under lower edge of sweatband 1/4 inch and stitch 1/8 inch from folded edge.	301 or 401	EFa-1 EFa-1	10-14 10-14	40/3 40/3	40/3 40/3
9.	Make visor.					
	Finished appearance. The visor shall be smooth and free of wrinkles, gathers, puckers, and other distortions. Quilting of visor shall be uniform.					
	a. Position top and bottom plies (basic material) for visor face to face with outer edge even and notches matching. Stitch together 1/4 inch	301 or 401	SSa-1 SSa-1	10-14 10-14	40/3 40/3	40/3 40/3

Source: https://assist.dla.mil -- Downloaded: 202640-20T22:35Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
9.	Make visor. (cont'd)					
	from the raw edge, distributing the fullness of bottom ply between notches.					
	b. Place seamed pieces of basic material on inner visor with top piece next to the inner visor and outer edge of all pieces aligned.					
	c. Join together all pieces of visor around outer edge, stitched 1/4 to 5/16 inch from edge.	301	SSa-1	6-8	40/3	40/3
		or 401	SSa-1	6-8	40/3	40/3
	d. Turn bottom piece to underside of inner visor forming a smooth front edge with an even binding affect. Raise stitch the binding affect through all plies with the raise stitching 1/16 to 1/8 inch on the seamed edge of simulated binding.	301	-	6-8	40/3	40/3
	e. Quilt visor through all plies with 4 rows of stitches evenly spaced 3/8 to 1/2 inch apart and parallel to outer edge of visor.	301	SSv-4	6-8	40/3	40/3
10.	Assembly cap.					
	Finished appearance. The outside band and sweatband shall be smoothly and evenly seamed to the cap without wrinkles, puckers, gathers, twists, or other distortions. Outside band shall finish 1-1/4 ± 1/8 inch wide. Sweatband shall finish 1-3/8 ± 1/8 inch wide.					
	a. Place lower edge of crown between top edge of outside band and sweatband with all					

Source: https://assist.dla.mil -- Downloaded: 202640-20T22:35Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
10.	Assembly cap. (cont'd)					
	raw edges even and with joining seam of sweatband and notch at the center back crown aligned.					
	b. Join outside band and sweatband to crown 3/8 inch from lower edge of crown, catching one edge of cloth identification-size label in seam near inside center back of cap either to the left or right of joining seam of sweatband.	301 or 401	SSa-1	8-10	40/3	40/3
		401	SSa-1	8-10	40/3	40/3
	c. Turn down outside band and raise stitch 1/16 inch from seam.	301	LSq-2 (shows finished seam)	10-14	40/3	40/3
	d. Mark the outside band at the center front after the band is set to the crown to determine the center front of the cap.					
	e. Position the hemmed lower edge of the outside band on the visor, with the mark on the front of the band in line with the notch on the visor and with the hemmed edge abutted against the back edge of the inner visor.					
	f. Stitch outside band to visor along the back edge of visor, not more than 1/16 inch from the hemmed lower edge. The line of stitching shall extend from end to end of the visor. The inner visor shall not be caught in the stitching.	301	SSc-1	10-14	40/3	40/3
	g. Turn cap on the inside.					

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:35Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
10.	Assembly cap. (cont'd)					
	h. Position the outside band and the sweatband, with the center back seams even and stitch together 1/16 inch from the lower hemmed edges. The line of stitching shall be from the center back seam to one end of the visor. From that point, lap the hemmed edge of sweatband to the back edge of visor and stitch 1/16 inch from the hemmed edge, the length of the visor. Continue to stitch the two bands together 1/16 inch from hemmed edges past the center back seam by a minimum of 1/2 inch.	301	LSb-1	10-14	40/3	40/3
11.	Clean cap.					
	a. Trim all ends of stitching and remove all loose ends of thread from cap. Remove all spots and stains and remove all shade tickets and marking without injury to the material.					

3.7 Finished dimensions. The finished dimensions of the caps shall conform to the following:

Size	Head measurement (inches)
Extra-Extra Small	20-1/2
Extra Small	21-1/4
Small	22
Medium	22-3/4
Large	23-1/2
Extra Large	24-1/4
Tolerance	± 1/4

3.8 Workmanship. The finished caps shall conform to the quality and grade of product established by this specification. The occurrence of defects shall not exceed the levels set by the applicable acceptable quality levels (AQL's).

Source: https://assist.dla.mil -- Downloaded: 20260-20T22:35Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of Sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptance practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.4).

b. Quality conformance inspection (see 4.5).

4.3 Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with the test conditions specified in MIL-STD-105.

4.4 First article inspection. When a first article is required (see 6.2), it shall be examined for the defects specified in 4.5.2.1 and 4.5.2.2. The quantity to be inspected will be as specified in the contract. The presence of any defect or failure to pass any test shall be cause for rejection of the first article. If required, subsequent first article presentations will be as directed by the Contracting Officer.

4.5 Quality conformance inspection.

4.5.1 Testing of components. Testing of components shall be in accordance with applicable subsidiary specifications and standards to the extent applicable, except that the specification shall govern in the event of conflict. The method of testing specified in FED-STD-191 and UU-P-31, wherever applicable, and as listed in Table II shall be followed. All requirements are applicable to sample unit. When the data as to number of determinations per sample unit and the results reported as columns are not specified in Table II, they shall be as required by the referenced test method. The unit for expressing lot

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:35Z
Check the source to verify that this is the current version before use.

sizes and sample unit for testing each component shall be in accordance with applicable subsidiary specification and as follows:

Component	Lot size expressed as	Sample unit for testing
Non-woven fibrous material (inner visor)	yards	1 square yard
Eyelets	each	15
Insignia (decalcomania)	each	15

4.5.1.1 Sampling for testing. Government furnished materials shall not be sampled or tested unless specifically requested by the Government. Unless a component is covered by a subsidiary specification that specifies the inspection level and AQL for testing, the inspection level shall be S-1 and the AQL shall be 4.0 of MIL-STD-105.

4.5.1.2 In-process inspection. Inspection shall be performed during the manufacturing of the end item to ascertain that the operations are performed as specified herein. The Government reserves the right to determine the acceptability of construction methods not performed in accordance with specified requirements for operations or subassemblies.

4.5.2 Inspection of the end item. The end item shall be inspected for defects in 4.5.2.1 and 4.5.2.2. The sample unit for the examination shall be one cap.

4.5.2.1 Visual inspection. The end item shall be visually inspected for defects. The inspection level for this visual inspection shall be level II of MIL-STD-105. The AQL for this inspection shall be 2.5 defects per 100 units (DHU) for major defects, 10.0 DHU for major and minor A (combined) defects, and 15.0 DHU for total (major and minor A and B combined) defects. Defects shall be classified as follows:

EXAMINE	DEFECT	CLASSIFICATION		
		MAJOR	MINOR	
			A	B
Material defects and damages	a. Any hole.	X		
	b. Any weakening defects such as a smash, multiple float, loose slub which may develop into a hole.	X		
	c. Shade bar or unsightly slub, affecting appearance.	X		
	d. Needle chew, cut, tear, or mend.	X		
	NOTE: Material defects and workmanship damages are to be classified as indicated above			

Source: https://assist.dla.mil -- Downloaded: 202640-20T22:35Z
Check the source to verify that this is the currentversion before use.

EXAMINE	DEFECT	CLASSIFICATION		
		MAJOR	MINOR	
			A	B
Material defects and damages (cont'd)	only when the condition is one which weakens the fabric or garment, or when it is so conspicuously located as to be clearly noticeable. Nonweakening conditions which are inconspicuous shall not be classified as defects.			
Shaded parts	Any outside part shaded (affecting appearance).		X	
Cleanness	a. Spots or stains of an obvious permanent nature.		X	
	b. Removable spots or stains, clearly noticeable.		X	
	c. Thread ends not trimmed or loose threads not removed.			X
	d. One or more shade tickets not removed.			X
	e. Shade stamp marking exposed on outside of caps, seriously affecting appearance.	X		
Component and assembly	a. Any defective component or defect of assembly (unless otherwise classified).		X	
	b. Any component part of required operation omitted (unless otherwise classified).	X		
Seam and stitching	a. Accuracy of seaming: - Part of cap caught in any unrelated operation of stitching.		X	
	- Seams twisted, puckered, or pleated (unless otherwise classified herein).		X	
	- End(s) of stitching when not caught in other seams of stitching backstitched less than 1/4 inch.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:35Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT	CLASSIFICATION		
		MAJOR	MINOR	
			A	B
Seam and stitching (cont'd)	- Stitching overlapping the end(s) of thread break less than 1/2 inch.			X
	b. Gage of stitching (top, edge, raised, or quilting stitches):			
	- Irregular, i.e., unevenly gaged or various stitching not uniform, affecting appearance (to be scored when conditions exists on major portion of seam).		X	
	- Edge of raised stitching sewn too close to edge, resulting in damage to cloth.	X		
	- Beyond range or width specified or varies more than 1/16 inch when no range is specified.			X
	c. Open seams:			
	- 1/8 inch or more but not more than 1/4 inch.			X
	- more than 1/4 inch but not more than 3/4 inch.		X	
	- more than 3/4 inch.	X		
	NOTE: One or more broken or two or more continuous skipped or run-off stitches constitute an open seam.			
	d. Raw edges:			
	- 1/4 inch or less.			X
	- more than 1/4 inch but not more than 3/4 inch.		X	
	- more than 3/4 inch.	X		
	NOTE: Raw edges not securely caught in stitching shall be classified as an open seam.			
	e. Run-off:			
	- Joining seams - When resulting in an open seam, use "Open seam" classification.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:35Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT	CLASSIFICATION		
		MAJOR	MINOR	
			A	B
Seam and stitching (cont'd)	- Top, edge, quilting, or raised stitching (when not resulting in an open seam).		X	
	- On outside:			X
	- more than 1/2 inch.			
	- 1/4 inch or more but not more than 1/2 inch.		X	
	f. Seams and stitch types:			
	- Not specified seam or stitch type.	X		
	- Looper thread of 401 stitch type on outside of finished cap.		X	
	g. Stitch tension:			
	- Loose tension on raised or edge stitching, i.e., loosely exposed loops of lower or top thread.	X		
	- Loose tension resulting in a loose seam.	X		
	- Tight tension (stitches break when normal strain is applied to seam or stitching).			
	NOTE: Puckering is evidence of tight tension. When puckering is evident, seam shall be tested by exerting normal pull in lengthwise direction of seam.			
	h. Stitches per inch (to be scored only when the condition exists on major portion of the seam or stitching), on all seams or stitching.			
	- less than minimum number specified by:			X
	- not more than 2 stitches.		X	
	- more than 2 but not more than 4 stitches.	X		X
	- more than 4 stitches.			
	- one or more stitches in excess of maximum number specified.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:35Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT	CLASSIFICATION		
		MAJOR	MINOR	
			A	B
Seam and stitching (cont'd)	i. Stitches skipped or broken: - On edge or raised stitching when seam is seamed, turned and stitched: - more than 1/4 inch.			X
	- On visor quilting stitches: - more than 1/4 inch on one row of stitching.			X
	- more than 1/4 inch on two or more rows of stitching.		X	
Eyelets	a. Any omitted or added.		X	
	b. Defective eyelets (but securely clinched): - 1 eyelet.			X
	- 2 or more eyelets.		X	
	c. Not properly clinched, i.e., loose or raw edges of material exposed around edge of eyelet on outside of cap: - 1 eyelet.		X	
	- 2 or more eyelets.	X		
	d. Not specified type of size.		X	
	e. Position less than 7/8 inch or more than 1-1/8 inches from center of eyelet to top edge of outside band.			X
	f. Color and finish: - Does not compare favorably with standard or approved sample.		X	
	- Surfaces not smooth.			X
	- Discoloration or stain clearly noticeable.			X
	- Abraded, scuffed, scratched, or otherwise damaged.			X
	g. Distance between eyelets from center to center less than 1-1/8 inches or more than 1-3/8 inches.			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:35Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT	CLASSIFICATION		
		MAJOR	MINOR	
			A	B
Eyelets (cont'd)	h. Center of eyelets not equidistant from front and side darts by more than 1/4 inch.			X
Visor	a. Upper and lower plies of material badly wrinkled or puckered, pleated, or excessively full between rows of quilting stitches.		X	
	b. Visor interlining caught in stitching joining bands to visor (to be scored when the condition exists on major portion of seaming).		X	
	c. Number of rows of quilting stitches (including row at finished edge of visor): - 4 or less. - 6 or more.		X	X
	d. Visor not centered with center front of cap: - more than 1/4 inch.	X		
	e. Edge of outer band not firmly folded over edge of inner visor, i.e., excess material extends 1/8 inch or more beyond edge of inner visor.		X	
	f. Finished edge of visor less than 3/16 inch or more than 5/16 inch wide.			X
	g. Edge of visor poorly shaped, affecting appearance.		X	
	h. End(s) of visor insecurely caught in stitching of outer and inner bands.	X		
	i. Width of visor at center less than 2-1/2 inches or more than 2-3/4 inches.			X

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:35Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT	CLASSIFICATION		
		MAJOR	MINOR	
			A	B
Band (outside)	a. Width less than 1-1/8 inches or more than 1-3/8 inches.			X
	b. Twisted, pleated, or excessively full.	X		
	c. Irregular in width by 3/16 inch or more.	X		
	d. Back seam of band offset from mid-point between back crown darts by more than 1/4 inch.			X
Crown	a. Edge stitching along top edge between from darts omitted.	X		
	b. End(s) of edge stitching along top edge at front: - extending beyond dart(s) at either end by 1/4 inch or more.			X
	- not extending to dart(s) at either end by 1/4 inch or more.			X
	c. Height of crown across center front including band measures less than 3-3/8 inches or more than 3-5/8 inches.			X
	d. Height of crown at end of visor to end of side dart including band measures less than 2-7/8 inches or more than 3-1/8 inches.			X
	e. Crown puckered or pleated at joining to crown.		X	
Darts	a. Any dart omitted.	X		
	b. Folding of darts: - two rear darts not folded toward back of crown.		X	

Source: https://assist.dla.mil -- Downloaded: 20261O-20T22:35Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT	CLASSIFICATION		
		MAJOR	MINOR	
			A	B
Darts (cont'd)	- center front darts not folded toward front of crown.		X	
	- all other darts on front and sides not folded toward front of crown.		X	
	c. Ends not properly tapered on one or more darts.			X
	d. Front darts not in vertical alignment ± 1/16 inch.		X	
Insignia (Type I cap only)	a. Not specified type, size, or color.		X	
	b. Not properly transferred, i.e., indistinct or blurred.		X	
	c. Set on crookedly, affecting appearance.		X	
	d. Top edge placed less than 1/8 inch or more than 3/8 inch below folded (stitched) edge of crown.			X
	e. Off center between front darts by 3/16 inch or more.		X	
Sweatband	a. Sweatband exposed below bottom edge of cap by 1/8 inch or more:			
	- for a distance 1/2 inch or more, but not more than 1 inch.			X
	- for a distance of more than 1 inch.		X	
	b. Twisted or tight, affecting appearance of outside band.			X
	c. Joining seam of sweatband out of alignment with joining seam of outside band by more than 1/2 inch.			X

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:35Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT	CLASSIFICATION		
		MAJOR	MINOR	
			A	B
Sweatband (cont'd)	d. Width less than 1-1/4 inches or more than 1-1/2 inches.			X
Labels	a. Size label omitted, incorrect or illegible.	X		
	b. Contractor's label: - omitted, incorrect or illegible.		X	
	- not securely caught in stitching when cloth label is used.		X	

4.5.2.2 Examination of finished dimensions. The end item shall be examined for conformance to the finished dimensions specified herein (see 3.7). The inspection level for the examination shall be S-3 of MIL-STD-105. The AQL for this examination shall be 4.0 DHU for defects (one class). Any finished measurement deviating from the finished dimension specified herein shall be classified as a dimensional defect.

4.5.3 Inspection of packaging. Shipping containers fully prepared for delivery shall be inspected for the defects listed below to determine conformance to packaging, packing, and marking requirements. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. The lot size shall be the number of containers in the inspection lot. The inspection level shall be S-2 of MIL-STD-105. The AQL shall be 2.5 DHU.

Examine	Defect
Marking	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.
Materials	Any component missing. Any component damaged, affecting serviceability.
Workmanship	Inadequate application of components, such as incomplete closure of container flaps, improper taping, loose strapping, inadequate stapling, bulging, of distortion of container.
Content	Number of bundles per shipping container is more or less than required. Number of caps per bundle is more or less than required (one bundle shall be examined from each shipping container in the sample).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:35Z
Check the source to verify that this is the current version before use.

Table II. Test Methods

Components	Characteristics	Reqmt. para.	Test method	No. Determinations per sample unit	Results reported as
Inner visor	Material identification	3.3.4	1/	1	Pass or fail
	Compounded neoprene content	3.3.4	1/	1	To the nearest percent
	Stiffness:				
	Original	3.3.4	5202 2/		
	After laundering	3.3.4	5610/5202 2/		
	After wet (dry) cleaning	3.3.4	5622/5202 2/		
	Tensile strength	3.3.4	171 3/	10	To the nearest 1.0 lb.
	Stretch	3.3.4	171 3/	10	To the nearest percent
	Tearing strength	3.3.4	170 3/	5	To the nearest Gm.
	Weight	3.3.4	5041 2/	1	To the nearest lb./sq. yd.
	Thickness	3.3.4	5030 2/	1	To the nearest 0.001 inch
	Water absorption	3.3.4.1	5502 2/	1	Pass or fail
	Perspiration	3.3.4.2	5680 2/	1	Pass of fail

Source: https://assist.dla.mil - Downloaded: 20260-20T22:35Z
Check the source to verify that this is the current version before use.

Table II. Test Methods

Components	Characteristics	Reqmt. para.	Test method	No. Determinations per sample unit	Results reported as
Inner visor (cont'd)	Accelerated aging	3.3.4.3	4/	1	Pass or fail
	Shrinkage	3.3.4.4	5/	1	Pass or fail
Insignia (applied on swatches of basic material)	Insignia shall be clearly visible after laundering 6/	3.3.7	5610	3	Pass of fail

1/ A certificate of compliance is required and will be acceptable for the requirement stated (see 4.1.1).

2/ FED-STD-191.

3/ UU-P-31.

4/ The material shall be kept in a forced circulating air over 15 days at 100°C.

5/ The material shall be soaked in water at room temperature for 24 hours.

6/ Test to be performed three times prior to the evaluation.

Source: https://assist.dla.mil - Downloaded: 2026-10-20T22:35Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Preservation and packaging. Preservation and packaging shall be level A or commercial as specified (see 6.2).

5.1.1 Level A. Ten caps of one type and size only shall be nested together in a bundle, with visor laying flat, and cross-tied with cotton tape or twine.

5.1.2 Commercial. Commercial packaging shall afford adequate protection against deterioration and physical damage during shipment from the supply source to the first receiving activity. The contractor may use his standard practice provided it meets the requirements specified for commercial packing.

5.2 Packing. Packing shall be level A, B, or commercial as specified (see 6.2).

5.2.1 Level A

5.2.1.1 Method 1. Two hundred caps of one type and size only, packaged as specified in 6.2, shall be packed in a fiberboard shipping container with liner conforming to type CF, weather resistant, SW, V3C of PPP-B-636 and assembled, closed, and reinforced as specified in the box specification. In addition, each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight Kraft paper conforming to grade B of UU-P-268. Inside dimensions shall approximate 23-1/2 inches in length, 15 inches in width, and 18 inches in height with the fiberboard minimum bursting strength of 200 pounds per square inch.

5.2.1.2 Method 2. When specified (see 6.2), three level B shipping containers (600 caps of one type and size only) shall be overpacked in a fiberboard shipping container conforming to class weather resistant, of PPP-B-636 in a size to fit the contents.

5.2.2 Level B. Two hundred caps of one type and size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container with liner conforming to class domestic, SW of PPP-B-636 and assembled, closed, and reinforced as specified in the box specification. The fiberboard used in fabricating the box and liner shall be grade 275 and 200, respectively. In addition, each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight Kraft paper conforming to grade B of UU-P-268. Inside dimensions shall approximate 23-1/2 inches in length, 15 inches in width, and 18 inches in height.

5.2.3 Commercial. Caps shall be packed in a manner to insure carrier acceptance and safe delivery at destination. Containers shall be in accordance with Uniform Freight Classification Rules, National Motor Freight Classification Rule and U.S. Post Service Manual or regulations of other carriers applicable to the mode of transportation.

5.3 Palletization. When specified (see 6.2), caps, packed as specified in 5.2.1 and 5.2.2, shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Pallet type shall be type I (4-way entry),

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:35Z
Check the source to verify that this is the current version before use.

type IV, or type V in accordance with MIL-STD-147. Pallets shall be fabricated from wood groups I, II, III, or IV of MIL-STD-731. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L or film bonding means O or P. Pallet pattern shall be number 3 in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course.

5.4 Marking. In addition to any special marking required by the contract or purchase order, shipping containers and palletized unit loads shall be marked in accordance with MIL-STD-129.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The caps are intended for wear by personnel of the Marine Corps and Navy.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.
b. Size and type required (see 1.2).
c. Whether first article is required (see 3.2).
d. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
e. When level A, method 2, packing is required (see 5.2.1.2).
f. When palletization is required (see 5.3).

6.3 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209 and the requirements of this specification. The sample(s) presented for inspection may be first articles, preproduction samples, first production or sample(s) taken from the first lot depending on the contractors history and will be as directed by the Contracting Officer. The Contracting Officer should include specific instructions in all acquisition instruments regarding arrangements for selection, inspection, and approval of the first article.

6.4 Standard samples and shade samples. For information regarding availability of standard samples and standard shades specified, address inquiry to the acquiring activity issuing the invitation for bids.

6.5 Subject term (key word) listing.


Cap
Camouflage
Utility

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:35Z
Check the source to verify that this is the currentversion before use.


6.6 Figures. Figures 1 through 4 show general design of the cap and are furnished for information only. In the event of a conflict between these figures and the text of this specification, the text of this specification shall govern.

6.7 Marginal notations. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Source: https://assist.dla.mil-- Downloaded: 2026-10-20T22:35Z
Check the source to verify that this is the current version before use.

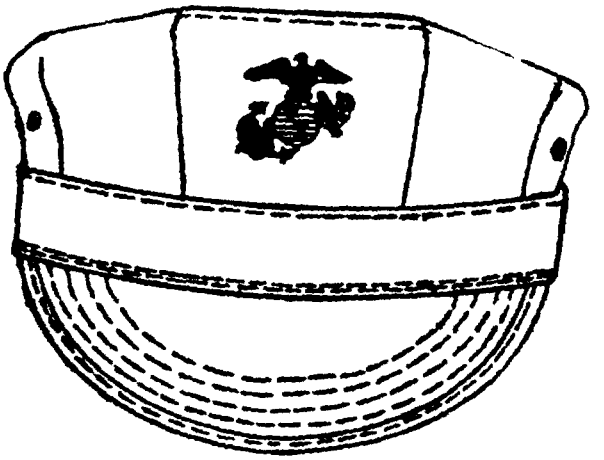

TYPE I

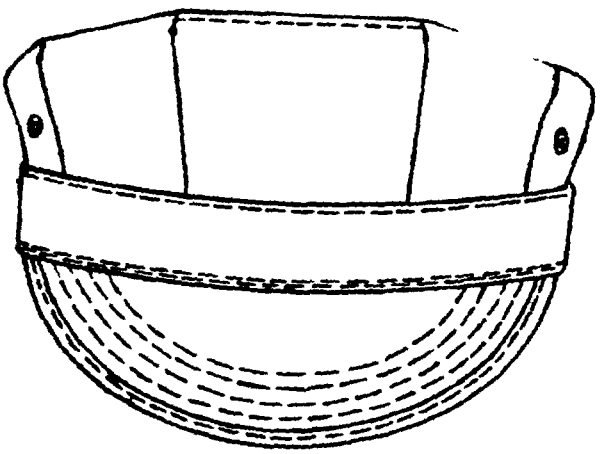

TYPE II

FIGURE 1. CAP, UTILITY, CAMOUFLAGE

05617

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:35Z
Check the source to verify that this is the current version before use.

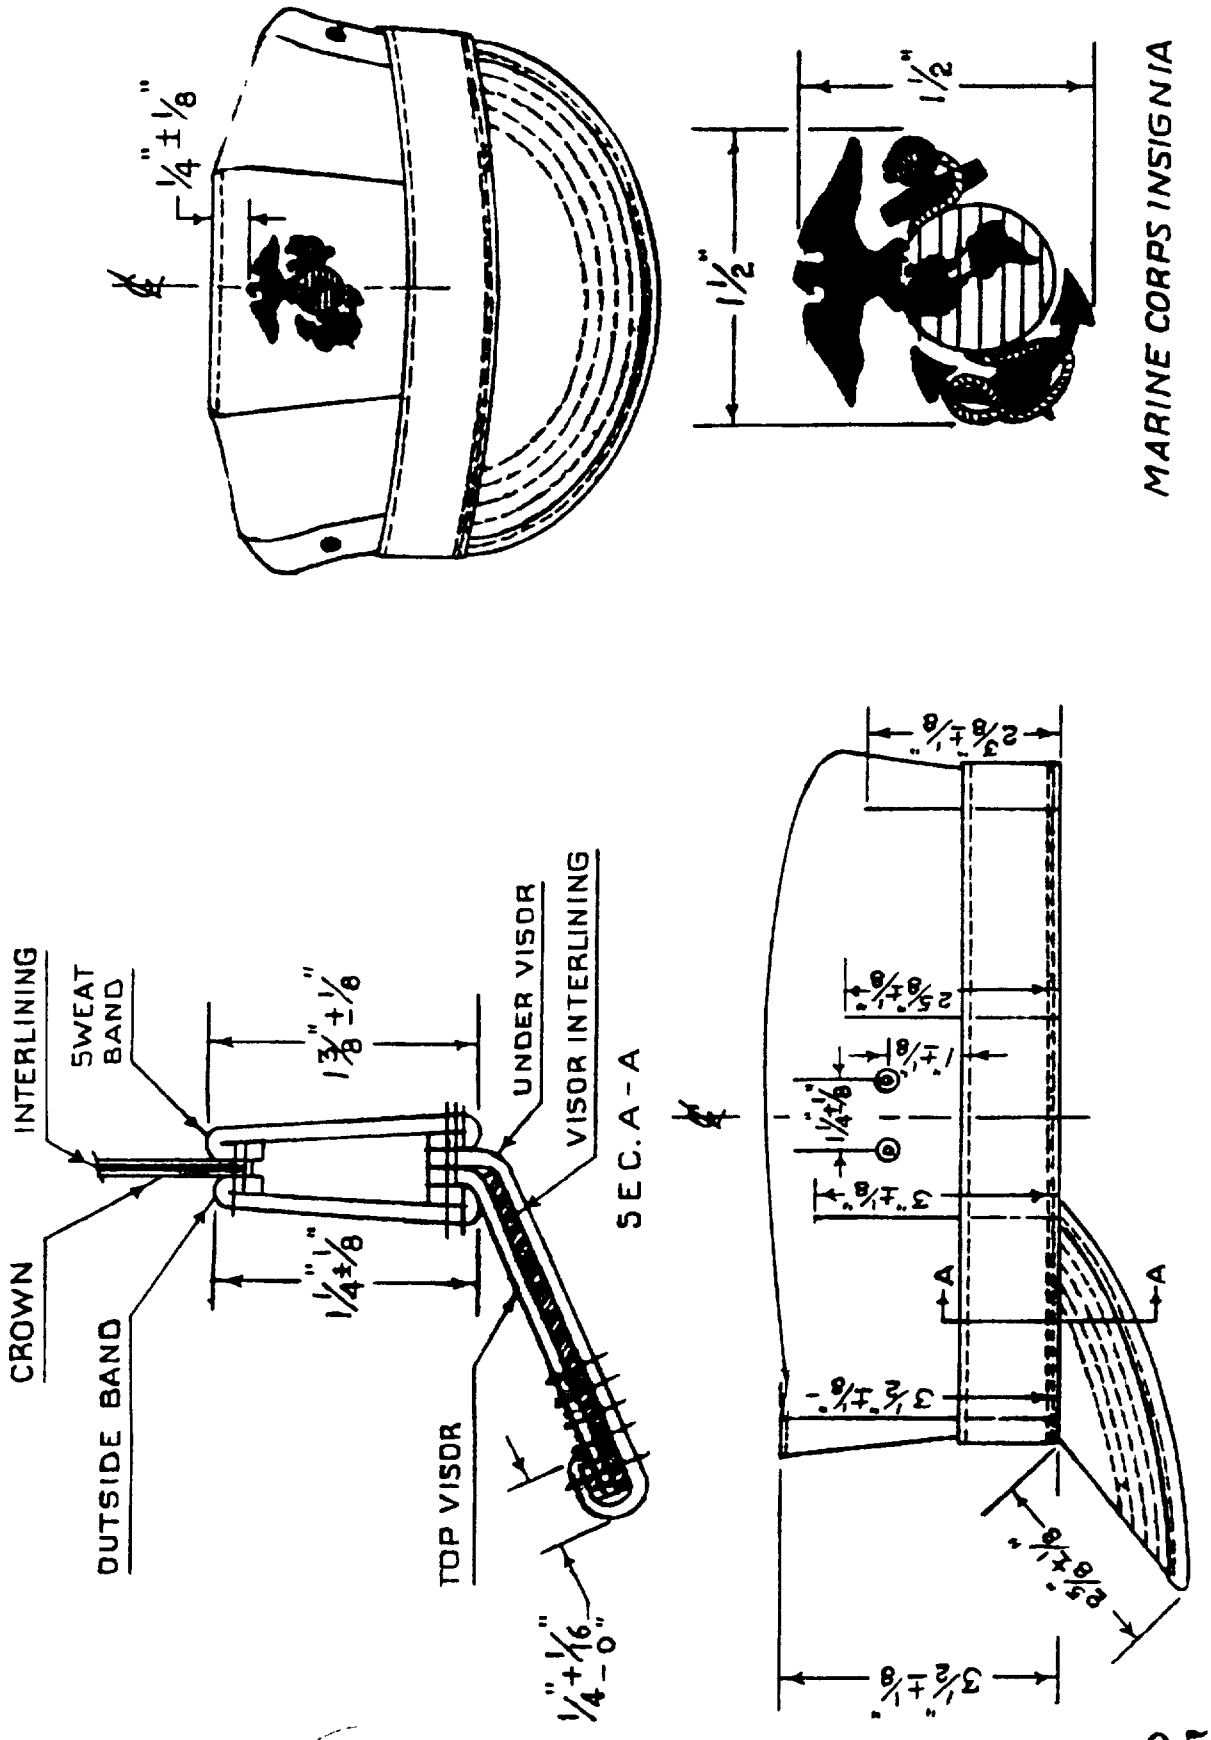


FIGURE 2. CAP, UTILITY, CAMOUFLAGE

05617

Source: https://assist.dla.mil -- Downloaded: 20261O-20T22:35Z
Check the source to verify that this is the current version before use.

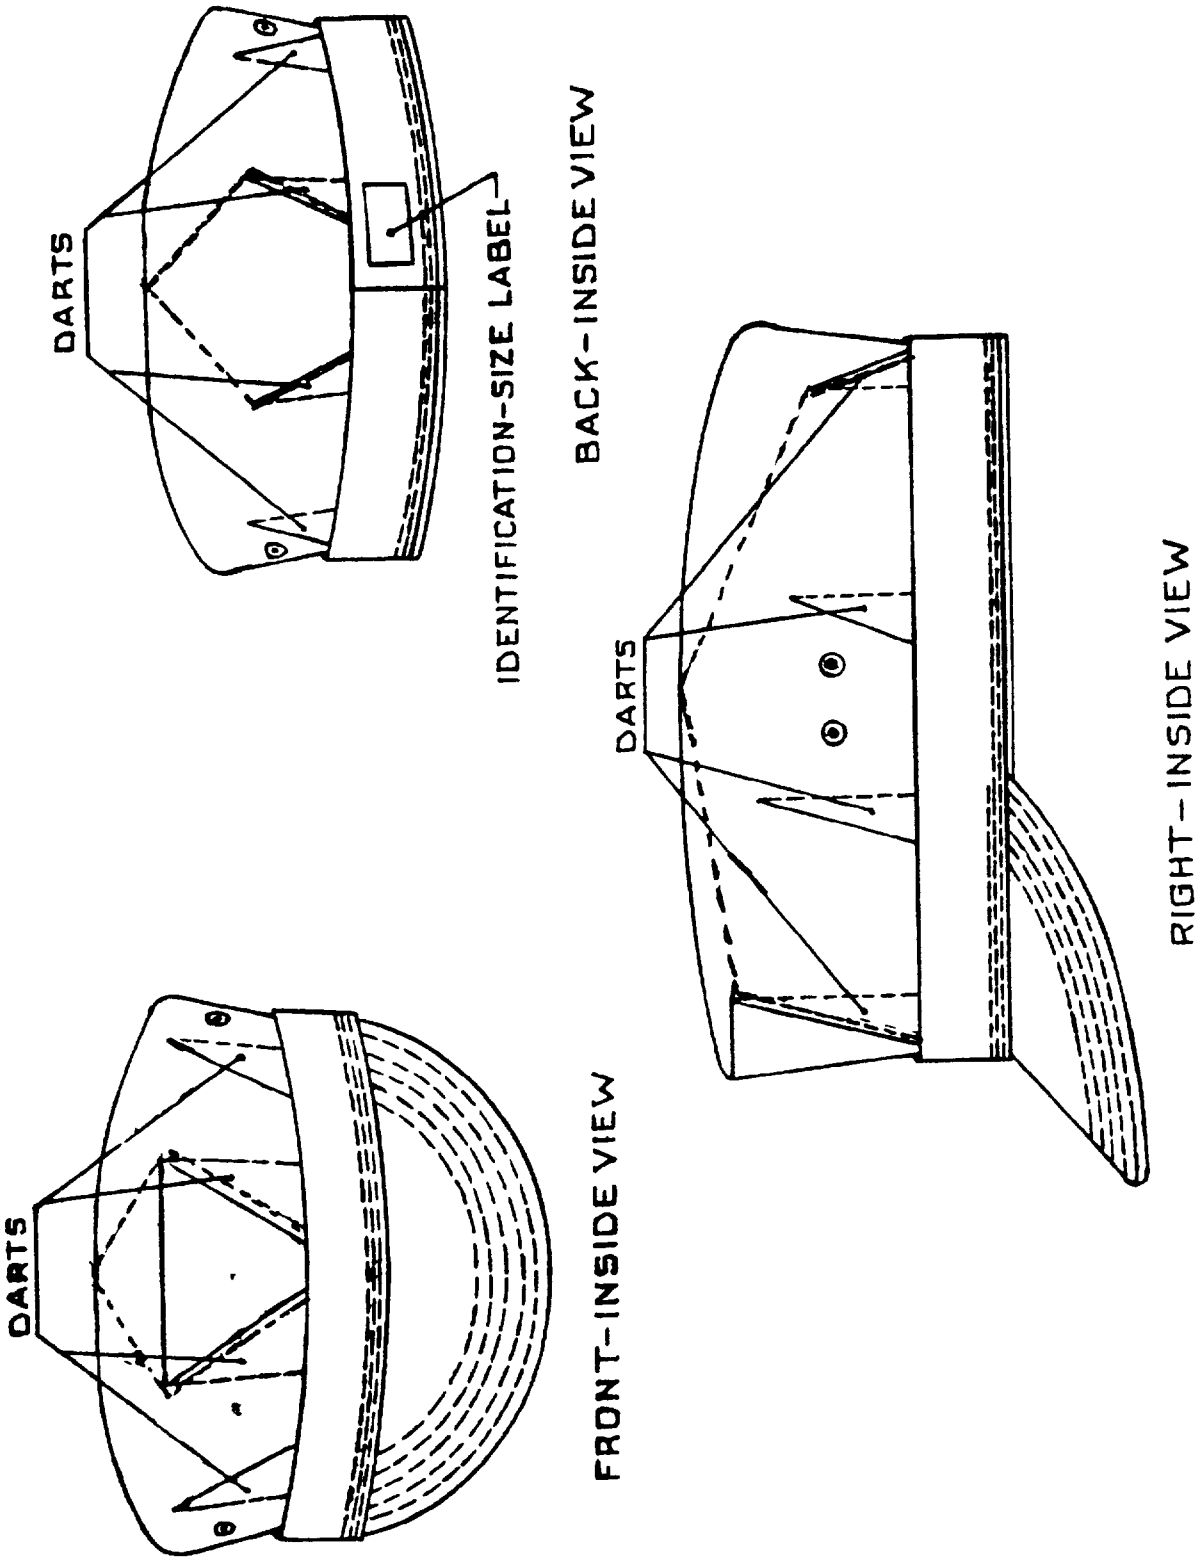


FIGURE 3. CAP, UTILITY, CAMOUFLAGE

05617

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:35Z
Check the source to verify that this is the current version before use.

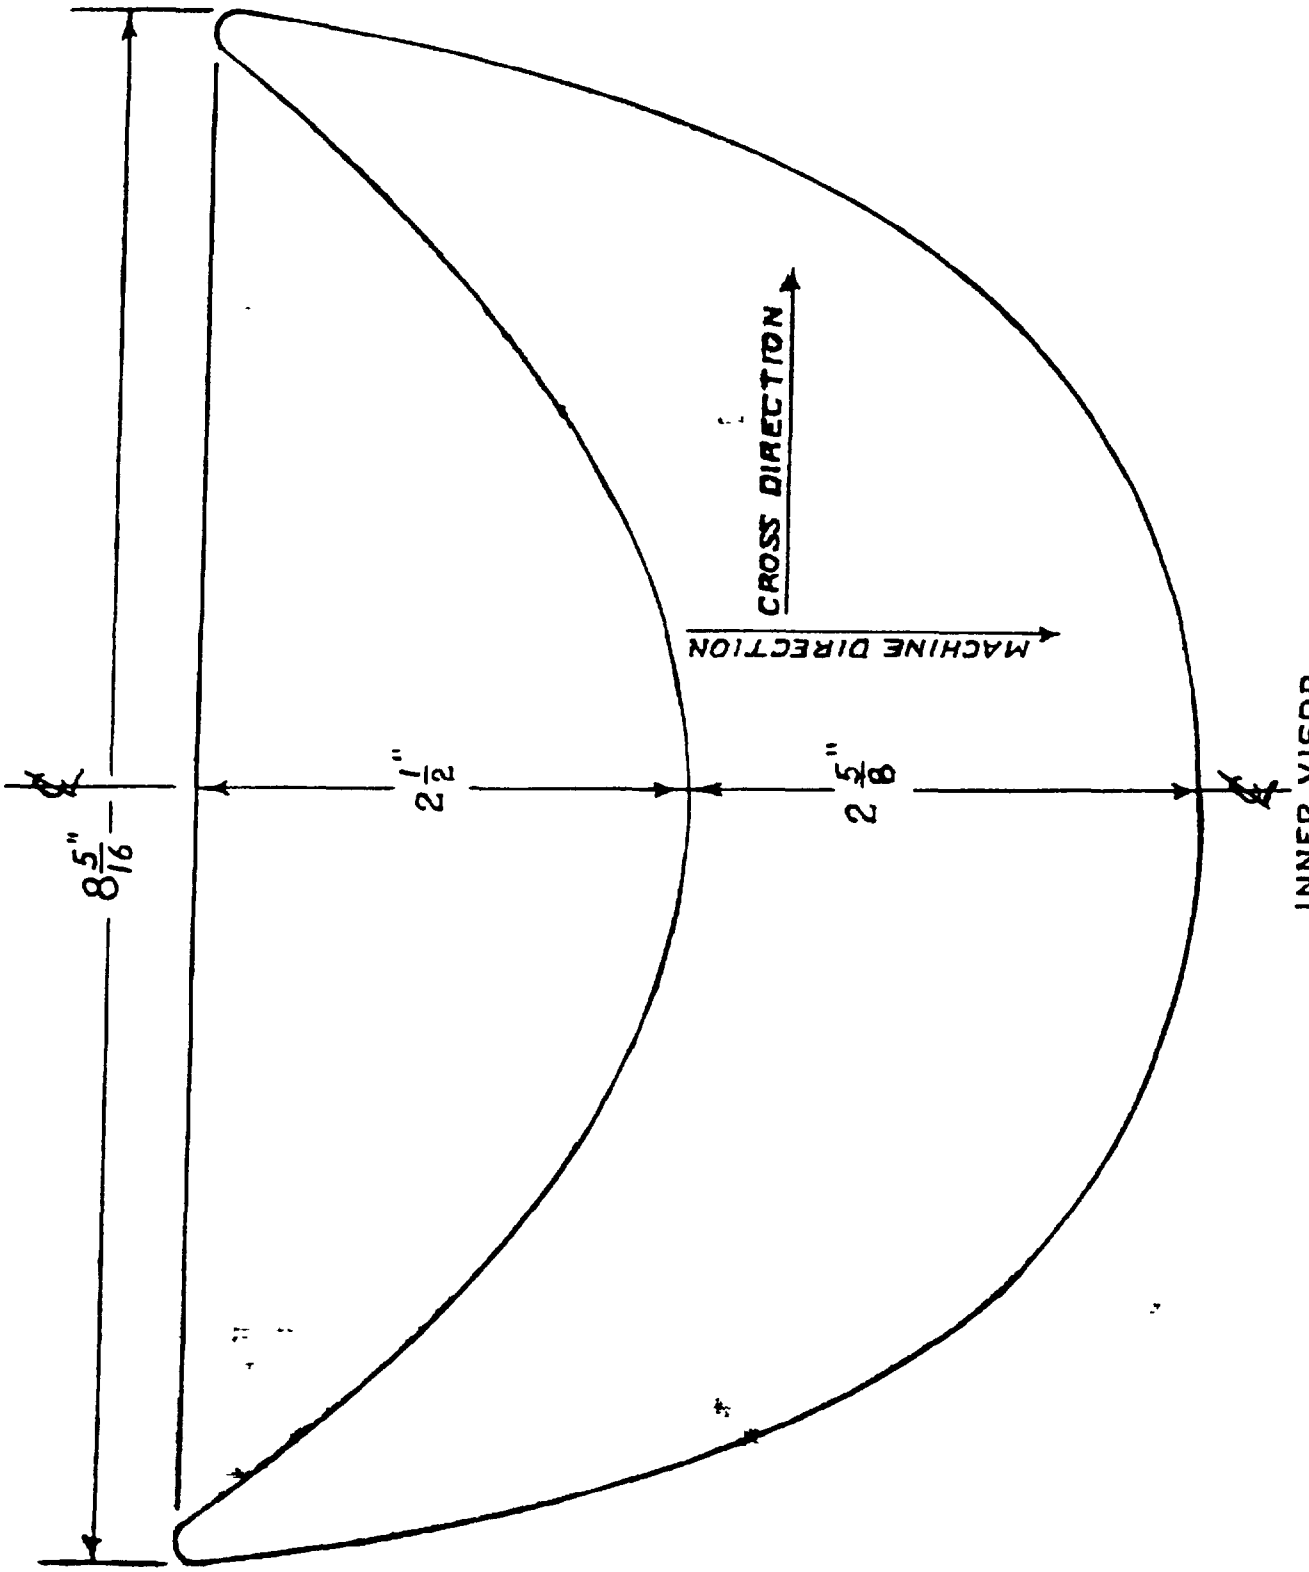


FIGURE 4. CAP, UTILITY, CAMOUFLAGE

Source: https://assist.dla.mil -- Downloaded: 20261O-20T22:35Z
Check the source to verify that this is the current version before use.

Preparing Activity
Navy - MC
Project No. 8405-N089

Custodians:
Navy - MC

Review Activities:
Navy - NU

User Activities:
Navy - YD

Source: https://assist.dla.mil -- Downloaded: 202640-20T22:35Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1 DOCUMENT NUMBER	2 DOCUMENT TITLE
MIL-C-29366B(MC)	CAP, UTILITY: CAMOUFLAGE

3a NAME OF SUBMITTING ORGANIZATION	4 TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)* _____

5 PROBLEM AREAS

a Paragraph Number and Wording

b Recommended Wording

c Reason/Rationale for Recommendation

6 REMARKS

7a NAME OF SUBMITTER *(Last First MI)* – Optional	b WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c MAILING ADDRESS *(Street City State, ZIP Code)* – Optional	8 DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil - Downloaded: 2026-02-20T22:35Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commanding General
Marine Corps Research, Development
and Acquisition Command, Code PSE-C
Washington, D.C. 20380-0001

Source: https://assist.dla.mil -- Downloaded: 202640-20T22:35Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS. In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commanding General
Marine Corps Research, Development
and Acquisition Command, Code PSE-C
Washington, D.C. 20380-0001

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:35Z
Check the source to verify that this is the current version before use.