MIL-C-29373A(MC)
7 October 1980
SUPERSEDING
MIL-C-29373(MC)
19 October 1978

MILITARY SPECIFICATION

CAP, GARRISON: WOMEN'S

This specification is approved for use by U. S. Marine Corps, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirement for women's garrison caps.

1.2 Classification. The garrison caps shall be one type in the following classes and sizes (see 6.2).

Class 1 - Wool Serge, Green, Shade 2207
Class 2 - Polyester/Wool, Tropical, Green Shade 2241

Schedule of Sizes

21	21-1/2	22	22-1/2	23	23-1/2	24

2. APPLICABLE DOCUMENTS

*2.1 Issue of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to the Commandant of the Marine Corps (LMA-1), Headquarters U. S. Marine Corps, Washington, D. C. 20380, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8410

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:37Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

V-T-276	- Thread, Cotton
V-T-301	- Thread, Silk
DDD-L-20	- Label, For Clothing, Equipage, and Tentage (General Use)

MILITARY

MIL-C-368	- Cloth, Satin, Rayon and Cloth, Twill, Rayon
MIL-C-823	- Cloth, Serge, Wool, Wool and Nylon, Polyester and Wool
MIL-B-17757	- Box, Shipping, Fiberboard (Modular Sizes)
MIL-C-21115	- Cloth, Tropical, Wool, Polyester/Wool
MIL-C-29118	- Cloth, Twill, Cotton

STANDARDS

FEDERAL

FED-STD-191	- Textile Test Methods
FED-STD-751	- Stitches, Seams and Stitchings

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-902	- Provisions for Evaluating Quality of Caps, Garrison, Women's

(Copies of specifications and standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

LAWS AND REGULATIONS

U. S. Postal Service Manual

(Copies of the manual may be obtained from the Superintendent of Documents, U. S. Government Printing Office, Washington, D.C. 20402.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:37Z
Check the source to verify that this is the current version before use.

UNIFORM CLASSIFICATION COMMITTEE

Uniform Freight Classification Rules

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606.)

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Association Inc., Tariff Order Section, 1616 P. Street, N.W., Washington, D. C. 20036.)

Department of Defense (DOD) Standard Color Card of
Official Standardized Shades for Sewing Threads 1968

(Copies may be obtained from the Color Association of the United States Inc., 200 Madison Avenue, New York, New York 10016.)

3. REQUIREMENTS

3.1 Standard sample. Standard samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variation from this specification may appear in the sample, in which case this specification shall govern.

3.2 First article. When specified (see 6.2), contractor shall furnish sample caps for first article inspection and approval.

3.3 Materials.

3.3.1 Basic material. The basic material for each class of caps shall be as follows:

(a) Class 1. Cloth, 12-ounce wool, serge, green, shade 2207 conforming to type 1, class 8, of MIL-C-823.

(b) Class 2. Cloth, 10-ounce polyester/wool, tropical, green shade 2241 conforming to type III, class 3 of MIL-C-21115.

3.3.2 Lining. The material for lining the caps shall be cloth, rayon twill 3.7 ounce, conforming to class 1 of MIL-C-368, green shade 2208.

3.3.3 Sweatband. The material for the sweatband shall be cloth, twill, cotton 5.7 to 6.3 ounces, conforming to MIL-C-29118, except the color shall be green shade 2224.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:37Z
Check the source to verify that this is the current version before use.

*3.3.4 Thread. All outside seaming and stitching shall be performed with silk thread conforming to type I of V-T-301 and other seaming and stitching with cotton thread conforming to type I of V-T-276.

Operation	Type	Ticket No.	Ply	Material	Needle/Bobbin
Inside seaming and stitching	IC2	A	3	Cotton	Both
Topstitching top crown hemming curtain	I	A	3	Silk	Both

*3.3.4.1 Color and colorfastness. The cotton and silk thread shall be dyed olive drab shade T-1 cable No. 66023 (See DOD Standard Color Card of Official Standardized Shades for Sewing Threads 1968). The colored threads, when tested in accordance with the applicable thread specification shall show good fastness to wet (dry) cleaning, and in addition, the thread shall show good fastness to light.

3.3.5 Eyelets. The eyelets shall be brass, rolled flange type, with the barrel scored with 6 to 8 scores. The flange of the eyelet shall be enameled a shade to closely match the shade of the basic material (see 3.3.1), or the entire eyelet may be enameled. Eyelets with a washer may be used. The eyelets shall conform to the following dimensions (see Section 4, Table III for required tests):

Outside diameter of barrel, inch:	0.185 + 0.004
Outside diameter of flange, inch:	0.312 ∓ 0.005
Length of barrel under flange, inch:	0.145 ∓ 0.004
Metal thickness, inch:	0.008 ∓ 0.001

3.3.6 Labels. Each cap shall have a combination identification and size label conforming to type I, class 4 of DDD-L-20 except the contents shall include the name of contractor 1/ and the Wool Product Act Information. The label shall measure not less than 1-3/4 by 1-1/4 inches, with a minimum 1/4-inch margin at the top edge for sewing. The caps are intended to be dry cleaned and shall show fastness to dry cleaning.

3.4 Design. The cap shall be the U. S. Marine Corps design shown on Figure 1.

3.5 Patterns. Standard patterns will be furnished to the contractor by the Government. The standard patterns shall not be altered in any way and shall be used only as a guide for cutting the working patterns. The standard patterns provide 1/4 inch seam allowance, except as otherwise specified in Table I, show size and are marked or notched for the proper cutting, placement, and assembly of the component parts.

1/ Size of characters for name of contractor shall be minimum 6 point (approximately 1/16 inch).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:37Z
Check the source to verify that this is the current version before use.

3.5.1 Pattern parts. The component parts of the caps shall be cut from materials specified herein in accordance with the pattern parts indicated below:

Item	Pattern Nomenclature (Classes 1 and 2)	No. of cut parts
	Basic Material	
1.	Side crown	2
2.	Top crown	1
3.	Curtain	2
	Material: Cloth, Rayon Twill	
4.	Lining, side crown	2
5.	Lining, top crown	1

3.6 Construction. The caps shall be manufactured in accordance with operation requirements as specified in Table I. The contractor is not required to follow the exact sequence of operations as listed in Table I, but all operations specified shall be used to manufacture the caps.

3.6.1 Stitches, seams and stitching. Stitch, seam and stitching types specified in Table I shall conform to FED-STD-751. The number of stitches per inch, as specified in Table I, indicates the minimum and maximum number permitted.

3.6.1.1 Tacking and backstitching. Ends of seams and stitching produced with 301 type stitch, when not caught in other seams or stitching shall be securely backtacked not less than 1/4 inch. Thread breaks shall be secured by stitching back of the break not less than 1/2 inch.

3.6.2 Pressing. All pressing operations specified in Table I shall be accomplished with a heated pressing iron or pressing machine set at medium (low) temperature (285°F maximum).

*3.6.3 Shade marking. The component parts of the cap, except the sweatband and underply of curtain, shall be marked to insure a uniform shade and size throughout the cap. Any method of shade marking may be used except:

1. Corrosive metal fastening devices.
2. Sew-on shade tickets.
3. Adhesive type tickets whose adhesive discolors or adheres to the material after removal of the tickets.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:37Z
Check the source to verify that this is the current version before use.

TABLE 1 MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	THREAD NDL	THREAD BOBN/ LPR
1.	Cutting.					
	a. Cut the cap in strict accordance with the patterns furnished by the Government.					
	b. Cut the material in the direction indicated by directional lines on the pattern.					
	c. Cut the wool and polyester/wool parts of the cap from one piece of the basic material.					
	d. Cut the lining for the cap from one piece of the rayon twill material.					
	e. Cut the sweatband on the straight (warp or filling direction) of the cotton twill material. The sweatband shall be cut 1-1/4 inches wide and sufficiently long in order to lap the ends 3/4 inch, with the top end turned under not less than 3/4 inch.					
2.	Replacement of damaged parts.					
	a. Replace, at time of cutting, any part of the cap or lining materials containing damages, such as holes or seriously weakening defects, such as smashes, multiple floats, and slubs likely to develop into a hole.					
	b. Replace any part damaged during the manufacturing process by needle chews which may be expected to develop into a hole, scissor or knife cut, tear, holes, mends, burns and large exposed drill holes.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:37Z
Check the source to verify that this is the current version before use.

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	THREAD NDL	THREAD BOBN/ LPR
3.	Shade marking.					
	a. Mark all component parts as specified in 3.6.3, in order to insure a uniform shade and size throughout the cap and proper assembly.					
*4.	Make curtain.					
	Finished appearance. The curtain shall finish smooth and flat, without twists, pleats, puckers or other distortion. The edge shall not be stretched. The edges shall be neatly and completely worked out.					
	a. The curtain shall be made of two plies of basic material.					
	b. Position the two plies face to face, with edges even and notches matching. Stitch together with a 1/4-to 5/16-inch seam along the upper edges.	301	SSe-3 (a)	10-14	A	A
	c. Turn and edge stitch the curtain uniformly with a double row of stitches 1/16 and 1/4 inch respectively from the seamed edges.	301	SSe-3 (b)	10-14	A	A Silk
	d. Seam the two plies of curtain together 1/4 inch from the raw lower edge.	301	SSa-1	10-14	A	A
	e. Press the curtain smooth and flat with a heated pressing iron or pressing machine (see 3.6.2).					
5.	Join ends of curtain.					
	Finished appearance. The ends of the curtain shall be joined without twists, fullness or puckers.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:37Z
Check the source to verify that this is the current version before use.

TABLE 1 MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	THREAD NDL	THREAD BOBN LPR
*5.	Join ends of curtain. (cont'd)					
	a. Lap the right end of the curtain on the outside of the left end, with the bottom edges even, and with the notch at the right front in line with the edge of left front.					
	b. Seam the ends together along the bottom edge 1/4 inch from the edge.	301	LSa-1	10-14	A	A
*6.	Join lining to top crown.					
	Finished appearance. The lining shall be joined to the top crown without twists, puckers, pleats or distortion.					
	a. Position top crown and top crown lining with edges even and notches matching and seam together 1/8 inch from the edges.	301	SSa-1	6-8	A	A
	b. Fold the top crown-lining assembly in half lengthwise, with the lining side out and stitch along the folded edge from end to end. The line of stitching shall taper from zero at each end to 1/4 inch from the folded edge at the center.	301	OSf-1	10-14	A	A
*7.	Join top and side crowns.					
	Finished appearance. The top and side crown shall be joined without twists, puckers, pleats or distortion.					
	a. Position the left and right side crown, respectively, on the outside of the top crown with edges even and notches matching and with front and back point of					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:37Z
Check the source to verify that this is the current version before use.

TABLE 1 MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	THREAD NDL	THREAD BOBN/ LPR
*7.	Join top and side crowns.(cont'd)					
	top crown matching the upper corners of side crown.	301	LSq-2 (a)	10-14	A	A
	b. Join the left and right side crown, respectively, to the top crown with a 1/4-inch seam, beginning and ending on the center fold of the top crown 1/4 inch from each end. The specified manner of joining the side crowns to top crown will permit the front and back corners of the cap to be more sharply formed when joining side crowns at the ends.					
*8.	Join side crown lining to cap.					
	Finished appearance. The side crown lining shall be joined to the cap without twists, puckers, pleats or distortion.					
	a. Position the left and right side crown lining, respectively, on the inside of top crown, with edges even and notches matching and join to the top crown-side crown seam outlet with a 1/4-inch seam. The seam shall begin and end on the center fold of the top crown, 1/4 inch from each end.	301	SSa-1	10-14	A	A
*9.	Join ends of side crown.					
	Finished appearance. The ends of side crown shall be joined together without twists, puckers, pleats or distortion. The center of the top crown shall be in line with the front and back seams of cap. The stitching shall not extend to the top edge of the side crown.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:37Z
Check the source to verify that this is the current version before use.

TABLE 1 MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	THREAD NDL	THREAD BOBN/ LPR
*9.	Join ends of side crown. (cont'd)					
	a. Join the left and right side crown at front and back ends of cap with a 1/4-inch seam, from the lower edge up to the joining seam line of the side and top crown.	301	SSz-3 (a)	10-14	A	A
*10.	Join ends of side crown lining.					
	Finished appearance. The ends of the side crown lining shall be joined without twists, puckers, pleats or other distortion. The stitching shall not extend to top edge of the lining.					
	a. Join the left and right side crown lining at front and back ends of cap with a 1/4-inch seam, from the lower edge up to the joining seam line of the side and top crown.	301	SSa-1	10-14	A	A
*11.	Topstitch side crown					
	Finished appearance. The side crown shall be uniformly topstitched. The side crown lining at front and back ends of cap shall not be caught in the topstitching.					
	a. Turn cap right side out, working out the upper front and back corners; spread open the seam at each end of cap and topstitch the left and right side crowns, respectively, 1/16 inch from the seam; turn the crown seam outlet towards the side and continue to topstitch the side crown 1/16 inch from the raised edge, catching the outlet in the stitching. The topstitching at each end of cap shall not be through the side crown lining	301	SSz-3 (b) (ends) LSq-2 (b) (raised edge)	10-14	A	A Silk

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:37Z
Check the source to verify that this is the current version before use.

TABLE 1 MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	THREAD NDL	THREAD BOBN/ LPR
*12.	Join lining to side crown.					
	Finished appearance. The lining shall be joined to side crown without twists, puckers, pleats or other distortion. The front and back seams of lining and side crown shall match.					
	a. Turning cap wrong side out, match the front and back lining seams to the respective crown seam with bottom edges even. Join lining to side crown 1/4 to 3/8 inch from raw bottom edge, with the front and back seams of side crown lining turned flat against the respective side crown seams and the ends caught in the stitching.	301	SSa-1	6-8	A	A
*13.	Join curtain to cap.					
	Finished appearance. The curtain shall fit close to sides of cap without twists, puckers, pleats or other distortion. The ends of the curtain shall lap on the left side of cap. The curtain shall be the proper height for each size cap.					
	a. Turn cap right side out. Position the curtain on the outside of cap with botton edges even and notches in curtain matching the respective side crown joining seam. Join the curtain to the cap through the lining with a 3/8-inch seam.	301	LSq-2 (a)	10-14	A	A
	b. Turn the cap curtain down with the raw bottom edge of curtain and side crown turned to the inside. Topstitch the side crown on the outside 1/16 inch from the raised bottom edge.	301	LSq-2 (b)	10-14	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:37Z
Check the source to verify that this is the current version before use.

TABLE 1 MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	THREAD NDL	THREAD BOBN/ LPR
*14.	Join sweatband to cap.					
	Finished appearance. The edges of the sweatband shall be properly turned under to finish uniformly 5/8 to 3/4 inch wide. The sweatband shall be uniformly stitched to the cap; shall finish smooth and flat without pleats, puckers, gathers, twists or other distortion; shall cover the raw bottom edge of the curtain and side crown; and the lower edge shall be 1/8 to 3/16 inch above the bottom finished edge of cap. The ends of the sweatband shall finish to the right or left, but not on, the back seam of cap, and shall lap each other not less than 1 inch. The combination identification--size label shall be properly positioned.					
	a. Properly position the 1-1/4 inch wide sweatband on the inside of the cap.					
	b. Stitch the sweatband to the cap with a double row of stitches, turning under the top and bottom edges to finish 5/8 to 3/4 inch wide, lapping the ends, turning under the top end and catching the turned-under edges and top end in the stitching 1/16 inch from the top and bottom folded edges. The combination identification-size label shall be positioned to the right or left of the back seam with the top edge placed under the sweatband and caught in the top row of stitches.	301	LSd-1 (each edge)	10-14	A	A
	c. Turn up curtain.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:37Z
Check the source to verify that this is the current version before use.

TABLE 1 MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/STCH TYPE	STCH/IN	THREAD NDL	THREAD LPR
15.	Clean cap.					
	a. Trim all ends of stitching and remove all loose ends of thread from the cap. Remove all spots, stains and shade tickets and markings, without injury to the material.					
16.	Press cap.					
	a. The cap shall be well pressed with a heated pressing iron or pressing machine (see 3.6.2). The bottom edge of curtain shall be smoothly and carefully folded and well creased. The front and back of the curtain shall not be creased.					
	b. The spread at the top of the crown shall be evenly distributed on each side of the cap. The sweatband shall not be exposed below the bottom edge of the cap. All pressing marks shall be removed.					
*17.	Tack ends of curtain.					
	a. Tack the lapped ends of the curtain together on the inside with a blindstitch. The tack shall be 1/2 to 5/8 inch down and 1 to 1-1/8 inches in from the outer edge of curtain.	Hand or Machine		4-6	A	
	-or-					
	b. Superimpose tack on outer row of the double row of stitching at the curved edge for a distance of 3/4 to 1 inch.	301 or Hand	SSa-1	10-14 4-6 per tack	A C	A Silk
18.	Attach eyelet to curtain.					
	Finished appearance. The eyelet shall be properly positioned and securely attached through the lapped ends of the curtain, and securely clinched on the inside without distorting and cutting the material or splitting the flange of the eyelet.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:37Z
Check the source to verify that this is the current version before use.

TABLE 1 MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	THREAD NDL	THREAD BOBN/ LPR
18.	Attach eyelet to curtain.(cont'd) a. Mark the left side of the curtain 1-3/4 ± 1/8 inches from the top edge and 1-1/2 ± 1/8 inches from the side edge for the location of one metal eyelet (See Figure 1). b. Attach the metal eyelet to the curtain at the mark.					

*3.7 Finished measurements. The finished caps shall conform to the measurements shown in Table II.

Table II. Finished measurements 1/

	Cap				
	Height 2/			Width 3/	
Size	Front (inches)	Back (inches)	Center (inches)	Top Crown (inches)	Circum-ference 4/
21	2-5/8	2-7/8	3-3/8	4	21
21-1/2	2-5/8	2-7/8	3-3/8	4-1/8	21-1/2
22	2-3/4	3	3-1/2	4-1/4	22
22-1/2	2-3/4	3	3-1/2	4-3/8	22-1/2
23	2-7/8	3-1/8	3-5/8	4-1/2	23
23-1/2	2-7/8	3-1/8	3-5/8	4-5/8	23-1/2
24	2-7/8	3-1/8	3-5/8	4-3/4	24

	CURTAIN (Height) 5/			
	Front (inches)	Back (inches)	Center Left and Right	Through eyelet (inches)
21	2-3/4	2	2	3
21-1/2	2-3/4	2	2	3
22	2-7/8	2-1/8	2-1/8	3-1/8
22-1/2	2-7/8	2-1/8	2-1/8	3-1/8
23	3	2-1/4	2-1/4	3-1/4
23-1/2	3	2-1/4	2-1/4	3-1/4
24	3	2-1/4	2-1/4	3-1/4

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:37Z
Check the source to verify that this is the current version before use.

1/ Tolerance: ± 1/8 inch.

2/ Height of cap measurement taken at the location for front and back seams and at the center of side crown from folded lower edge of curtain to upper raised edge of side crown.

3/ Width of top crown measurement taken at the center of the crown from raised edge to raised edge of side crown with the spread fully extended.

4/ Circumference of the cap taken along the center of the sweatband.

5/ Heights of curtain measurement taken at the location for front and back seams, at the center of left and right side of curtain, and through the center of the metal eyelet, from folded bottom edge of curtain to outer edge of curtain.

3.8 Workmanship. The finished caps shall confrom to the quality and grade of product established by this specification. The occurrence of defects shall not exceed the levels set by the applicable acceptable quality levels (AQL's).

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance. Where certificates of compliance are permitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.4).
2. Quality conformance inspection (see 4.5).

4.3 Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with the test conditions specified in MIL-STD-902.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:37Z
Check the source to verify that this is the current version before use.

4.4 First article inspection. When first article is required, inspection shall be made of a completely fabricated cap for all provisions of this specification.

4.5 Quality conformance inspection.

4.5.1 Testing of components. Testing of components shall be made in accordance with applicable subsidiary specifications and drawings referenced herein to the extent applicable, except that this specification shall govern in the event of conflict. In addition, inspection shall be performed on components listed in Table III for characteristics noted.

*4.5.1.1 Sampling for testing. Government furnished material shall not be sampled or tested unless specifically requested by the Government. The sample unit for testing of each component shall be the quantity necessary to perform all required tests one time each. The inspection level for each component shall be S-1 of MIL-STD-105. The AQL for each characteristic tested shall be 6.5 defects per 100 units. The unit for expressing lot sizes and the sample unit for testing each component shall be in accordance with applicable subsidiary specifications and as follows:

Component	Lot size expressed as	Sample unit for testing
Eyelets	each	10 each

4.5.2 In-process inspection. Inspection shall be performed during the manufacturing of the end item to ascertain that the operations are performed as specified herein. The Government reserves the right to determine the acceptability of construction methods not performed in accordance with specified requirements for operations or subassemblies.

4.5.3 End item examination. Samplings and examination of the end item shall be performed for caps in accordance with the provisions of MIL-STD-902.

4.5.4 Finished measurement examination. The provisions for the finished measurement examination of the finished cap shall be as specified in MIL-STD-902 and Table II of this specification.

4.5.5 Examination of packaging. Shipping containers that are fully prepared for delivery except for closure shall be subjected to the examination of preparation for deliviery described in MIL-STD-902. The occurrence of defects during this examination shall not exceed the applicable point value or defect limit specified in MIL-STD-902.

*4.6 Tests. The method of testing specified in FED-STD-191, wherever applicable, and as listed in Table III shall be followed. All requirements apply to the sample unit requirement except where otherwise specified.

Source: https://assist.dla.mil Downloaded: 2026-10-20T22:37Z
Check the source to verify that this is the current version before use.

Table III. Test methods

Components	Characteristics	Rqmt. Para.	Test Method	Results Reported as
Eyelets 1/	Material identification	3.3.5	Std Comm'l	Pass or Fail
	Finish	3.3.5	Visual	Pass or Fail
	Color	3.3.5	Visual	Pass or Fail
	Dimensions			
	- outside dia. - barrel	3.3.5	Std Comm'l	Pass or Fail
	Outside dia flange	3.3.5	Std Comm'l	Pass or Fail
	Length of barrel	3.3.5	Std Comm'l	Pass or Fail
	Metal thickness	3.3.5	Std Comm'l	Pass or Fail

1/ A certificate of compliance will be acceptable for this requirement.

5. PACKAGING

5.1 Preservation and packaging. Preservation and packaging shall be level A or commercial, as specified (see 6.2).

5.1.1 Level A.

*5.1.1.1 Unit packaging. Each cap shall be placed in an individual polyethylene bag measuring approximately 6 inches wide by 15 inches long with a 1-inch lip at the open end along the 6-inch dimension. The polyethylene flexible film shall be 0.00125 inch thickness (± 25 percent tolerance). Each bag shall contain a label (see 5.3.1).

5.1.2 Commercial. Caps shall be packaged to afford adequate protection against physical damage during shipment from the contractor to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribtuion.

5.2 Packing. Packing shall be level A, B or commercial as specified (see 6.2).

5.2.1 Level A.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:37Z
Check the source to verify that this is the current version before use.

*5.2.1.1 Method 1. One hundred twenty five (125) caps of one size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container, conforming to weather-resistant class, size No.2A of MIL-B-17757, assembled, closed and reinforced as specified in the Appendix thereto. Towards the end of the contract, or when there is less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container (see 5.3.2).

*5.2.1.2 Method 2. When specified (see 6.2), six level B shipping containers (750 caps of one size only) shall be packed in a fiberboard shipping container conforming to weather-resistant class, size No. 4 of MIL-B-17757, assembled, closed and reinforced as specified in the Appendix thereto. Towards the end of the contract, or when there is less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container (see 5.3.2).

*5.2.2 Level B. One hundred twenty five (125) caps of one size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to domestic class, size No. 2A of MIL-B-17757, assembled and closed as specified in the Appendix thereto. Towards the end of the contract, or when there is less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container (see 5.3.2).

5.2.3 Commercial. Caps, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rates for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with the U. S. Postal Service Manual, Uniform Freight Classification Rule or National Motor Freight Classification Rules, as applicable.

5.3 Marking. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

5.3.1 Polyethylene bagged packages. Polethylene bagged packages shall have the following information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification. The bag or label shall indicate the following information.

STOCK NUMBER
NOMENCLATURE
SIZE
CONTRACT NUMBER
NAME OF CONTRACTOR

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:37Z
Check the source to verify that this is the current version before use.

5.3.2 Mixed sizes. Each shipping container packed with mixed sizes shall have a 5 X 4 inch white paper label securely attached to the end and side directly under the printing or stenciling. The words "MIXED SIZES" shall be plainly stamped or printed thereon and under these words shall be legibly stamped or printed the correct quantity and sizes contained therein.

6. NOTES

6.1 Intended use. The caps are intended for wear by women personnel of the U. S. Marine Corps.

6.2 Ordering data Procurement documents should specify the following:

6.2.1 Procurement requirements.

(a) Title, number and date of this specification.
(b) Class and size (see 1.2).
(c) Whether first article is required (see 3.2).
(d) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(e) When level A, method 2, packing is required (see 5.2.1.2)

6.2.2 Data requirements. Data conforming to Data Item Descriptions DI-R-4803, DI-R-4805, DI-T-4901, DI-T-4902, DI-T-4903 and DI-T-4904 will usually be required for delivery in connection with this specification. When so required, such data will be specified for delivery on a DD Form 1423 included in the contract.

6.3 Standard sample and patterns. For information regarding the availability of standard sample and patterns, address inquiry to the procuring activity issuing the invitation for bids.

6.4 First article. Examinations, tests and approval shall be as specified by the contracting officer (see 3.2).

6.5 Figures. Figures are furnished for information purposes only. To the extent of any inconsistencies between the written specification and the figures, the written specification shall control.

*6.6 Marginal notations. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirememts of this

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:37Z
Check the source to verify that this is the current version before use.

document based on the entire content irrespective of the marginal notations and relationship of the last previous issue.

Preparing Activity
Navy - MC
Project No 8410-N498

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:37Z
Check the source to verify that this is the current version before use.

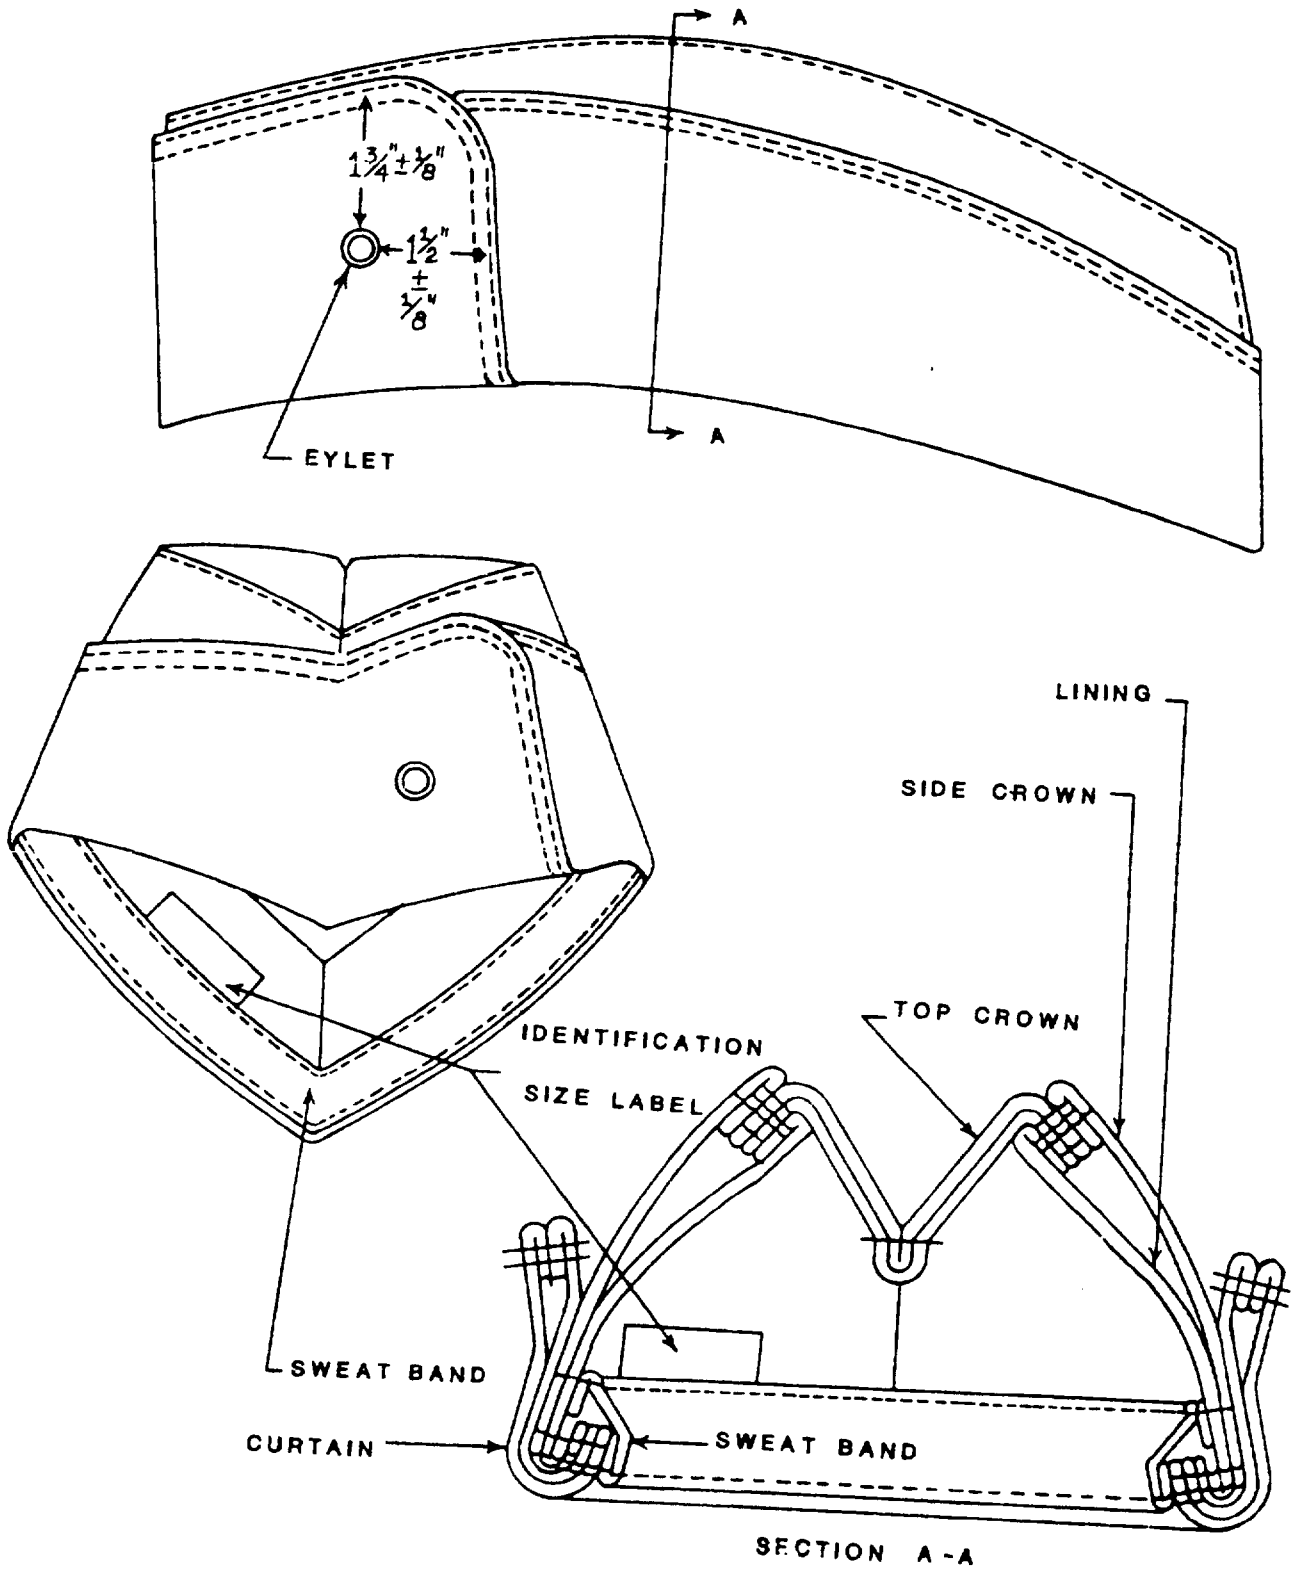


FIGURE 1: CAP, GARRISON, WOMAN'S

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:37Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:37Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for us submitting comments and suggestions for improvements. All users of military standardization documents are invited to pro suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorizatio to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POST
NECESS/
IF MAIL
IN THI
UNITED ST

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commandant of the Marine Corps
Headquarters, US Marine Corps
(Code LMA-1)
Washington, DC 20380

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:37Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:37Z
Check the source to verify that this is the current version before use.

PREVIOUS EDITION IS OBSOLETE