MILITARY SPECIFICATION

CAPS, DRESS: WOMEN'S

This specification is approved for use by U. S. Marine Corps, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers requirements for women's white vinyl dress caps.

1.2 Classification. The caps shall be in the following types, classes and sizes, as specified (see 6.2).

Type I - Black poromeric visor
Class 1 - with black poromeric chin strap
Class 2 - with gold chin strap

Type II - Black broadcloth/poromeric visor
Class 1 - with field grade embroidery and gold chin strap
Class 2 - with general officer embroidery and gold chin strap

Type III - White vinyl visor with scarlet cord (USMC Band)

Schedule of Sizes

21	21-1/2	22	22-1/2	23	23-1/2	24

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to the Commandant of the Marine Corps (LMA-1), Headquarters, U. S. Marine Corps, Washington, D. C. 20380, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8410

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:44Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATION

FEDERAL

V-T-276	- Thread, Cotton
V-T-295	- Thread, Nylon
CCC-C-417	- Cloth, Coated or Laminated (Table and Shelf)
CCC-C-700	- Cloth, Coated, Vinyl, Coated (Artificial Leather)
DDD-L-20	- Label, For Clothing, Equipage and Tentage (General Use)
PPP-B-636	- Box, Shipping, Fiberboard

MILITARY

MIL-C-297	- Cloth, Interlining, Cotton Warp and Spun Hair-wool Filling
MIL-C-368	- Cloth, Satin, Rayon and Cloth, Twill, Rayon
MIL-B-3461	- Buttons, Insignia, Metal, Uniform and Cap
MIL-E-17568	- Embroidery Materials, Metallic and Synthetic Metallic
MIL-C-19559	- Cord, Service Cap, Women's
MIL-L-20271	- Lace, Gold, Ornamental
MIL-E-20652	- Eyelets, Metallic, and Eyelet Washers, Metallic, (General Specification For)
MIL-C-82252	- Cloth, Broadcloth Wool and Wool/Synthetic (Moth-proofed)

STANDARDS

FEDERAL

FED-STD-191	- Textile Test Methods
FED-STD-751	- Stitches, Seams and Stitchings

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage

(Copies of specification and standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:44Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

LAWS AND REGULATIONS

U. S. Postal Service Manual

(Copies of the manual may be obtained from the Superintendent of Documents, U. S. Government Printing Office, Washington, D.C. 20402.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification Rules

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606.)

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Association, Inc., Tariff Order Section, 1616 P. Street, N.W., Washington D. C. 20026.)

3. REQUIREMENTS

3.1 Standard sample. Standard samples are furnished solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample, in which case the specification shall govern.

3.2 First article. When specified (see 6.2), before production is commenced, the first article, consisting of the number of caps specified by the procuring activity (see 6.2) shall be submitted, or made available to the contracting officer or his authorized representative for inspection. The approval of the first article authorizes the commencement of production, but does not relieve the contractor of responsibility for compliance with all provisions of this specification. The first article shall be manufactured by the contractor in the same facilities to be used for the manufacture of the production items.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:44Z
Check the source to verify that this is the current version before use.

3.3 Materials.

3.3.1 Basic material. The basic material for the cap shall be cloth, coated, vinyl, 18 ounce conforming to class 7 of CCC-C-700, white shade 1572.

3.3.2 Visor. The visors shall be constructed from the following materials:

3.3.2.1 Type I. Type I visors shall consist of a top piece and bottom piece, bonded together and bound on the outer edge with a plastic material. The top and bottom pieces shall be a smooth high gloss poromeric material, 0.045 ± 0.003 inches thick, 16.5 ± 1 ounce per square yard., The shade shall match Black 111.

3.3.2.2 Type II. Type II visors shall consist of a top ply of black broadcloth conforming to type I, class 4 of MIL-C-82252 and a bottom ply of smooth high gloss poromeric material, 0.045 ± 0.003 inches thick, 16.5 ± 1 ounce per square foot. The shade for the broadcloth shall match shade 2307.

3.3.2.3 Type III. Type III visors shall consist of a visor interlining (see 3.3.7) covered with the basic white vinyl material specified in 3.3.1.

3.3.2.4 Binding. The binding for type I and II visors shall be made from a plastic film, vinyl or equal, weighing not less than 12 ounces per square yard, and having a thickness of less than 0.0013 inch. The plastic film shall have a smooth high finish, and the color shall match that of the top piece for the visor. The binding shall not crack and shall show no evidence of tackiness. The binding shall be tested as specified in Section 4, Table III.

3.3.3 Lining. The material for lining the caps shall be cloth, rayon twill, 3.7 ounce, conforming to class 1 of MIL-C-368, white shade 3001.

3.3.4 Interlining.

3.3.4.1 Haircloth. The interlining for the top crown, center crown and lower crown shall be nontoxic cloth having undyed cotton warp yarns and natural horsehair. The horsehair shall meet current Quarantine Laws and pertinent regulations of the U. S. Department of Agriculture as set forth in Code of Federal Regulations. In addition to the above, the haircloth shall conform to the following requirements (see Section 4, Table III for required test) or the top crown, center crown and lower corwn interlining may be synthetic haircloth material, equal to Crown Textile Style No. 453 or 455, 7.8 ounce to 8.5 ounce. Both materials may be used in the same cap.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:44Z
Check the source to verify that this is the current version before use.

Weight-ounce per square yard	9 to 10
Yarns per inch (minimum):	
Warp (two-ply cotton)	60
Filling (natural horsehair)	90
Weave	with two ends weaving as one
Color	Natural
Stiffness - inch pounds, minimum average	
Warp	0.035
Filling	0.045

3.3.4.2 Outer crown interlining. The material for interlining the outer top crown piece shall be cloth, cotton warp and spun hair-wool filling, plain weave, conforming to type I, class 1 of MIL-C-297 or, the interlining shall be a plain weave fabric having plied cotton and hair warp yarns and hair filling yarns (hair shall be a suitable quality goat hair or equal, sterilized and natural in color). The finished cloth shall weigh 6.5 ounces minimum per square yard, shall have not less than 30 ends and 30 picks per inch, and shall have a minimum average stiffness (bending moment) of 0.002 inch-pound in the warp and filling directions when tested as specified in Section 4, Table III.

3.3.5 Outer sweatband. The outer sweatband shall be a millinery belting ribbon conforming to the following requirements when tested as specified in Section 4, Table III.

Material identifications:	
Warp	Rayon
Filling	Cotton
Width - inches	7/8 ± 1/16
Weight - ounces per linear yard	0.19 ± 0.2
threads per inch (minimum)	
Warp	122
Filling	30
Ply - cotton yarn	2, 4 or 5
Color	White
Weave	Plain
pH	5.5 to 8.5
Nonfibrous material	
Colorfastness to:	
Crocking	Good
Wet/dry cleaning	Good
Perspiration	Good

3.3.6 Inner sweatband. The material for the inner sweatband shall be cloth, coated or laminated white shade 1572 (see 6.3) conforming to CCC-C-417.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:44Z
Check the source to verify that this is the current version before use.

3.3.7 Visor interlining. The material for interlining the visor shall be a nonwoven, fibrous material produced from a highly purified alpha cellulose vegetable fiber and leather fibers, wet web impregnated with approximately 15 percent compounded synthetic rubber conforming to the following physical requirements when tested as specified in Section 4, Table III.

	Machine Direction	Cross Direction
Weight (pounds per square yard): 3.0 minimum		
Thickness: 0.085 ± 0.003 inch		
Tensile strength (pounds per inch, minimum)	168	103
Tearing strength (grams centimeters, minimum)	1,200	1,600
Stretch (percent, maximum)	12	15
Stiffness (load pounds per inch, minimum):		
Original	5.0	4.0
After wet(dry) cleaning	5.0	4.0
Water absorption (percent, maximum): 19		
Accelerated aging: Shall show no embrittlement, development of stickiness or delamination.		
Resistance to water: Shall show no shrinking or warping.		

The finished visor interlining material shall be marked by directional symbols to designate the greater flexibility of the material. The marking shall be legibly and clearly designated on the textured side of the material.

3.3.8 Chin straps.

3.3.8.1 Black chin straps. The black chin straps for the type I, class 1 caps shall be made of a single ply of poromeric material conforming to the requirements specified for type I visor (see 3.3.2.1).

3.3.8.2 Gold chin straps. The gold chin straps shall be gold lace conforming to class 1 of MIL-L-20271, 3/8 inch wide, constructed with tarnish resistant synthetic yarn conforming to type III, class 8 of MIL-E-17568. The gold lace shall be mounted on leather or other suitable material to provide body to the strap.

3.3.9 Cord. The cord for the type III cap shall conform to class 1 of MIL-C-19559, scarlet shade to closely match HL Cable No. 67156 color.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:44Z
Check the source to verify that this is the current version before use.

3.3.10 Eyelets. The eyelets for the cap and gold chin straps shall be brass, rolled flange type, with the barrel scored with 6 to 8 scores. The eyelets shall conform to MIL-E-20652, sheet 1A - BE108 and be white enamel finished for the cap and brass finished for the gold chin straps.

3.3.11 Buttons. The gold-plated insignia buttons to engage the chin straps and cords shall be 27-line conforming to MIL-B-3461 as follows:

Type I, Class 1 and Type III: Type II, style 3, class A, subclass 2.
Type I, Class 2 and Type II, Classes 1 and 2: Type II, style 3, class A, subclass 1.

3.3.12 Thread.

3.3.12.1 Cotton. The cotton thread shall conform to V-T-276, type IC2, mercerized finish, ticket No. A, 3-ply for all seaming and stitching and type IB3, glazed finished, ticket No. 24, 4-ply for tacking the crown. The cotton thread shall be white shade, Cable No. 66050 for assembling the cap and black shade, Cable No. 66043 for sewing the visor binding on type I caps.

3.3.12.2 Nylon. The nylon thread for tacking the cord to the type III cap shall conform to type IV, subclass A, letter size A, 2-ply of V-T-295, scarlet shade, cable No. 67156. Colorfast requirements are not applicable.

3.3.12.3 Tarnish-resistant. The thread for embroidering the visors on the type II caps shall be tarnish resistant synthetic gold yarn conforming to type III, class 8 of MIL-E-17568.

3.3.13 Labels. Each cap shall have a combination identification and size label conforming to type I, class 4 of DDD-L-20 except the content shall include the name of contractor. The label shall measure not less than 1-3/4 by 1-1/4 inches, with a minimum 1/4-inch margin at the top edge for sewing.

3.4 Design. The cap shall be the U. S. Marine Corps design shown in Figures 1 through 5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:44Z
Check the source to verify that this is the current version before use.

3.5 Patterns. Standard patterns will be furnished to the contractor by the Government. The standard patterns shall not be altered in any way and shall be used only as a guide for cutting the working patterns. The standard patterns provide 1/4-inch seam allowance, except as otherwise specified in Table I, show size and are marked or notched for the proper cutting, placement, and assembly of the component parts.

3.5.1 List of pattern parts. The component parts of the caps shall be cut from materials as specified in accordance with the pattern parts listed below:

Item	Pattern Parts	No. of cut parts
	Material: Basic fabric	
1.	Top crown	2
2.	Outer top crown	1
3.	Center crown	1
4.	Lower crown	1
5.	Visor (type III)	2
	Material: Cloth, rayon twill	
6.	Top crown lining	1
7.	Lower crown lining	1
	Material: Haircloth	
8.	Top crown	2
9.	Center crown	1
10.	Lower crown	1
11.	Eyelet reinforcement	2
	Material: Cloth, cotton warp, spun hair-wool filling; or cotton and hair interlining	
12.	Outer top crown	1
	Material: Nonwoven fibrous material	
13.	Visor interlining	1
	Material: Poromeric	
14.	Visor (types I and II) (see pattern part 5)	2

3.6 Construction.

3.6.1 Manufacturing requirements. The caps shall be manufactured in accordance with the operations and the stitch, seam, and stitching types specified in Table I. The manufacturer is not required to follow the exact sequence of operations as listed in Table I, but all operations specified shall be used to manufacture the caps. The thread and the fabric shall not be lubricated by any means prior to or during the seaming.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:44Z
Check the source to verify that this is the current version before use.

3.6.1.1 Stitches, seams, and stitching. The stitch, seam, and stitching type specified in Table I shall conform to FED-STD-751. The number of stitches per inch as specified in Table I indicates the minimum and maximum number permitted. If two or more methods of seam or stitch types are given for the same part of an operation, any one of them may be used. Where stitch type 401 is used, the looper (under thread) shall be on the inside of the finished cap. Seams shall be sewn so that no raw edges, run offs, twists, pleats, puckers, or open seams will result. All seams shall start and finish evenly. Thread tension shall be maintained so that the stitching will not be tight or loose.

3.6.1.2 Tacking and backstitching. The ends of all seams and stitchings not caught by other seams and stitching shall be backtacked not less than 1/2 inch. Thread breaks of stitch type 301 shall be secured by stitching back of the break not less than 1/2 inch. Thread breaks or skipped stitches in stitch type 401 shall be backstitched not less than 1 inch with the stitching superimposed and anchoring the ends of the break.

3.6.2 Shade marking. The component parts shall be marked or bundled to insure a uniform shade and size throughout the cap. Any method of shade marking may be used except:

(a) Corrosive metal devices.
(b) Adhesive-type tickets which show discoloration and adhesive mass which adheres to the material upon removal of the ticket.
(c) Sew-on shade tickets.

TABLE 1 MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	THREAD NDL	THREAD BOB/ LPR
1.	Cutting.					
	a. Cut the cap in strict accordance with the patterns furnished by the Government.					
	b. Cut the material in the direction indicated by directional lines on the pattern.					
	c. Cut the basic material for the outer crown, center crown and lower crown face down.					
	d. Cut the two piece top crown and visor (type III) face to face.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:44Z
Check the source to verify that this is the current version before use.

TABLE 1 MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	THREAD	
					NDL	BOB/ LPR
1.	Cutting. (cont'd)					
	e. Care shall be exercised in cutting the crown component parts and top ply of the visor (type III) to assure that twill lines in the finished cap finish diagonally (right to left) on all parts.					
	f. Cut the component parts of the cap from one piece of the basic material.					
	g. Cut the lining for the cap from one piece of the rayon twill material.					
	h. Cut the interlining pieces in the same direction as the basic material, except the interlining for the outer top crown piece shall be cut across the material in the direction of the filling, and the interlining for the lower crown shall be cut on the bias as indicated on the pattern.					
	NOTE: When alternate haircloth material is used, the top crown will be constructed of two plies of material cut in opposite directions. The center crown and lower crown shall be constructed of one ply.					
	i. Cut the fiber visor (type III) interlining in the warp direction.					
	j. Cut the visor binding (types I and II) 3/4 to 7/8 inch wide.					
2.	Replacement of damaged parts.					
	a. Replace, at time of cutting, all parts of the cap or lining containing holes or serious weakening defects such as smashes, multiple floats, loose or weakening slubs, etc., expected to develop into a hole, shade bars, dye streaks or unsightly slubs, etc., affecting appearance.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:44Z
Check the source to verify that this is the current version before use.

TABLE 1 MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	THREAD NDL	THREAD BOB/ LPR
2.	Replacement of damaged parts. (cont'd)					
	b. Replace any part damaged during manufacturing process by needle chews which may be expected to develop into hole, scissors or knife cuts, tears, holes, mends, burns and large drill holes in material.	a				
3.	Shade marking.					
	a. Mark all component parts as specified in 3.6.2 in order to insure uniform shade and size throughout the cap.	a				
	b. The use of tickets with metal fastening devices is prohibited on the rayon twill lining.					
4.	Make and attach eyelet reinforcement.					
	a. The eyelet reinforcement shall be made of 2 plies of the haircloth interlining, with each ply cut in the warp or filling direction.					
	b. Join the two plies together along all edges 1/8 to 3/16 inch from edges.	301	SSa-1	5-6	A	A
	c. Position the eyelet reinforcement on the inner side of the lower crown interlining with notches matching, and stitch all plies together 3/16 to 1/4 inch from the lower edge of the eyelet reinforcement.	301	SSbd-1	5-6	A	A
5.	Interline top, outer top, center crown and lower crown pieces.					
	Finished appearance. The crown interlining pieces shall not be tight, short, or twisted, affecting smoothness on the outside of the crown.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:44Z
Check the source to verify that this is the current version before use.

TABLE 1 MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	THREAD NDL	THREAD BOB/ LPR
5.	Interline top, outer top, center crown and lower crown pieces. (cont'd)					
	a. Join the top, outer top, center crown and lower crown pieces to the corresponding interlining pieces, 1/8 inch from all edges. The eyelet reinforcement patch shall not be caught in the stitching.	301 or 401	SSa-1	8-10	A	A
6.	Assemble cap.					
	Finished appearance. The top crown pieces shall be joined together without twists, puckers, pleats or distortions.					
	a. Join together the two plies of top crown piece with 1/4-inch seam.	301	SSz-3 (a)	12-16	A	A
	b. Spread open the seam and stitch through the seam allowance 1/16 inch from each side of the seam.	301	SSz-3 (a)	12-16	A	A
	c. Position the outer top crown to the center crown with edges even, front notches matching and with the ends of the outer top crown even with the inner notches on the back of the center crown. Seam together 1/4 inch from edges.	301	SSz-3 (a)	12-16	A	A
	d. Spread open the seam and stitch through the seam allowance 1/16 inch from each side of the seam.	301	SSz-3 (a)	12-16	A	A
	e. Position top crown to the outer top and center crown assembly with edges even and with the front notch of the outer top crown in line with the seam line of the top crown and with the ends of top crown even with the back notches of center crown. Seam together 1/4 inch from the edges.	301	SSz-3 (a)	12-16	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:44Z
Check the source to verify that this is the current version before use.

TABLE 1 MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	THREAD NDL	THREAD BOB/ LPR
6.	Assemble cap. (cont'd)					
	f. Spread open the seam and stitch through the seam allowance 1/16 inch from each side of the seam.	301	SSz-3 (a)	12-16	A	A
	g. Position the lower crown to the center crown with front notches and edges even. Seam together 1/4 inch from edges. The eyelet reinforcement patch shall not be caught in the stitching.	301	SSz-3 (a)	12-16	A	A
	h. Spread open the eam and stitch through the seam allowance 1/16 inch from each side of the seam.	301	SSz-3 (a)	12-16	A	A
	i. Join back end of the cap with 1/4-inch seam from the bottom edge up to the joining seam of the top and center crown.	301	SSz-3 (a)	12-16	A	A
	j. Spread open the seam and stitch through the seam allowance 1/16 inch from each side of the seam.	301	SSz-3 (b)	12-16	A	A
7.	Block cap.					
	a. Place the interlined crown on the proper size block and place in a live steam box for a sufficient length of time to make the fabrics pliable.					
	b. Properly smooth and shape the crown to conform to the shape of the block, and mark the location of the finished bottom edge of the cap as indicated by the block.					
	c. The center seam of the top crown shall be in line with the center front of the cap.					
	d. The cap shall be thoroughly dried before removing from block.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:44Z
Check the source to verify that this is the current version before use.

TABLE 1 MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	THREAD NDL	THREAD BOB/ LPR
8.	Finish bottom edge.					
	a. Remove the cap from the block and trim the excess material at the lower edge of crown within 1/4 to 3/8 inch from the finished edge mark. Turn the bottom edge to the inside along the mark and stitch 1/8 to 3/16 inch from the folded edge.	301 or 401	EFa-1	10-14	A	A
	b. In the finished cap, the center front height shall measure 3-1/2 ± 1/8 inches from the bottom edge to the top seam. The lower and center crowns shall measure 1-5/8 ± 1/16 and 1-7/8 ± 1/16 inches respectively at the center front as shown on Figure 1.					
9.	Tack crown.					
	a. The identification around the top of the crown shall be held in position by loosely tacking the outer top crown on the inside with evenly spaced stitches around the front of the cap from approximately the center of one side to the center of the other side.	Hand		20-25 (per cap)	2	4/4
	b. One end of each stitch shall be caught in the seam allowance joining the top and outer top crowns, and the other end shall be caught in the seam allowance joining the center and lower crowns, except at the front where it shall be caught in the eyelet reinforcement piece, making a series of approximately 1-inch long stitches around the front of the cap as shown in Figure 1.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:44Z
Check the source to verify that this is the current version before use.

TABLE 1 MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	THREAD NDL	THREAD BOB/ LPR
10.	Make poromeric visor (type I).					
	Finished appearance. Binding for the outside edge of the visor shall be uniform and smooth without distortion or defect. Dimensions of the visor shall conform to Figure 1.					
	a. Secure the top and bottom plies together, back to back, with rubber cement or a suitable flexible glue.					
	b. Mold the visor permanently into a curved shape as indicated in the sample.					
	c. Stitch the binding to the visor around the outside edge, 1/16 inch from the turned edge of binding on top of visor and catching the other edge with the bottom stitching.	301	BSb-1	8-12	36/4	36/4
11.	Make broadcloth/poromeric visor (type II).					
	Finished appearance. The broadcloth top ply, embroidered as required, shall finish smooth and tight without wrinkles, gathers or puckers or other distortion. The binding for the outside edge of the visor shall be uniform and smooth without distortion or defect. Design/ dimensions shall conform to Figures 1 and 4.					
	a. The visor shall be made with an embroidered broadcloth top ply, secured to the poromeric bottom ply with the outside edge covered with binding strip.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:44Z
Check the source to verify that this is the current version before use.

TABLE 1 MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	THREAD NDL	THREAD BOB/ LPR
11.	Make broadcloth/poromeric visor (type II). (cont'd)					
	b. After embroidery, secure the top ply to the back of the bottom ply with rubber cement or a suitable flexible glue.					
	c. Stitch the binding to the visor around the outside edge, 1/16 inch from the turned edge of binding on top of visor and catching the other edge with the bottom stitching.	301	BSb-1	8-12	36/4	36/4
12.	Make vinyl visor (type III).					
	Finished appearance. The top and bottom plies of the finished visor shall be smooth and tight without wrinkles, gathers, puckers or other distortion, and with the front seam finishing on the under side 1/16 to 1/8 inch back from the front edge.					
	a. The visor shall be made of two plies of basic material interlined with one thickness of the fiber material specified in 3.3.7.					
	b. Join the two plies of basic material together around the front 3/16 to 1/4 inch from the edge.	301 or 401	SSa-1	12-16	A	A
	c. Turn the plies and place the fiber visor between, forcing the visor to the seamed edge.					
	d. Join the two plies of basic material together along the back edge of the fiber visor, as close to the edge as possible but not through the fiber material, leaving a 5/8 to 3/4 inch wide hinge.	301 or 401	SSa-1	12-16	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:44Z
Check the source to verify that this is the current version before use.

TABLE 1 MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	THREAD NDL	THREAD BOB/ LPR
13.	Attach visor to crown.					
	a. Lap the folded bottom edge of the lower crown on the hinge of the visor, with the notch of the visor positioned in line with the center front of the cap and with the bottom edge of the crown. Seam the crown to the hinge of the visor 1/8 inch from the folded bottom edge.	301	LSa-1	12-16	A	A
	b. On the finished cap, the visor shall measure 2-1/4 ± 1/8 inches from front to back at the center, as shown in Figure 1.					
14.	Make sweatband.					
	a. The sweatband shall be made of the millnery belting ribbon and the coated fabric specified in 3.3.5 and 3.3.6 respectively.					
	b. The coated fabric shall be cut on the bias, 1-1/2 inches wide. The belting ribbon shall be 7/8 ± 1/16 inch wide. Both shall be cut the same length as the lower crown lining.					
	c. Fold one edge of the coated fabric 1/2 inch to uncoated side, with the folded edge forming the bottom edge of the finished sweatband. Place the ribbon on the uncoated side of the coated fabric on top of the turned edge, with the lower edge of the ribbon positioned 1/16 inch below the folded edge of the coated fabric, and seam the ribbon and coated fabric together 1/16 inch from the lower edge of the ribbon.	301	SSb-1	10-14	A	A (Black)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:44Z
Check the source to verify that this is the current version before use.

TABLE 1 MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	THREAD NDL	THREAD BOB/ LPR
15.	Make lining and join sweatband with label.					
	a. Fold the top crown lining, matching the cut edge of the dart on each side of the crown, and stitch the entire length of the dart 1/4 inch from the cut edges, tapering to a point at the front end.	301	SSa-1	12-16	A	A
	b. Lap the top edge of the sweatband ribbon only on the face of the lower crown lining 1/4 to 3/8 inch above the bottom edge, with the uncoated side of the inner sweatband against the lining, and seam the ribbon to the lining 1/16 inch from the top edge of the ribbon from end to end, with the top end of the label placed under the ribbon 2 to 3 inches to the left or right of the center back and caught in the stitching. The raw edge of the coated fabric shall not be caught in the stitching.	301	LSa-1	12-16	A	A
	c. Seam the top and lower crown lining pieces together, with front notches matching and edges even, with 1/4-inch seam.	301	SSa-1	12-16	A	A
	d. Fold the top crown lining, matching the cut edge of the center back dart and the ends of the sweatband. Stitch the entire length of the dart 1/4 inch from the bottom edge of the sweatband, tapering to a point at the front end.	301	SSa-1	12-16	A	A
16.	Join lining to cap.					
	a. Properly position the lining assembly in the cap with the bottom edge of the sweatband abutting the back edge of the visor and 1/16 to 1/8 inch above the cap at the sides and back.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:44Z
Check the source to verify that this is the current version before use.

TABLE 1 MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	THREAD NDL	THREAD BOBV LPR
16.	Join lining to cap. (cont'd)					
	b. Seam the lining assembly to the cap 1/8 inch above the bottom edge of the sweatband.	301	SSa-1	12-16	A	A
17.	Attach eyelet.					
	a. Attach the metal eyelet to the lower crown of the cap with the center of the eyelet in line with the center front of the crown and 3/8 ± 1/16 inch below the seam line joining the center and lower crown, as shown in Figure 1.					
	b. The eyelet shall be securely attached through the outside of the cap and through the reinforcement piece and lining on the inside, and securely clinched on the inside without distorting and cutting the material or splitting the flange of the eyelet.					
18.	Attach cord (type III).					
	a. The cap cord shall be double strand, 10-1/4 inches in length, with a loop on each end for the buttons with the overhand knot at the center and the two free ends 1-3/4 inches in length as shown in Figure 2.					
	b. Position the cord across the front of the cap at the seamline of the lower crown and visor. Tack cord to lower crown for its entire length, with the ends of stitching securely back-stitched and the cord covering the joining seam of lower crown and visor. The cord shall finish smooth and flat without causing pleats or puckers of	Hand		40 per cord	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:44Z
Check the source to verify that this is the current version before use.

TABLE 1 MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	THREAD NDL	THREAD BOB/ LPR
18.	Attach cord (type III). (cont'd)					
	the lower crown. The knotted ends of the cord shall be spread 1-3/4 inches apart and positioned on the visor as shown in Figure 1. The lower ends of the cord shall finish 3/8 inch from the nearest point of the front edge of the visor.					
	c. The free ends of the cord, positioned on the visor as specified, shall be tacked at the extreme ends, to the visor, with the ends of the stitching securely tacked.	Hand		6 per end	A	-
	d. The tacking of the cord and free ends shall be made on the underside so as to not be visible on the finished cap. The stitching of the cord shall be made through both strands of the loops so as to hold the strands together.					
	Note: The strands of the cord may be tacked together prior to attaching to cap.					
19.	Make poromeric chin strap.					
	Finished appearance. Chin straps shall be made in two sections with a hole at one end and a loop at the other end of each section. The two sections shall be identical except for the manner of attaching the loops. All edges shall be stained black. The top and bottom edges of the strap and the loop shall have an embossed line. The loops shall be positioned with the edge of loop parallel to the square end of strap (see Figure 4).					
	a. The chin strap shall be made of one piece of poromeric material (see 3.3.2.1) for each strap and one piece for each loop.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:44Z
Check the source to verify that this is the current version before use.

TABLE 1 MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	THREAD	
					NDL	BOB/ LPR
19.	Make poromeric chin strap. (cont'd)					
	b. Position the loop for the top section on the outside of the strap, and stitch loop to strap 1/16 inch from the right and left edges -or- the loop may be attached to the strap with a clinch rivet finished in black enamel to match the shade of the poromeric material.	301	SSa-2	10-12	A/3	A/3
	c. Lap the ends of the loop 1/4 ± 1/16 inch on the underside of the strap and fasten the ends with two staples through the ends of the loop only.					
	d. Stitch the loop for the bottom strap 1/16 inch from each edge to the underside of the strap -or- the loop may be attached to the underside of the strap with two staples through the ends of the loop and strap only.	301	SSa-2	10-12	A/3	A/3
	e. Punch a 1/4-inch hole 5/16 inch from the end of both the upper and lower straps for attaching the screw buttons.					
20.	Make gold lace chin strap.					
	a. The chin strap shall be made from one piece of gold lace (see 3.3.8.2) for each strap, and one piece for each loop.					
	b. Position the loop for the top section on the outside of the strap with the edge of the loop 1/2 + 1/16 inch from the pointed end. Stitch the loop to the strap 1/16 inch from the right and left edges.	301	SSa-2	10-12	A/3	A/3
	c. Lap the ends of the loop 1/4 ± 1/16 inch on the underside of the strap and stitch the ends together forming the loop.	301	SSa-2	10-12	A/3	A/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:44Z
Check the source to verify that this is the current version before use.

TABLE 1 MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	THREAD NDL	THREAD BOB/ LPR
20.	Make Gold Lace chin strap (cont'd) d. Cut the pointed end from the lower strap to a length of 7/8 ± 1/16 inch. Stitch the loop over the top of the short piece with the edge of the loop 1/2 ± 1/16 inch from the pointed end.	301	SSa-2	10-12	A/3	A/3
	e. Lap the ends of the loop 1/4 ± 1/16 inch on the underside of the lower strap, with end of strap even with edge of loop, and stitch to strap forming the upper loop.	301	SSa-2	10-12	A/3	A/3
	f. Attach a metal eyelet 5/16 inch from the square end of both the upper and lower straps for attaching the screw buttons (see 3.3.10). The eyelets shall be brass finished.					
21.	Attach buttons.					
	a. Punch a hole through left and right sides of the headband for the button screw tubes. The holes shall be positioned so that the center of the screw tube shall be at the vertical juncture of the visor and lower edge of the cap, 1/4 to 3/8 inch from the lower finished edge of the cap.					
	b. Insert a button tube through the punched holes. Place the assembled chin strap or cord loops, engaging the button screw tubes, and snugly fit the strap across the front of the lower crown. Screw the buttons into the tubes the entire length of the screw with the eagle being in an upright position, wings horizontal with the lower edge of the cap.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:44Z
Check the source to verify that this is the current version before use.

TABLE 1 MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	THREAD NDL	THREAD BOB/ LPR
22.	Finish and clean cap. a. Any ends of stitching shall be trimmed and the loose ends removed from the cap. b. Any spots, stains and shade tickets or marking shall be removed without injury to the material.					

3.7 Finished measurements. The head measurement shall be the inside circumference of the headband at the lower edge of outer sweatband. The head measurement for each size cap shall be as specified in Table II. Other finished measurements of the cap shall be as specified in Figures 1 through 4.

Table II. Head measurements

Size of cap	Head measurements 1/ inches
21	21
21-1/2	21-1/2
22	22
22-1/2	22-1/2
23	23
23-1/2	23-1/2
24	24

1/ All head measurements ± 1/4, -1/8 inch.

3.8 Government-loaned property. Unless otherwise specified (see 6.2), the head block for the caps shall be furnished to the contractor by the Government. The head block, when furnished to the contractor, shall remain the property of the Government and shall be used only as a guide for making other sizes. The contractor will be held responsible for the safe care and return of block in the same condition as received, except for normal wear and tear, and will be required to replace lost, or repair damaged, head block. Upon completion or termination of the contract, the contractor shall pack and ship the head block in the same manner as received to a point designated by the contracting officer.

3.9 Workmanship. The finished caps shall conform to the quality and grade of product established by this specification. The occurrence of defects shall not exceed the levels set by the applicable acceptable quality levels (AQL's).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:44Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certification of compliance. When certifications of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.4)
2. Quality conformance inspection (see 4.5).

4.3 Inspection conditions. All inspections shall be in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated herein.

4.4 First article inspections. When first article is required, inspection shall be made of a completely fabricated cap for all provisions of this specification.

4.5 Quality conformance inspection.

4.5.1 Testing of components. Testing of components shall be in accordance with the applicable subsidiary specifications and standards to the extent applicable, except that this specification shall govern in the event of conflict. The method of testing shall be as specified in FED-STD-191, wherever applicable. Testing shall be performed on components listed in Table III for characteristics noted.

4.5.2 In-process inspection. Inspection shall be performed during the manufacturing of the end item to ascertain that the operations are performed as specified herein. The Government reserves the right to determine the acceptability of construction methods not performed in accordance with specified requirements for operations or subassemblies.

4.5.3 Sampling test. Unless otherwise specified in subsidiary specifications, sampling shall be in accordance with the following:

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:44Z
Check the source to verify that this is the current version before use.

Lot Size (lot unit)	Sample size (sample unit)
800 or less	2
801 to 22,000	3
22,001 and over	5

The lot shall be unacceptable if one or more sample units fail to meet any test requirement specified herein. The unit for expressing lot size and sample unit for testing component shall be in accordance with applicable subsidiary specification and as follows:

Component	Lot size expressed as:	Sample unit for testing
Hair cloth interlining	Yard	1 yard full width
Cotton and hair interlining	Yard	1 yard full width
Sweatband (millinery belting ribbon)	Yard	5 continuous yards
Visor interlining	Yard	1 square yard
Poromeric visor and chin strap material	Yard	1 square yard
Binding, plastic	100 Yards	1 square foot

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:44Z
Check the source to verify that this is the current version before use.

Table III. Test Methods

Components	Characteristics	Rqmt. para.	Test method	No. Determinations per sample unit	Results reported as
Haircloth interlining	Material identification				
	Warp	3.3.4.1	1200	2	Pass or fail
	Filling 1/	3.3.4.1	Std Coml	1	Pass or fail
	Color				
	Warp	3.3.4.1	Visual	1	Pass or fail
	Filling	3.3.4.1	Visual	1	Pass or fail
	Weave	3.3.4.1	Visual	5	Pass or fail
	Yarns per inch				
	Warp	3.3.4.1	5050	5	Avg of the 5 det. in each direction to nearest whole number.
	Filling	3.3.4.1	5050	5	
	Weight per sq in	3.3.4.1	5041	5	Avg of the 5 det to nearest 0.1 oz.
	Stiffness, in lbs				
	Warp	3.3.4.1	5202 2/	10	Avg of the 10 det in each direction to nearest 0.001 in lbs for bending moment.
	Filling	3.3.4.1	5202 2/	10	
Cotton and hair interlining	Material identification				
	Warp	3.3.4.2	1200 (cotton)	2	Pass or fail
			Std Coml (goat hair) 1/	1	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:44Z
Check the source to verify that this is the current version before use.

Table III. Test Methods

Components	Characteristics	Rqmt. para.	Test method	No. Determinations per sample unit	Results reported as
Cotton and hair interlining (cont'd)	Filling	3.3.4.2	Std Coml	1	Pass or fail
	Color				
	Warp	3.3.4.2	Visual	1	Pass or fail
	Filling	3.3.4.2	Visual	1	Pass or fail
	Weave	3.3.4.2	Visual	5	Pass or fail
	Yarn per inch				
	Warp	3.3.4.2	5050	5	Avg of the 5 det. in each direction to nearest whole number.
	Filling	3.3.4.2	5050	5	
	Weight per sq yd	3.3.4.2	5041	5	Avg of the 5 det to nearest 0.1 oz.
	Stiffness, inch lbs				
	Warp	3.3.4.2	5202	10	Avg of the 10 det. in each direction to nearest 0.001 in lbs for bending moment.
	Filling	3.3.4.2	5202	10	
Sweatband (Millinery belting	Material identification				
	Warp	3.3.5	1500	2	Pass or fail
	Filling	3.3.5	1200	2	Pass or fail
	Color	3.3.5	Visual	1	Pass or fail

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:44Z
Check the source to verify that this is the current version before use.

Table III. Test Methods

Components	Characteristics	Rqmt. para.	Test method	No. Determinations per sample unit	Results reported as
Sweatband (Millinery belting)	Colorfastness to:				
	Wet (dry) cleaning	3.3.5	5622	1	Pass or fail
	Crocking (wet and dry)	3.3.5	5651	1	Pass or fail
	Perspiration	3.3.5	5680	1	Pass or fail
	Weave	3.3.5	Visual	1	Pass or fail
	Thread count				
	Warp	3.3.5	5050	5	Avg of the 5 det. to the nearest whole number
	Filling	3.3.5	5050	5	
	Weight	3.3.5	5041	5	To the nearest whole number
	Width	3.3.5	Scale	1	To the nearest 1/16 inch.
	pH	3.3.5	2811	2	To the nearest 0.1 pH.
	Nonfibrous content 3/	3.3.5	Std Coml	1	Pass or fail
Visor inter lining material	High alpha cellulos vegetable fiber, leather fiber approxi mately 15%	3.3.7	Std Coml	1	Pass or fail
	Synthetic rubber	3.3.7	Std Comml	2	Avg of the 2 det. to nearest 1.0 percent.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:44Z
Check the source to verify that this is the current version before use.

Table III. Test Methods

Components	Characteristics	Rqmt. para.	Test method	No. Determinations per sample unit	Results reported as
Visor interlining material (cont'd)	Weight per sq yd	3.3.7	Std Coml	2	Avg of the 2 det to nearest 0.1 lb.
	Thickness	3.3.7	Gage	2	Avg of the 2 det to nearest 0.001 inch
	Tensile strength				
	machine direction	3.3.7	171 of UU-P-31	10	Avg of the 10 det in each direction to nearest 1.0 lbs/ inc.
	cross direction	3.3.7	171 of UU-P-31	10	
	Tearing strength				
	machine direction	3.3.7	170 of UU-P-31	5	Avg of the 5 det in each direction to nearest 10.0 gm. cms.
	cross direction	3.3.7	170 of UU-P-31	5	
	Stretch				
	machine direction	3.3.7	171 of UU-P-31	10	Avg of the 10 det in each direction to nearest 1.0 percent.
	cross direction	3.3.7	171 of UU-P-31	10	
	Stiffness 4/				
	Original machine direction	3.3.7	5202	5	Avg of the 5 det in each direction to nearest 1.0 lb per inch.
	cross direction	3.3.7	5202	5	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:44Z
Check the source to verify that this is the current version before use.

Table III. Test Methods

Components	Characteristics	Rqmt. para.	Test method	No. Determinations per sample unit	Results reported as
Visor interlining material (cont'd)	After wet (dry) cleaning 5/				
	machine direction	3.3.7	5622 and 5202	5	Avg of the 5 det. in each direction to nearest 1.0 lb per inch.
	cross direction	3.3.7	5622 and 5202	5	
	Water absorption	3.3.7	5502	2	Avg of the 2 det to nearest 1.0 percent
	Accelerated aging	3.3.7	5850 Sample placed in oven with circulating air at 100°C for 7 days	1	Pass or fail
	Resistance to water	3.3.7	Sample soaked in water for 24 hours	1	Pass or fail
Poromeric for visor and chin strap	Material identification	3.3.2	Std Comml	1	Pass or fail
	Color	3.3.2	Visual	1	Pass or fail
	Finish	3.3.2	Visual	1	Pass or fail
	Weight per sq yd	3.3.2	Visual	1	Pass or fail
	Thickness	3.3.2	Gage	2	Pass or fail

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:44Z
Check the source to verify that this is the current version before use.

Table III. Test Methods

Components	Characteristics	Rqmt. para.	Test method	No. Determinations per sample unit	Results reported as
Binding	Material identification	3.3.2.1	Std Comml	1	Pass or fail
	Weight	3.3.2.1	Scale	2	Pass or fail
	Thickness	3.3.2.1	Gage	2	To nearest 0.0001 inch.
	Finish	3.3.2.1	Visual	1	Pass or fail
	Color	3.3.2.1	Visual	1	Pass or fail

1/ Certificate of compliance will be acceptable for this requirement.

2/ Use 1/2 inch wide sample and add 0.075 weight (total weight 0.0800 shall be used and result multiplied by 2.

3/ Certificate of compliance certifying that no loading agent has been used.

4/ Results based on 1/4 inch wide sample, and multiplied by 4.

5/ Air dried for a minimum of 72 hours and conditioned.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:44Z
Check the source to verify that this is the current version before use.

4.5.4 Examination of end items. The end item shall be examined for defects listed in 4.5.4.1 through 4.5.4.3. The sample unit shall be one cap.

4.5.4.1 General defects. General defects shall be classified as follows:

Examine	Defect	Classification		
		Major	Minor	
			A	B
Blocking	a. Omitted	X		
	b. Poorly blocked, causing distortion of crown or crown seams.		X	
Cleanness	a. Any spot or stain:			
	1. On outside (longest dimension in any direction):			
	(a) Up to 3/8 inch			X
	(b) More than 3/8 inch	X		
	2. On inside.			X
	b. Any marking exposed or visible on outside.	X		
	c. Thread ends on outside not trimmed or loose threads not removed.			X
	d. One or more shade tickets or size ticket not removed.			X
Component and assembly	a. Any defective component (unless otherwise classified herein).	X		
	b. Any component part omitted (unless otherwise classified herein).	X		
	c. Any required operation omitted or improperly performed (unless otherwise classified herein).	X		
Cutting	Any component part not cut in accordance with directional lines on patterns, or in accordance with specification requirements:			
	a. On outside of cap	X		
	b. On inside of cap (lining only).			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:44Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification		
		Major	Minor	
			A	B
Label (combination identification and size)	a. Missing, illegible, or incorrect.	X		
	b. Top end of label not inserted between top edge of ribbon and side crown lining or not securely caught in the stitching.			X
	c. Positioned less than 2 inches or more than 3 inches from center back seam.			X
Material defect and workmanship damages	a. Weakening defect, such as smash, multiple float, loose slub, etc., that may develop into a hole.	X		
	b. Shade bar, slub, dye or finishing streak, or any other material defect on outside of cap.	X		
	c. Cut, tear, mend, burn or needle chew that may develop into a hole.	X		
	d. Hole.	X		
	e. Ruptured fibers in the line of sewing (usually caused by broken blunt or hooked needles), affecting appearance or serviceability.	X		
	NOTE: Material defects and workmanship damages are to be classified as indicated above only when the condition is one which definitely weakens the fabric or when it is so conspicuously located as to be clearly noticeable. Weakening or nonweakening conditions which are inconspicuous and have negligible effect on serviceability are to be classified as follows: Material defect - No defect Workmanship damages - Minor B defect			

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:44Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification		
		Major	Minor	
			A	B
Seam and stitching	a. Accuracy of seaming:			
	1. Seam puckered (unless otherwise classified).			X
	2. Seam irregular, pleated or wavy.	X		
	3. Part of cap caught in any unrelated operation or stitching.	X		
	4. Ends of seams produced with 301 stitch type not backtacked when not caught in other seams or stitching.			X
	5. Stitching overlapping ends of thread breaks or ends of a continuous line of stitching by less than 1/2 inch.			X
	6. 401 stitch type used when ends are not caught in other seams or rows of stitching.			X
	7. Not specified shade or two or more shades of thread used on same cap, affecting appearance.		X	
	b. Gage of stitching:			
	1. Unevenly gaged, affecting appearance (to be scored only when the condition exists on major protion of seam).		X	
	2. Beyond range of width specified or varies more than 1/16 inch when no range is specified.			X
	c. Open seams.			
	1. On outside seam: - over 1/8 inch but not over 1/4 inch. - over 1/4 inch.		X X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:44Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification		
		Major	Minor	
			A	B
	2. On inside seams: - 1/4 inch but not over 1/2 inch. - over 1/2 inch.	 X	 X	
	NOTE: One or more broken or two or more continuous skipped or run-off stitches on joining seams constitute an open seam.			
	d. Stitches skipped or broken (on top or edge stitching when not constituting an open seam): - over 1/4 inch, to and including 1/2 inch. - over 1/2 inch.	 X	X X	
	e. Raw edges. - 1/4 inch but not over 1/2 inch - over 1/2 inch.	 X	X	
	NOTE: Raw edges shall be classified as such when they occur at places where an edge is required to be turned under, or over, and stitched.			
	f. Run-offs.			
	1. Joining seams - when resulting in an open seam, use "open seam" classification.			
	2. Top, edge or raised stitching (when not resulting in an open seam): - run-off over 1/2 inch.			X
	g. Seam and stitch types:			
	1. Not specified seam or stitch type.		X	
	2. Looper thread of 401 stitch type on outside of finished caps.	X		
	h. Stitch tension:			
	1. Loose tension, resulting in a loose seam.	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:44Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification		
		Major	Minor	
			A	B
	2. Loose tension on outside stitching, resulting in loosely exposed bobbin thread or top thread.		X	
	3. Tight tension (stitches break when normal strain is applied to the seam or stitching) score as "open seam".			
	NOTE: Puckering is evidence of tight tension. When puckering is evident, the inspector shall test seam by exerting normal pull in the lengthwise direction of seam or stitching.			
	i. Stitch per inch (score only when condition exists on more than one-half the length of seam).			
	1. More than the maximum specified.			X
	2. Less than the minimum specified.			
	- By one or two stitches.			X
	- By three or more stitches.		X	
Shaded parts	Any part on outside shaded, or variations within a part.	X		

4.5.4.2 Detailed defects. Detailed defects shall be classified as follows:

Examine	Defect	Classification		
		Major	Minor	
			A	B
Buttons	a. One or both missing, loose, broken, bent, or otherwise defective.	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:44Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification		
		Major	Minor	
			A	B
	b. Center of button over 3/8 inch or under 1/4 inch from bottom edge of lower crown.		X	
	c. Unequally spaced from junction of visor and lower edge by over 1/4 inch.			X
	d. Not specified type, size, or finish.	X		
	e. One or both buttons not attached to cap with the eagle in an upright position with wing tips horizontal with finished lower edge of side of the cap.			X
	NOTE: Buttons shall be considered defective if they have sharp, rough or cracked edges; scratches, blemishes or imbedded foreign matter on face of button, loose shank; or are badly shaded.			
Cord (Type III)	a. Not specified type, size or color.	X		
	b. Loosely or unevenly twisted or less than five turns per inch.	X		
	c. Knot omitted on one or both ends or less than four full turns on one or both knots.	X		
	d. End of cord not securely hidden in one or both knots.		X	
	e. Not tacked along its entire length to cap.	X		
	f. One or both looped ends not placed around buttons.	X		
	g. Cord tacking visible, affecting appearance.	X		
	h. Cord over 10-1/2 inches long or less than 10 inches.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:44Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification		
		Major	Minor	
			A	B
	i. Overhand knot more than 1/4 inch off center.	X		
	j. Knotted end spread more than 2 inches or less than 1-1/2 inches.			X
	k. Length of cord ends:			
	1. More than 1-7/8 inches.		X	
	2. Less than 1-5/8 inches.			X
	l. Tacking along the entire length of cord to cap performed with less than 35 hand stitches per cord.	X		
	m. Upper and lower strands of cord not held together in the tacking of cord to cap.		X	
	n. One or both knotted ends less than 1/4 inch or more than 1/2 inch from front edge of visor.	X		
	o. Knot at one or both ends not tacked, or insecurely tacked to visor.		X	
	p. Cord not positioned on lower crown, covering seam line.		X	
Crown (top, outer, center and lower)	a. Poorly shaped.	X		
	b. Outside tight, full or twisted, i.e., not smooth against interlining.	X		
	c. Tacking forming indentation around top crown omitted.	X		
	d. Ends of indentation tacking insecure.		X	
	e. Interlining omitted from any section.	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:44Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification		
		Major	Minor	
			A	B
	f. Sections poorly shaped or joining seam lines irregular, i.e., crooked.	X		
	g. Center crown at center front less than 1-13/16 inches or more than 1-15/16 inch in height.	X		
	h. Lower crown at center front less than 1-9/16 inches or more than 1-11/16 inch in height.		X	
	i. Height between the joining seam line of center crown to outer top crown, and the visor joining seam to lower crown less than 3-3/8 inches or more than 3-5/8 inches.	X		
	j. Bottom edge of crown not abutting the back edge of the fiber visor by 1/8 inch or more.		X	
	k. Ends of seam line joining center and lower crowns: Figure 2 (c).			
	1. Out of horizontal alignment from lower edge by 1/8 inch or more.	X		
	2. Not equal distance from center back seam by 1/4 inch or more.	X		
	l. Center back ends of seam line joining top crown to outer and center top crowns staggered more than 1/4 inch. Figure 2 (b).	X		
	m. Ends of seam line joining the center and outer top crown not equidistant from center back seam by more than 1/4 inch. Figure 2 (a).	X		
Eyelet	a. Omitted, or one or more added.	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:44Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification		
		Major	Minor	
			A	B
	b. Not specified type, size, or finish.	X		
	c. Chipped, bent, or broken.	X		
	d. Not securely clinched through cap, reinforcement piece and lining, or clinched too tightly, cutting the fabric around the eyelet.	X		
	e. Out of alignment with the midway point between the ends of visor and the center seam in top crown:			
	1. Over 1/8 inch but not over 1/4 inch.		X	
	2. Over 1/4 inch.	X		
	f. Center of eyelet less than 5/16 inch or more than 7/16 inch below the seam line joining the center and lower side crowns.		X	
	g. Eyelet reinforcement piece omitted or misplaced, not serving the intended purpose.		X	
Lining	Tight, puckered, or pleated at belting ribbon sweatband joining seam.		X	
Sweatband	a. Not specified type or color.	X		
	b. Bottom edge of sweatband:			
	1. Less than 1/16 inch above bottom edge of cap but not exposed below bottom edge of cap beyond ends of visor.		X	
	2. Exposed below bottom edge of cap beyond ends of visor.	X		
	3. More than 1/16 inch from the back edge of visor interlining.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:44Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification		
		Major	Minor	
			A	B
	c. Tight, causing puckering of cap.		X	
	d. Back seam out of alignment with center back seam of cap by 1/4 inch or more.		X	
	e. Inner sweatband omitted.	X		
	f. Bottom folded edge of inner (coated fabric) sweatband exposed beyond bottom edge of belting ribbon sweatband less than 1/16 inch or more than 1/8 inch.			X
	g. Fold omitted at bottom edge of inner sweatband.	X		
	h. Sweatband ribbon less than 13/16 inch or more than 15/16 inch wide.			X
Visor	a. Midway point between ends of visor not in line with top crown center seam and eyelet by:			
	1. 1/4 inch or more but not more than 1/2 inch.		X	
	2. More than 1/2 inch.	X		
	b. Outside full, twisted, wrinkled or not smooth.	X		
	c. Seam positioned less than 1/16 inch or more than 1/8 inch from front edge of underside of visor. (Types I and II).			X
	d. Stitching joining visor to cap caught through the fiber material. (Type III).	X		
	e. Lower side crown seamed to hinge of visor more than 1/8 inch from bottom edge.			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:44Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification		
		Major	Minor	
			A	B
	f. Depth from front to back at center less than 2-1/8 inches or more than 2-3/8 inches.		X	
	g. Interlining omitted.	X		
Embroidery (Type II)	a. Omitted	X		
	b. Not specified type.	X		
	c. Core yarn not fully covered with metallic ribbon.		X	
	d. Loose stitches		X	

4.5.4.3 Finished measurements. Any head measurement deviating from the nominal dimensions and tolerance specified in Table II shall be classified as a size measurement defect.

4.5.4.4 Inspection levels and AQL's. Inspection levels and AQL's expressed in defects per 100 units (DHU) shall be as follows:

4.5.4.1 and 4.5.4.2

Inspection level III of MIL-STD-105

AQL Major	1.5 DHU
AQL Major and Minor A (combined)	10.0 DHU
Total Major, Minor A and Minor B (combined)	15.0 DHU

4.5.4.3

Inspection level S-3 of MIL-STD-105

One class	4.0 DHU

4.5.5 Examination of packaging. An examination shall be made to determine compliance with packaging, packing and marking requirements of Section 5 of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully packed, selected just prior to closing operation. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the inspection lot. The inspection lot shall be S-2 and the AQL shall be 2.5 DHU.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:44Z
Check the source to verify that this is the current version before use.

Examine	Defect
Marking	Omitted; incorrect, illegible, of improper location, sequence or method of application.
Materials	Any component missing; any component damaged, affecting serviceability.
Workmanship	Inadequate application of components, such as incomplete closure of case liners, container flaps and loose strapping. Bulging or distortion of containers.
Content	Number of intermediate packages is more or less than required.

5. PACKAGING

5.1 Preservation and packaging. Preservation and packaging shall be level A or commercial, as specified (see 6.2).

5.1.1 Level A. Each cap shall be individually packaged in an oval shaped hat box of the design and dimensions shown in Figure 6. The box and cover shall be made of standard commercial chipboard completely covered on the inside with white paper and on the outside with glazed scarlet color paper. The corner stay around top of cover and bottom of box shall be a gold or yellow color paper trimming, 1/8 to 3/16 inch of the gold or yellow color showing on each side of the corner in the finished box. Box and cover strips shall be wire stitched. The box shall be provided with a carrying cord made of two strands of gold rayon yarn over a cotton core; the strands shall be twisted together to form a cord approximately 1/4 inch in diameter and 30 inches long. The cord shall be laced through brass eyelets on each side of the box in a manner to form a carrying handle on one side. The cord shall extend across the cover to the other side of box to prevent cover slipping off when box is carried (see Figure 6). Each end of the cord shall be secured on the inside of the box by a small knot or by any other means which will permit the ends of the cord to be as flat as possible against the sides of the box so as not to interfere with a proper packaging of the cap. The cap shall fit snugly within the box, using tissue paper to prevent shifting of cap and to support crown. An approximately 18-inch-long by 3-inch-wide strip of chipboard shall be formed into a cylinder by lapping the ends 1 inch and securing the lapped ends with not less than two noncorrosive metal staples. The chipboard cylinder shall be placed flat (not on edge) within the crown to afford additional support. Caps so packaged shall be further packaged individually in a standard commercial nontest corrugated fiberboard set-up box, the outside dimensions of which shall not exceed 11 inches long, 9 inches wide, and 6-1/2 inches deep. The hat box shall fit snugly within the set-up box. A certificate of compliance will be acceptable for the hat box requirement specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:44Z
Check the source to verify that this is the current version before use.

5.1.2 Commercial. Commercial packaging shall afford adequate protection against deterioration and physical damage during shipment from the supply source to the first receiving activity. The contractor may use his standard practice provided it meets the requirements specified for commercial packing.

5.2 Packing. Packing shall be level A, B or commercial, as specified (see 6.2).

5.2.1 Level A. Eight caps, of one size and class only, packaged as specified in 5.1.1 shall be packed in a fiberboard shipping container conforming to type CF, class weather resistant, variety SW, style RSC of PPP-B-636 with approximate inside dimensions of 22 inches in length by 18 inches in width by 13 inches in depth. Each shipping container shall be assembled, closed, and reinforced as specified in the appendix to the box specification. Towards the end of the contract, or when there is less than the required amount per container of same size, mixed sizes may be packed within the same shipping container.

5.2.2 Level B. Eight caps, of one size and class only, packaged as specified in 5.1.1, shall be packed in a fiberboard shipping container conforming to type CF, class domestic, variety SW, grade 200, style RSC of PPP-B-636 with approximate inside dimensions of 33 inches in length by 18 inches in width by 13 inches in depth. Each shipping container shall be assembled and closed as specified in the appendix to the box specification. Towards the end of the contract, or when there is less than required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.3 Commercial. Caps shall be packed in a manner to ensure carrier acceptance and safe delivery at destination. Containers shall be in accordance with Uniform Freight Classification Rules, National Motor Freight Classification Rule and U. S. Postal Service Manual or regulations of other carriers applicable to the mode of transportation.

5.3 Marking. In addition to any special marking required by the contract or order, the shipping and intermediate container shall be marked in accordance with the requirements of MIL-STD-129.

5.3.1 Labels. Each shipping container packed with mixed sizes shall have securely attached to the end and side directly under the printing or stenciling a white paper label with the words "MIXED SIZES" plainly stamped or printed thereon, and under these words shall be legibly printed the correct quantity and sizes contained therein. Each hat box shall have affixed thereto a removable type paper size label backed with pressure sensitive adhesive. The paper label shall be oval shaped, 2 inches in length by 1-1/2 inches in width, with a white background and black numerals 1 inch in height. The label shall be positioned on center at either end of the box body.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:44Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. The caps described herein are intended for wear by enlisted and officer female personnel of the U. S. Marine Corps.

6.2 Ordering data. Purchasers should exercise any desired options offered herein, and procurement documents should specify the following:

6.2.1 Procurement requirements:

(a) Title, number, and data of this specification.
(b) Type, class and size required (see 1.2).
(c) Whether first article is required (see 3.2).
(d) Number of caps in first article (see 3.2).
(e) Whether head block is required (see 3.8).
(f) Selection of applicable level of preservation, packaging and packing (see 5.1 and 5.2).

6.2.2 Contract data requirements. Data conforming to Data Item Description DI-R-4803, DI-R-4805, DI-T-4901, DI-T-4902, DI-T-4903 and DI-T-4904 will usually be required for delivery in connection with this specification. When so required, such data will be specified for delivery on DD Form 1423 included in the contract.

6.3 Standard samples, head block and shade samples. For information regarding the availability of a sample of the cap, the head block, and of the standard shades specified, address inquiry to the procuring activity issuing the invitation for bids.

6.4 First article. Examination, tests and approval shall be as specified by the contracting officer (see 3.2).

6.5 Figures. Figures 1 through 6 show general design of the caps and hat box and are furnished for information only. In the event of conflict between these figures and the text of this specification, the text of this specification shall govern.

Preparing Activity:

Navy - MC

Project No. 8410-N470

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:44Z
Check the source to verify that this is the current version before use.

5 | Make Sleeve Strap (cont'd)



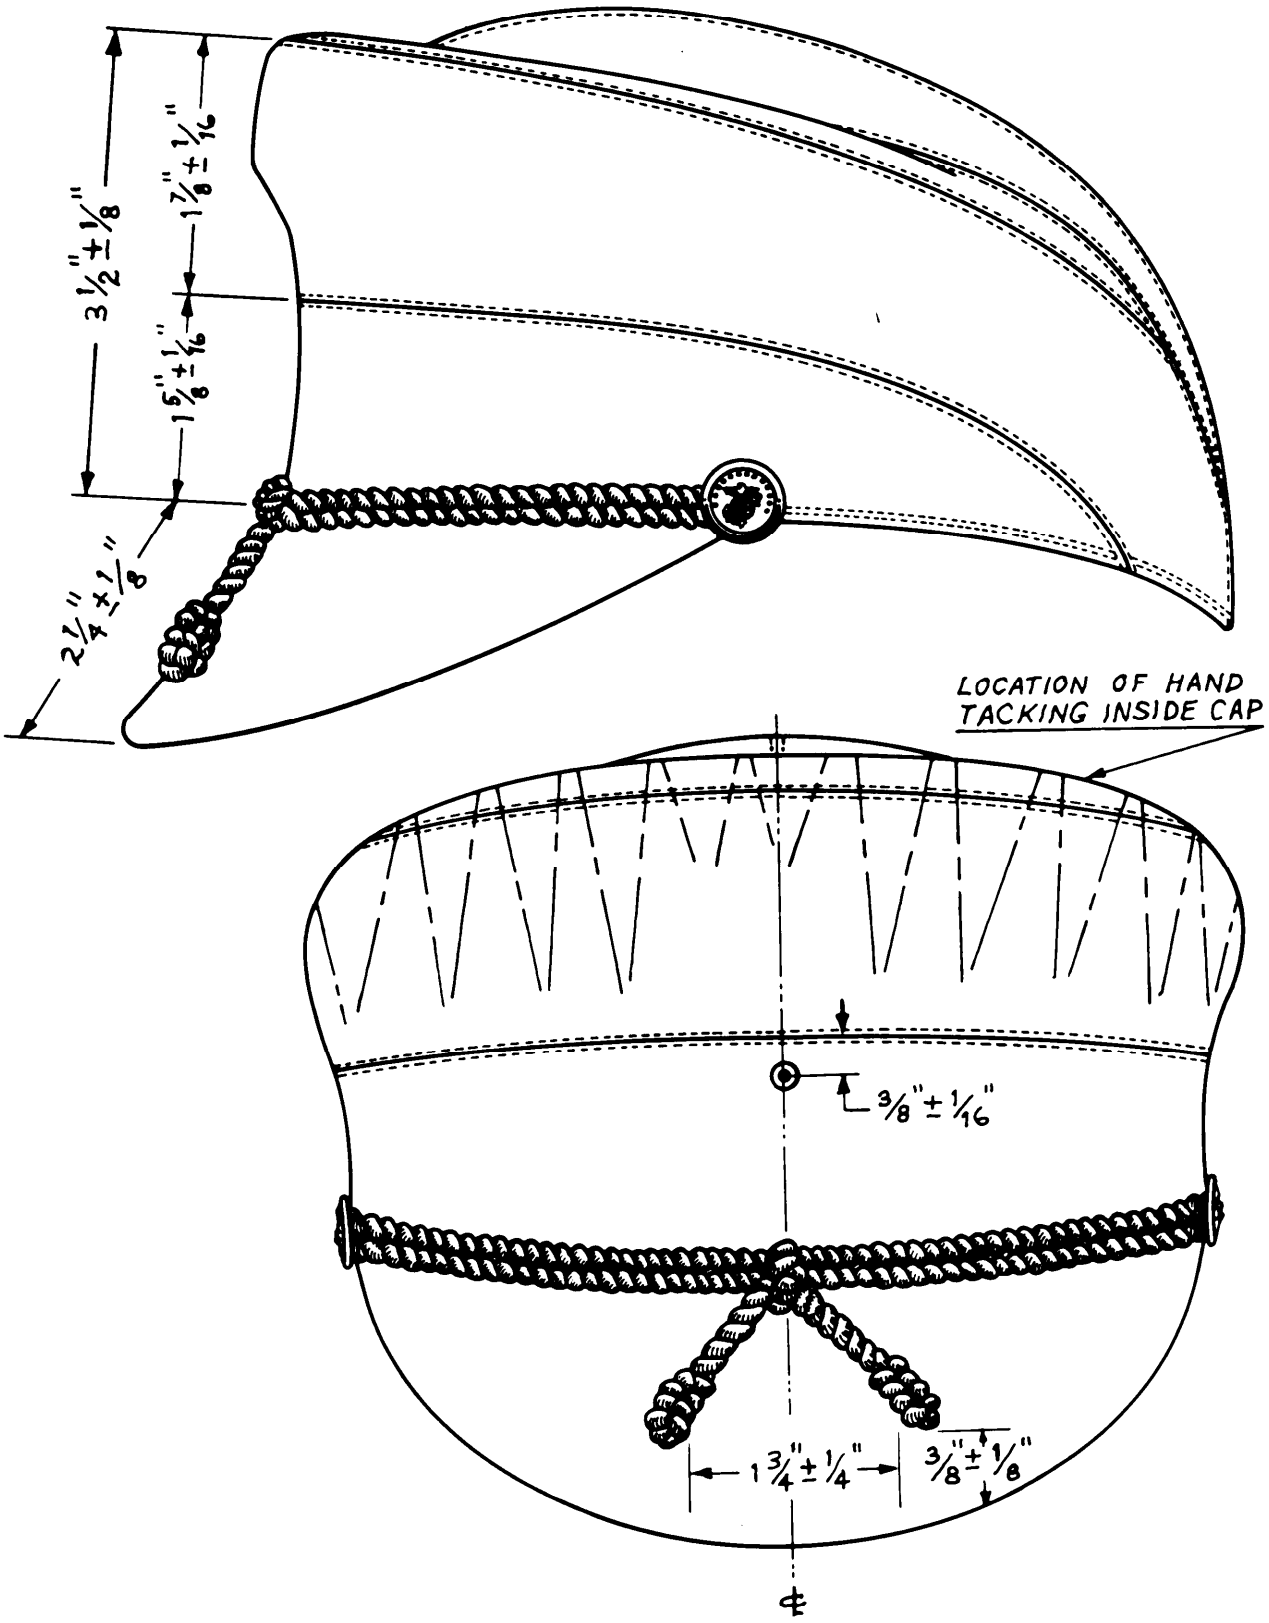


FIGURE 1. CAPS, WOMAN'S, DRESS (TYPE III SHOWN)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:44Z
Check the source to verify that this is the current version before use.

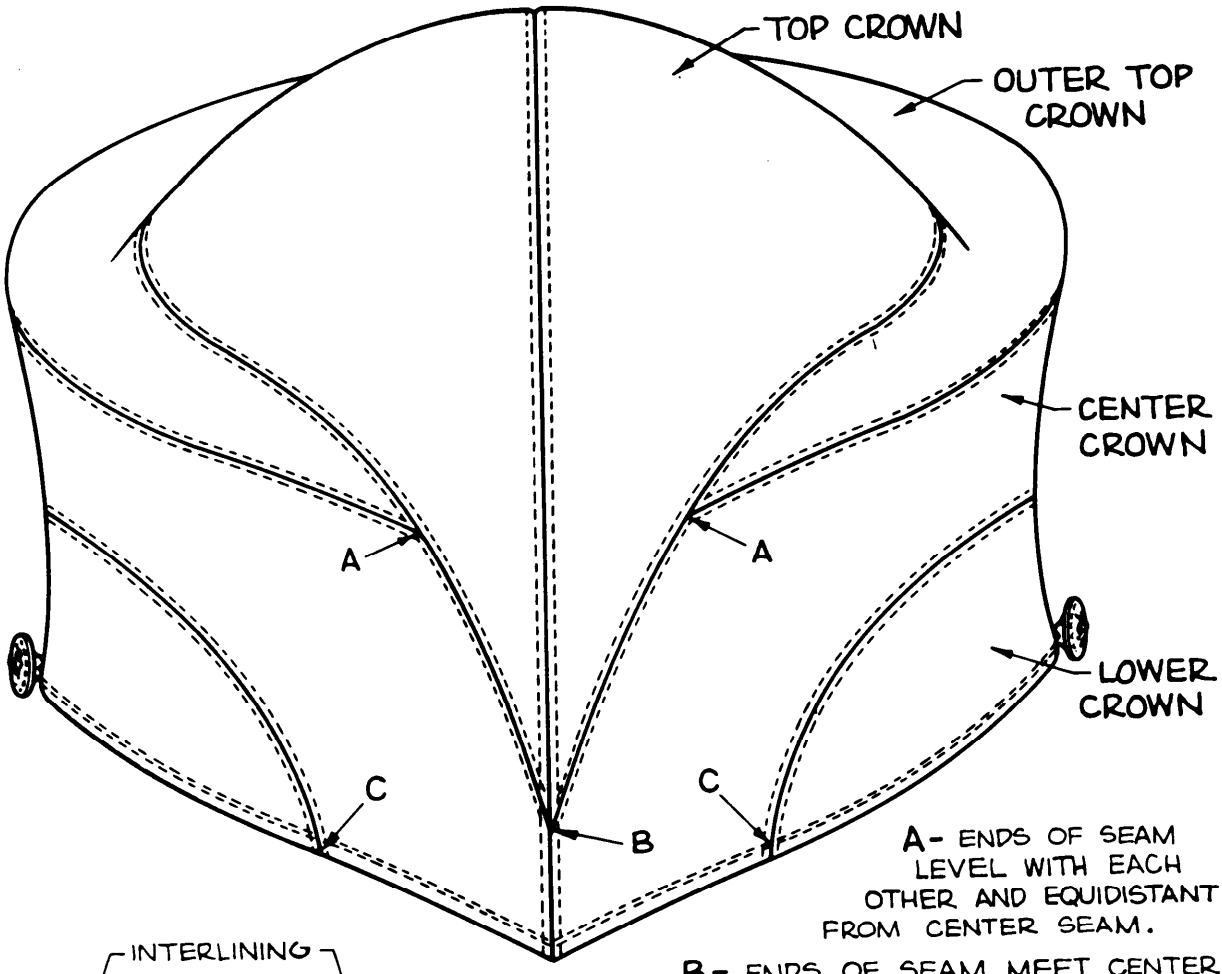

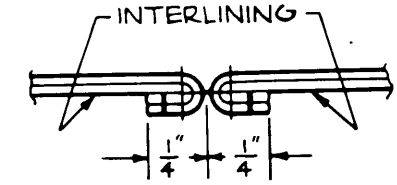

TYPICAL SECTION
SHOWING SEAM CONSTRUCTION

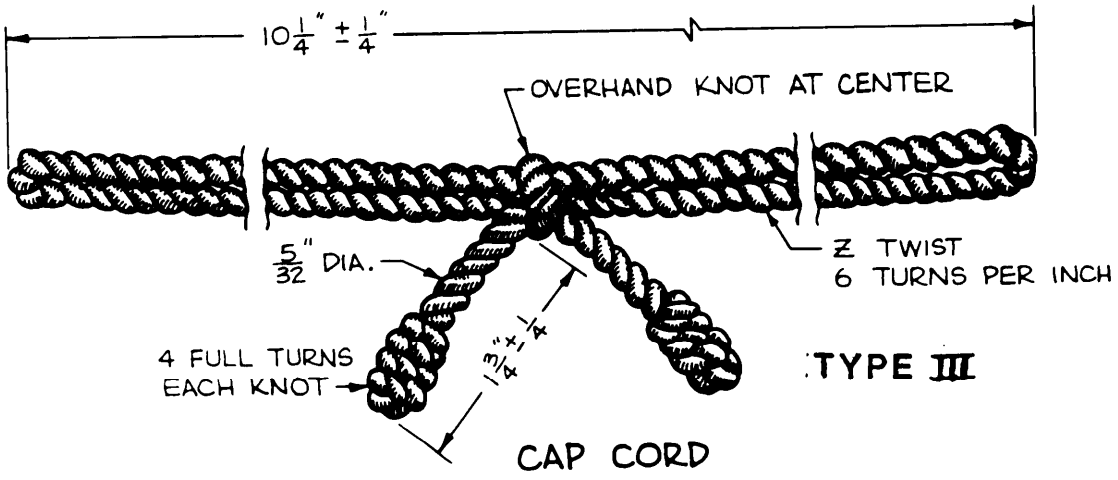


FIG. 2: CAPS, WOMAN'S DRESS

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:44Z
Check the source to verify that this is the current version before use.



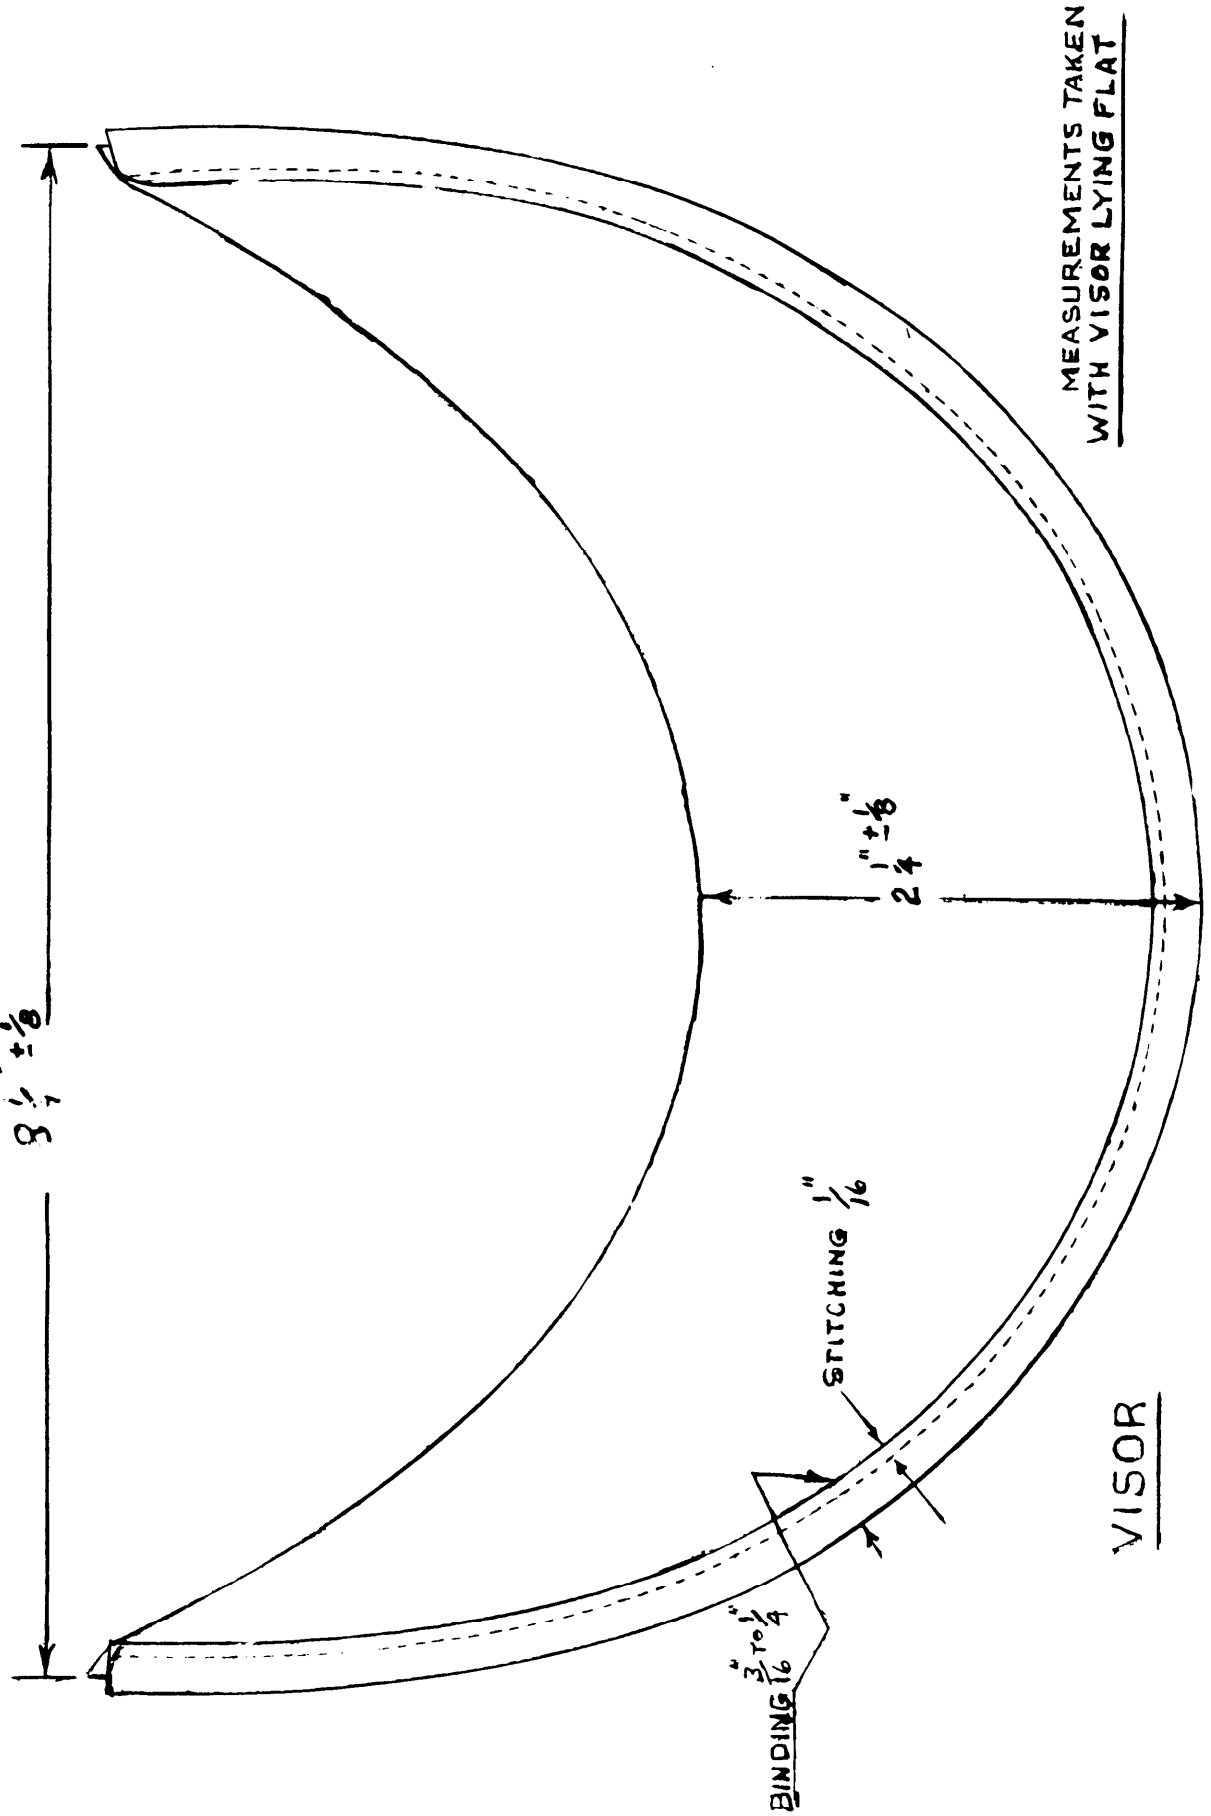


FIGURE 3 VISOR, TYPE I

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:44Z
Check the source to verify that this is the current version before use.

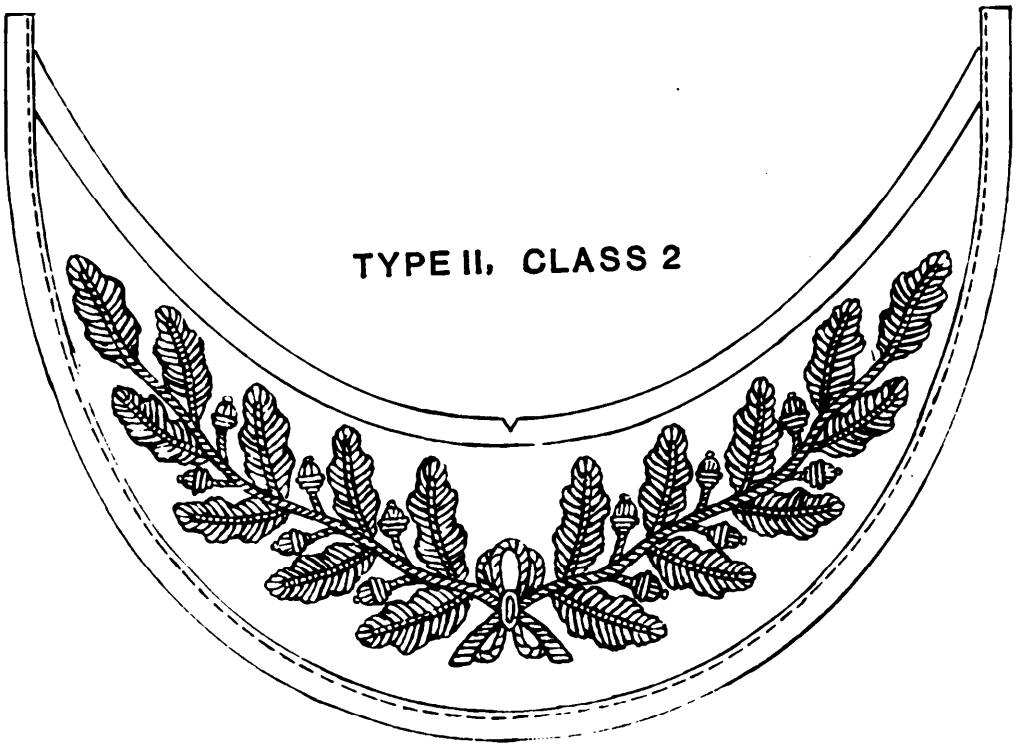

GENERAL OFFICER

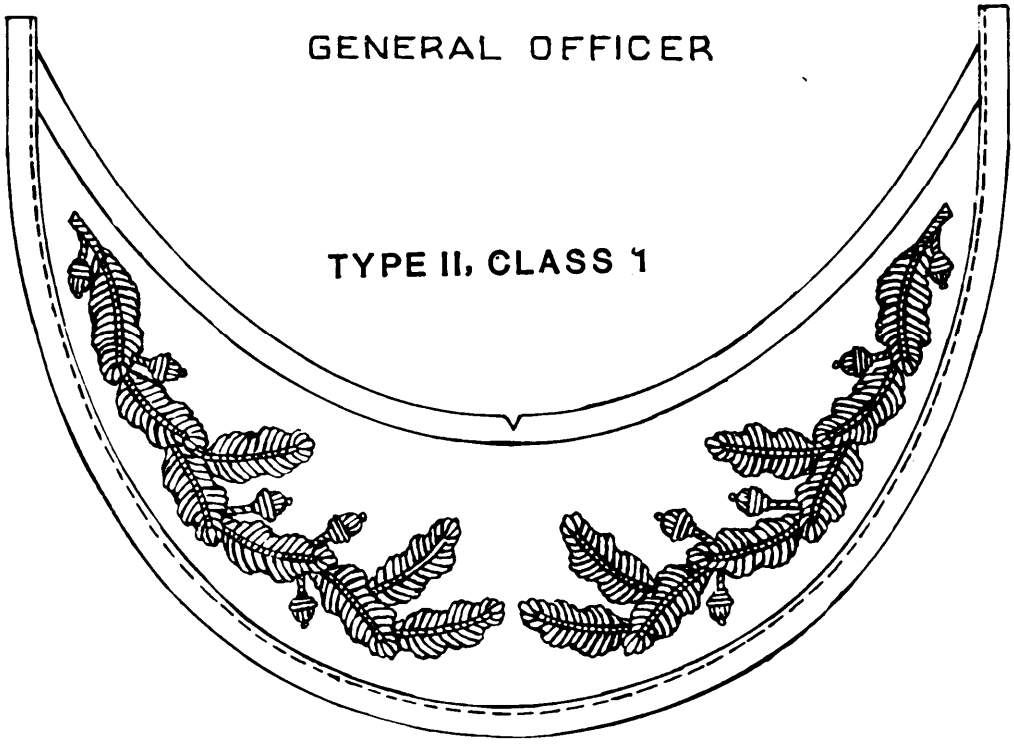


FIELD OFFICER

FIG. 4: CAPS WOMAN'S DRESS

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:44Z
Check the source to verify that this is the current version before use.

TYPE I, CLASS 1

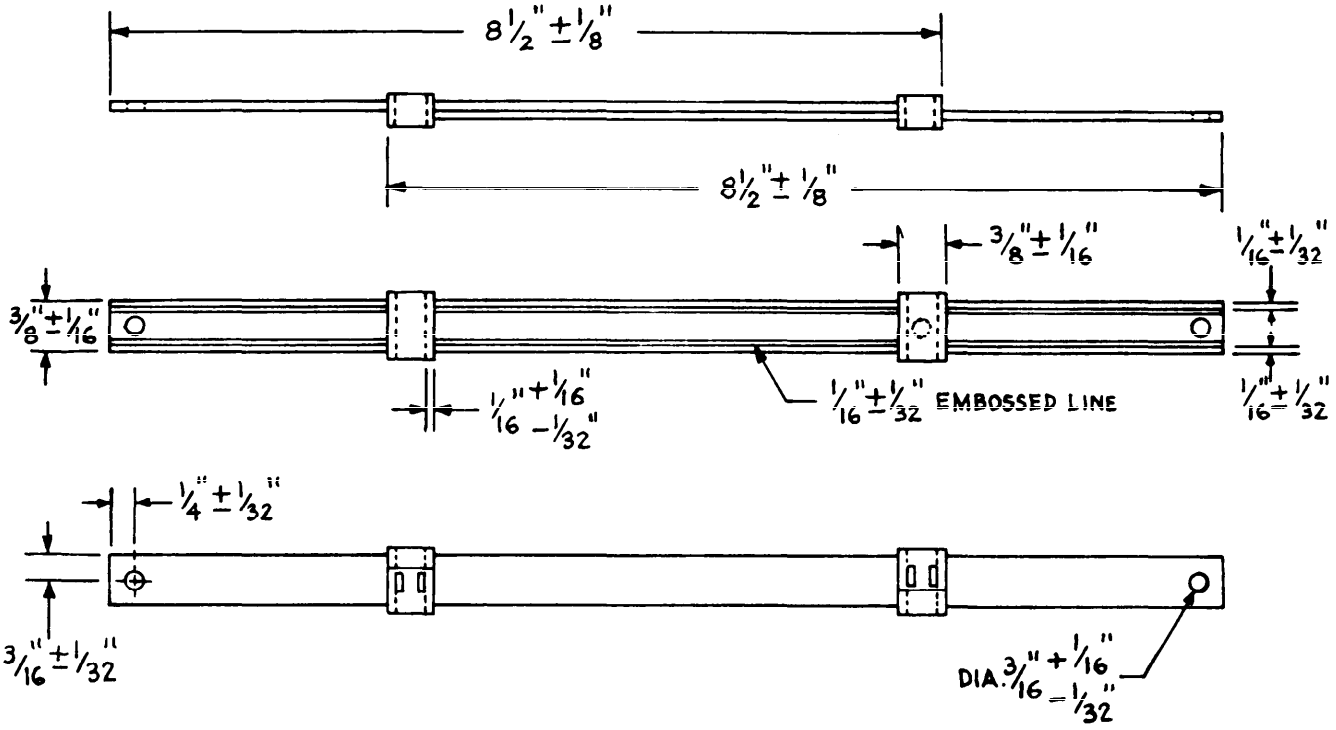

TYPE I, CLASS 2 AND TYPE II, CLASSES 1 &2

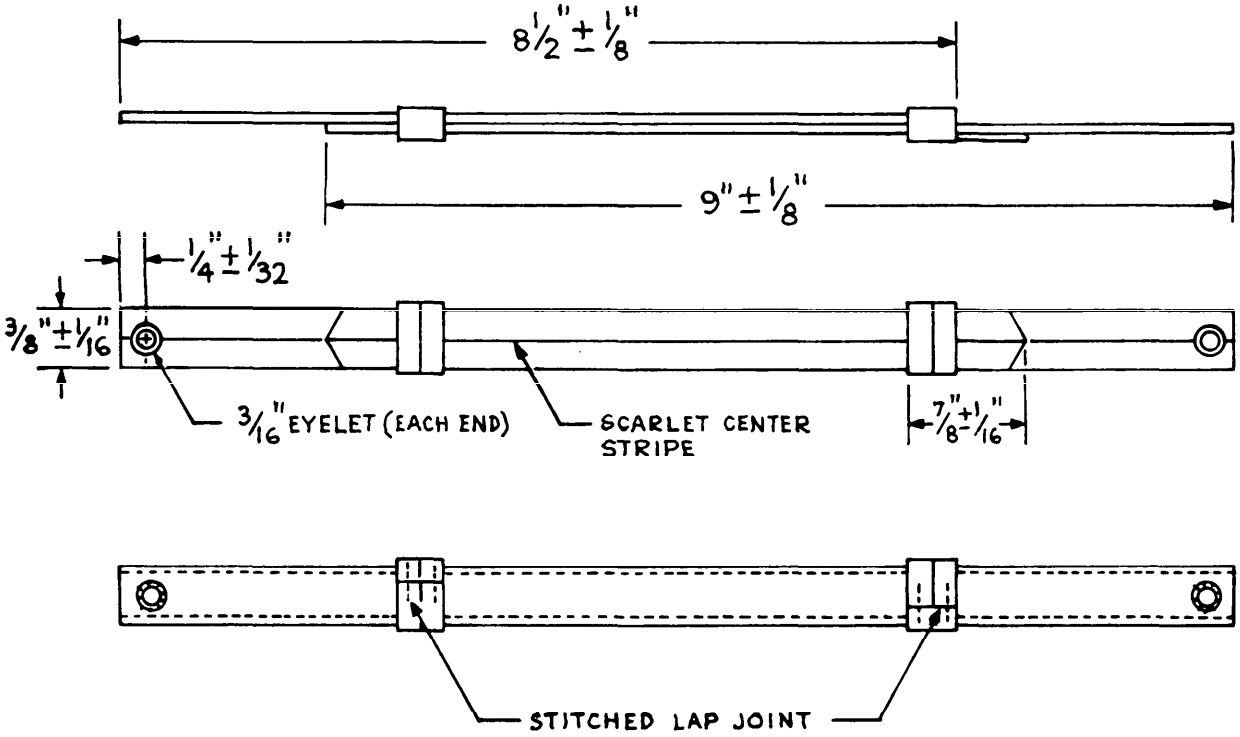


FIG. 5 CHIN STRAPS

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:44Z
Check the source to verify that this is the current version before use.

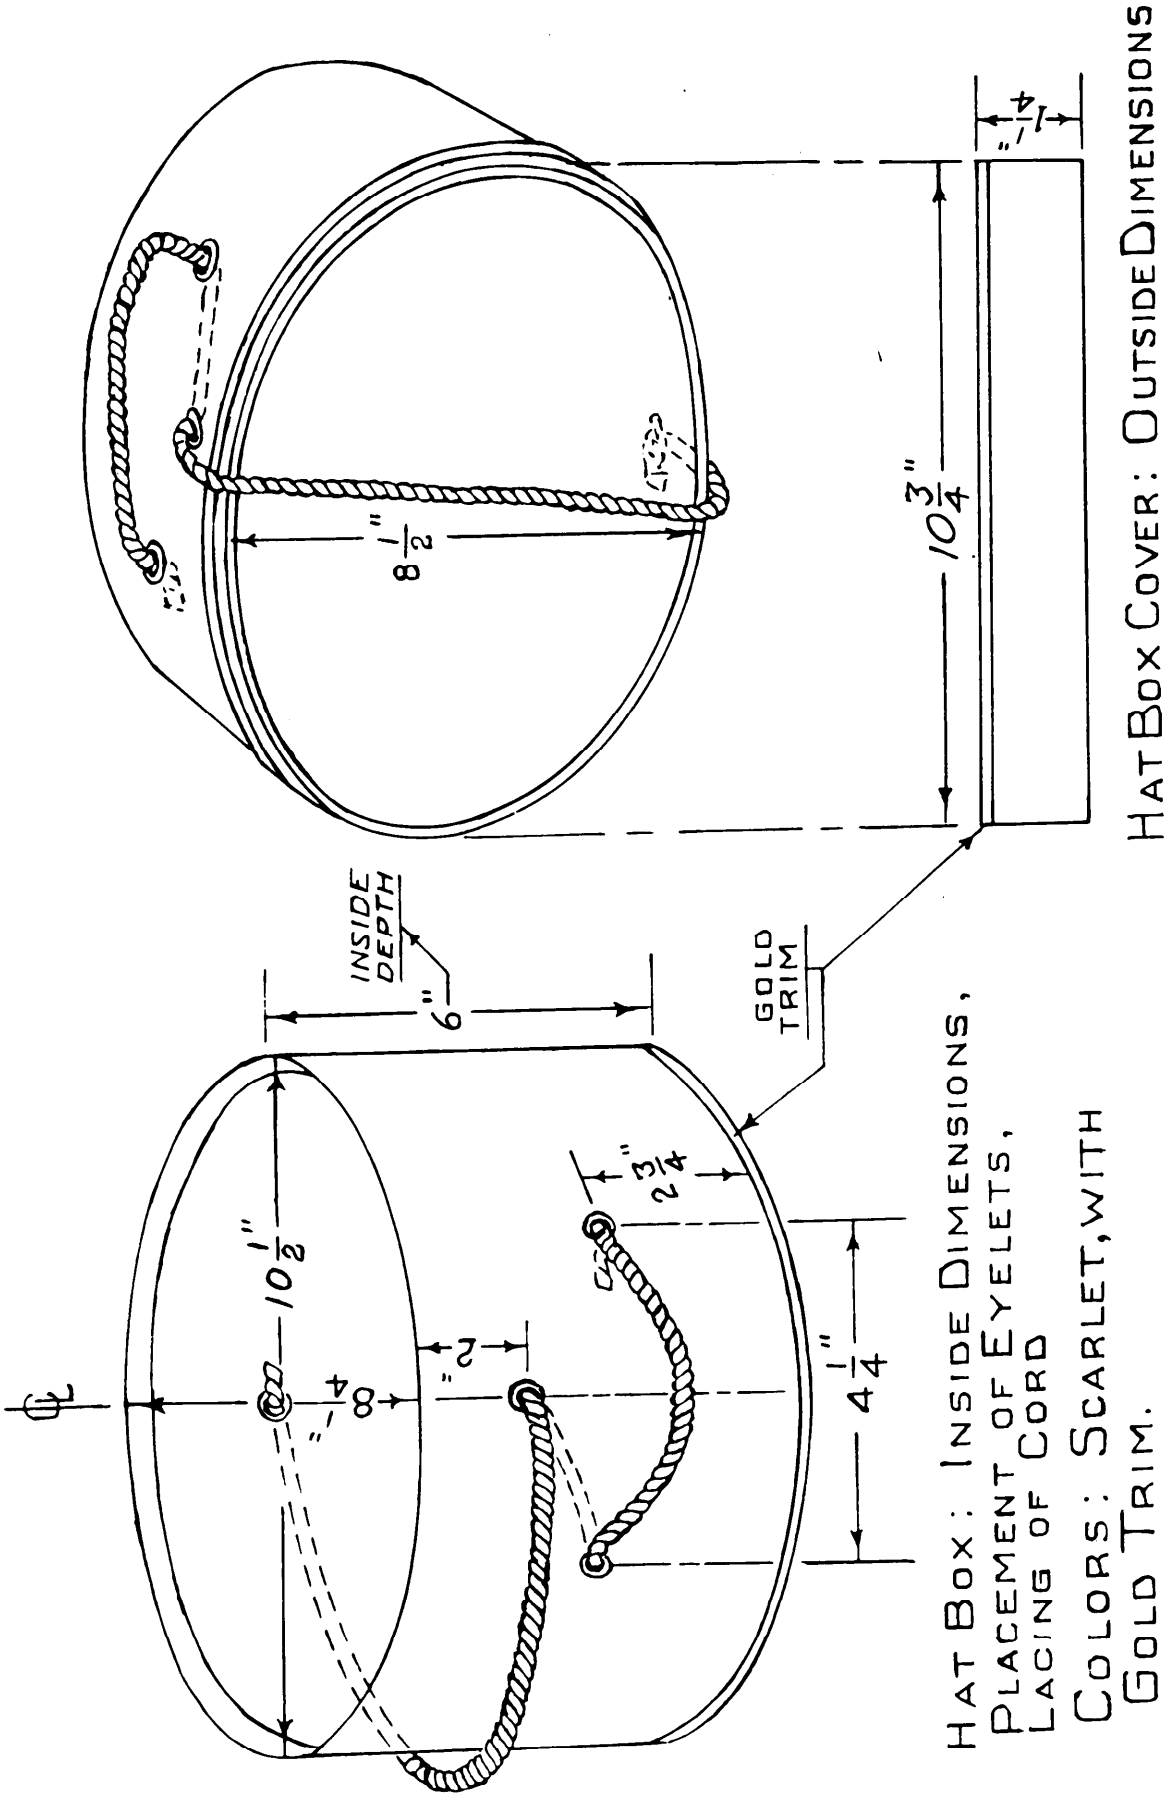


FIGURE 6. HAT BOX, FOR CAPS

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:44Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-C-29386(MC) CAPS, DRESS: WOMEN'S

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-LF-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:44Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
HEADQUARTERS, U. S. MARINE CORPS
WASHINGTON, D.C. 20380

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
DEPARTMENT OF THE NAVY
DOD-317



Commandant of the Marine Corps
Headquarters, U.S. Marine Corps
(Code LMA-1)
Washington, D. C. 20380

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:44Z
Check the source to verify that this is the current version before use.