MIL-C-29386A(MC)
8 JUNE 1987
SUPERSEDING
MIL-C-29386(MC)
5 March 1980

MILITARY SPECIFICATION

CAPS, DRESS: WOMEN'S

This specification is approved for use by U. S. Marine Corps, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers requirements for women's white vinyl dress caps.

1.2 Classification. The cap shall be in the following types, classes and sizes, as specified (see 6.2).

Type I - Black poromeric visor
  Class 1 - with black poromeric chin strap
  Class 2 - with gold chin strap

Type II - Black broadcloth/poromeric visor
  Class 1 - with field grade embroidery and gold chin strap
  Class 2 - with general officer embroidery and gold chin strap

Type III - White vinyl visor with scarlet cord (USMC Band)

Schedule of Sizes

21	21-1/2	22	22-1/2	23	23-1/2	24

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to the Commandant of the Marine Corps, Headquarters, U. S. Marine Corps (LMA-2), Washington, D. C. 20380, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8410

AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:43Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

FEDERAL

V-T-276	-Thread, Cotton
V-T-295	-Thread, Nylon
NN-P-71	-Pallet, Material Handling, Wood Stringer Construction, 2 Way and 4 Way (Partial)
CCC-C-417	-Cloth, Coated or Laminated (Table and Shelf)
CCC-C-700	-Cloth, Coated, Vinyl, Coated (Artificial Leather)
DDD-L-20	-Label, For Clothing, Equipage and Tentage (General Use)
PPP-B-636	-Box, Shipping, Fiberboard

MILITARY

MIL-C-297	-Cloth, Interlining, Cotton Warp and Spun Hair-wool Filling
MIL-C-368	-Cloth, Satin, Rayon and Cloth, Twill, Rayon
MIL-B-3461	-Button, Insignia, Metal, Uniform and Cap
MIL-P-15011	-Pallet, Material Handling, Wood, Post Construction, 4 Way Entry
MIL-E-17568	-Embroidery Materials, Metallic and Synthetic Metallic
MIL-C-19559	-Cord, Service Cap, Women's
MIL-L-20271	-Lace, Gold, Ornamental
MIL-E-20652	-Eyelets, Metallic, and Eyelet Washers, Metallic, (General Specification For)
MIL-C-82252	-Cloth, Broadcloth Wool and Wool/Synthetic (Moth-proofed)

STANDARDS

FEDERAL

FED-STD-191	-Textile, Test Methods
FED-STD-751	-Stitches, Seams, and Stitchings

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:43Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-STD-105 -Sampling Procedures and Tables for Inspection
MIL-STD-129 -Marking for Shipment and Storage
MIL-STD-147 -Palletized Unit Loads

(Copies of specifications, standards, handbooks, drawings, and publications required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer).

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

LAWS AND REGULATIONS

U.S. POSTAL SERVICE MANUAL

(Application for copies should be addressed to the Superintendent of Documents, U.S. Government Printing Office, Washington D.C. 20402.)

2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted shall be those listed in the issue of the DODISS specified in the solicitation. Unless otherwise specified, the issue of documents not listed in DODISS shall be the issue of the nongovernment documents which is current on the date of the solicitation.

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification Rules

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606.)

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to American Trucking Association, ATTN: Order Section, 1616 P Street, N.W., Washington, D.C. 20026.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein (except for associated detail specifications, specification sheets or MS standards), the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:43Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Guide sample. Guide samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variation from this specification may appear in the sample, in which case this specification shall govern.

3.2 First article. When specified (see 6.2), before production is commenced, the first article, consisting of the number of caps specified by the acquiring activity (see 6.2) shall be submitted, or made available to the contracting officer or his authorized representative for inspection. The approval of the first article authorizes the commencement of production, but does not relieve the contractor of responsibility for compliance with all provisions of this specification. The first article shall be manufactured by the contractor in the same facilities to be used for the manufacture of the production items.

3.3 Materials.

3.3.1 Basic material. The basic material shall be cloth, coated, vinyl, 18 ounce conforming to class 7 of CCC-C-700, white shade 1572, with the following exceptions:

(a) The commercial designation of the base cloth shall be 3.7 ounces per square yard.
(b) The coated cloth shall weigh 15.0 ounces per square yard (minimum).
(c) The coating weight shall be 12.0 ounces per square yard (minimum).
(d) The grain shall be simulated twill weave embossing.

3.3.2 Visor. The visor shall be constructed from the following materials:

3.3.2.1 Type I. Type I visor shall consist of a top piece and bottom piece, bonded together and bound on the outer edge with a plastic material. The top and bottom pieces shall be a smooth high gloss poromeric material, 0.045 ± 0.003 inches thick, 16.5 ± 1 ounce per square yard. The shade shall match Black 111.

3.3.2.2 Type II. Type II visors shall consist of a top ply of black broadcloth conforming to type I, class 4 of MIL-C-82252 and a bottom ply of smooth high gloss poromeric material, 0.045 ± 0.003 inches thick, 16.5 ± 1 ounce per square foot. The shade for the broadcloth shall match shade 2307.

3.3.2.3 Type III. Type III visors shall consist of a visor interlining (see 3.3.7) covered with the basic white vinyl material specified in 3.3.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:43Z
Check the source to verify that this is the current version before use.

3.3.2.4 Binding. The binding for type I and II visors shall be made from a plastic film, vinyl or equal, weighing not less than 12 ounces per square yard, and having a thickness of less than 0.0013 inch. The plastic film shall have a smooth high finish, and the color shall match that of the top piece for the visor. The binding shall not crack and shall show no evidence of tackiness. The binding shall be tested as specified in Section 4, Table III.

3.3.3 Lining. The material for lining the caps shall be cloth, rayon twill, 3.7 ounce, conforming to class 1 of MIL-C-368, white shade 3001.

3.3.4 Interlining.

3.3.4.1 Haircloth. The interlining for the top crown, center crown and lower crown shall be nontoxic cloth having undyed cotton warp yarns and natural horsehair. The horsehair shall meet current Quarantine Laws and pertinent regulations of the U.S. Department of Agriculture as set forth in Code of Federal Regulations. In addition to the above, the haircloth shall conform to the following requirements (see section 4, Table III for required test) or the top crown, center crown and lower crown interlining may be synthetic haircloth material, equal to Crown Textile Style No. 453 or 455, 7.8 ounce to 8.5 ounce. Both materials may be used in the same cap.

Weight-ounce per square yard	9 to 10
Yarns per inch (minimum):	
Warp (two-ply cotton)	60
Filling (natural horsehair)	90
Weave	with two ends weaving as one
Color	Natural
Stiffness-inch pounds, minimum average	
Warp	0.035
Filling	0.045

3.3.4.2 Outer crown interlining. The material for interlining the outer top crown piece shall be cloth, cotton warp and spun hair-wool filling, plain weave, conforming to type I, class I of MIL-C-297 or, the interlining shall be plain weave fabric having plied cotton and hair warp yarns and hair filling yarns (hair shall be a suitable quality goat hair or equal, sterilized and natural in color). The finished cloth shall weigh 6.5 ounces minimum per square yard, shall have not less than 30 ends and 30 picks per inch, and shall have a minimum average stiffness (bending moment) of 0.002 inch-pound in the warp and filling directions when tested as specified in Section 4, Table III.

3.3.5 Outer sweatband. The outer sweatband shall be a millinery belting ribbon conforming to the following requirements when tested as specified in Section 4, Table III.

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:43Z
Check the source to verify that this is the current version before use.

Material identifications:	
Warp	Rayon
Filling	Cotton
Width - inches	7/8 ± 1/16
Weight - ounces per linear yard	0.19 ± 0.2
threads per inch (minimum)	
Warp	122
Filling	30
Ply - cotton yarn	2, 4 or 5
Color	White
Weave	Plain
pH	5.5 to 8.5
Nonfibrous material	
Colorfastness to:	
Crocking	Good
Wet/dry cleaning	Good
Perspiration	Good

3.3.6 Inner sweatband. The material for the inner sweatband shall be cloth, coated or laminated, in a white shade (see 6.3) conforming to CCC-C-417.

3.3.7 Visor interlining. The material for interlining the visor shall be a nonwoven, fibrous material produced from a highly purified alpha cellulose vegetable fiber and leather fibers, wet web impregnated with approximately 15 percent compounded synthetic rubber conforming to the following physical requirements when tested as specified in Section 4, Table III.

	Machine Direction	Cross Direction
Weight (pounds per square yard): 3.0 minimum		
Thickness: 0.085 ± 0.003 inch		
Tensile strength (pounds per inch, minimum)	168	103
Tearing strength (grams centimeters, minimum)	1,200	1,600
Stretch (percent, maximum):	12	15
Stiffness (load pounds per inch, minimum):		
Original	5.0	4.0
After wet (dry) cleaning	5.0	4.0
Water absorption (percent, maximum): 19		
Accelerated aging: Shall show no embrittlement, development of stickiness or delamination.		
Resistance to water: Shall show no shrinking or warping.		

Source: https://assist.dla.mil -- Downloaded: 20260-20T22:43Z
Check the source to verify that this is the current version before use.

The finished visor interlining material shall be marked by directional symbols to designate the greater flexibility of the material. The marking shall be legibly and clearly designated on the textured side of the material.

3.3.8 Chin straps.

3.3.8.1 Black chin straps. The black chin straps for the type I, class 1 caps shall be made of a single ply of porameric material conforming to the requirements specified for type I visor (see 3.3.2.1). The finished dimensions shall be as shown in Figure 1.

3.3.8.2 Gold chin straps. The gold chin straps shall be gold lace conforming to class 1 of MIL-L-20271, 3/8 inch wide, constructed with tarnish resistant synthetic yarn conforming to type III, class 8 of MIL-E-17568. The gold lace shall be mounted on leather or other suitable material to provide body to the strap. The finished dimensions shall be as shown in Figure 1.

3.3.9 Cord. The cord for the type III cap shall conform to class 1 of MIL-C-19559, scarlet shade to closely match HL Cable No. 61756.

3.3.10 Eyelets. The eyelets for the cap and gold chin straps shall be brass, rolled flange type, with the barrel scored with 6 to 8 scores. The eyelets shall conform to MIL-E-20652, sheet 1A - BE108 and be white enamel finished for the cap and brass finished for the gold chin straps. The eyelets shall be backed with a washer.

3.3.11 Buttons. The gold plated insignia buttons to engage the chin strap and cords shall conform to type II, style 3, class A, subclass 1 in screw tube and post type conforming to MIL-B-3461.

3.3.12 Thread.

3.3.12.1 Cotton. The cotton thread shall conform to V-T-276, type IC2, mercerized finish, ticket No. A, 3-ply for all seaming and stitching and type IB3, glazed finished, ticket No. 24, 4-ply for tacking the crown. The cotton thread shall be white shade, Cable No. 66050 for assembling the cap and black shade, Cable No., 66043 for sewing the visor binding on type I caps. As an alternate, polyester thread may be used.

3.3.12.2 Nylon. The nylon thread for tacking the cord to the type III cap shall conform to type IV, subclass A, letter size A, 2-ply of V-T-295, scarlet shade, cable No. 67156. Colorfast requirements are not applicable.

3.3.12.3 Tarnish-resistant. The thread for embroidering the visors on the type II caps shall be tarnish resistant synthetic gold yarn conforming to type III, class 8 of MIL-E-17568.

Source: https://assist.dla.mil -- Downloaded: 202640-20T22:43Z
Check the source to verify that this is the currentversion before use.

3.3.13 Labels. Each cap shall have a combination identification and size label conforming to type I, class 4 of DDD-L-20 except the content shall include the name of contractor. The label shall measure not less than 1-3/4 by 1-1/4 inches, with a minimum 1/4-inch margin at the top edge for sewing.

3.4 Design. The cap shall be the U.S. Marine Corps design shown in Figures 1 through 5.

3.5 Patterns. Standard patterns will be furnished to the contractor by the Government. The standard patterns shall not be altered in any way and shall be used only as a guide for cutting the working patterns. The standard patterns provide 1/4-inch seam allowance, except as otherwise specified in Table I, show size and are marked or notched for the proper cutting, placement, and assembly of the component parts.

3.5.1 List of pattern parts. The component parts of the caps shall be cut from materials as specified in accordance with the pattern parts listed below:

Item	Pattern Parts	No. of cut parts
	Material: Basic fabric	
1.	Top crown	2
2.	Outer top crown	1
3.	Center crown	1
4.	Lower crown	1
5.	Visor (type III)	2
	Material: Cloth, rayon twill	
6.	Top crown lining	1
7.	Lower crown lining	1
	Material: Haircloth	
8.	Top crown	2
9.	Center crown	1
10.	Lower crown	1
11.	Eyelet reinforcement	2
	Material: Cloth, cotton warp, spun hair-wool filling; or cotton and hair interlining	
12.	Outer top crown	1
	Material: Nonwoven fibrous material	
13.	Visor interlining	1
	Material: Nonwoven fibrous material	
14.	Visor (types I and II) (see pattern part 5)	2

Source: https://assist.dla.mil -- Downloaded: 202640-20T22:43Z
Check the source to verify that this is the currentversion before use.

3.6. Construction. The caps shall be manufactured in accordance with the operations and the stitch, seam, and stitching types specified in Table I. The manufacturer is not required to follow the exact sequence of operations as listed in Table I, but all operations specified shall be used to manufacture the caps. The thread and the fabric shall not be lubricated by any means prior to or during the seaming.

3.6.1. Stitches, seams and stitching. The stitch, seam, and stitching type specified in Table I shall conform to FED-STD-751. The number of stitches per inch as specified in Table I indicates the minimum and maximum number permitted. If two or more methods of seam or stitch types are given for the same part of an operation, any one of them may be used. Where stitch type 401 is used, the looper (under thread) shall be on the inside of the finished cap. Seams shall be sewn so that no raw edges, run offs, twists, pleats, puckers, or open seams will result. All seams shall start and finish evenly. Thread tension shall be maintained so that the stitching will not be tight or loose.

3.6.1.1 Tacking and backstitching. The ends of all seams and stitchings not caught by other seams and stitching shall be backtacked not less than 1/2 inch. Thread breaks of stitch type 301 shall be secured by stitching back of the break not less than 1/2 inch. Thread breaks or skipped stitches in stitch type 401 shall be backstitched not less than 1 inch with the stitching superimposed and anchoring the ends of the break.

3.6.2 Shade marking. The component parts shall be marked or bundled to insure a uniform shade and size throughout the cap. Any method of shade markings may be used except:

(a) Corrosive metal devices.
(b) Adhesive-type tickets which show discoloration and adhesive mass which adheres to the material upon removal of the ticket.
(c) Sew-on shade tickets.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
1.	Cutting. a. Cut the cap in strict accordance with the patterns furnished by the Government. b. Cut the material in the direction indicated by directional lines on the pattern. c. Cut the basic material for the outer crown, center crown and lower crown face down. d. Cut the two piece top crown and visor (type III) face to face.					

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:43Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
1.	Cutting. (cont'd) e. Care shall be exercised in cutting the crown component parts and top ply of the visor (type III) to assure that twill lines in the finished cap finish diagonally (right to left) on all parts. f. Cut the component parts of the cap from one piece of the basic material. g. Cut the lining for the cap from one piece of the rayon twill material. h. Cut the interlining pieces in the same direction as the basic material, except the interlining for the outer top crown piece shall be cut across the material in the direction of the filling, and the interlining for the lower crown shall be cut on the bias as indicated on the pattern. NOTE: When alternate haircloth material is used, the top crown will be constructed of two plies of material cut in opposite directions. The center crown and lower crown shall be constructed of one ply. i. Cut the fiber visor (type III) interlining in the warp direction. j. Cut the visor binding (types I and II) 3/4 to 7/8 inch wide.					
2.	Replacement of damaged parts. a. Replace, at time of cutting, all parts of the cap or lining containing holes or seriously					

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:43Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
2.	Replacement of damaged parts. (cont'd)					
	weakening defects such as smashes, multiple floats, loose or weakening slubs, etc., expected to develop into a hole, shade bars, dye streaks or unsightly slubs, etc., affecting appearance.					
	b. Replace any part damaged during manufacturing process by needle chews which may be expected to develop into a hole, scissors or knife cuts, tears, holes, mends, burns and large drill holes in material.					
3.	Shade marking.					
	a. Mark all component parts as specified in 3.6.2 in order to insure a uniform shade and size throughout the cap.					
	b. The use of tickets with metal fastening devices is prohibited on the rayon twill lining.					
4.	Make and attach eyelet reinforcement.					
	a. The eyelet reinforcement shall be made of 2 plies of the haircloth interlining, with each ply cut in the warp or filling direction.					
	b. Join the two plies together along all edges 1/8 to 3/16 inch from edges.	301	SSa-1	5-6	A	A
	c. Position the eyelet reinforcement on the inner side of the lower crown interlining with notches matching, and stitch all plies together 3/16 to 1/4 inch from the lower edge of the eyelet reinforcement.	301	SSbd-1	5-6	A	A

Source: https://assist.dla.mil -- Downloaded: 202640-20T22:43Z
Check the source to verify that this is the currentversion before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
5.	Interlining top, outer top, center crown and lower crown pieces.					
	Finished appearance. The crown interlining pieces shall not be tight, short, or twisted, affecting smoothness on the outside of the crown.					
	a. Join the top, outer top, center crown and lower crown pieces to the corresponding interlining pieces, 1/8 inch from all edges. The eyelet reinforcement patch shall not be caught in the stitching.	301 or 401	SSa-1	8-10	A	A
6.	Assemble cap.					
	Finished appearance. The top crown pieces shall be joined together without twists, puckers, pleats or distortions.					
	a. Join together the two plies of top crown pieces with 1/4-inch seam.	301	SSz-3 (a)	12-16	A	A
	b. Spread open the seam and stitch through the seam allowance 1/16 inch from each side of the seam.	301	SSz-3 (a)	12-16	A	A
	c. Position the outer top crown to the center with edges even, front notches matching and with the ends of the outer top crown even with the inner notches on the back of the center crown. Seam together 1/4 inch from edges. Trim excess seam allowance as necessary to avoid impression when blocked.	301	SSz-3 (a)	12-16	A	A
	d. Spread open the seam and stitch through the seam allowance 1/16 inch from each side of the seam.	301	SSz-3 (a)	12-16	A	A
	e. Position top crown to the outer top and center crown assembly with edges even and with the front notch	301	SSz-3 (a)	12-16	A	A

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:43Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDI.	BOB/ LPR
6.	Assemble cap (cont'd)					
	of the outer top crown in line with the seam line of the top crown and with the ends of top crown even with the back notches of center crown. Seam together 1/4 inch from the edges.					
	f. Spread open the seam and stitch through the seam allowance 1/16 inch from each side of the seam.	301	SSz-3 (a	12-16	A	A
	g. Position the lower crown to the center crown with front notches and edges even. Seam together 1/4 inch from edges. The eyelet reinforcement patch shall not be caught in the stitching.	301	SSz-3 (a)	12-16	A	A
	h. Spread open the seam and stitch through the seam allowance 1/16 inch from each side of the seam.	301	SSz-3 (a)	12-16	A	A
	i. Join back end of the cap with 1/4-inch seam from the bottom edge up to the joining seam of the top and center crown.	301	SSz-3 (a)	12-164	A	A
	j. Spread open the seam and stitch through the seam allowance 1/16 inch from each side of the seam.	301	SSz-3	12-16	A	A
7.	Block cap.					
	a. Place the interlined crown on the proper size block and place in a live steam box for a sufficient length of time to make the fabrics pliable.					
	b. Properly smooth and shape the crown to conform to the shape of the block, and mark the location of the finished bottom edge of the cap as indicated by the block.					

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:43Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
7.	Block cap. (cont'd)					
	c. The center seam of the top crown shall be in line with the center front of the cap.					
	d. The cap shall be thoroughly dried before removing from block.					
8.	Finished bottom edge.					
	a. Remove the cap from the block and trim the excess material at the lower edge of crown within 1/4 to 3/8 inch from the finished edge mark. Turn the bottom edge to the inside along the mark and stitch 1/8 to 3/16 inch from the folded edge.	301 or 401	FFa-1	10-14	A	A
	b. In the finished cap, the center front height shall measure 3-1/2 ± 1/8 inches from the bottom edge to the top seam. The lower and center crowns shall measure 1-5/8 ± 1/16 and 1-7/8 ± 1/16 inches respectively at the center front as shown on Figure 2.					
9.	Tack crown.					
	a. The indentation around the top of the crown shall be held in position by loosely tacking the outer top crown on the inside with evenly spaced stitches around the front of the cap from approximately the center of one side to the center of the other side.	Hand		20-25 (per cap)	24/4	
	b. One end of each stitch shall be caught in the seam allowance joining the top and outer top crowns, and the other end shall be caught in the seam allowance joining the center and lower crown, except at the front where it shall be caught in the eyelet reinforcement piece, making a series of approximately 1-inch long stitches around the front of the cap as shown in Figure 2.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:43Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
10.	Make poromeric visor (type I). Finished appearance. Binding for the outside edge of the visor shall be uniform and smooth without distortion or defect. Dimensions of the visor shall conform to Figures 2 and 4. The inside edge of the visor shall be slashed or pinked prior to attachment to provide a cushioning effect. a. Secure the top and bottom plies together, back to back, with rubber cement or a suitable flexible glue. b. Mold the visor permanently into a curved shape as indicated in the sample. c. Stitch the binding to the visor around the outside edge, 1/16 inch from the turned edge of binding on top of visor and catching the other edge with the bottom stitching.	301	BSb-1	8-12	36/4	36/4
11.	Make broadcloth/poromeric visor (type II). Finished appearance. The broadcloth top ply, embroidered as required, shall finish smooth and tight without wrinkles, gathers or puckers or other distortion. The binding for the outside edge of the visor shall be uniform and smooth without distortion or defect. Design/dimensions shall conform to Figures 2 and 5. a. The visor shall be made with an embroidered broadcloth top ply, secured to the poromeric bottom ply with the outside edge covered with binding strip. b. After embroidery, secure the top ply to the back of the bottom ply with rubber cement or a suitable flexible glue.					

Source: https://assist.dla.mil -- Downloaded: 20261O-20T22:43Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
11.	Make broadcloth/poromeric visor (type II).					
	c. Stitch the binding to the visor around the outside edge, 1/16 inch from the turned edge of binding on top of visor and catching the other edge with the bottom stitching.	301	BSb-1	8-12	36/4	36/4
12.	Make vinyl visor (type III).					
	Finished appearance. The top and bottom plies of the finished visor shall be smooth and tight without wrinkles, gathers, puckers or other distortion, and with the front seam finished on the under side 1/16 to 1/8 inch back from the front edge.					
	a. The visor shall be made of two plies of basic material interlined with one thickness of the fiber material specified in 3.3.7.					
	b. Join the two plies of basic material together around the front 3/16 to 1/4 inch from the edge.	301 or 401	SSa-1	12-16	A	A
	c. Turn the plies and place the fiber visor between, forcing the visor to the seamed edge.					
	d. Join the two plies of basic material together along the back edge of the fiber visor, as close to the edge as possible but not through the fiber material, leaving a 5/8 to 3/4 inch wide hinge.	301 or 401	SSa-1	12-16	A	A
13.	Attach visor to crown.					
	a. Lap the folded bottom edge of the lower crown on the hinge of the visor, with the notch of the visor positioned in line with the center front of the cap and with the bottom edge of the crown. Seam the crown to the hinge of the visor 1/8 inch from the folded bottom edge.	301	LSa-1	12-16	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:43Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
13.	Attach visor to crown. (cont'd)					
	b. On the finished cap, the visor shall measure 2-1/4 ± 1/8 inches from front to back at the center, shown in Figure 2.					
14.	Make sweatband.					
	a. The sweatband shall be made of the millnery belting ribbon and the coated fabric specified in 3.3.5 and 3.3.6 respectively.					
	b. The coated fabric shall be cut on the bias, 1-1/2 inches wide. The belting ribbon shall be 7/8 ± 1/16 inch wide. Both shall be cut the same length as the lower crown lining.					
	c. Fold one edge of the coated fabric 1/2 inch to uncoated side, with the folded edge forming the bottom edge of the finished sweatband. Place the ribbon on the uncoated side of the coated fabric on top of the turned edge, with the lower edge of the ribbon positioned 1/16 inch below the folded edge of the coated fabric, and seam the ribbon and coated fabric together 1/16 inch from the lower edge of the ribbon.	301	SSb-1	10-14	A	A (Black)
15.	Make lining and join sweatband with label.					
	a. Fold the top crown lining, matching the cut edge of the dart on each side of the crown, and stitch the entire length of the dart 1/4 inch from the cut edges, tapering to a point at the front end	301	SSa-1	12-16	A	A

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:43Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
15	Make lining and join sweatband with label. (cont'd)					
	b. Lap the top edge of the sweatband ribbon only on the face of the lower crown lining 1/4 to 3/8 inch above the bottom edge, with the uncoated side of the inner sweatband against the lining, and seam the ribbon to the lining 1/16 inch from the top edge of the ribbon from end to end, with the top end of the label placed under the ribbon 2 to 3 inches to the left or right of the center back and caught in the stitching. The raw edge of the coated fabric shall not be caught in the stitching.	301	LSa-1	12-16	A	A
	c. Seam the top and lower crown lining pieces together, with front notches matching and edges even, with 1/4-inch seam.	301	SSa-1	12-16	A	A
	d. Fold the top crown lining, matching the cut edge of the center back dart and the ends of the sweatband. Stitch the entire length of the dart 1/4 inch from the bottom edge of the sweatband, tapering to a point at the front end.	301	SSa-1	12-16	A	A
16	Join lining to cap.					
	a. Properly position the lining assembly in the cap with the bottom edge of the sweatband abutting the back edge of the visor and 1/16 to 1/8 inch above the cap at the sides and back.					
	b. Seam the lining assembly to the cap 1/8 inch above the bottom edge of the sweatband.	301	SSa-1	12-16	A	A

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:43Z
Check the source to verify that this is the currentversion before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
17.	Attach eyelet. a. Attach the metal eyelet to the lower crown of the cap with the center of the eyelet in line with the center front of the crown and through the seam line of the upper and lower crown. b. The eyelet shall be securely attached through the outside of the cap and through the reinforcement piece and lining on the inside with a washer and shall be securely clinched on the inside without distorting and cutting the material or splitting the flange of the eyelet.					
18.	Attach cord (type III). a. The cap cord shall be double strand, 10-1/4 inches in length, with a loop on each end for the buttons, with the overhand knot at the center and the two free ends 1-3/4 inches in length as shown in Figure 3. b. Position the cord across the front of the cap at the seamline of the lower crown and visor. Tack cord to lower crown for its entire length, with the ends of stitching securely backstitched and the cord covering the joining seam of lower crown and visor. The cord shall finish smooth and flat without causing pleats or puckers of the lower crown. The knotted ends of the cord shall be spread 1-3/4 inches apart and positioned on the visor as shown in Figure 2. The lower ends of the cord shall finish 3/8 inch from the nearest point of the front edge of the visor.	Hand		40 per cord	A	A

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:43Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
18	Attach cord (type III). (cont'd)					
	c. The free ends of the cord, positioned on the visor as specified, shall be tacked at the extreme ends, to the visor, with the ends of the stitching securely tacked.	Hand		6 per end	A	-
	d. The tacking of the cord and free ends shall be made on the underside so as to not be visible on the finished cap. The stitching of the cord shall be made through both strands of the loops so as to hold the strands together.					
	NOTE: The strands of the cord may be tacked together prior to attaching to cap.					
19.	Make poromeric chin strap.					
	Finished appearance. Chin straps shall be made in two sections with a hole at one end and a loop at the other end of each section. The two sections shall be identical except for the manner of attaching the loops. All edges shall be stained black. The top and bottom edges of the strap and the loop shall have an embossed line. The loops shall be positioned with the edge of loop parallel to the square end of strap (see Figure 1).					
	a. The chin strap shall be made of one piece of poromeric material (see 3.3.2.1) for each strap and one piece for each loop.					
	b. Position the loop for the top section on the outside of the strap, and stitch loop to strap 1/16 inch from the right and left edges, or the loop may be attached to the strap with a clinch rivet finished in black enamel to match the shade of the poromeric material.	301	SSa-2	10-12	A/3	A/3

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:43Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
19.	Make poromeric chin strap. (cont'd)					
	c. Lap the ends of the loop 1/4 ± 1/16 inch on the underside of the strap and fasten the ends with two staples.					
	d. Stitch the loop for the bottom strap 1/16 inch from each edge to the underside of the strap, or the loop may be attached to the underside of the strap with two staples through the ends of the loop and strap only.	301	SSa-2	10-12	A/3	A/3
	e. Punch a 3/16-inch hole 1/4 inch from the end of both the upper and lower straps for attaching the screw buttons.					
20.	Make gold lace chin strap.					
	a. The chin strap shall be made from one piece of gold lace (see 3.3.8.2) for each strap, and one piece for each loop.					
	b. Position the loop for the top section on the outside of the strap with the edge of the loop 1/2 ± 1/16 inch from the pointed end. Stitch the loop to the strap 1/16 inch from the right and left edges.	301	SSa-2	10-12	A/3	A/3
	c. Lap the ends of the loop 1/4 ± 1/16 inch on the underside of the strap and stitch the ends together forming the loop.	301	SSa-2	10-12	A/3	A/3
	d. Cut the pointed end from the lower strap to a length of 7/8 ± 1/16 inch. Stitch the loop over the top of the short piece with the edge of the loop 1/2 ± 1/16 inch from the pointed end.	301	SSa-2	10-12	A/3	A/3

Source: https://assist.dla.mil -- Downloaded: 202640-20T22:43Z
Check the source to verify that this is the currentversion before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
20.	Make gold lace chin strap. (cont'd)					
	e. Lap the ends of the loop 1/4 ± 1/16 inch on the underside of the lower strap, with end of strap even with edge of loop, and stitch to strap forming the upper loop.	301	SSa-2	10-12	A/3	A/3
	f. Attach a 3/16-inch wide diameter metal eyelet 1/4 inch from the square end of both the upper and lower straps for attaching the screw buttons (see 3.3.10). The eyelets shall be brass finished.					
21.	Attach buttons.					
	a. Punch a hole through left and right sides of the headband for the button screw tubes. The holes shall be positioned so that the center of the screw tube shall be at the vertical juncture of the visor and lower edge of the cap, 1/4 to 3/8 inch from the lower finished edge of the cap.					
	b. Insert a button tube through the punched holes and seams with a tinnerman lock washer or heavy duty staple. Place the assembled chin strap or cord loops, engaging the button screw tubes, and snugly fit the strap across the front of the lower crown. Screw the buttons into tubes the entire length of the screw with the eagle being in an upright position, wings horizontal with the lower edge of the cap.					
22.	Finish and clean cap.					
	a. Any ends of stitching shall be trimmed and the loose ends removed from the cap.					
	b. Any spots, stains and shade tickets or marking shall be removed without injury to the material.					

Source: https://assist.dla.mil -- Downloaded: 20261-20T22:43Z
Check the source to verify that this is the current version before use.

3.7 Finished measurements. The head measurement shall be the inside circumference of the headband at the lower edge of outer sweatband. The head measurement for each size cap shall be as specified in Table II. Other finished measurements of the cap shall be as specified in Figures 2 through 5.

Table II. Head measurements

Size of cap	Head measurements 1/ inches
21	21
21-1/2	21-1/2
22	22
22-1/2	22-1/2
23	23
23-1/2	23-1/2
24	24

1/ All head measurements + 1/4, -1/8 inch.

3.8 Government-loaned property. Unless otherwise specified (see 6.2), the head block for the caps shall be furnished to the contractor by the Government. The head block, when furnished to the contractor, shall remain the property of the Government and shall be used only as a guide for making other sizes. The contractor will be held responsible for the safe care and return of block in the same condition as received, except for normal wear and tear, and will be required to replace lost, or repair damaged, head block. Upon completion or termination of the contract, the contractor shall pack and ship the head block in the same manner as received to a point designated by the contracting officer.

3.9 Workmanship. The finished caps shall conform to the quality and grade of product established by this specification. The occurrence of defects shall not exceed the levels set by the applicable acceptable quality levels (AQL's).

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:43Z
Check the source to verify that this is the current version before use.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Certification of compliance. When certification of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.4)
2. Quality conformance inspection (see 4.5).

4.3 Inspection conditions. All inspections shall be in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated herein.

4.4 First article inspections. When first article is required, inspection shall be made of a completely fabricated cap for all provisions of this specification.

4.5 Quality conformance inspection.

4.5.1 Testing of components. Testing of components shall be in accordance with applicable subsidiary specifications and standards to the extent applicable, except that this specification shall govern in the event of conflict. The method of testing shall be as specified in FED-STD-191, wherever applicable. Testing shall be performed on components listed in Table III for characteristics noted.

4.5.2 In-process inspection. Inspections shall be performed during the manufacturing of the end item to ascertain that the operations are performed as specified herein. The Government reserves the right to determine the acceptability of construction methods not performed in accordance with specified requirements for operations or subassemblies.

4.5.3 Sampling test. Unless otherwise specified in subsidiary specifications, sampling shall be in accordance with the following:

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:43Z
Check the source to verify that this is the current version before use.

Lot Size (lot unit)	Sample size (sample unit)
800 or less	2
801 to 22,000	3
22,001 and over	5

The lot shall be unacceptable if one or more sample units fail to meet any test requirement specified herein. The unit for expressing lot size and sample unit for testing components shall be in accordance with applicable subsidiary specification and as follows:

Component	Lot size expressed as:	Sample unit for testing
Haircloth interlining	Yard	1 yard full width
Cotton and hair interlining	Yard	1 yard full width
Sweatband (millinery belting ribbon)	Yard	5 continuous yards
Visor interlining	Yard	1 square yard
Poromeric visor and chin strap material	Yard	1 square yard
Binding, plastic	100 Yards	1 Square foot

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:43Z
Check the source to verify that this is the current version before use.

Table III. Test Methods

Components	Characteristics	Rqmt. para.	Test method	No. Determinations per sample unit	Results reported as
Haircloth interlining	Material identification				
	Warp	3.3.4.1	1200	2	Pass or fail
	Filling 1/	3.3.4.1	Std Coml	1	Pass or fail
	Color				
	Warp	3.3.4.1	Visual	1	Pass or fail
	Filling	3.3.4.1	Visual	1	Pass or fail
	Weave	3.3.4.1	Visual	5	Pass or fail
	Yarns per inch				
	Warp	3.3.4.1	5050	5	Avg of the 5 det. in each direction to nearest whole number.
	Filling	3.3.4.1	5050	5	
	Weight per sq in	3.3.4.1	5041	5	Avg. of the 5 det to nearest 0.1 oz.
	Stiffness, in lbs				
	Warp	3.3.4.1	5202 2/	10	Avg of the 10 det in each direction to nearest 0.001 in lbs for bending moment.
	Filling	3.3.4.1	5202 2/	10	
Cotton and hair interlining	Material identification				
	Warp	3.3.4.2	1200 (cotton)	2	Pass or fail
			std coml (goat hair) 1/	1	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:43Z
Check the source to verify that this is the current version before use.

Table III. Test Methods

Components	Characteristics	Rqmt. para.	Test method	No. Determinations per sample unit	Results reported as
Cotton and hair interlining (cont'd)	Filling	3.3.4.2	Std Coml	1	Pass or fail
	Color				
	Warp	3.3.4.2	Visual	1	Pass or fail
	Filling	3.3.4.2	Visual	1	Pass or fail
	Weave	3.3.4.2	Visual	5	Pass or fail
	Yarn per inch				
	Warp	3.3.4.2	5050	5	Avg of the 5 det. in each direction to nearest whole number.
	Filling	3.3.4.2	5050	5	
	Weight per sq yd	3.3.4.2	5041	5	Avg of the 5 det to nearest 0.1 oz.
	Stiffness, inch lbs				
	Warp	3.3.4.2	5202	10	Avg of the 10 det. in each direction to nearest 0.001 in lbs for bending momemt.
	Filling	3.3.4.2	5202	10	
Sweatband (Millinery belting)	Material identification				
	Warp	3.3.5	1500	2	Pass or fail
	Filling	3.3.5	1200	2	Pass or fail
	Color	3.3.5	Visual	1	Pass or fail

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:43Z
Check the source to verify that this is the current version before use.

Table III. Test Methods

Components	Characteristics	Rqmt. para.	Test method	No. Determinations per sample unit	Results reported as
Sweatband (Millinery belting)	Colorfastness to:				
	Wet (dry) cleaning	3.3.5	5622	1	Pass or fail
	Crocking (wet and dry)	3.3.5	5651	1	Pass or fail
	Perspiration	3.3.5	5680	1	Pass or fail
	Weave	3.3.5	Visual	1	Pass or fail
	Thread count				
	Warp	3.3.5	5050	5	Avg. of the 5 det. to the nearest whole number.
	Filling	3.3.5	5050	5	
	Weight	3.3.5	5041	5	To the nearest whole number.
	Width	3.3.5	Scale	1	To the nearest 1/16 inch.
	pH	3.3.5	2811	2	To the nearest 0.1 pH.
	Nonfibrous content 3/	3.3.5	Std Cml	1	Pass or fail
Visor Interlining material	High alpha cellulos vegetable fiber, leather fiber approx-mately 15%	3.3.7	Std Cml	1	Pass or fail
	Synthetic rubber	3.3.7	Std Comml	2	Avg of the 2 det. to nearest 1.0 percent.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:43Z
Check the source to verify that this is the current version before use.

Table III. Test Methods

Components	Characteristics	Rqmt. para.	Test method	No. Determinations per sample unit	Results reported as
Visor interlining material (cont'd)	Weight per sq yd	3.3.7	Std Coml	2	Avg of the 2 det to nearest 0.1 lb.
	Thickness	3.3.7	Gage	2	Avg of the 2 det to nearest 0.001 inch
	Tensile strength				
	machine direction	3.3.7	171 of UU-P-31	10	Avg of the 10 det in the direction to nearest 1.0 lbs/ inc.
	cross direction	3.3.7	171 of UU-P-31	10	
	Tearing strength				
	machine direction	3.3.7	170 of UU-P-31	5	Avg of the 5 det in each direction to nearest 10.0 gm. cms.
	cross direction	3.3.7	170 of UU-P-31	5	
	Stretch				
	machine direction	3.3.7	171 of UU-P-31	10	Avg of the 10 det in each direction to nearest 1.0 percent.
	cross direction	3.3.7	171 of UU-P-31	10	
	Stiffness 4/				
	Original machine direction	3.3.7	5202	5	Avg of the 5 det in each direction to nearest 1.0 lb per inch.
	cross direction	3.3.7	5202	5	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:43Z
Check the source to verify that this is the current version before use.

Table III. Test Methods

Components	Characteristics	Rqmt. para.	Test method	No. Determinations per sample unit	Results reported as
Visor interlining material (cont'd)	After wet (dry) cleaning 5/				
	machine direction	3.3.7	5622 and 5202	5	Avg of the 5 det. in each direction to nearest 1.0 lb per inch.
	cross direction	3.3.7	5622 and 5202	5	
	Water absorption	3.3.7	5502	2	Avg of the 2 det to nearest 1.0 percent
	Accelerated aging	3.3.7	5850	1	Pass or fail
			sample placed in oven with circulating air at 100°C for 7 days		
	Resistance to water	3.3.7	Sample soaked in water for 24 hours	1	Pass or fail
Poromeric for visor and chin strap	Material identification	3.3.2	Std	1	Pass or fail
	Color	3.3.2	Visual	1	Pass or fail
	Finish	3.3.2	Visual	1	Pass or fail
	Weight per sq yd	3.3.2	Visual	1	Pass or fail
	Thickness	3.3.2	Gage	2	Pass or fail

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:43Z
Check the source to verify that this is the current version before use.

Table III. Test Methods

Components	Characteristics	Rqmt. para.	Test method	No. Determinations per sample unit	Results reported as
Binding	Material identification	3.3.2.1	Std Comml	1	Pass or fail
	Weight	3.3.2.1	Scale	2	Pass or fail
	Thickness	3.3.2.1	Gage	2	To nearest 0.0001 inch.
	Finish	3.3.2.1	Visual	1	Pass or fail
	Color	3.3.2.1	Visual	1	Pass or fail

1/ Certificate of compliance will be acceptable for this requirement.

2/ Use 1/2 inch wide sample and add 0.075 weight (total weight 0.0800 shall be used and result multiplied by 2.

3/ Certificate of compliance certifying that no loading agent has been used.

4/ Results based on 1/4 inch wide sample, and multiplied by 4.

5/ Air dried for a minimum of 72 hours and conditioned.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:43Z
Check the source to verify that this is the current version before use.

4.5.4 Examination of end items. The end item shall be examined for defects listed in 4.5.4.1 through 4.5.4.3. The sample unit shall be one cap.

4.5.4.1 General defects. General defects shall be classified as follows:

Examine	Defect	Classification		
		Major	Minor	
			A	B
Blocking	a. Omitted	X		
	b. Poorly blocked, causing distortion of crown or crown seams.		X	
Cleanness	a. Any spot or stain:			
	1. On outside (longest dimension in any direction):			
	(a) Up to 3/8 inch			X
	(b) More than 3/8 inch	X		
	2. On inside			X
	b. Any marking exposed or visible on outside.	X		
	c. Thread ends on outside not trimmed or loose threads not removed.			X
	d. One or more shade tickets or size ticket not removed.			X
Component and assembly	a. Any defective component (unless otherwise classified herein).	X		
	b. Any component part omitted (unless otherwise classified herein)	X		
	c. Any required operation omitted or improperly performed (unless otherwise classified herein).	X		
Cutting	Any component part not cut in accordance with directional lines on patterns, or in accordance with specification requirements:			

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:43Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification		
		Major	Minor	
			A	B
	a. On outside of cap	X		
	b. On inside of cap (lining only).			X
Label (combination identification and size	a. Missing, illegible, or incorrect.	X		
	b. Top end of label not inserted between top edge of ribbon and side crown lining or not securely caught in the stitching.			X
	c. Positioned less than 2 inches or more than 3 inches from center back seam.			
Material defect and workmanship damages	a. Weakening defect, such as smash, multiple float, loose slub, etc., that may develop into a hole.	X		
	b. Shade bar, slub, dye or finishing streak, or any other material defect on outside of cap.	X		
	c. Cut, tear, mend, burn or needle chew that may develop into a hole.	X		
	d. Hold.	X		
	e. Ruptured fibers in the line of sewing (usually caused by broken, blunt or hooked needles), affecting appearance or serviceability.	X		
	NOTE: Material defects and workmanship damages are to be classified as indicated above only when the condition is one which definitely weakens the fabric or when it is so conspicously located as to be clearly noticeable. Weakening or nonweakening conditions which are inconspicuous and have negligible effect on serviceability are to be classsified as follows:			
	Material defect - No defect Workmanship damages - Minor B defect			

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:43Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification		
		Major	Minor	
			A	B
Seam and stitching	a. Accuracy of seaming:			
	1. Seam puckered (unless otherwise classified).			X
	2. Seam irregular, pleated or wavy.	X		
	3. Part of cap caught in any unrelated operation or stitching.	X		
	4. Ends of seam produced with 301 stitch type not backtacked when not caught in other seams or stitching.			X
	5. Stitching overlapping ends of thread breaks or ends of a continuous line of stitching by less than 1/2 inch.			X
	6. 401 stitch type used when ends are not caught in other seams or rows of stitching.			X
	7. Not specified shade or two or more shades of thread used on same cap, affecting appearance.		X	
	b. Gage of stitching:			
	1. Unevenly gaged, affecting appearance (to be scored only when the condition exists on major portion of seam).		X	
	2. Beyond range of width specified or varies more than 1/16 inch when no range is specified.			X
	c. Open seams.			
	1. On outside seam; - over 1/8 inch but not over 1/4 inch.	X		

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:43Z
Check the source to verify that this is the currentversion before use.

Examine	Defect	Classification		
		Major	Minor	
			A	B
	- over 1/4 inch.		X	
	2. On inside seams: - 1/4 inch but not over 1/2 inch.		X	
	- over 1/2 inch.	X		
	NOTE: One or more broken or two or more continuous skipped or run-off stitches on joining seams constitute an open seam.			
	d. Stitches skipped or broken (on top or edge stitching when not constituting an open seam): - over 1/4 inch, to and including 1/2 inch.		X	
	- over 1/2 inch.	X		
	e. Raw edges. - 1/4 inch but not over 1/2 inch		X	
	- over 1/2 inch.	X		
	NOTE: Raw edges shall be classified as such when they occur at places where an edge is required to be turned under, or over, and stitched.			
	f. Run-offs.			
	1. Joining seams - when resulting in an open seam, use "open seam" classification.			
	2. Top, edge or raised stitching (when not resulting in an open seam): - run-off over 1/2 inch.			X
	g. Seam and stitch types:			
	1. Not specified seam or stitch type.		X	

Source: https://assist.dla.mil -- Downloaded: 202640-20T22:43Z
Check the source to verify that this is the currentversion before use.

Examine	Defect	Classification		
		Major	Minor	
			A	B
	2. Looper thread of 401 stitch type on outside of finished caps.	X		
	h. Stitch tension:			
	1. Loose tension, resulting in a loose seam.	X		
	2. Loose tension on outside stitching, resulting in loosely exposed bobbin thread or top thread.		X	
	3. Tight tension (stitches break when normal strain is applied to the seam or stitching) score as "open seam".			
	NOTE: Puckering is evidence of tight tension. When puckering is evident, the inspector shall test seam by exerting normal pull in the lengthwise direction of seam or stitching.			
	i. Stitch per inch (score only when condition exists on more than one-half the length of seam).			
	1. More than the maximum specified.			X
	2. Less than the minimum specified. - By one or two stitches. - By three or more stitches.		X	X
	j. Grinning seam (noticeable at a distance of three feet).	X		
Shaded Parts	Any part on outside shaded, or variations within a part.	X		

Source: https://assist.dla.mil -- Downloaded: 20260-20T22:43Z
Check the source to verify that this is the current version before use.

4.5.4.2 Detailed defects. Detailed defects shall be classified as follows:

Examine	Defect	Classification		
		Major	Minor	
			A	B
Buttons	a. One or both missing, loose, broken bent or otherwise defective.	X		
	b. Center of button over 3/8 inch or under 1/4 inch from bottom edge of lower crown.		X	
	c. Unequally spaced from junction of visor and lower edge by over 1/4 inch.			
	d. Not specified type, size, or finish.	X		
	NOTE: Buttons shall be considered defective if they have sharp, rough or cracked edges; scratches, blemishes or imbedded foreign matter on face of button, or badly shaped.			
Cord (Type III)	a. Not specified type, size or color.	X		
	b. Loosely or unevenly twisted, or less than five turns per inch.	X		
	c. Knot omitted on one or both ends or less than four full turns on one or both knots.	X		
	d. End of cord not securely hidden in one or both knots.		X	
	e. Not tacked along its entire length to cap.	X		
	f. One or both looped ends not placed around buttons.	X		
	g. Cord tacking visible, affecting appearance.	X		
	h. Cord over 10-1/2 inches long or less than 10 inches.		X	

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:43Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification		
		Major	Minor	
			A	B
	i. Overhand knot more than 1/4 inch off center.	X		
	j. Knotted end spread more than 2 inches or less than 1-1/2 inches.			X
	k. Length of cord ends:			
	1. More than 1-7/8 inches.		X	
	2. Less than 1-5/8 inches.			X
	l. Tacking along the entire length of cord to cap performed with less than 35 hand stitches per cord.	X		
	m. Upper and lower strands of cord not held together in the tacking of cord to cap.		X	
	n. One or both knotted ends less than 1/2 inch from front edge of visor.	X		
	o. Knot at one or both ends not tacked, or insecurely tacked to visor.		X	
	p. Cord not positioned on lower crown, covering seam line.		X	
Crown (top outer, center and lower)	a. Poorly shaped.	X		
	b. Outside tight, full or twisted, i.e., not smooth against interlining.	X		
	c. Tacking forming indentation around top crown omitted.	X		
	d. Ends of indentation tacking insecure.		X	
	e. Interlining omitted from any section.	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:43Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification		
		Major	Minor	
			A	B
	f. Sections poorly shaped or joining seam lines irregular, i.e., crooked.	X		
	g. Center of crown at center front less than 1-13/16 inches or more than 1-15/16 inch in height.	X		
	h. Lower crown at center front less than 1-9/16 inches or more than 1-11/16 inch in height.		X	
	i. Height between the joining seam line of center crown to outer top crown and the visor joining seam to lower crown less than 3-3/8 inches or more than 3-5/8 inches.	X		
	j. Bottom edge of crown not abutting the back edge of the fiber visor by 1/8 inch or more.		X	
	k. Ends of seam line joining center and lower crowns (Figure 3 (c)).			
	1. Out of horizontal alignment from lower edge by 1/8 inch or more.	X		
	2. Not equal distance from center back seam by 1/4 inch or more.	X		
	l. Center back ends of seam line joining top crown to outer and center top crowns staggered more than 1/4 inch (Figure 3(b)).	X		
	m. Ends of seam line joining the center and outer top crown not equidistant from center back seam by more than 1/4 inch (Figure 3 (a)).	X		
Eyelet	a. Omitted, or one or more added.	X		

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:43Z
Check the source to verify that this is the currentversion before use.

Examine	Defect	Classification		
		Major	Minor	
			A	B
	b. Not specified type, size or finish.	X		
	c. Chipped, bent, or broken.	X		
	d. Not securely clinched through cap, reinforcement piece and lining, or clinched too tightly, cutting the fabric around the eyelet.	X		
	e. Out of alignment with the midway point between the ends of visor and the center seam in top crowns:			
	1. Over 1/8 inch but not over 1/4 inch.		X	
	2. Over 1/4 inch.	X		
	f. Washer omitted.		X	
	g. Eyelet reinforcement piece omitted or misplaced, not serving the intended purpose.		X	
Lining	Tight, puckered, or pleated at belting ribbon sweatband joining seam.		X	
Sweatband	a. Not specified type or color.	X		
	b. Bottom edge of sweatband:			
	1. Less than 1/16 inch above bottom edge of cap but not exposed below bottom edge of of cap beyond ends of visor.		X	
	2. Exposed below bottom edge of cap beyond ends of visor.	X		
	3. More than 1/16 inch from the back edge of visor interlining.		X	

Source: https://assist.dla.mil -- Downloaded: 20261O-20T22:43Z
Check the source to verify that this is the currentversion before use.

Examine	Defect	Classification		
		Major	Minor	
			A	B
	c. Tight, causing puckering of cap.		X	
	d. Back seam out of alignment with center back seam of cap by 1/4 inch or more.		X	
	e. Inner sweatband omitted.	X		
	f. Bottom folded edge of inner (coated fabric) sweatband exposed beyond bottom edge of belting ribbon sweatband less than 1/16 inch or more than 1/8 inch.			X
	g. Fold omitted at bottom edge of inner sweatband.	X		
	h. Sweatband ribbon less than 13/16 inch or more than 15/16 inch wide.			X
Visor	a. Midway point between ends of visor not in line with top crown center seam and eyelet by:			
	1. 1/4 inch or more but not more than 1/2 inch.		X	
	2. More than 1/2 inch.	X		
	b. Outside full, twisted, wrinkled or not smooth.	X		
	c. Seam positioned less than 1/16 inch or more than 1/8 inch from front edge of underside of visor (Type I and III).			X
	d. Stitching joining visor cap caught through the fiber material (Type III).	X		
	e. Lower side crown seamed to hinge of visor more than 1/8 inch from bottom edge.			X

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:43Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification		
		Major	Minor	
			A	B
	f. Depth from front to back at center less than 2-1/8 inches or more than 2-3/8 inches.		X	
	g. Interlining omitted	X		
Embroidery (Type II)	a. Omitted	X		
	b. Not specified type.	X		
	c. Core yarn not fully covered with metallic ribbon.		X	
	d. Loose stitches		X	

4.5.4.3 Finished measurements. Any head measurement deviating from the normal dimensions and tolerance specified in Table II shall be classified as a size measurement defect.

4.5.4.4. Inspection levels and AQL's. Inspection levels and AQL's expressed in defects per 100 units (DHU) shall be as follows:

4.5.4.1 and 4.5.4.2

Inspection level III of MIL-STD-105

AQL Major 1.5 DHU
AQL Majoar and Minor A (combined) 10.0 DHU

Total Major, Minor A and Minor B (combined) 15.0 DHU

4.5.4.3

Inspection level S-3 of MIL-STD-105

One class 4.0 DHU

4.5.5 Examination of packaging. An examination shall be made to determine compliance with packaging, packing and marking requirements of Section 5 of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fulled packed, selected just prior to closing operation. Defects of closure listed below shall be examined on shipping containers fully prepared for delvery. The lot size shall be the number of shipping containers in the inspection lot. The inspection lot shall be S-2 and the AQL shall be 2.5 DHU.

Source: https://assist.dla.mil -- Downloaded: 20260-20T22:43Z
Check the source to verify that this is the currentversion before use.

Examine	Defect
Marking	Omitted; incorrect, illegible, of improper location, sequence or method of application.
Materials	Any component missing; any component damaged, affecting serviceability.
Workmanship	Inadequate application of components, such as incomplete closure of case liners, container flaps and loose strapping. Bulging or distortion of containers.
Content	Number of intermediate packages is more or less than required.

4.5.6 Examination of palletization. An examination shall be made to determine that the palletization complies with Section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully prepared for delivery. The lot size shall be the number of palletized unit loads in the end item inspection lot. The inspection level shall be S-1 and AQL shall be 6.5 DHUs.

Examine	Defect
Finished dimension	Length, width or height exceeds specified maximum requirement.
Palletization	Not as specified.
	Container pattern not as specified.
	Interlocking of loads not as specified.
	Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted; incorrect; illegible; of improper size, location, sequence or method of application.

5. PACKAGING

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:43Z
Check the source to verify that this is the currentversion before use.

5.1 Preservation and packaging. Preservation and packaging shall be level A or commercial, as specified (see 6.2).

5.1.1 Level A. Each cap shall be individually packaged in an oval shaped hat box of the design and dimensions shown in Figure 6. The box and cover shall be made of standard commercial chipboard completely covered on the inside with white paper and on the outside with glazed scarlet color paper. The corner stay around top of cover and bottom of box shall be a gold or yellow color paper trimming, 1/8 to 3/16 inch of the gold or yellow showing on each side of the corner in the finished box. Box and cover strips shall be wire stitched. The box shall be provided with a carrying cord made of two strands of gold rayon yarn over a cotton core; the strands shall be twisted together to form a cord approximately 1/4 inch in diameter and 30 inches long. The cord shall be laced through brass eyelets on each side of the box to form a carrying handle on one side. The cord shall extend across the cover to the other side of box to prevent cover slipping off when box is carried (see Figure 6). Each end of the cord shall be secured on the inside of the box by a small knot or by any other means which will permit the ends of the cord to be as flat as possible against the sides of the box so as not to interfere with a proper packaging of the cap. The cap shall fit snugly within the box, using tissue paper to prevent shifting of cap and to support crown. An approximately 18-inch-long by 3-inch- wide strip of chipboard shall be formed into a cylinder by lapping the ends 1 inch and securing the lapped ends with not less than two noncorrosive metal staples. The chipboard cylinder shall be placed flat (not on edge) within the crown to afford additional support. Caps so packaged shall be further packaged individually in a standard commercial nontest corrugated fiberboard set-up box, the outside dimensions of which shall not exceed 11 inches long, 9 inches wide, and 6-1/2 inches deep. The hat box shall fit snugly within the set-up box. A certificate of compliance will be acceptable for the hat box requirements specified herein.

5.1.2 Commercial. Commercial packaging shall afford adequate protection against deterioration and physical damage during shipment from the supply source to the first receiving activity. The contractor may use his standard practice, provided it meets the requirements specified for commercial packing.

5.2 Packing. Packing shall be level A, B or commercial, as specified (see 6.2).

5.2.1 Level A. Eight caps, of one size and class only, packaged as specified in 5.1.1 shall be packed in a fiberboard shipping container conforming to type CF, class weather resistant, variety SW, style RSC of PPP-B-636 with approximate inside dimensions of 22 inches in length by 18 inches in width by 13 inches in depth. Each shipping container shall be assembled, closed, and reinforced as specified in the appendix to the box specification. Towards the end of the contract, or when there is less than the required amount per container of same size, mixed sizes may be packed within the same shipping container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:43Z
Check the source to verify that this is the current version before use.

5.2.2 Level B. Eight caps, of one size and class only, packaged as specified in 5.1.1, shall be packed in a fiberboard shipping container conforming to type CF, class domestic, variety SW, grade 200, style RSC of PPP-B-636 with approximate inside dimensions of 33 inches in length by 18 inches in width by 13 inches in depth. Each shipping container shall be assembled and closed as specified in the appendix to the box specification. Towards the end of the contract, or when there is less than required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.3 Commercial. Caps shall be packed in a manner to ensure carrier acceptance and safe delivery at destination. Containers shall be in accordance with Uniform Freight Classification Rules, National Motor Freight Classification Rule, U.S. Postal Service Manual or regulations of other carriers applicable to the mode of transportation.

5.3 Marking. In addition to any special marking required by the contract or purchase order, the shipping and intermediate container shall be marked in accordance with the requirements of MIL-STD-129.

5.3.1 Labels. Each shipping container packed with mixed sizes shall have securely attached to the end and side directly under the printing or stenciling a white paper label with the words "MIXED SIZES" plainly stamped or printed thereon, and under these words shall be legibly printed the correct quantity and sizes contained therein. Each hat box shall have affixed thereto a removable type paper size label backed with pressure sensitive adhesive. The paper label shall be oval shaped, 2 inches in length by 1-1/2 inches width, with a white background and black numerals 1 inch in height. The label shall be positioned on center at either end of the box body.

5.4 Palletization. When specified (see 6.2), caps packed as specified in 5.2 shall be palletized on a 4-way entry pallet in accordance with load type 1A of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means C, K and L or O or P. Pallet pattern shall be in accordance with the appendix of MIL-STD-147. The pallet shall be 4-way, Type I Class 1, Style 1, Size A, Wood Group I, II, III, or IV of MIL-P-15011, or, 4-way, Type IV, V or VIII, Class 1, Style A, Size 2, Wood Group I, II, III or IV, Grade A of NN-P-71. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall be approved by the contracting officer.

6. NOTES

6.1 Intended use. The caps described herein are intended for wear by enlisted and officer female personnel of the U.S. Marine Corps.

6.2 Ordering data.

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:43Z
Check the source to verify that this is the currentversion before use.

6.2.1 Acquisition requirements. Acquisition documents should specify the following:

(a) Title, number, and data of this specification.
(b) Type, class and size required (see 1.2).
(c) Whether first article is required (see 3.2).
(d) Number of caps in first article (see 3.2).
(e) Whether head block is required (see 3.8).
(f) Selection of applicable level of preservation, packaging and packing (see 5.1 and 5.2).
(g) When palletization is required (see 5.4).

6.2.2 Data requirements. When this specifcation is used in an acquisition and data are required to be delivered, the data requirements identified below shall be developed as specified by an approved Contract Data Requirements List (CDRL), incorporated into the contract. When the provisions of DoD FAR Supplement, Part 27, Sub-Part 27.410-6 (DD Form 1423) are invoked and the DD Form 1423 is not used, the data specified below shall be delivered by the contractor in accordance with the contract or purchase order requirements. Deliverable data required by this specification are cited in the following paragraphs.

	Paragraph No.	Data Requirements	Applicable DID No.
a.	4.	Inspection System Program Plan	DI-R-4803
b.	4.4	First Article Inspection Procedures	DI-T-4901
c.	4.4	First Article Inspection Reports	DI-T-4902
d.	4.5	Production/Acceptance Inspection Procedures	DI-T-4903
e.	4.5	Production Inspection Report	DI-T-4904

(Data item descriptions related to this specification, and identified in section 6 will be approved and listed as such in DoD 5000.19L., Vol.II, AMDSL. Copies of data item descriptions required by the contractors in connection with specific acquisition functions should be obtained from the Naval Publications and Forms Center or as directed by the contracting officer).

6.3 Guide samples, head block and shade samples. For information regarding the availability of a sample of the cap, the head block, and of the standard shades specified, address inquiry to the acquiring activity issuing the invitation for bids.

6.4 First article. Examination, tests and approval shall be as specified by the contracting officer (see 3.2).

6.5 Figures. Figures 1 through 6 show general design of the caps and hat box and are furnished for information only. In the event of conflict between these figures and the text of this specification, the text of this specification shal govern.

Source: https://assist.dla.mil -- Downloaded: 20260-20T22:43Z
Check the source to verify that this is the current version before use.

6.6 Subject term (key word) listing

Caps
Dress
Women's

6.7 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue due to extensiveness of the changes.

Preparing Activity:

Navy - MC

Project No. 8410-N632

Source: https://assist.dla.mil -- Downloaded: 20261O-20T22:43Z
Check the source to verify that this is the current version before use.



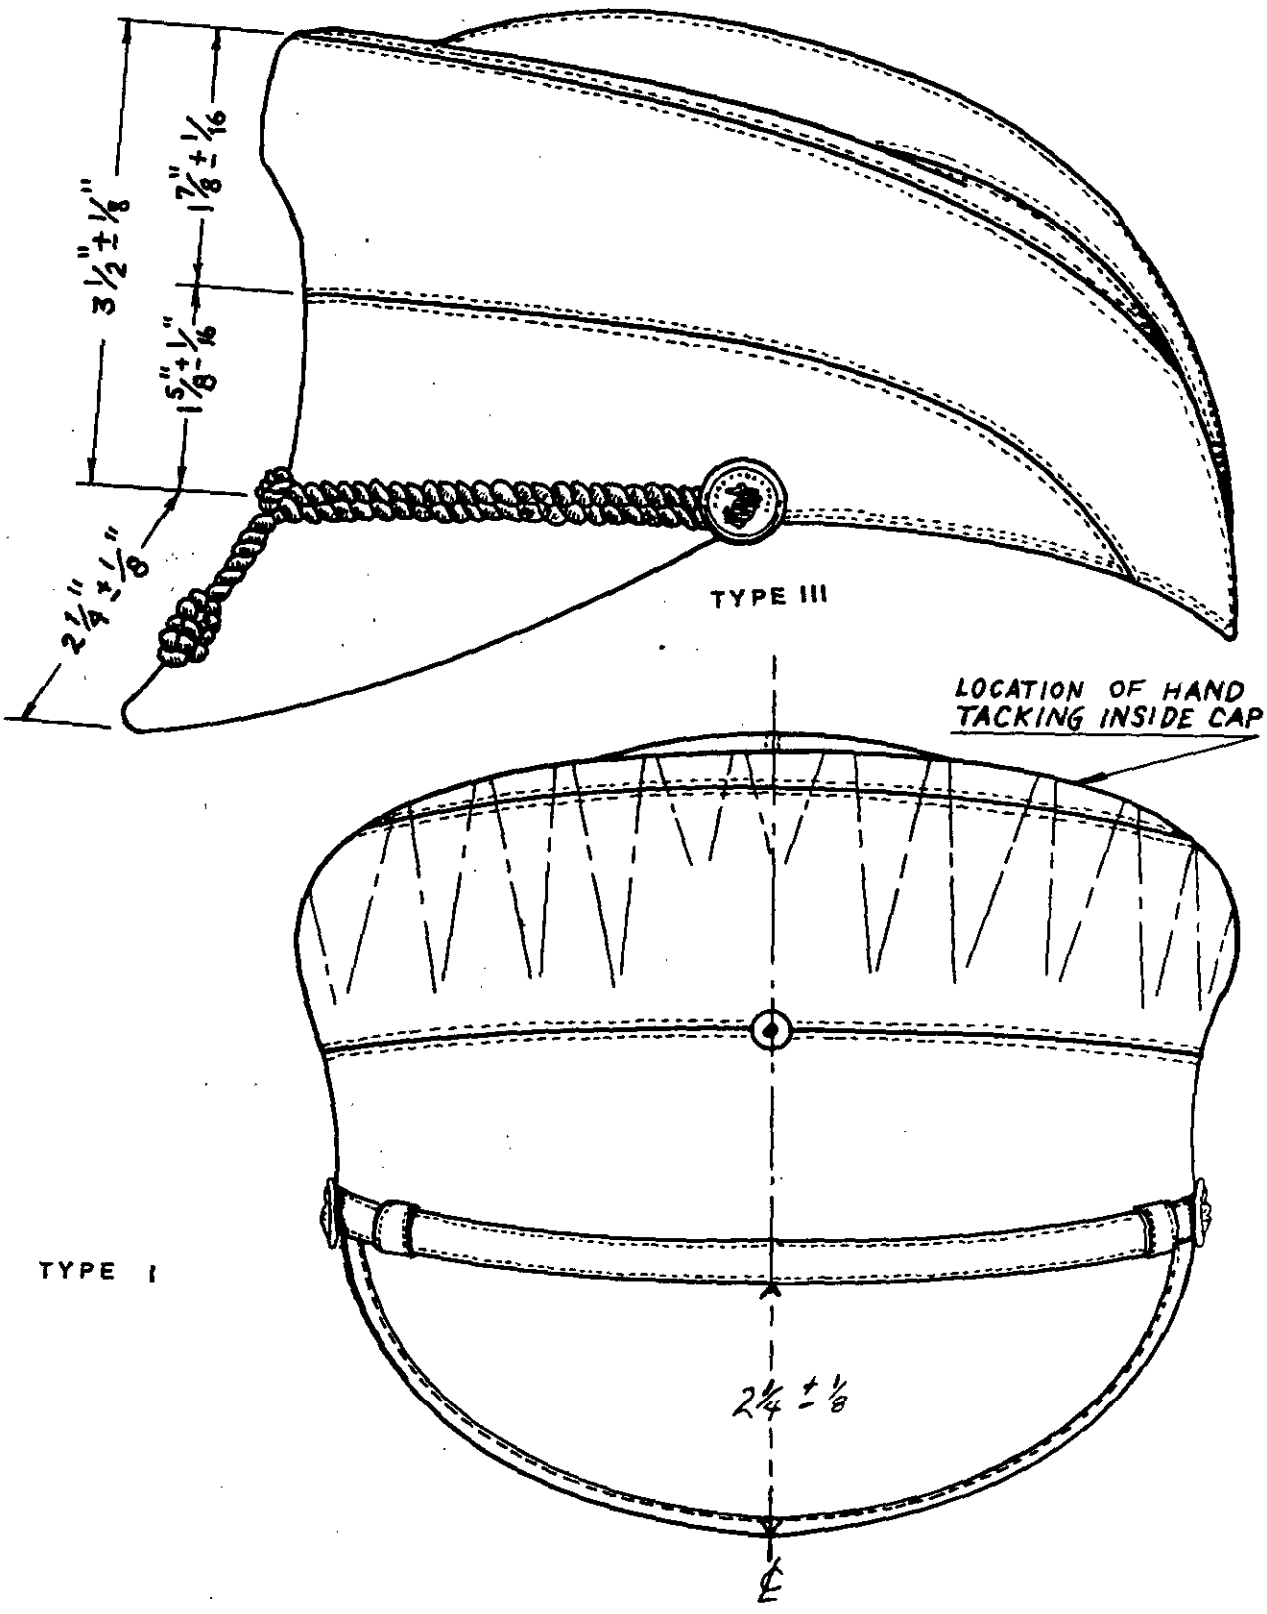


FIGURE 1. CAPS, WOMAN'S, DRESS

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:43Z
Check the source to verify that this is the current version before use.

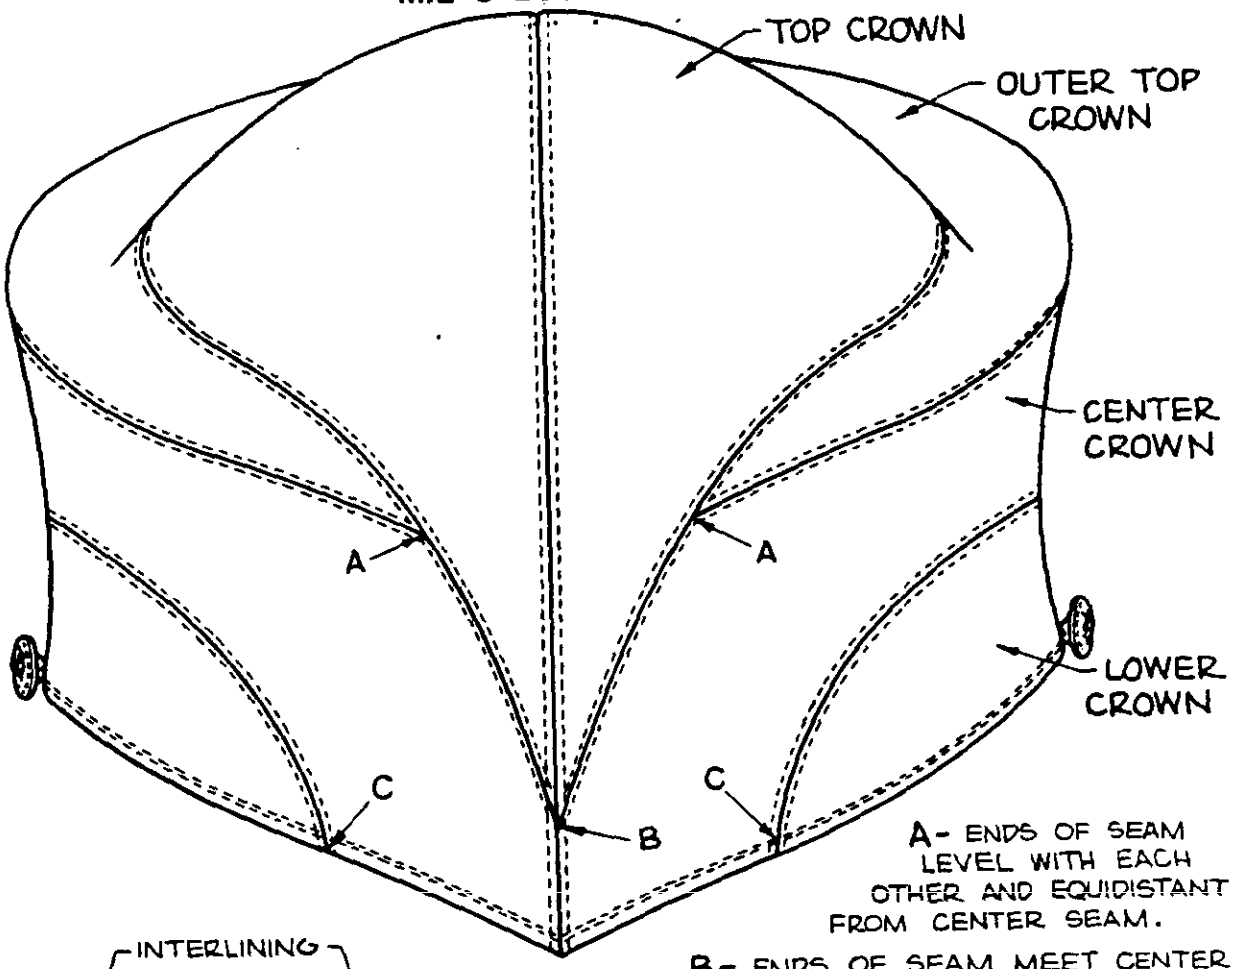

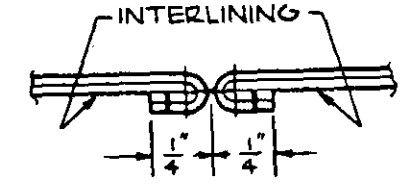

TYPICAL SECTION
SHOWING SEAM CONSTRUCTION

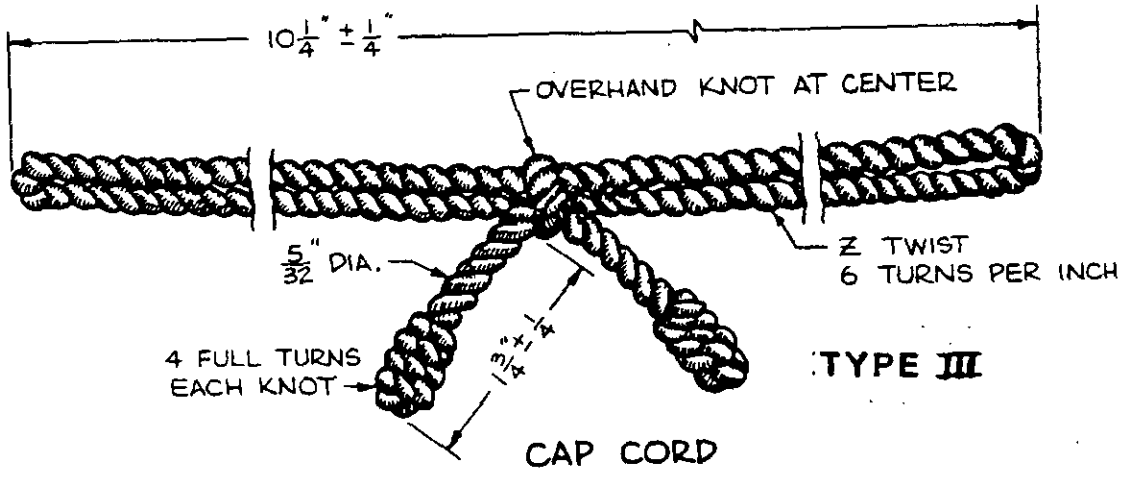


FIG. 2: CAPS, WOMAN'S DRESS

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:43Z
Check the source to verify that this is the current version before use.


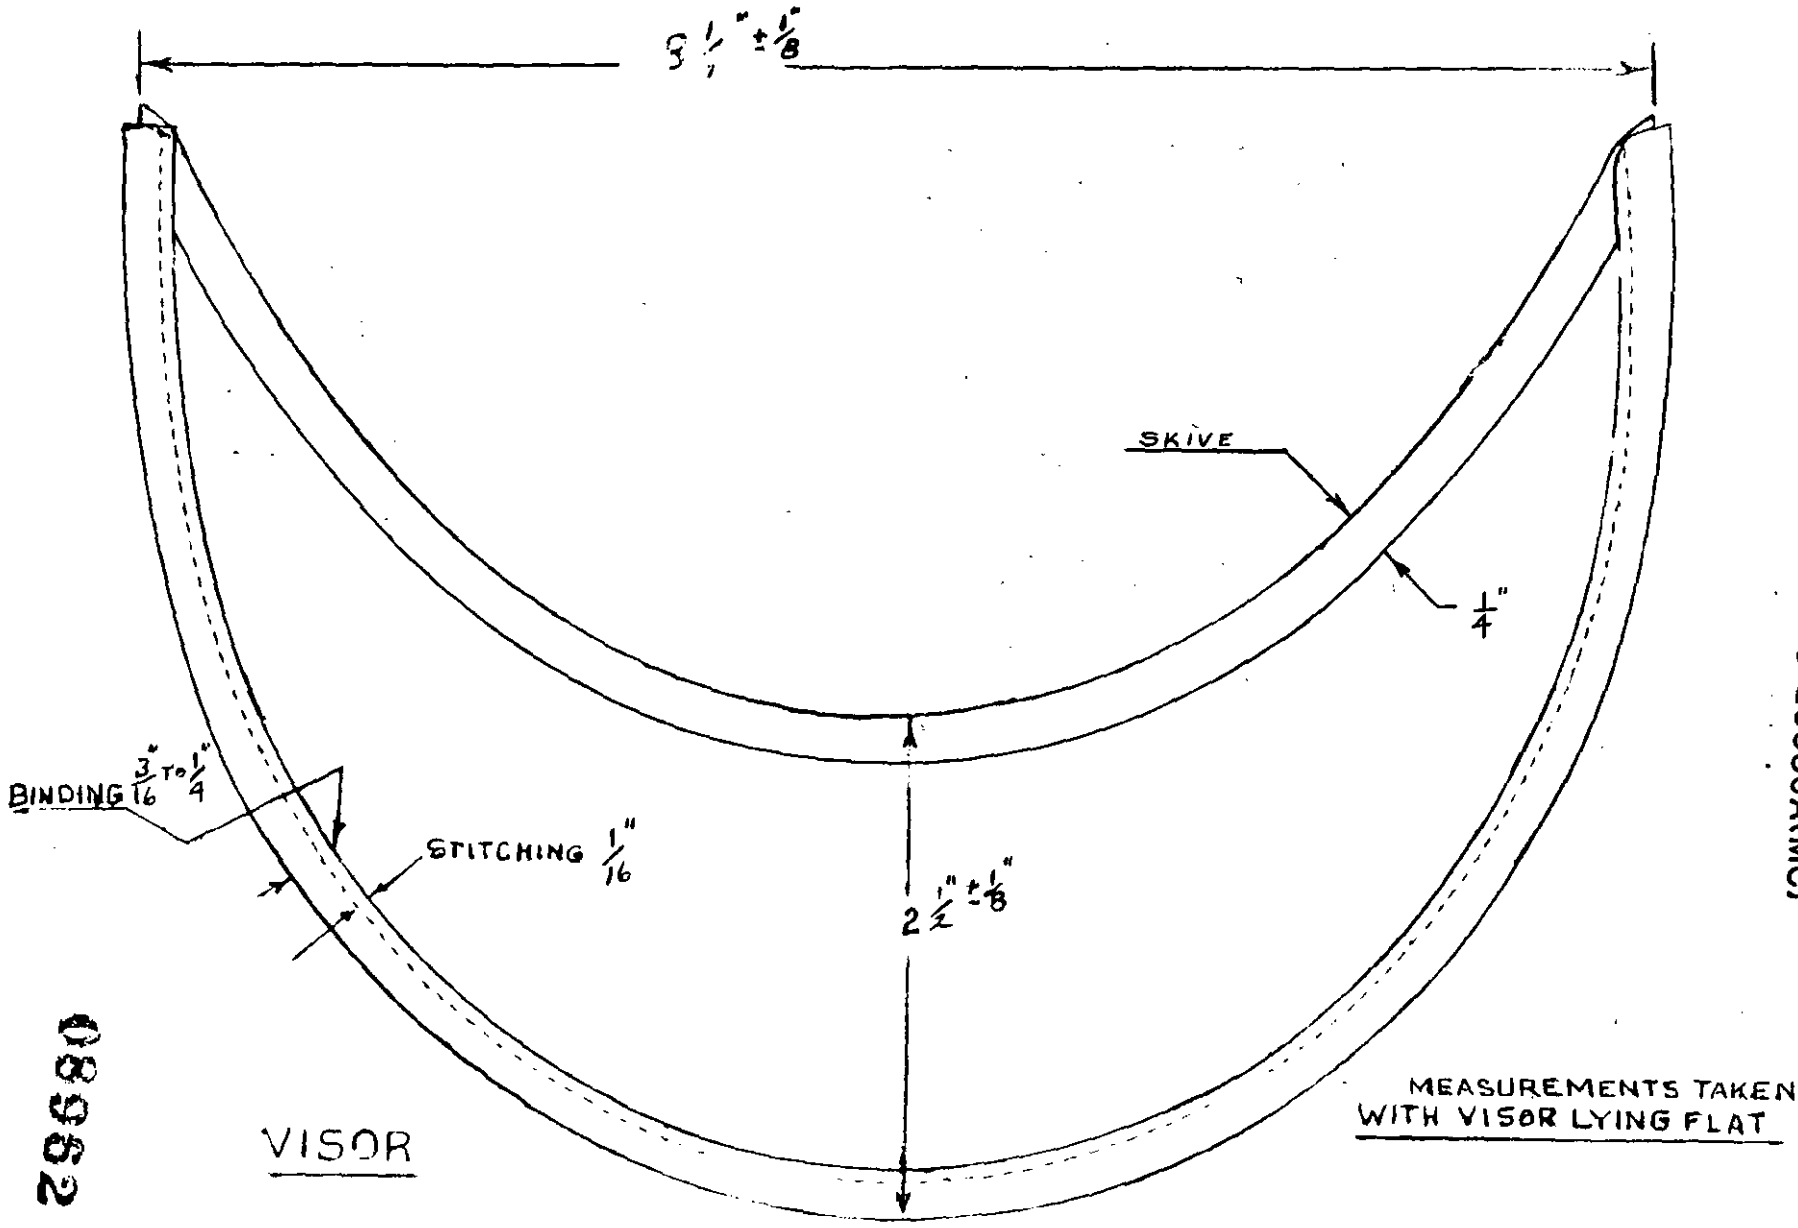



FIGURE 3 VISOR, TYPE I

29581

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:43Z
Check the source to verify that this is the current version before use.

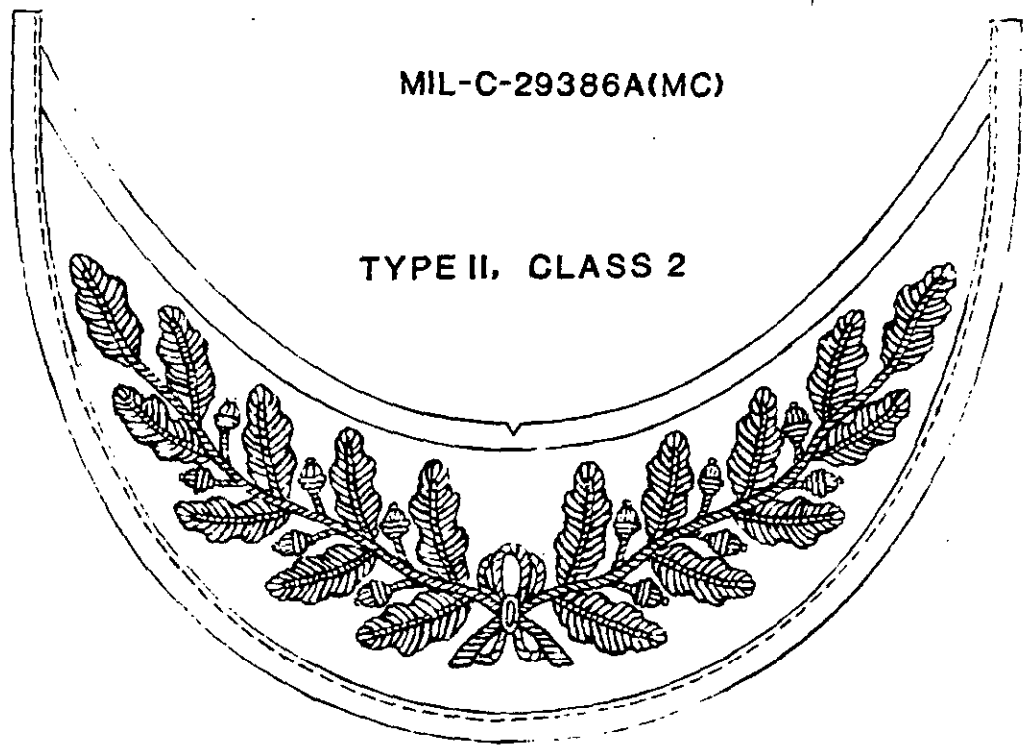

GENERAL OFFICER

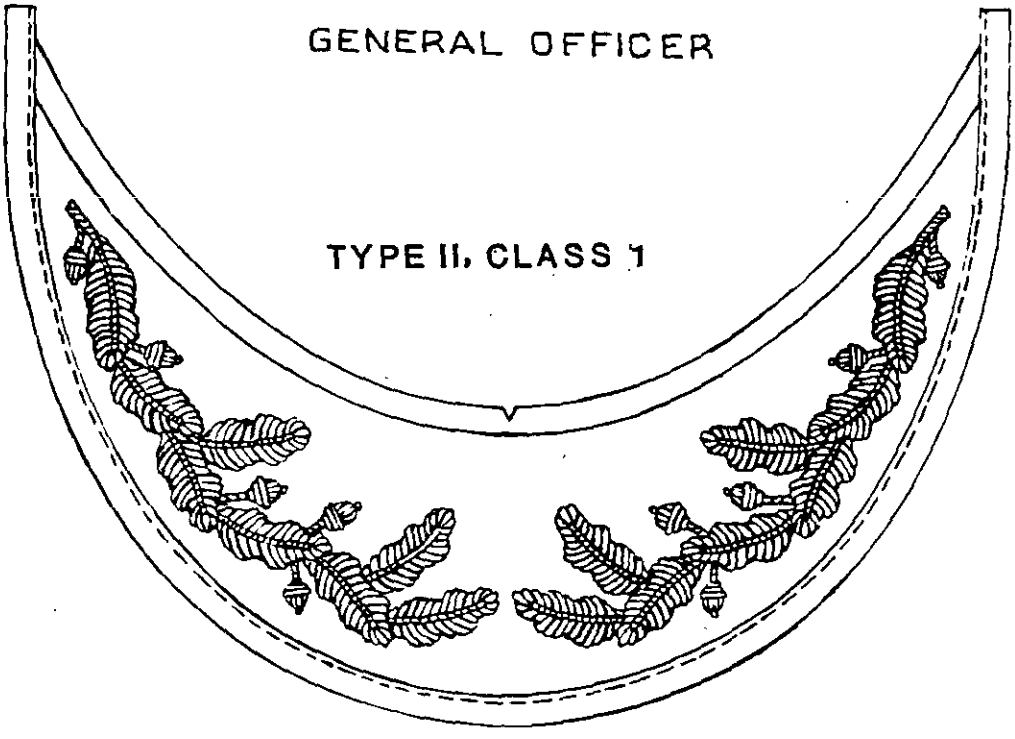


FIELD OFFICER

FIG. 4: CAPS WOMAN'S DRESS

08352

Source: https://assist.dla.mil -- Downloaded: 20260-20T22:43Z
Check the source to verify that this is the current version before use.

TYPE I CLASS 1

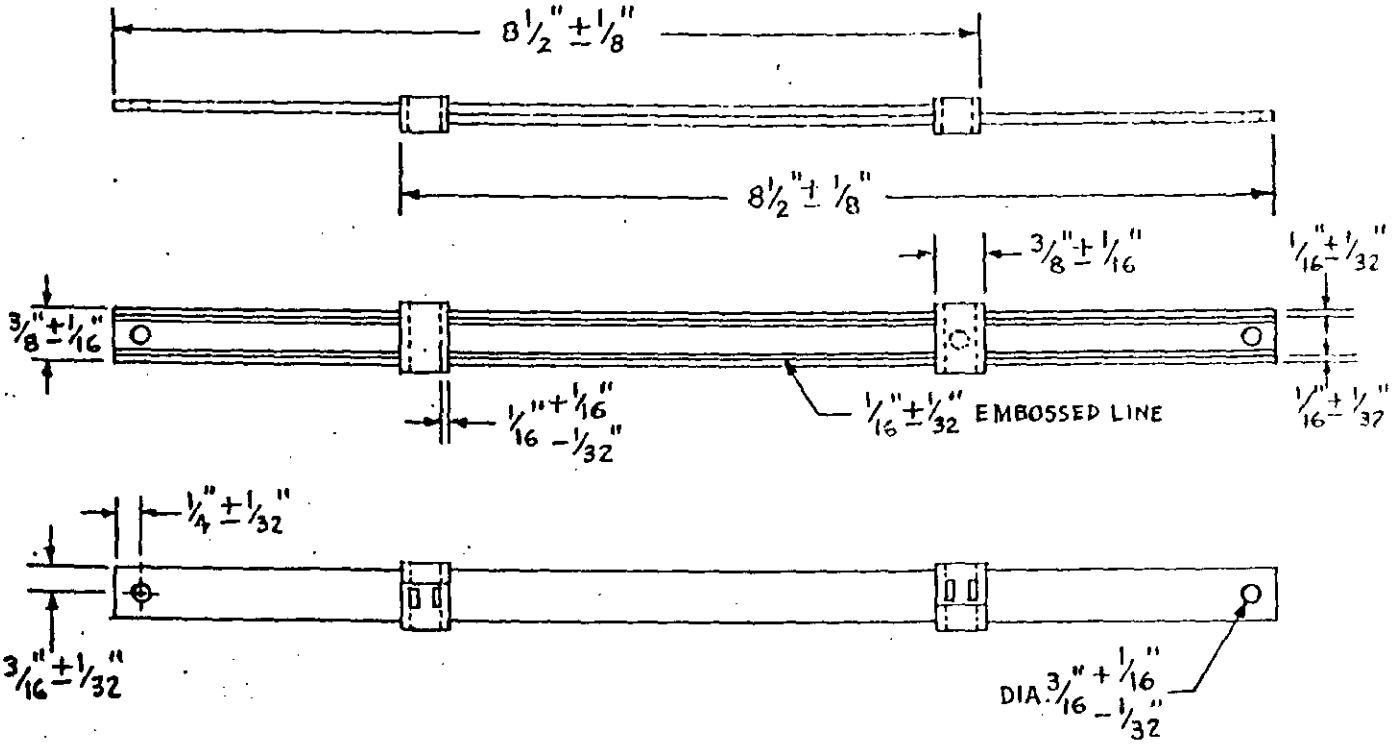

TYPE I CLASS 2 & TYPE II


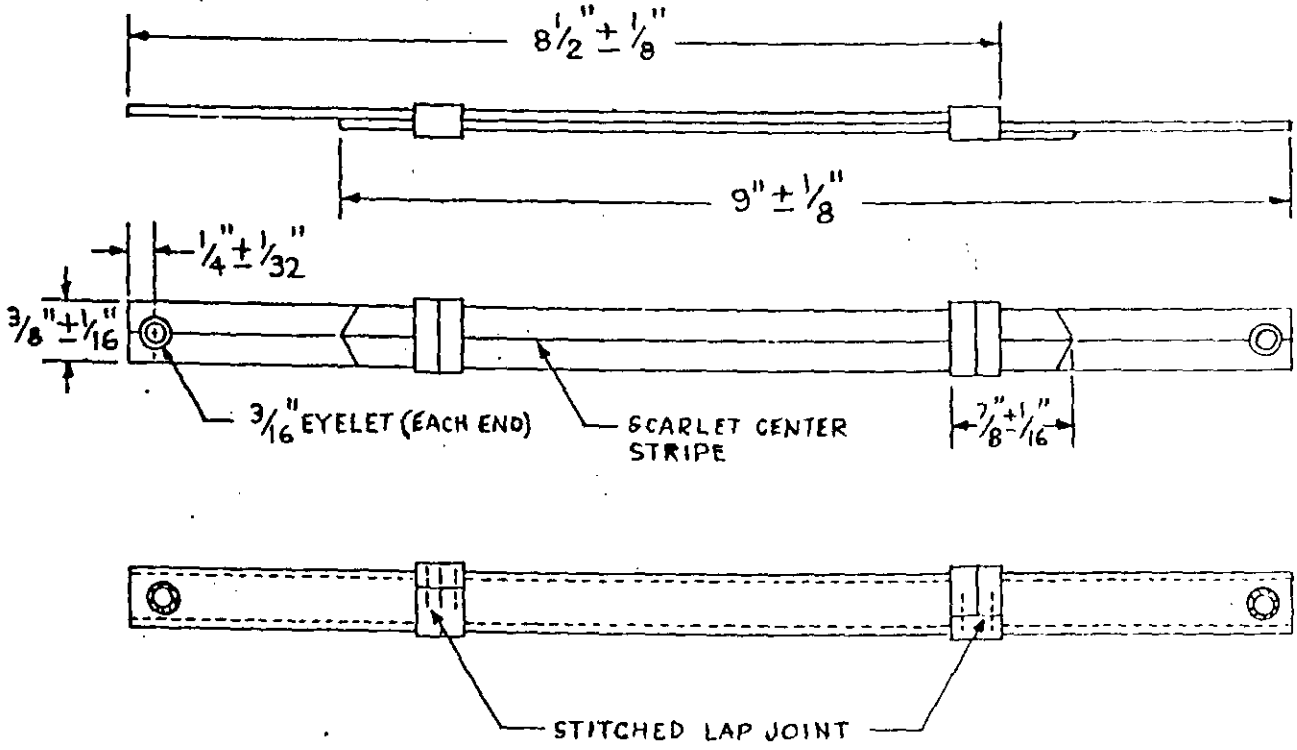


FIG. 5 CHIN STRAPS

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:43Z
Check the source to verify that this is the current version before use.

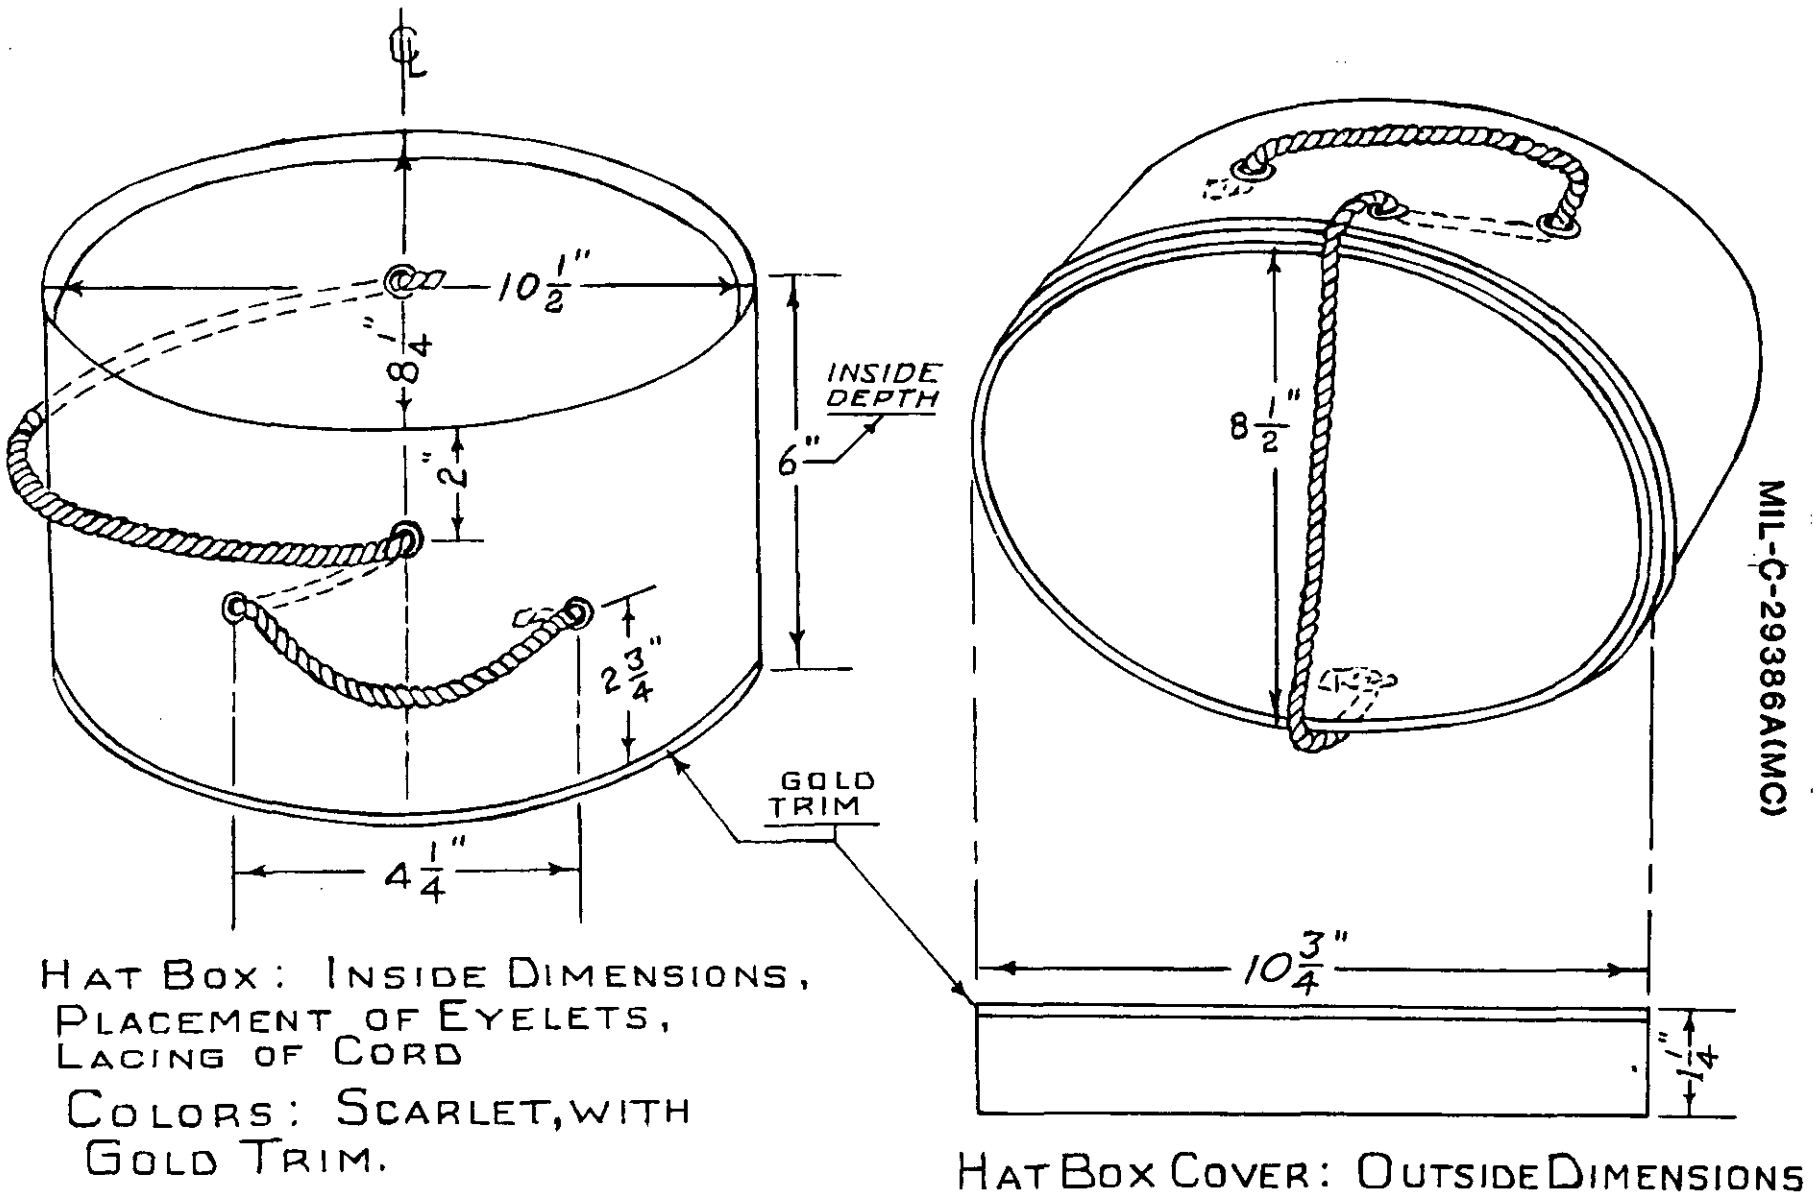

HAT BOX: INSIDE DIMENSIONS, PLACEMENT OF EYELETS, LACING OF CORD

COLORS: SCARLET, WITH GOLD TRIM.

HAT BOX COVER: OUTSIDE DIMENSIONS

FIGURE 6 HAT BOX, FOR CAPS

20 SEP 02

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:43Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-29386A(MC)	CAPS, DRESS: WOMEN'S

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil – Downloaded: 2026-10-20T22:43Z
Check the source to verify that this is the current version before use.