INCH-POUND

MIL-V-29384A(MC)

14 April 1994

SUPERSEDING
MIL-V29384(MC)
27 November 1979

MILITARY SPECIFICATION

VEST, WOMEN'S: SCARLET, DRESS (GENERAL OFFICER'S)

This specification is approved for use by U. S. Marine Corps, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for a scarlet vest for wear by general officers.

1.2 Classification. The vest shall be of one type in the following sizes as specified (see 6.2).

Schedule of Sizes

Short	Regular	Long
4	4	4
6	6	6
8	8	8
10	10	10
12	12	12
14	14	14
	16	16

1.3 Individual orders. When the vest is custom tailored to an individual order, this specification shall govern, except the detailed requirements of Section 3, Table I may be modified to the extent necessary for good custom tailoring practice.

2. APPLICABLE DOCUMENTS.

2.1 Government documents.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to the Commander (PSC), Marine Corps Systems Command, Quantico, VA 22134-5010 by using the self addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8410

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:43Z
Check the source to verify that this is the current version before use.

2.1.1 Specifications, standards and handbooks. The following specifications, standards and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

A-A-50196	- Thread, Silk
A-A-50198	- Thread, Gimp, Cotton, Buttonhole
A-A-52094	- Thread, Cotton
DDD-L-20	- Label, For Clothing Equipage, and Tentage, (General Use)
DDD-T-86	- Tape, Textile, Cotton, General Purpose (Unbleached, Bleached or Dyed)
PPP-B-676	- Boxes, Setup

MILITARY

MIL-C-368	- Cloth, Satin, Rayon and Cloth, Twill, Rayon
MIL-B-3461	- Buttons, Insignia, Metal, Uniform and Cap
MIL-C-17757	- Box, Shipping, Fiberboard (Modular Sizes)
MIL-C-21115	- Cloth, Tropical, Wool, Polyester/Wool
MIL-C-44296	- Cloth, Fusibles

STANDARDS

FEDERAL

FED-STD-191	- Textile Test
FED-STD-751	- Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection By Attributes
MIL-STD-129	- Marking for shipment and Storage

(Unless otherwise indicated, copies of federal and military specifications, standards and handbooks are available form the Standardization Documents Order Desk, Bldg 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094).

2.1.2 Other Government publications. The following other Government publication forms a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

Department of Defense (DoD) Standard Color Card for Sewing Threads 1968

Department of Defense (DoD) Standard Shades for Buttons 1966

(Application for copies should be addressed to the Color Association of the United States, Inc., 200 Lexington Avenue, New York, NY 10016).

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:43Z
Check the source to verify that this is the currentversion before use.

(Copies of specifications, standards and publications required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer).

2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted shall be those listed in the issue of the DODISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

AMERICAN SOCIETY OF TESTING AND MATERIALS

ASTM D 3951 - Standard Practice for Commercial Packaging

(Application for copies should be addressed to American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103).

(Non-Government standards and other publications are normally available form the organizations that prepare or distribute the documents. These documents may also be available in or through libraries or other informational services).

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Guide sample. Guide samples are furnished solely for guidance and information to the contractor (see 6.3). Variation from this specification may appear in the sample, in which case the specification shall govern.

3.2 First article. When specified (see 6.2), the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.4 and 6.4).

3.3 Materials.

3.3.1 Basic material. The basic material shall be cloth, wool, tropical, scarlet shade 2502 (see 6.3), 10.5 ounce, conforming to type I, class 1 of MIL-C-21115.

3.3.2 Lining. The material for lining the fronts, interlining at the eyelet opening and making the back shall be cloth, rayon, scarlet shade 2506 (see 6.3), 4.5 ounce, conforming to class 3 of MIL-C-368.

3.3.3 Front interlining. The material for interlining the vest fronts and side fronts shall be cloth, fusible, conforming to class 3 of MIL-C-44296.

3.3.4 Tape. The tape for the breakline for the lapel front, button edge and armholes shall be cotton, unbleached, 1/4 inch wide conforming to type III, class 1 of DDD-T-86, except the requirement for nonfiberious material shall not apply.

Source: https://assist.dla.mil -- Downloaded: 2026l0-20T22:43Z
Check the source to verify that this is the currentversion before use.

3.3.5 Thread.

3.3.5.1 Silk thread. The silk thread shall conform to A-A-50196 except the requirement for extractable material shall not apply; type I, ticket No. A, 3-ply for eyelets, bartacking and top and edgestitching; ticket No. B and F, 3-ply for buttonholes, needle and bobbin respectively; type III, ticket No. C, 2-ply for handfelling.

3.3.5.2 Cotton thread. All inside seaming and stitching shall be accomplished with cotton thread conforming to type IC2, ticket No. A, 3-ply of A-A-52094. The thread for basting shall be of good commercial grade.

3.3.5.3 Color and colorfastness. All thread except basting thread shall be dyed scarlet shade W, Cable No. 66040, and shall show good fastness to wet (dry) cleaning and, in addition, the silk thread shall show good fastness to light. All colorfastness tests shall be conducted as specified in the applicable thread specification. Basting thread shall be white or unbleached.

3.3.6 Gimp. The buttonhole gimp shall be cotton, No. 8, soft or glazed finish, conforming to type I or type II of A-A-50198. The color of the gimp shall be scarlet shade W, Cable No. 66040, and shall show good fastness to wet (dry) cleaning.

3.3.7 Buttons. The buttons shall be metal, gold plated, insignia, officers' design, 22-line, regular shank, conforming to type I, style 4, class 4, subclass 1 of MIL-B-3461.

3.3.7.1 Toggles, ring. The insignia buttons specified in 3.3.7 shall be secured to the vest with ring type toggles conforming to the requirements of MIL-B-3461.

3.3.8 Labels. Each vest shall have an indentification label and a size label conforming to DDD-L-20 as specified herein. The vest is intended to be dry cleaned, therefore, the labels shall show fastness to dry cleaning.

3.3.8.1 Indentification label. The identification label shall be type I, class 1 of DDD-L-20 and shall measure not less than 2-1/2 by 1-1/2 inches. The content and format shall be as follows:

Nomenclature (Item description)
Contract Number
Name of Contractor
Wool Products Information Act

NOTE: Size of characters for "Name of Contractor" shall be minimum 6 point, approximately 1/16 inch.

Source: https://assist.dla.mil -- Downloaded: 20260-20T22:43Z
Check the source to verify that this is the current version before use.

3.3.8.2 Size label. The size label shall be type I, class 2 of DDD-L-20 and shall measure not less than 1-1/2 inches by 1 inch. The label shall consist of the numerical size designation specified in 1.2, followed by the letter S, R or L for Short, Regular or Long, respectively, as shown by the following example:

14 R

3.4 Design. The vest shall be in the U. S. Marine Corps design shown on figures 1 through 3 (see 6.5), a fully lined, four button, single breasted vest with four worked eyelets in the left front for detachable buttons, back waist darts, two-piece back, and shawl type lapel.

3.5 Patterns. Standard patterns will be furnished to the contractor by the Government. The standard patterns shall not be altered in any way and shall be used only as a guide for cutting the contractor's working patterns. the contractor's working patterns shall be identical to the standard patterns. The standard patterns provide 3/8 inch allowance for joining front and side front, shoulder, bust dart and back seam and 1/4 inch allowance for all other seams, with a side outlet according to the pattern. Standard patterns show size and are marked and notched for proper cutting, placement and assembly of component parts.

3.5.1 List of pattern parts. The vests shall be cut from the specified materials in accordance with the pattern parts as follows:

Item	Pattern Nomenclature	No of Cut Parts
	Material: Cloth, Tropical, Wool	
1.	Front	2
2.	Side front	2
3.	Front facing	2
	Material: Cloth, Satin, Rayon (Lining)	
4.	Back	4
5.	Front	2
6.	Side front	2
7.	Eyelet opening lining	1
8.	Facing lining	1
	Material: Cloth, Nonwoven Fusible	
9.	Front	2
10.	Side front	2
	Marker	
11.	Eyelet	

3.6 Construction.

3.6.1 Manufacturing requirements. The vests shall be manufactured in accordance with the operations and the stitch, seam and stitching type specified in Table I. The contractor is not required to follow the exact sequence of the operations as listed in Table I, but all operations specified shall be used to manufacture the vests.

Source: https://assist.dla.mil -- Downloaded: 20261O-20T22:43Z
Check the source to verify that this is the currentversion before use.

3.6.1.1 Stitches, seams and stitchings. The stitch, seam and stitching types specified in Table I shall conform to FED-STD-751. The number of stitches per inch as specified in Table I indicate the minimum and maximum number permitted.

3.6.1.2 Tacking and backstitching. Ends of seams and stitching produced with 301 type stitch, when not caught in other seams or stitchings shall be backtacked not less than 1/4 inch; thread breaks (all stitch types) shall be secured by stitching back of break not less than 1/2 inch.

3.6.2 Shade marking. The component parts of the vest, except those parts which may be cut from ends (see 1.c), shall be shade marked to insure a uniform shade size throughout the garment. Any method of shade marking may be used except:

(a) Corrosive metal fastening devices.
(b) Sew-on shade tickets.
(c) Adhesive type tickets where adhesive causes discoloration or whose adhesive mass adheres to the material upon removal of the tickets.
(d) Any marking medium which would tend to leave a permanent mark.

3.6.3 Fusing operations. The fusing operations for fusing the fusible interlining specified in 3.3.3 to the basic fabric of the outer shell specified in 3.3.1 should be performed on a fusing press. Specific settings (see 6.6) for the particular fusing style and press to be used should be obtained from the supplier of the fusible material so that optimum results can be obtained. Test shall be as specified in 4.5.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:43Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
1	Cutting.					
	a. Cut vest in strict accordance with patterns furnished.					
	b. Cut all materials in the direction indicated by the directional lines on the patterns.					
	c. Cut all wool components of the vest from one piece of basic material.					
	d. Cut front lining, side fronts and back from one piece of rayon satin material. All other rayon parts may be cut from ends.					
	e. Cut the vest front interlining in accordance with the pattern furnished.					
	f. The use of drill holes is prohibited.					
2	Replacement of damaged parts.					
	a. Replace at time of cutting any part containing damages such as holes or seriously weakening defects such as smashes, multiple floats, and slubs likely to develop into holes.					
	b. Replace any part damaged during the manufacturing process by needle chews which may be expected to develop into a hole, scissor or knife cuts, tears, mends or burns.					
3	Shade marking.					
	a. Mark all component parts cut from one piece of basic and lining materials to insure uniform shade and size throughout the vest.					
	b. The use of tickets with metal fastening devices is prohibited on the rayon material.					

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:43Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
3	Shade marking. (cont'd)					
	c. Adhesive type shade ticket, when used, shall be adhered to the inside of the vest.					
4	Labeling.					
	Finished appearance. The labels shall be correctly positioned and securely attached.					
	a. Position the identification label on front lining approximately 1 inch from the finished side seam and approximately 4 inches from armhole and seam on all sides 1/8 inch from each edge.	301	LSbj-1	12-14	A	A
	b. The size label shall be centered on the inside right back 1-1/2 to 2 inches below the neck and seamed 1/8 inch from all edges.	301	LSbj-1	12-14	A	A
5	Make fronts.					
	a. Position the left and right front interlining on the underside of their respective vest fronts and fuse (see 3.6.1.4).					
	b. Position the left and right side front interlining on the underside of their respective side fronts and fuse (see 3.6.3).					
	c. Position facing rayon lining on the inside of left front with front and bottom edges even. Stitch the two plies together 1/8 inch from bottom and front edge.	301	SSa-1	10-14	A	A
	d. Position a 1 inch wide by 6 inch long strip of fusible material on the upper and back raw edge of lining and interlining and fuse.					

Source: https://assist.dla.mil -- Downloaded: 20261O-20T22:43Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
6	Assemble front and side fronts.					
	a. Fold the side front face to face, matching the cut edges of the bust dart and stitch the entire length of the dart 1/4 inch from cut edges at the back end and tapering to a point at the front end. The stitching shall extend approximately 1/2 inch beyond the point and be securely backtacked.	301	SSa-1	10-14	A	A
	b. Position front and side fronts back to back with notches matching and join together with 3/8 inch seam.	301	SSa-1	10-14	A	A
	c. Spread open the dart seams and front side joining seams and press smooth and flat with a heated pressing iron or pressing machine.					
7	Dress right front.					
	a. Dress right front and right front facing from top edge to lower end for eyelet stand as indicated by marks on pattern.					
8	Stitch bridle tape to lapel.					
	Finished appearance. The bridle tape shall be stitched along the breakline with the proper tensions to allow the lapel to roll properly in the finished vest.					
	a. Position the 1/4 inch wide bridle tape on the interlining side of the fronts along the breakline of lapel and with the front edge of the tape in line with the breakline. The tape shall extend from the gorge to approximately 1 inch above the lower edge of lapel.					
	b. Stitch the tape through the front of the vest evenly, smoothly and with normal tension, holding the tape taut and working in 1/2 to	301	SSau-2	12-16	A	A

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:43Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
8	Stitch bridle tape to lapel. (cont'd) 5/8 inch fullness along the breakline. The tape shall be stitched 1/16 inch from each edge.					
9	Make eyelets in left front. Finished appearance. The eyelets shall be worked with the purling on the outside of the front, and shall finish with 1/8 inch diameter opening. All stitches shall be securely caught in the fabric. The center of the eyelets shall be uniformly 1/2 inch minimum and 5/8 inch maximum from the finished front edge of the vest and shall be evenly spaced. a. Mark the left front in accordance with marks on pattern for the location of four worked eyelets.					
	b. Make an eyelet at each mark on the left front, through the front and interlining.	Eyelet		20 Per eyelet (minimum)	A	A (Silk)
10	Stitch lining, for eyelet opening, to facing. a. Position lining for eyelet opening on outside of left front facing with edge of facing and lining even, and with notches matching. Stitch lining to facing with a 3/8 inch seam extending the distance between the upper and lower notches.	301	SSe-2 (a)	10-14	A	A (Silk)
	b. Extend the depth of the notches up to the lining facing seam. Turn lining to the underside of the facing and edgestitch 1/16 to 1/8 inch from the seamed edge.	301	SSe-2 (b)	10-14	A	A
	c. Stitch the front raw edge of lining and facing together 1/8 to	301	SSa-1	10-14	A	A (Silk)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:43Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
10	Stitch lining, for eyelet opening, to facing. (cont'd)					
	3/16 inch from the raw edge. Trim excess lining if necessary.					
11	Assemble front lining.					
	a. Fold the side front lining, matching the cut edges of the bust dart, and stitch the entire length 1/4 inch from the cut edge at the back end and tapering to a point at the front end.	301	SSa-1	10-14	A	A
	b. Position front lining and side front lining back to back with notches matching and join together with a 3/8 inch seam.	301	SSa-1	10-14	A	A
12	Seam facing to front lining.					
	Finished appearance. The lining shall be properly and carefully aligned and seamed to the facing so that in the finished vest, the lining shall be smooth and flat along the facing without creases, bulges, overlapping of excess material, or other defect or distortion. The eyelet opening shall not gap or be distorted.					
	a. Position right and left front linings on the respective facing with the notches at back edge of facing and front edge of lining matching.					
	b. Join lining to the left front facing with a 3/8 inch seam, extending from the notch at the upper edge of facing to top notch for the eyelet opening and from the bottom notch for the eyelet opening to the lower edge of facing.	301	SSa-1	10-14	A	A
	c. Form a 3/16 to 1/4 inch hem in the lining, from top to bottom eyelet opening notches, turning	301	EFb-1	10-14	A	A

Source: https://assist.dla.mil -- Downloaded: 2026l0-20T22:43Z
Check the source to verify that this is the currentversion before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
12	Seam facing to front lining. (cont'd)					
	under the raw edge and catching the turned under edge in the stitching 1/16 inch from the inner folded edge of the hem.					
	d. Tack both ends of the eyelet opening.	301		10-14	A	A
	e. Join lining to right front facing from the notch at the upper edge to the lower edge of the facing.	301	SSa-1	10-14	A	A
	f. Press the facing-lining seam, front side joining seams and bust darts smooth and flat. The bust dart shall be pressed toward the armhole and the facing-lining seam and front side seam shall be pressed toward the back.					
13	Join back and waist darts.					
	Finished appearance. The back seams shall start and finish evenly and shall be smooth and flat without gathers, puckers or pleats.					
	a. The back, cut from rayon material, shall be two-ply and each ply shall consist of a right and left part.					
	b. Properly position the right and left parts of each ply with edges even. Join the right and left parts of each ply together with a 3/8 inch seam along the center back.	301	SSa-1	10-14	A	A
	c. Fold the darts, matching the cut edges. Stitch along the entire length of the darts, beginning 3/8 inch from the raw edge at the bottom end and tapering to a point at the top end.	301	SSa-1	10-14	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:43Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
13	Join back and waist darts. (cont'd)					
	d. Position the back component face to face, with edges even and center seams matching and join together along the bottom edge with a 3/8 inch seam.	301	SSa-1	10-14	40/3	40/3
	e. Turn the two-ply back face side out and press the seam smooth and flat with a heated pressing iron or pressing machine. The bottom seam shall not be visible on the outside.					
14	Join facing-lining assemblies to front with tapes.					
	Finished appearance. The facing-lining assemblies shall be joined to the fronts in such a way as to produce smooth and flat seams without pleats, puckers or gathers in the finished vest.					
	a. Position facing-lining assembly on the outside of the respective fronts, with the upper edge of neck extension and front edges even.					
	b. Join facing-lining assemblies to the front with a 1/4 inch seam and with the stay tape positioned on the inside of the front 1/8 inch from the edge and caught in the stitching. The line of stitching shall extend from within 1 inch of the ends of the neck extension, along the front and bottom edge to the side edge.	301	SSab-1	10-14	A	A
	c. Join the lining to the fronts along the armhole with a 3/8 inch seam.	301	SSa-1	10-14	A	A
15	Join neck.					
	a. Position right and left fronts face to face and with raw end of	301	SSa-1	10-14	A	A

Source: https://assist.dla.mil -- Downloaded: 20261-20T22:43Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
15	Join neck. (cont'd)					
	neck extension even. Join the neck extensions with a seam 3/8 inch from the raw ends.					
	b. Spread open the neck facing joining seam and press smooth and flat.					
	c. Complete the closing of the neck extension at the front edge with 1/4 inch seam, catching the ends of the neck seam in the stitching.	301	SSa-1	10-14	A	A
	d. Turn each front right side out, through their respective shoulder, forcing out the seams. Baste the fronts along the front, bottom and armhole edges.	Hand or 101		4-6	A	A
	e. Press fronts smooth and flat with a heated pressing machine.					
16	Finish front.					
	Finished appearance. Fronts shall finish smooth and flat without distortion. The edgestitching shall be of uniform width without twisting, pleating or puckering and shall finish smooth and flat.					
	a. Edgestitch the vest along the armhole, front and bottom edges 1/16 inch from each seamed edge.	301	SSe-2 (b)	12-16	A	A (Silk)
	b. Press the edges of lapel, top front and bottom edges of vest smooth and flat with a heated pressing iron or pressing machine, removing the fullness. Turn lapel back and crease along the breakline smooth and flat.					
	c. Tack the upper and lower rounded corners of the lapel to the fronts, through all plies, in line with the edgestitching for a	301	SSa-1	12-16	A	A (Silk)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:43Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
16	Finish front. (cont'd)					
	distance of approximately 1 inch.					
17	Join back to front.					
	Finished appearance. The seams shall be carefully joined without twists, puckers or pleats. The seams shall start and finish evenly. The back shall be over the fronts. The lower joining seam for the two-ply back shall not be visible on the outside of the vest.					
	a. Position right and left fronts between the plies of the respective two-ply backs with edges even, notches matching and lower edge of front abutting the lower joining seam for the two-ply back.					
	b. Join the back to the fronts along the sides, through all plies, with a row of stitches in line with the upper and lower notches forming an outlet at the side seams. Close the two-ply back at the armhole with a 3/8 inch seam.	301	SSa-1	10-14	40/3	40/3
	c. Notch the seam allowance around armholes for better turning.					
	d. Join the back to the front at the shoulder with a 3/8 inch seam. The seam shall extend from the armhole seam to approximately 3/8 to 1/2 inch from the upper raw edge of the back lining.	301	SSa-1	10-14	A	A
	e. Pull fronts through the neck opening. Turn under the raw top edges of the back lining approximately 3/8 inch and fell the folded edges to the respective neck extension of front and front facing.	Hand		8-10	C (Silk)	

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:43Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOBBIN LPR
18	Make buttonholes. Finished appearance. The buttonholes shall be clean-cut, well made and correctly positioned. The stitching shall be securely caught in the fabric. a. Mark the right front in accordance with marks on the pattern for the location of four buttonholes. b. Make a horizontal, eyelet-end, square-bar type buttonhole, cut 5/8 inch, at each of the marks on the right front. The inside edge of the buttonhole eyelet shall finish 3/8 to 1/2 inch from the front edge. c. The buttonholes shall be well worked over gimp to fit the 22-line button. The gimp shall be pulled through to the underside. The purling shall be on the outside. d. Securely bartack the end of each buttonhole and trim the ends of the gimp.	Buttonhole Bartack		60 Per buttonhole (minimum) 21 Per bartack (minimum)	A 40/3	A 40/3
19	Attach buttons (when required). Finished appearance. The buttons shall be properly attached to the vest. The buttons shall be properly aligned with the buttonholes to secure a smooth and complete closure without bulging or misalignment. a. Attach four 22-line insignia buttons to the left front with shank of buttons inserted through eyelets and secured by ring fasteners.					

Source: https://assist.dla.mil -- Downloaded: 20261O-20T22:43Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
20	Clean vest. a. Trim all ends of stitchings and remove all loose threads from the vest. b. Remove all spots, shade tickets, markers and stains from the vest without injury to the material.					
21	Press vest. Finished appearance. Pressing shall be done with a heated pressing iron or pressing machine of a type suitable to obtain the desired shape and appearance in accordance with good manufacturing practice. a. Press the entire vest, removing all wrinkles. b. Finish press the lining					

3.7 Finished measurements. The finished vest shall conform to the measurements specified in Table II.

Table II Finished Measurements 1/

Size	Breast 2/ (inches)	Back length 3/ (inches)
	SHORT	
4	35-1/2	15-1/2
6	36-1/2	15-3/4
8	38	16
0	39-1/2	16-1/4
12	41	16-1/2
14	43	16-3/4
	REGULAR	
4	35-1/2	16-1/2
6	36-1/2	16-3/4
8	38	17

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:43Z
Check the source to verify that this is the current version before use.

Table II Finished Measurements 1/

Size	Breast 2/ (inches)	Back length 3/ (inches)
	REGULAR	
10	39-1/2	17-1/4
12	41	17-1/2
14	43	17-3/4
16	45	18
	LONG	
4	35-1/2	18
6	36-1/2	18-1/4
8	38	18-1/2
10	39-1/2	18-3/4
12	41	19
14	43	19-1/4
16	45	19-1/2

1/ Tolerance - ± 1/2 inch

2/ Breast measurement taken with vest buttoned or in buttoned position, from folded edge to folded edge in line with pit of armhole. Multiply by 2.

3/ Back length measurement taken along center back seam from top edge of neckline to bottom edge of vest.

3.8 Workmanship. This vest shall conform to the quality and grade of product established by this specification. The number of defects shall not exceed the applicable acceptable quality levels (AQL's).

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor amy use his own or any other facilities suitable for the performance of the inspection requirements specified herein., unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.4).
2. Quality conformance inspection (see 4.5).

4.3 Inspection conditions. Inspection shall be in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated herein.

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:43Z
Check the source to verify that this is the current version before use.

4.4 First article inspection. When first article is required, inspection shall be made of a completely fabricated vest for all provisions of this specification.

4.5 Quality conformance inspection.

4.5.1 Testing of components. Testing of components shall be in accordance with the applicable subsidiary specifications and standards to the extent applicable, except that this specification shall govern in the event of conflict. The method of testing shall be as specified in FED-STD-191, wherever applicable.

4.5.2 In-process inspection. Inspection will be made at any point or during any phase of the manufacturing process to determine whether operations or assemblies are performed as specified herein. The Government reserves the right to exclude from consideration for acceptance any material or service for which in-process inspection has indicated nonconformance.

4.5.3 Examination of end item. The end item shall be examined for defects listed in 4.5.3.1, 4.5.3.2 and 4.5.3.3.

4.5.3.1 General defects. General defects shall be classified as follows:

Examine	Defect	Classification Major	Minor
Buttonholes and eyelets (construction)	a. One or more omitted or added.	101	
	b. Wrong type buttonhole or eyelet.		201
	c. Buttonhole or eyelet not securely caught on fabric causing stitching to pull away from fabric.	102	
	d. Not corresponding to size of button (front):		
	- too small, not permitting button to enter buttonhole.	103	
	- too large, 3/8 inch or more longer than the diameter of button (measured at inside of purling).		202
	e. Bartack omitted or loose on 1 or more buttonholes:		
	- Front buttonholes.	104	
	f. Bartack misplaced:		
	- on 1 buttonhole.		203
	- on 2 or more buttonholes.		204
	g. One or more broken stitches in:		
	- 1 buttonhole.		205
	- 2 or more buttonholes.	105	

Source: https://assist.dla.mil -- Downloaded: 20260-20T22:43Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Classification Minor
Buttonholes and eyelets (construction)	g. One or more broken stitches in: - 1 eyelet.	-	206
	- 2 or more eyelets.	106	
	h. More than 2 skipped stitches in one or more buttonholes or eyelets: - front buttonholes.		207
	- 1 eyelet.		208
	- 2 or more eyelets.		209
	i. Gimp omitted in 1 or more buttonholes.		210
	j. Ragged edges, affecting appearance.		211
	k. Poorly made affecting appearance (unless otherwise classified).		212
	l. Ends of gimp not pulled through on the underside on 1 or more buttonholes.		213
	m. Stitches per buttonhole on front (excluding bartack) less than minimum specified: - 1 or 2 stitches.		214
	- 3 stitches.		215
	- 4 or more stitches.	107	
	n. Any uncut buttonholes.		216
	o. Buttonhole finished with purling on inside.	108	
Buttons or ring toggle	a. Missing, loose or defective: - 1 button or ring toggle.		217
	- 2 or more buttons or ring toggles.	109	
	b. Not specified type or size.		218
	NOTE: Buttons shall be considered defective if they have sharp, rough or cracked edges; scratches, blemishes or imbedded foreign matter on face side of button, loose shanks; or badly shaded.		

Source: https://assist.dla.mil -- Downloaded: 20260-20T22:43Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Classification Minor
Cleanness	a. One or more removable spots or stains clearly noticeable: - on outside. - on inside.	110	219
	b. One or more spots or stains of an obvious permanent nature.	111	
	c. Thread ends not trimmed, loose thread ends, 2 or more shade markings, or basting not removed throughout garment (to be scored when the condition exists on major portion on vest).		220
Components and assembly	a. Any defective component or defect of assembly (not herein classified).		221
	b. Any component part or required operation omitted (not herein classified).		222
Cutting	a. Any component part of basic material not cut in accordance with directional lines on patterns, or in accordance with specification requirements.	112	
Material defects and damages	a. Any weakening defect such as smash, multiple float, loose slub, etc., that may develop into a hole.		223
	b. Any hole.		224
	c. Shade bars, unsightly slubs, etc.		225
	d. Needle chews which may develop into a hole.		226
	e. Scissors or knife cut, tear, mend or burn.		227

Source: https://assist.dla.mil -- Downloaded: 20260-20T22:43Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Classification Minor
	NOTE: Material defects and workmanship damages are to be classified as indicated above only when the condition is one which definitely weakens the fabric or when it is so conspicuously located as to be clearly noticeable. Weakening or nonweakening conditions which are inconspicuous and have negligible effect on serviceability are to be classified as follows: Material defect - No defect Workmanship damages - Minor defect		
Pressing	a. Burned or scorched.		228
	b. Pressing omitted (entire garment).		229
	c. Poorly pressed (unless otherwise classified).		230
	d. Basting or pressing impressions not removed on major portion of vest.		231
Seams and stitching	a. Accuracy of seaming.		
	1. Seams twisted, puckered, or pleated affecting appearance (unless otherwise classified).		232
	2. Part of garment caught in any unrelated operation or stitching.		233
	3. Thread breaks or ends of all stitching (when not caught in other seams or stitching) not securely backstitched.		234
	4. Wrong shade or 2 shades of thread used on outside of same vest.		235

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:43Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Classification Minor
Seams and stitching	b. Gage of stitching (edge or top stitching).	--	
	1. Irregular, i.e., unevenly gaged or various stitching not uniform, affecting appearance.		236
	2. Beyond range of width specified or varies more than 1/16 inch when no range is specified.		237
	c. Open seams.		
	1. On outside:		
	- up to 1/4 inch inclusive.		238
	- more than 1/4 inch but not more than 1/2 inch.		239
	- more than 1/2 inch.	113	
	2. On inside:		
	- up to 1/4 inch or more but not more than 1/2 inch.		240
	- more than 1/2 inch.		241
	d. Raw edges.		
	1. On outside:		
	- up to 1/8 inch inclusive.		242
	- more than 1/8 inch but not more than 1/4 inch.		243
	2. On inside:		
	- more than 1/4 inch but not more than 1/2 inch.		244
	- More than 1/2 inch.		245
	NOTE: Raw edges shall be classified as such when they occur at places where an edge is required to be turned under or over and stitched.		
	e. Run offs (see classification of seams).		

Source: https://assist.dla.mil -- Downloaded: 20260-20T22:43Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Classification Minor
Seams and stitching	f. Seam and stitch type.		
	1. Wrong seam type.		246
	2. Wrong stitch type.		247
	g. Stitch tension.		
	1. Loose tension, resulting in loose seams.		248
	2. Loose tension on edge or raised stitching resulting in loosely exposed bobbin thread or top thread.	114	
	3. Tight tension (stitches break when normal strain is applied to seam or stitching).	115	
	NOTE: Puckering is evidence of tight tension. When puckering is evident, the inspector shall test seam by exerting normal pull in the lengthwise direction of seam or stitching.		
	h. Stitches per inch (including labels) less than minimum specified:		
	- one or two stitches.		249
	- three stitches.		250
	- four or more stitches.	116	
	- one or more on labels.		251
	NOTE: To be scored only when condition exists on major portion of seam.		
	i. Stitches skipped or broken (on edge or top stitching when seam is seamed, turned and stitched).		
	1. More than 1/4 inch but not more than 3/4 inch.		252
	2. More than 3/4 inch.	117	
Shaded parts	Any outside part shaded.		253

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:43Z
Check the source to verify that this is the current version before use.

(S)(k) [With the pockets and topstitch the | (a) |

4.5.3.2 Detailed defects applicable to specific parts. Detailed defects shall be classified as follows:

Examine	Defect	Classification Major	Classification Minor
Alignment and position of buttonholes and eyelets	Outside of vest:		
	a. Buttonhole on right front not in same horizontal position as eyelet on left front by more than 1/4 inch.		254
	b. Position of front buttonhole from front edge:		
	- less than 1/4 inch or more than 3/4 inch.		255
Length of front	Unbuttoned fronts unequal in length by more than 1/2 inch.		256
Lapels	a. Lapel facings.		
	1. Twisted, short or tight, causing lapels to curl out, affecting appearance.		257
	2. Fullness or puckers, affecting appearance.		258
	b. Lapel edges.		
	1. Bulky, irregular, or not properly forced out, causing crooked edges, affecting appearance.		259
	c. Bridle tape.		
	1. Misplace, not serving intended purpose.		260
	2. Tape partly on creased edge or on lapel side.		261
	d. Lapel shape.		
	1. Not uniform i.e., left and right top edge of lapels vary in length by 1/4 inch or more.		262

Source: https://assist.dla.mil -- Downloaded: 20260-20T22:43Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Classification Minor
Lapels	2. Lapels poorly shaped or not of uniform size or shape.	-	263
Shoulder (construction)	Improperly joined or set, causing shoulders or back to twist.	118	
Armhole	Armhole seam crooked, affecting appearance.	119	
Body (outside)	a. Front dart.		
	1. One or both darts not properly tapered at top end causing puckers or pleats, affecting appearance.		264
	2. Upper end of darts not backtacked.		265
	3. Raw edges of darts not pressed open.		266
Front and bottom edges	a. Front edges stretched, affecting appearance.		267
	b. Bottom edge stretched, puckered or uneven, affecting appearance.		268
	c. Fronts rolling outward below button.		269
	d. Front edge irregular or not properly forced out, causing crooked or curved edges, affecting appearance.		270
	e. Facing exposed on right front edge, affecting appearance (score only when clearly noticeable and the condition exists along major portion of seam).		271
	f. Bottom corner of one or both fronts poorly shaped, affecting appearance.		272
Front facings	a. Short, tight or twisted, causing excessive fullness or twists on fronts.		273

Source: https://assist.dla.mil -- Downloaded: 2026l0-20T22:43Z
Check the source to verify that this is the currentversion before use.

Examine	Defect	Classification Major	Minor
Front facings	b. Facing long, causing bottom corner to curl up.		274
Size label	Inside of vest.		
	a. Missing, incorrect, illegible or not securely caught in stitching.		275
Identification instruction label	a. Omitted.	120	
	b. Incorrect or illegible.		276
	c. Not stitched on four sides.		277
Body seams	a. Seams not pressed open with heated pressing iron.		278

4.5.3.3 Size measurement. Any measurement deviating from nominal dimension and tolerance specified in Table II shall be classified as a size measurement defect. Measurements will be made at points prescribed in footnotes below Table II.

4.5.3.4 Inspection levels and AQL's. Inspection levels and AQL's shall be as noted in the contract or purchase order.

4.5.4 Bond strength of fusible interlining. The strength of the bond of the fusible interlining to the outer fabric shall be tested once each 4 hours as follows at each fusing press to determine that adequate fusing is being obtained. Prepare a test sample by fusing the fusible specified in 3.3.1 under the same fusing conditions to be used in the manufacture of the vest. Determine the bold strength of the test sample with a commercial spring scale (see 6.7). If the bond strength on any test sample is less than 22 ounces per inch of width, the fusing conditions shall be corrected and the bond strength shall be repeated. Those units represented by this test shall be fused again and retested. If they fail, they shall be rejected.

5. PACKAGING

5.1 Preservation. Preservation shall be commercial.

5.1.1 Commercial. The vests shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be commercial level.

5.2.1 Commercial. Vests preserved as specified in 5.1.1 shall be packed in accordance with ASTM D 3951.

5.3 Marking. In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with the requirements of MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 20260-20T22:43Z
Check the source to verify that this is the current version before use.

6. NOTES

(Information in this section is of a general or explanatory nature which may be helpful, but is not mandatory).

6.1 Intended use. The vest covered by this specification is intended for wear, by U. S. Marine Corps women general officers, with the evening dress uniform.

6.2 Ordering data. Procurement documents should specify the following:

6.2.1 Procurement requirements.

(a) Title, number, and date of this specification.
(b) Size required (see 1.2).
(c) When first article is not required (see 3.2, 4.4 and 6.4).

6.3 Guide sample. The guide sample and color sample may be obtained from the procuring activity or as directed by the contracting officer.

6.4 First article. Examination, tests and approval shall be as specified by the contracting officer (see 3.2).

6.5 Figures. Figures 1 through 3 show general design of the vest and are furnished for information only. In the event of conflict between these figures and the text of this specification, the text of this specification shall govern.

6.6 Fusing conditions. Specific machine setting should be obtained from the supplier of the particular fusible material for optimum results. The following fusing conditions include the recommendations of several suppliers of fusible material and are furnished for guidance only:

(a) Temperature between pressing surfaces of 300°F minimum and 320°F maximum, at the fuseline (not the temperature at the clock).

(b) Pressure between pressing surfaces of 6 pounds force per square inch (lb_f/in^2) minimum and 7 lb_f/in^2 maximum.

(c) Pressing time of 12 seconds minimum and 14 seconds maximum.

(d) Heat-dry.

6.7 Peel strength test. The procedure for the peel strength testing with a spring scale should be obtained from the supplier of the fusible material, and shall be accomplished 2 hours after fusing (see 4.5.4).

6.8 Subject term (key word) listing.

Evening dress
Officer's
Waist-coat

Preparing Activity
Navy - MC
Project No. 8410-N832

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:43Z
Check the source to verify that this is the currentversion before use.

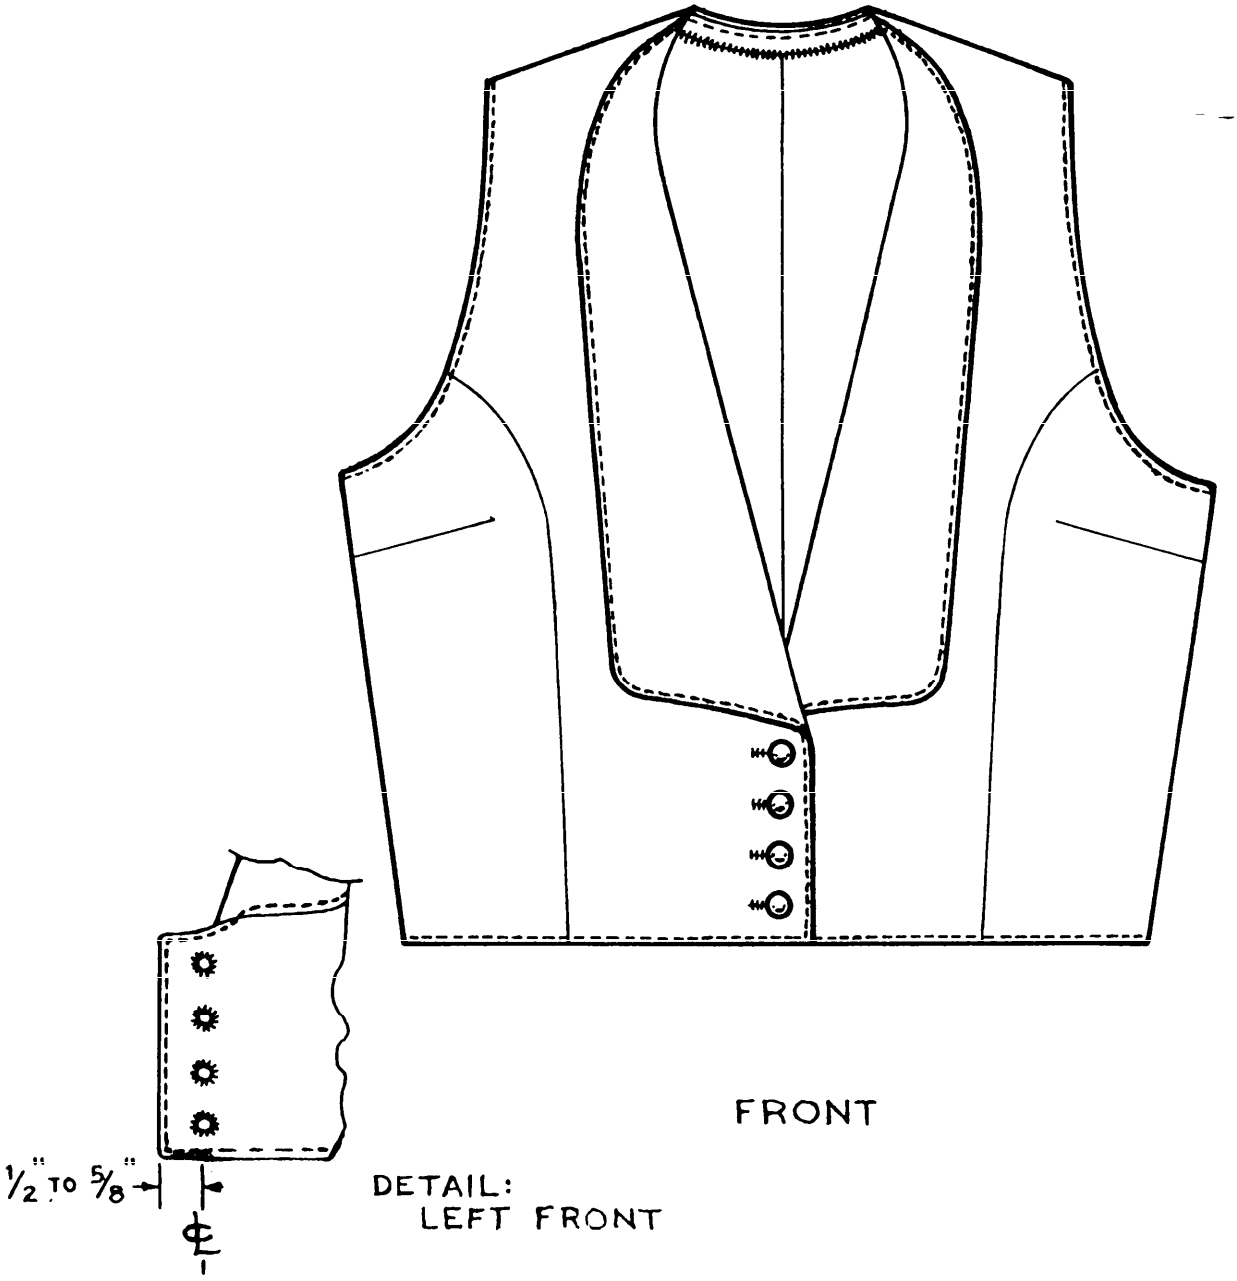


FIGURE 1. VEST, WOMEN'S SCARLET DRESS (GENERAL OFFICER'S)

Source: https://assist.dla.mil -- Downloaded: 20261O-20T22:43Z
Check the source to verify that this is the currentversion before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-V-29384A(MC)	14 April 1994

3. DOCUMENT TITLE

VEST, WOMEN'S: SCARLET, DRESS (GENERAL OFFICER'S)

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code) (1) Commercial	(2) AUTOVON
COMMANDER	(912) 439-6560	567-6560
c. ADDRESS (Include Zip Code) MARINE CORPS LOGISTICS BASE, CODE 855, 814 RADFORD BOULEVARD ALBANY GA 31704-1128	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:43Z
Check the source to verify that this is the current version before use.