INCH-POUND

MIL-DTL-29394C(MC)
8 October 1997
SUPERSEDING
MIL-S-29394B(MC)
28 February 1994

DETAIL SPECIFICATION

SKIRTS, WOMEN'S - EVENING DRESS, U.S. MARINE BAND (MUSICIAN'S)

This specification is approved for use by U.S. Marine Corps, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1. Scope. This specification covers the requirements for evening dress skirts for wear by female members of the U.S. Marine Corps Band.

1.2. Classification. The skirts will be of one type in the following classes, sizes and lengths (see 6.2):

Class 1 - Polyester/Wool, Gabardine, Sky Blue, Shade 2319
Class 2 - Gabardine, Polyester/Rayon, White, Shade 2400
Class 3 - Polyester/Wool, Gabardine, Dark Blue, Shade 2312

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to the Commander (PSE-D), Marine Corps Systems Command, Quantico, VA 22134-5010 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8410

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:50Z
Check the source to verify that this is the current version before use.

Schedule of sizes

Short	Regular	Long
2	2	
4	4	4
6	6	6
8	8	8
10	10	10
12	12	12
14	14	14
16	16	16
	18	18

2. APPLICABLE DOCUMENTS

2.1. General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2. Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

A-A-50198 - Thread, Gimp, Cotton, Buttonhole
A-A-50199 - Thread, Polyester Core, Cotton or Polyester Covered
A-A-52094 - Thread, Cotton
A-A-52106 - Cloth, Twill or Plain Weave, Polyester and Polyester Blend

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:50Z
Check the source to verify that this is the current version before use.

V-B-871 - Button, Sewing Hole, and Button, Staple, (Plastic)
V-F-106 - Fastener, Slide, Interlocking
DDD-L-20 - Label: For Clothing, Equipage, and Tentage, (General Use)

DEPARTMENT OF DEFENSE
MIL-C-368 - Cloth, Satin, Rayon and Cloth, Twill, Rayon
MIL-B-371 - Braid, Textile, Tubular
MIL-T-5237 - Tape, Textile; Webbing, Textile; Rayon
MIL-C-10176 - Cloth, Gabardine: Wool, Polyester and Wool
MIL-C-41820 - Cloth, Gabardine, Polyester and Rayon

STANDARDS

FEDERAL
FED-STD-751 - Stitches, Seams and Stitchings

DEPARTMENT OF DEFENSE
MIL-STD-984 - Provisions for Size Labeling of Women's Uniform Clothing
MIL-STD-1609 - Provisions for Evaluating Quality of Women's Skirts

(Unless otherwise indicated, copies of the above specifications, standards, handbooks are available from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

2.3. Non-Government publications. The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DoDISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS are the issues of the documents cited in the solicitation (see 6.2).

Department of Defense (DoD) Standard Color Card of Official Standardized Shades for Sewing Threads 1968

Department of Defense (DoD) Standard Shades for Buttons 1966

(Application for copies should be addressed to the Color Association of the United States, Inc., 409 W. 44th Street, New York, NY 10016-0927.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:50Z
Check the source to verify that this is the current version before use.

2.4. Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1. Standard sample. Standard samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variation from this specification may appear in the sample, in which case this specification shall govern.

3.2. First article. When specified (see 6.2), a sample shall be subjected to first article inspection in accordance with 4.3.

3.3. Materials.

3.3.1 Basic materials. The basic material for each class of skirt shall be as follows:

3.3.1.1. Class 1. Cloth, 10.6 ounce polyester/wool gabardine, sky blue, shade 2319 conforming to type II, class 12 of MIL-C-10176.

3.3.1.2. Class 2. Cloth, 8 ounce, polyester/rayon gabardine, white, shade 2400 conforming to type III, class 1 of MIL-C-41820.

3.3.1.3. Class 3. Cloth, 10.6 ounce, polyester/wool gabardine, dark blue, shade 2312 conforming to type II, class 12 of MIL-C-10176.

3.3.2 Lining. The material for lining the skirts shall be cloth, twill, rayon, conforming to class 1 (3.7 ounces) of MIL-C-368 in the following colors:

3.3.2.1. Classes 1 and 3. Black, shade 2604.

3.3.2.2. Class 2. White, shade 3001.

3.3.3 Waistband interlining. The waistband interlining material shall be cloth, twill or plain weave, polyester or polyester blend conforming to A-A-52106 in shade black for classes 1 and 3 and white for class 2. A fusible waistband interlining of

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:50Z
Check the source to verify that this is the current version before use.

suitable material may be substituted for the polyester and cotton twill.

3.3.4 Finishing tape. The tape for finishing the bottom of the skirt shall be tape, textile, rayon conforming to type I of MIL-T-5237. The color shall be the same as specified for thread in 3.3.6.2.

3.3.5 Hanger braid. The braid for the skirt hangers shall be braid, textile, tubular, conforming to type IX, class 1 of MIL-B-371. The color shall be the same as specified for thread in 3.3.6.2.

3.3.6 Thread. Cotton thread shall be used conforming to A-A-52094 as follows:

Use	Type	Ticket No.	Ply
Buttonholes	III	0	3
Seams, stitching	I	30,50	3
Buttons	II	16,24	4

As an alternate to the cotton thread, a polyester, cotton-covered thread conforming to A-A-50199, ticket No. 70, 2-ply may be used.

3.3.6.1. Automatic button sewing. If an automatic machine which sews and shanks (wraps) the buttons in one operation is used, the thread shall be waxed.

3.3.6.2. Color. The color of the thread shall be as follows:

Class 1 - Navy Blue, shade AT, cable No. 66060
Class 2 - White, shade AH, cable No. 66050
Class 3 - Black, shade AA, cable No. 66043

(See DoD Standard Color Card of Official Standardization Shades for Sewing Threads 1968.)

3.3.6.3. Colorfastness. The colored thread shall show fastness to light and wet (dry) cleaning equal to or better than the standard sample. When no standard sample is available, the colored thread shall show "good" fastness to light and wet (dry) cleaning.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:50Z
Check the source to verify that this is the current version before use.

3.3.7 Gimp. The gimp for reinforcing the buttonholes shall be cotton ticket No. 8, conforming to type I or II of A-A-50198.

3.3.7.1. Color. The color requirements for the gimp shall be the same as specified in 3.3.6.2 for the thread.

3.3.7.2. Colorfastness. The color gimp shall show fastness to wet (dry) cleaning equal to or better than the standard sample. When no standard sample is available, the color gimp shall show "good" fastness to wet (dry) cleaning.

3.3.8 Buttons. The buttons for the waistband shall be 27-line conforming to type II, class D, style 4 of V-B-871 (see DoD Standard Shades for Buttons 1966). The color of the buttons shall be as follows:

Class 1 - Blue, shade BV, cable No. 62003
Class 2 - White, shade BA, cable No. 62031
Class 3 - Black, shade BT, cable No. 62001

3.3.9 Slide fasteners. The slide fasteners shall conform to either 3.3.9.1 or 3.3.9.2.

3.3.9.1. Metal. The slide fasteners shall conform to type I, style 3, short tab pull, cam lock size LS (commercial size No. 4) of V-F-106, except that the salt spray test shall not be required. All the components of the slide fastener shall be brass and from the same supplier. The tape shall be cotton or synthetic or a combination. The length of the slide fastener shall be 7 inches long for all sizes.

3.3.9.2. Plastic coil. The slide fastener shall be manufactured of polyester or nylon consisting of an automatic or cam lock and shall be equal to commercial size No. 2. The tape shall be a blend of nylon and cotton or polyester and cotton or polyester. The length of the slide fastener shall be 7 inches long for all sizes.

3.3.9.3. Color. The color of the slide fastener shall be as follows:

Class 1 - Blue, shade AA, cable No. 66527
Class 2 - White
Class 3 - Black, shade G, cable No. 66507

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:50Z
Check the source to verify that this is the current version before use.

3.3.9.4. Colorfastness. The dyed slide fastener tape shall show colorfastness to laundering equal to or better than the standard sample when tested as specified in V-F-106. When no standard sample is available, the tape shall show "good" colorfastness when tested as specified in V-F-106.

3.3.10 Labels.

3.3.10.1.Combination label. Each skirt shall have a combination identification and instruction label conforming to type VI, classes 2 and 15 of DDD-L-20. The fastness to laundering requirements of DDD-L-20 shall apply.

Skirt, woman's
Contract number: M67004-94-0-000 (Example)
Name of contractor:
DRY CLEAN ONLY

3.3.10.2.Size label. The size label shall conform to type VI, class 2 of DDD-L-20 except the stock number is not required. The inscription on the size label shall conform to MIL-STD-984; Table II Height Ranges, Table III Body measurements for Marine Corps and Figure 2.

3.4. Design. The skirts shall be the U.S. Marine Corps design shown in Figures 1 and 2, ankle length, with a one piece front, two piece back panels fully lined with slide fastener closure at the center back and a watch pocket on the right front at the waistband seam.

3.5. Patterns. Standard patterns will be furnished to the contractor by the Government (see 6.3). The standard patterns shall not be altered in any way and shall be used only as a guide for cutting the contractor's working patterns. The contractor's working patterns shall be identical to the standard patterns. Standard patterns show size, seam allowances, directional lines for cutting, and are marked or notched for proper placement and assembly of the component parts. The patterns provide an allowance of 3 inches for hemming the bottom of skirt.

3.5.1 Pattern parts. The skirts shall be cut from the materials specified herein in accordance with the pattern parts indicated below:

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:50Z
Check the source to verify that this is the current version before use.

ITEM	PATTERN NOMENCLATURE	NO. OF CUT PARTS
	Material: Basic	
1	Front	1
2	Back	2
3	Waistband	1
4	Placket	1
5	Watch pocket (bottom ply)	1
	Material: Lining	
6	Front	2
7	Back	2
	Material: Twill, polyester and cotton or fusible	
8	Waistband-interlining	1
9	Watch pocket (top ply)	1

3.6. Construction. The skirts shall be manufactured in accordance with operation requirements as specified in Table I. The contractor is not required to follow the exact sequence of operation as listed in Table I, but all operations specified shall be used to manufacture the skirts.

3.6.1 Stitches, seams, and stitchings. Stitch, seam, and stitching types specified in Table I shall conform to FED-STD-751. The minimum and maximum number of stitches per inch shall be specified in Table I.

3.6.1.1. Thread breaks and ends of seams. The ends of all seams and stitching produced with 301 stitch type, when not caught in other seams or stitching, shall be backstitched not less than 1/4 inch. Thread breaks (all stitch types) shall be secured by stitching back of the break not less than 1/2 inch. Skipped stitches may be repaired by using 301 stitch type. The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. Thread ends of darts shall be trimmed to a length of 1/2 inch. When an automatic dart machine is used, the ends shall be backstitched not less than three stitches.

3.6.2 Buttonhole. The buttonhole shall be eyelet end, taper bar type. The finished cut length of buttonhole shall be 3/4 inch.

3.6.3 Pressing. Pressing as required in Table I shall be accomplished with a heated pressing iron or machine.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:50Z
Check the source to verify that this is the current version before use.

3.6.4 Shade marking. The component parts shall be marked to ensure a uniform shade and size throughout the skirt. Any method of shade marking may be used except:

a. Corrosive metal fastening devices.
b. Sew-on shade tickets.
c. Adhesive type tickets which show discoloration or leave traces of paper or adhesive mass to the material upon removal of the tickets.

TABLE I. Manufacturing requirements.

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/IN	NDL	BOB/ LPR
1	Cutting. a. Cut the skirt in strict accordance with patterns furnished by the Government. b. Cut all materials in the direction indicated by directional lines on pattern. The directional line shall be placed in the warp direction of the cloth unless otherwise indicated on the pattern. c. Cut component parts of skirt from one piece of basic material, except placket, and watch pocket which may be cut from ends. d. Cut front and back lining parts of the skirt from one piece of lining material. e. Cut braid for skirt hanger in lengths of 4 ± 1/8 inches. Each skirt shall be provided with two hangers. f. Cut hem tapes not less than 108 inches long (see operation 23). g. Cut waistband interlining of polyester and cotton twill material (see 3.3.3) in accordance with pattern to reinforce the underside of the waistband.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:50Z
Check the source to verify that this is the current version before use.

TABLE I. Manufacturing requirements - Continued.

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/IN	NDL	BOB/ LPR
2	Replacement of damaged parts.					
	a. Replace at time of cutting any part of the skirt containing holes or seriously weakening defects such as smashes, multiple floats, loose weakening slubs, etc., expected to develop into holes, shade bars and dye streaks or unsightly slubs, etc.					
	b. Replace any part damaged during manufacturing process by needle chews which may develop into a hole, scissor or knife cuts, tears, holes, mends or burns in the material.					
3	Shade marking.					
	a. Mark, ticket or bundle all component parts (see 3.6.4) cut from one piece of basic material, except those parts cut from ends, to ensure uniform shade and size throughout the skirt. All lining parts shall be marked, bundled or ticketed to ensure uniform shade and size throughout the garment.					
	b. The use of tickets with any metal fastening devices or sew-on shade tickets is prohibited on the lining.					
4	Make watch pocket and attach combination label.					
	a. The watch pocket shall be made of one ply of basic material and one ply of interlining cloth and shall finish not less than 4 inches wide and 4 inches deep.					
	b. Position both plies of watch pocket face up and with sides and bottom edges even. Join both plies together 3/8 inch from raw edges, 1/2 inch down from the top raw edges of each side.	301	SSa-1	12-14	50	50
	c. Overedge stitch the raw edges of side and bottom of pocket.	503 or 504	EFd-1	8-10	70	70
	-or-					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:50Z
Check the source to verify that this is the current version before use.

TABLE I. Manufacturing requirements - Continued.

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/IN	NDL	BOB/ LPR
4	Make watch pocket and attach combination label. (cont'd)					
	d. The watch pocket may be joined by seaming and overedge stitching the raw edges together in one operation.	516 or 517	SSa-2	12-14	70	70
5	Overedge stitch seams.					
	a. The raw edges of the seam allowances of the skirt shall be neatly overedge stitched.	503 or 504	EFd-1	8-10	70	70
	NOTE: Care shall be exercised during the overedging operation to ensure that no seam allowance is reduced by more than 1/16 inch.					
6	Pink seams and bottom edge of lining.					
	a. The raw edge of the seam allowances and raw edges at the bottom of the front and back lining shall be neatly and evenly pinked with the points of the pinking 1/8 inch in depth.					
7	Join back parts.					
	Finished appearance. The backs shall be joined without gathers, puckers or pleats.					
	a. Position the back parts with edges even and join together at the center back with a 3/4 inch seam from the bottom edge of the skirt to 7-1/2 inches below the top of waistline.	301	SSa-1	10-14	A	A
	b. Press the center back seam smooth and flat with a heated pressing iron or pressing machine.					
8	Join front and back parts.					
	a. Join the front and back parts of skirt at the side seams with a 1 inch seam allowance and with notches matching.	301	SSa-1	10-14	50	50
	b. Spread open side seams and press smooth and flat with a heated iron or pressing machine.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:50Z
Check the source to verify that this is the current version before use.

TABLE I. Manufacturing requirements - Continued.

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/IN	NDL	BOB/ LPR
9	Join lining back parts.					
	Finished appearance. The lining back parts shall be joined without gathers, puckers or pleats.					
	a. Position the lining back parts face to face with edges even and join at the center with a 3/4 inch seam, from bottom of skirt to 7-1/2 inches from top raw edge to provide for center opening.	301	SSa-1	10-14	50	50
	b. The center opening shall be edge stitched 1/8 inch on each side.	301	EFb-1	12-14	50	50
10	Join lining front parts.					
	a. Position the lining front parts face to face with edges even and join at the center with a 3/4 inch seam.	301	SSa-1	10-14	50	50
11	Join front and back parts of lining.					
	a. Join the front and back parts of lining at the side seam with a 3/4 inch seam and with notches matching. Spread open the center back seam and side seams and press smooth and flat with a heated iron or pressing machine.	301	SSa-1	10-12	50	50
12	Make waistband.					
	Finished appearance. On the finished skirt, the outside end of the waistband shall be pointed and the inside end shall be squared.					
	a. The waistband shall be made of a single ply of basic material and a single ply of interlining (twill or fusible).					
	b. Position the interlining on the inside of waistband with bottom edges even. Stitch the interlining to the underside of waistband along the top and bottom edges of interlining with a 1/8 inch seam. The line of stitching shall extend the entire length of waistband but the stitching shall not show on the front of the waistband.	301	SSa-1	10-14	A	A
	-or-					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:50Z
Check the source to verify that this is the current version before use.

TABLE I. Manufacturing requirements - Continued.

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/IN	NDL	BOB/ LPR
12	Make waistband. (cont'd)					
	When fusing the interlining to the waistband, position the interlining on the inside of waistband with bottom edges even. Stay stitch is not required.					
	c. Overedge stitch the inside raw edge of waistband.	503 or 504	EFd-1	8-12	70	70
	d. Fold the waistband in half lengthwise face to face with notches matching. Join the two plies together, at the pointed end, with 3/16 inch seam, starting at the folded edge.	301	SSe-2 (a)	10-14	50	50
	e. Close the squared end by seaming the two plies together 3/16 inch from the bottom raw edges, starting approximately midway between the notches and the end of the waistband, then seam straight across the width of the waistband to close the end.	301	SSe-2 (a)	10-14	50	50
	f. Turn the waistband, forcing out the corners and point completely, and edge stitch 1/16 inch from the seamed edges at the pointed and squared ends.	301	SSe-2	10-14	50	50
	g. Continue to edge stitch along the length of the waistband 1/16 inch from the folded edge.	301	OSf-2	10-14	50	50
13	Attach zipper.					
	a. Overedge stitch both sides and bottom of placket piece.	503 or 504	EFd-1	8-12	70	70
	b. Stitch right side of slide fastener to right side of placket piece with edge of zipper tape 1/4 inch in from edge of placket.	301	SSa-1	10-14	A	A
	c. Fold under both sides of skirt opening 3/4 inch, positioning slide fastener and placket piece in the proper position.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:50Z
Check the source to verify that this is the current version before use.

TABLE I. Manufacturing requirements - Continued.

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/IN	NDL	BOB/ LPR
13	Attach zipper. (cont'd)					
	d. With a 1/4 inch seam, topstitch left side of opening to zipper tape. Position placket flat and continue stitching across bottom and up right side forming a 1/4 inch welt on both sides. Placket and slide fastener shall be caught across the bottom and right side stitching of skirt opening.	301	SSa-1	10-14	50	50
14	Join lining to skirt.					
	a. Join lining to the skirt at the waist with a 1/4 inch seam from the raw edges, with respective seams matching. The center back opening of lining shall not overlap the slide fastener.	301	SSa-1	10-12	50	50
15	Attach watch pocket.					
	a. Position the inside edge of the polyester/cotton twill side of pocket to the top raw edge of the right front of skirt waist. The notch of the pocket shall be 1 inch in from the side seam. Join the pocket to the skirt with a 3/8 inch seam, from notch to notch forming a 4 inch wide opening at the top of the waist seam. Turn the pocket up and base stitch 1/16 inch through twill and front of skirt catching all plys.					
	b. Notch and turn pocket to the inside and bartack each edge of opening.	Bartack		21-28 per bartack	0	0
16	Join waistband to skirt with hangers and labels.					
	a. Position the waistband on the outside of the skirt, with notches at the squared end of waistband even with the edge of placket and the raw edge of the waistband even with the top raw waist edge of skirt and with the notches at the pointed end of waist band matching the back folded edge of skirt at the slide fastener.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:50Z
Check the source to verify that this is the current version before use.

TABLE I. Manufacturing requirements - Continued.

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/IN	NDL	BOB/ LPR
16	Join waistband to skirt with hangers and labels. (cont'd)					
	b. Join the outside part of the waistband to the skirt with a 3/8 inch seam, with the braid for the hangers folded in half to form a loop and with the ends of the loops and the top edge of the size label placed on the inside of the skirt and caught in the stitching.	301	LSa-1	10-14	50	50
	c. The hangers shall be positioned one at each side seamline. The size label shall be at the back on either side of zipper opening.					
	d. In the finished skirt, the length of the hanger loop shall be 1-5/8 ± 1/8 inches, measured from the bottom edge of the waistband to the end of the loop.					
17	Topstitch waistband.					
	Finished appearance. The waistband shall be sewn on smoothly and evenly and shall have a flat appearance throughout with no gathers, puckers, pleats or other distortions in the waistband, and shall be even width along the entire length. The waistband shall be 1 ± 1/8 inches wide. The pointed end shall extend 1-1/2 ± 1/8 inches beyond the front edge of the center back opening, and the squared end shall extend 1-1/2 ± 1/8 inches beyond the back edge of the zipper placket.					
	a. Align the inside overedged part of the waistband on the skirt with the edge laying flat. Topstitch through the waistband to the skirt 1/16 inch from the lower folded edge, catching the inside waistband portion in the stitching, and with the stitching extending the entire length of the waistband.	301	LSb-1	10-14	A (silk)	A (silk)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:50Z
Check the source to verify that this is the current version before use.

TABLE I. Manufacturing requirements - Continued.

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/IN	NDL	BOB/ LPR
18	Make buttonholes.					
	Finished appearance. The buttonholes shall be clean cut, well made and correctly positioned. The stitching shall be securely caught in the basic material. The buttonholes shall be well worked over gimp to fit 27-line buttons. The purling of the buttonholes shall be on the outside of the waistband.					
	a. Make a 3/4 inch long horizontal, eyelet end, taper-bar type buttonhole through the center of the pointed and squared ends of waistband with the inside purled edge of the eyelet 1/2 to 5/8 inch from the finished ends to waistband.	Button-hole		44-50 per button-hole (incl. tack)	0	0
19	Clean skirt.					
	a. All ends of stitching shall be trimmed and the loose threads removed from skirt. Pull and remove any basting threads.					
	b. Any spots, stains and shade tickets or markings shall be removed without injury to the material.					
20	Press skirt.					
	a. The entire skirt shall be pressed smooth with a heated pressing iron or steam pressing machine. Press marks and gloss shall be removed.					
21	Sew on buttons.					
	a. Close the slide fastener and mark the inside and outside ends of waistband with the location for sewing on the buttons to correspond with the eyelet of buttonholes.					
	b. The buttons shall be positioned to engage with the eyelet end of buttonholes, so that on the finished skirt, the ends of the waistband lie smooth and flat without twisting, bulging, or other distortion.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:50Z
Check the source to verify that this is the current version before use.

TABLE I. Manufacturing requirements - Continued.

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/IN	NDL	BOB/ LPR
21	Sew on buttons. (cont'd)					
	c. Securely sew a 27-line button at each mark. The thread ends of hand sewn buttons shall be securely tacked. The button on the outside of waistband shall be sewn through all plies of waistband. The stitches for the button sewn to the inside of the waistband shall not be visible on the outside.	Hand or Machine		4-6 button (double thread)		16/4
22	Prepare for packing.					
	a. Examine skirt.					
	b. An envelope containing the tape for the skirt hem shall be attached by string to the left hanger loop.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:50Z
Check the source to verify that this is the current version before use.

3.7. Finished measurements. The finished skirt shall conform to the measurements shown in Table II.

Table II. Finished measurements.

Size	Waist 1/ (inches)	Seat 2/ (inches)	Length 3/ (inches)
Short			
2	23-1/2	35-1/2	41
4	24-1/2	36-1/2	41
6	25-1/2	37-1/2	41
8	27	39	41
10	28-1/2	40-1/2	41
12	30	42	41
14	32	44	41
16	34	46	41
18	36	48	41
Regular			
2	23-1/2	35-1/2	43
4	24-1/2	36-1/2	43
6	25-1/2	37-1/2	43
8	27	39	43
10	28-1/2	40-1/2	43
12	30	42	43
14	32	44	43
16	34	46	43
18	36	48	43
Long			
2	23-1/2	35-1/2	45
4	24-1/2	36-1/2	45
6	25-1/2	37-1/2	45
8	27	39	45
10	28-1/2	40-1/2	45
12	30	42	45
14	32	44	45
16	34	46	45
18	36	48	45
Tolerances:	± 1/2	± 1/2	± 1/2

1/ Twice the measurement taken from folded edge to folded edge at center of waistband with slide fastener closed and waistband buttoned.

2/ Seven inches down from bottom of waistband, twice the measure across from folded edge to folded.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:50Z
Check the source to verify that this is the current version before use.

3/ Measurement taken at center front from lower edge of waistband to bottom edge of unhemmed skirt (see Figure 1).

3.8. Workmanship. The finished skirts shall conform to the quality and grade of product established by this specification.

3.9. Recycled, recovered, or environmentally preferable materials. Recycled, recovered, or environmentally preferable materials should be used to the maximum extent possible provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs.

4. VERIFICATION

4.1. Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Conformance inspection (see 4.4).

4.2. Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with the test conditions specified in MIL-STD-1609.

4.3. First article inspection. When first article is required, inspection shall be made of a completely fabricated skirt for all provisions of this specification.

4.4. Conformance inspection.

4.4.1 Components and material inspection. Components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase documents.

4.4.2 Examination of the end item. Samplings and examination of the end item shall be performed for dress (D) skirts in accordance with the provisions of MIL-STD-1609.

4.4.3 Dimensional examination. The dimensional examination provisions for the finished skirts shall be as listed in 3.7 and as specified in MIL-STD-1609.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:50Z
Check the source to verify that this is the current version before use.

4.4.4 In-process inspection. Inspection shall be performed during the manufacturing of the end item to ascertain that the operations are performed as specified herein. The Government reserves the right to determine the acceptability of construction methods not performed in accordance with specified requirements for operations or subassemblies.

5. PACKAGING

5.1. Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of material is to be performed by Department of Defense (DoD) personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activity within the Military Department of Defense Agency, or within the Military Department's Systems Command. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1. Intended use. The skirts described herein are intended for wear by female personnel of the U.S. Marine Corps Band.

6.2. Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of the specification.
b. Issue of DoDISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.2).
c. Packaging requirements (see 5.1).
d. Classes and sizes required (see 1.2).
e. Whether first article is required (see 3.2).
f. Number of skirts in first article (see 3.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:50Z
Check the source to verify that this is the current version before use.

6.3. Standard sample. For information regarding the availability of standard sample and patterns, address inquiry to the acquiring activity issuing the invitation for bids.

6.4. Figures. Figures 1 through 3 are furnished for information purposes only. To the extend of conflict between these figures and the text of this specification, the text of this specification will govern.

6.5. Subject term (keyword) listing.

Hanger braid
Slide fastener
Waistband
Watch pocket

6.6. Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Preparing Activity:
Navy - MC
Project No. 8410-N345

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:50Z
Check the source to verify that this is the current version before use.

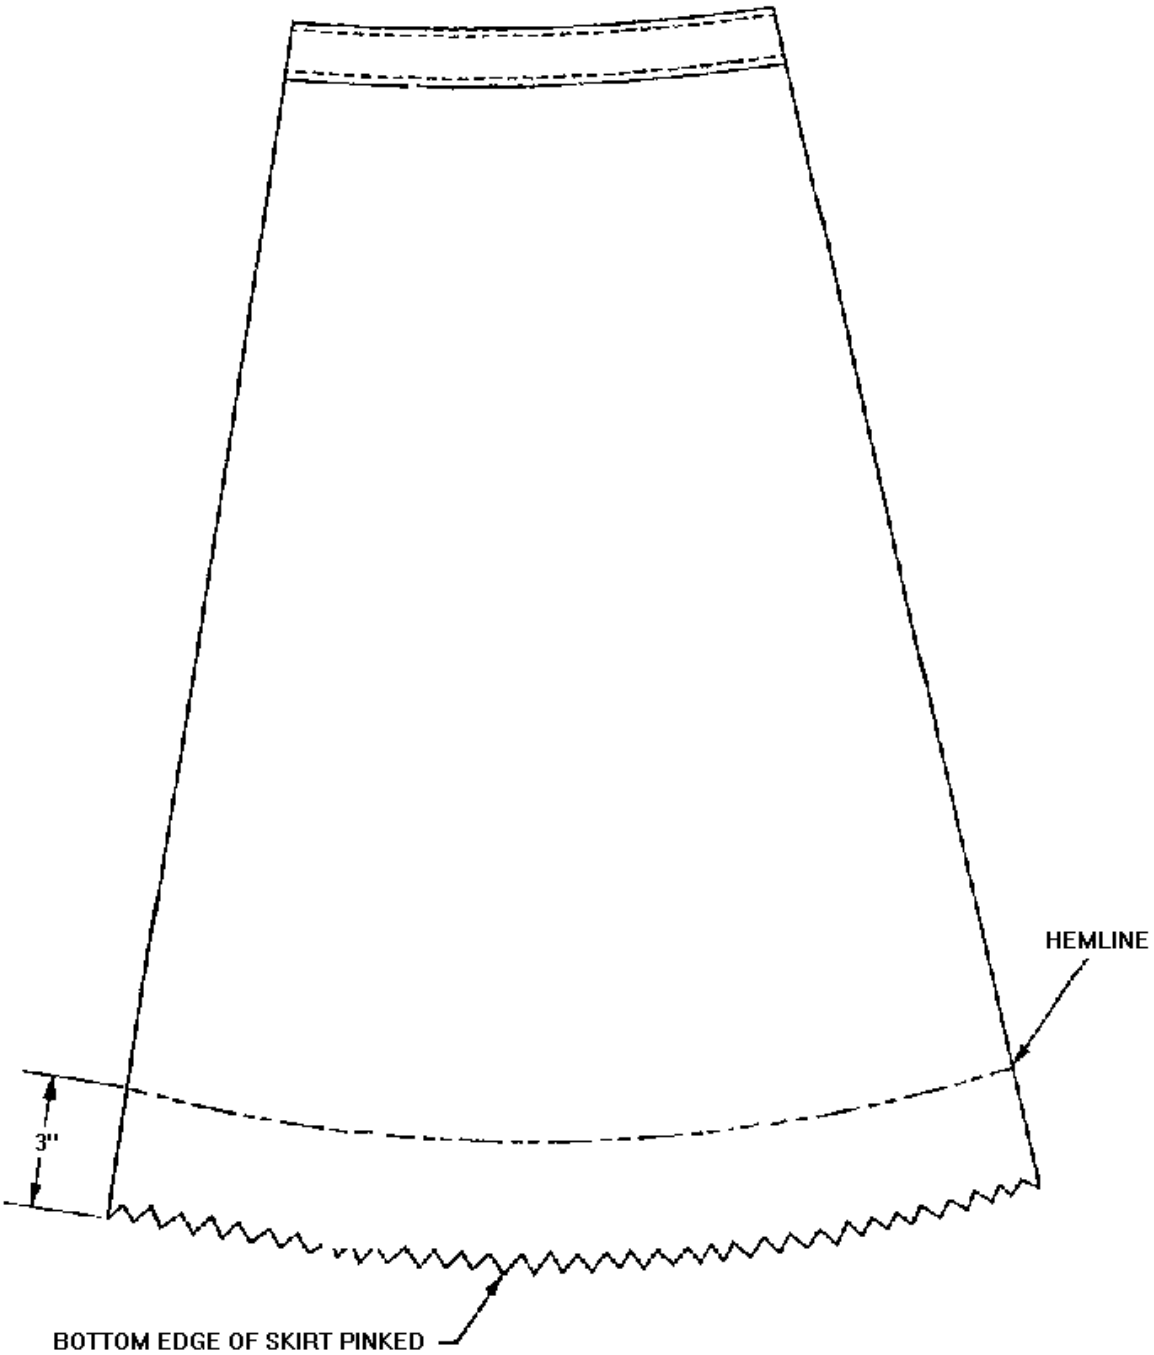


Figure 1. Skirts, Women's - Evening Dress, U.S. Marine Band (Musician's)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:50Z
Check the source to verify that this is the current version before use.

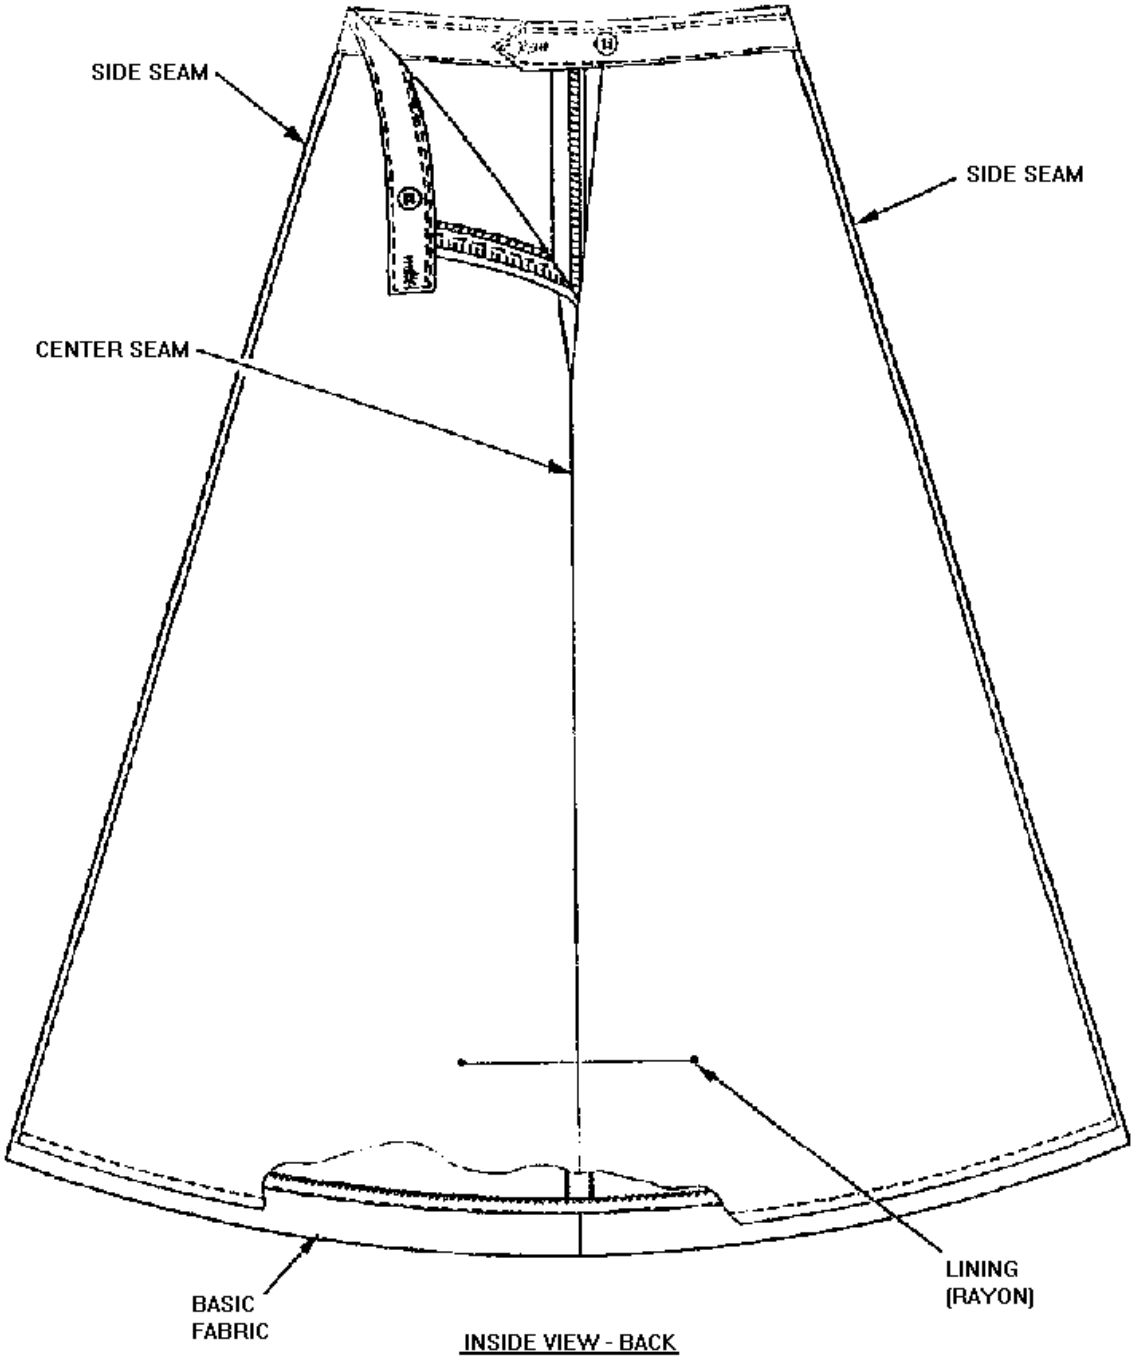


Figure 2. Skirts, Women's - Evening Dress, U.S. Marine Band (Musician's)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:50Z
Check the source to verify that this is the current version before use.

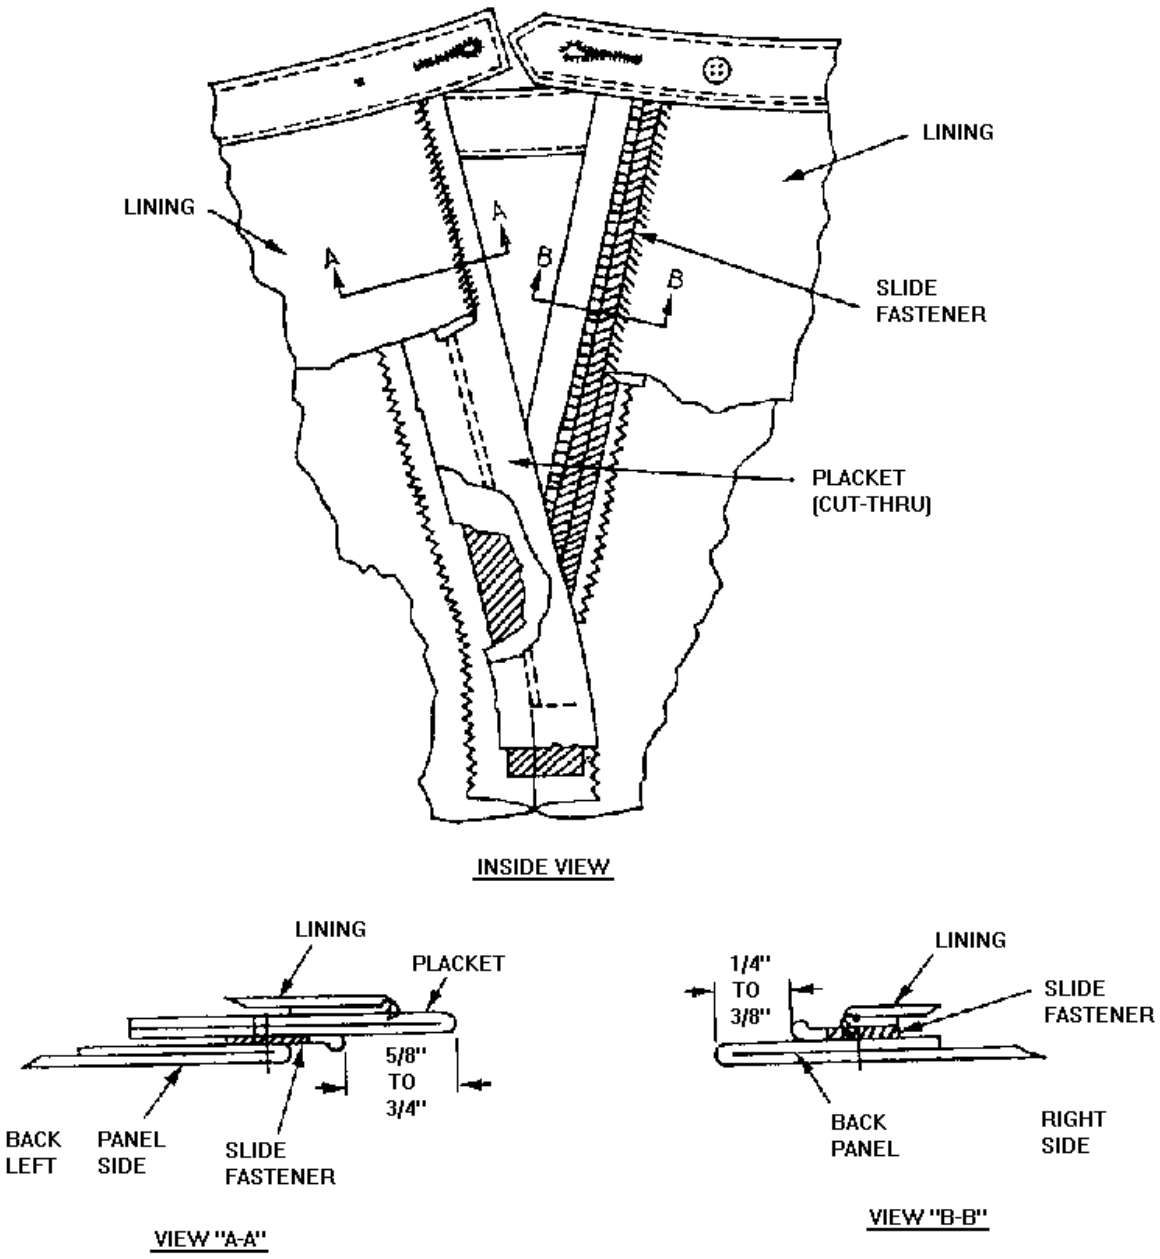


Figure 3. Skirts, Women's - Evening Dress, U.S. Marine Band (Musician's)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:50Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.

2. The submitter of this form must complete blocks 4, 5, 6, and 7.

3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	**1. DOCUMENT NUMBER** MIL-DTL-29394C(MC)	**2. DOCUMENT DATE (YYMMDD)** 971008

3. DOCUMENT TITLE COAT, MAN'S - FULL DRESS, SUMMER AND WINTER, SCARLET U.S. MARINE BAND, DRUM MAJOR

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME *(Last, First, Middle Initial)*	b. ORGANIZATION	
c. ADDRESS *(Include Zip Code)*	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON *(if applicable)*	**7. DATE SUBMITTED** (YYMMDD)

8. PREPARING ACTIVITY

a. NAME COMMANDER, MARCORSYSCOM, PSE-D	b. TELEPHONE *Include Area Code)* (1) Commercial (703)784-4584 (2) AUTOVON 278-4584
c. ADDRESS *(Include Zip Code)* 2033 BARNETT AVE, SUITE 315 QUANTICO, VA 22134-5010	**IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:** DEFENSE QUALITY AND STANDARDIZATION OFFICE 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22401-3466 Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:50Z
Check the source to verify that this is the current version before use.