MIL-S-29364C(MC)
5 September 1985
SUPERSEDING
MIL-S-29364B(MC)
12 March 1980

MILITARY SPECIFICATION

SLACKS, WOMEN'S

This specification is approved for use by U. S. Marine Corps, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for women's slacks.

1.2 Classification. The slacks shall be of one type in the following classes, sizes and lengths (see 6.2).

Class

Class 1 - Wool Serge, Green, Shade 2207
Class 2 - Polyester/Wool, Tropical, Green Shade 2241
Class 3 - Wool Gabardine, Light Blue 2317
Class 4 - Polyester Rayon Gabardine, White 2400
Class 5 - Wool Elastique, Sky Blue 2311
Class 6 - Polyester Rayon Gabardine (lined), White 2400

Schedule of Sizes and Lengths

Sizes - 4, 6, 8, 10, 12, 14, 16, 18, 20 and 22
Lengths - Short, Regular and Long

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. Unless otherwise specified, the following specifications, standards, and handbooks of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this specification to the extent specified herein.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to the Commandant of the Marine Corps (LMA-1), Headquarters, U. S. Marine Corps, Washington, D. C. 20380, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8410

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:34Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

V-B-871	- Button, Sewing Hole, and Button, Staple (Plastic)
V-F-106	- Fastener, Slide, Interlocking
V-T-276	- Thread, Cotton
V-T-280	- Thread, Gimp, Cotton, Buttonhole
V-T-295	- Thread, Nylon
V-T-301	- Thread; Silk
DDD-L-20	- Label; For Clothing, Equipage, and Tentage (General Use)

MILITARY

MIL-C-823	- Cloth, Serge, Wool; Wool and Nylon; Polyester and Wool
MIL-C-3738	- Cloth, Elastique, Wool
MIL-C-10176	- Cloth, Gabardine, Wool, Polyester and Wool
MIL-B-17757	- Box, Shipping, Fiberboard (Modular Sizes)
MIL-C-21115	- Cloth, Tropical, Wool, Polyester/Wool
MIL-C-41820	- Cloth, Gabardine, Polyester and Rayon
MIL-T-43548	- Thread, Polyester, Cotton-covered
MIL-C-29405	- Cloth, Broadcloth, Wool and Wool/Nylon

STANDARDS

FEDERAL

FED-STD-191	- Textile Test Methods
FED-STD-751	- Stitch, Seam and Stitching

MILITARY

MIL-STD-147	- Palletized Unit Loads
MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-656	- Provisions for Evaluating Quality of Slacks Women's

(Copies of specifications, standards, handbooks, drawings, and publications required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer).

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:34Z
Check the source to verify that this is the current version before use.

LAWS AND REGULATIONS

U. S. POSTAL SERVICE MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, U. S. Government Printing Office, Washington, D.C. 20402.)

2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. The issues of the documents which are indicated as DoD adopted shall be the issue listed in the current DoDISS and the supplement thereto, if applicable.

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification Rules

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza; Chicago, Illinois 60606.)

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Association, Inc, Tariff Order Section 1616 P Street, N.W., Washington, D. C. 20026.)

Department of Defense (DOD) Standard Color Card of
Official Standardized Shades for Sewing Threads 1968

Department of Defense (DoD) Standard Shades for Buttons 1966

(Copies may be obtained from the Color Association of the United States, Inc., 200 Madison Avenue, New York, New York 10016.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Guide sample. Guide samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variation from this specification may appear in the sample, in which case this specification shall govern.

3.2 First article. When specified (see 6.2), the contractor shall furnish sample slacks for first article inspection and approval.

3.3 Materials.

3.3.1 Basic materials. The basic material for each class of slacks shall be as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:34Z
Check the source to verify that this is the current version before use.

a. Class 1. Cloth, 12-ounce wool, serge, green, shade 2207 conforming to type I, class 8, of MIL-C-823.

b. Class 2. Cloth, 10-ounce, polyester/wool, tropical, green shade 2241 conforming to type III, class 3 of MIL-C-21115.

c. Class 3. Cloth, 14.5-ounce, wool, gabardine, light blue shade 2317 conforming to type I, class 5 of MIL-C-10176.

d. Class 4. Cloth, 8-ounce, polyester and rayon, gabardine, white shade 2400 conforming to type III, class 1 of MIL-C-41820.

e. Class 5. Cloth, 16-ounce, wool elastique, light blue shade 2311, type III of MIL-C-3738.

f. Class 6. Cloth, 8-ounce, polyester and rayon, gabardine, white shade 2400 conforming to type III, class 1 of MIL-C-41820.

3.3.2 Lining. The material for lining the class 6 shall be cloth, nylon, 1.6 ounce, white shade 2414 conforming to the following requirements when tested as specified in Section 4 Table III.

Weight - ounces per square yard (minimum)	1.6
Yarns per inch (minimum):	
- warp	104
- filling	67
Weave	Plain
Breaking strength - pounds (minimum): (Dry)	
- warp	142
- filling	96
Tearing strength - pounds (minimum)	
- warp	53
- filling	72
Acidity (pH)	5.0 to 8.
Material identification:	
- warp	Nylon
- filling	Nylon

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:34Z
Check the source to verify that this is the current version before use.

3.3.3 Ornamental stripes. The ornamental stripes for class 5 slacks shall be cloth, broadcloth, wool, or wool and nylon, scarlet shade 2501, conforming to type I or type II of MIL-C-29405.

3.3.4 Thread. The thread for each class of slacks shall be as follows:

a. Class 1, 2, 3, 4 and 6. Cotton thread shall be used conforming to V-T-276 as follows:

Operation	Type	Ticket No.	Ply
Buttonholes	IC2	0	3
Seams, stitching	IA3	30, 50	3
Overedging	IA3	70	2
Buttons	IB3	16, 20	4

As an alternate to the cotton thread, a polyester, cotton-covered thread conforming to MIL-T-43548, ticket No. 50, 3 ply or ticket No. 70, 2 ply may be used. CAUTION: Some automatic machines will not operate properly with this thread.

b. Class 5. All outside seaming and stitching shall be performed with silk thread conforming to type I of V-T-301 and all other seaming and stitching with cotton thread conforming to type I of V-T-276 as follows:

Operation	Type	Ticket No.	Ply	Material	Needle/Bobbin
Topstitching	---	A	3	Silk	Needle
	IC2	A	3	Cotton	Bobbin
Inseaming, outseaming seat seaming	IC2	A	3	Cotton	Both
Overedging	IA3	70	2	Cotton	Both
Buttonholes	---	A	3	Silk	Bobbin
	IC2	A	3	Cotton	Needle
Buttons	IB3	24	4	Cotton	Both
All other seaming and stitching	IA3	40	3	Cotton	Both

3.3.4.1 Automatic button sewing. If an automatic machine which sews and shanks (wraps) the buttons in one operation is used, the thread shall be waxed nylon monocord special No. 5, having a minimum breaking strength of 16 pounds and a minimum length per pound of 2150 yards. This thread shall be tested for these requirements and for colorfastness (see 3.3.4.3) in accordance with test methods in V-T-295.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:34Z
Check the source to verify that this is the current version before use.

3.3.4.2 Color. The color of the thread for each class of slacks shall conform to the following:

a. Class 1 and 2. Olive Drab, T-1, Cable No 66023

b. Class 3. Blue, AT, Cable No 66060

c. Class 4 and 6. White, AG, Cable No 66049

d. Class 5. Blue shade to approximate the basic fabric blue shade 2311 (see 3.3.1(e)). The thread for attaching the ornamental stripes shall scarlet shade W, Cable No. 66040.

NOTE: See DoD Standard Color Card of Official Standardized Shades for Sewing Threads 1968.

3.3.4.3 Colorfastness. The colored thread shall show fastness to light and wet dry-cleaning equal to or better than the standard sample. When a standard sample is not available, the colored thread shall show "good" fastness to light and wet dry-cleaning.

3.3.5 Gimp. The gimp for reinforcing the buttonhole shall conform to type I or II, size No. 8 of V-T-280. The color of the gimp shall be the same as indicated for thread in 3.3.4.2 with same colorfastness requirements specified for thread in 3.3.4.3.

3.3.6 Button. The button for the waistband shall be 27-line conforming to type II, class D, style 4 of V-B-871. The color of the buttons for each class of slacks shall be as follows: (See DOD Standard Shades for Buttons, 1966.)

a. Class 1 and 2. Green, Shade AF, Cable No 62017.

b. Class 3 and 5. Blue, Shade BV, Cable No 62003.

c. Class 4 and 6. White, Shade BA, Cable No 62031.

3.3.7 Slide fasteners. The slide fasteners shall conform to either 3.3.7.1 or 3.3.7.2.

3.3.7.1 Metal. The slide fasteners shall conform to type I, style 3, short tab pull, cam lock size LS (commercial No. 4), of V-F-106, except that the salt spray test shall not be required. All the components of the slide fastener shall be brass and from the same supplier (see 4.5.1). The tape shall be cotton or synthetic or a combination. The length of the slide fastener shall be 7 inches for all sizes.

3.3.7.2 Plastic coil. The slide fastener shall be manufactured of polyester or nylon consisting of an automatic or cam lock and shall be equal to commercial size No. 2. The tape shall be a blend of nylon and cotton or polyester and cotton or polyester. The length of the slide fastener shall be 7 inches for all sizes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:34Z
Check the source to verify that this is the current version before use.

3.3.7.3 Color. The color of the slide fastener tape shall be as follows:

a. Class 1 and 2. Green, Shade AF, Cable No 66531.

b. Class 3 and 5. Blue, Shade AA, Cable No 66527.

c. Class 4 and 6. White, Shade C, Cable No 66503.

3.3.7.4 Colorfastness. The dyed slide fastener tape shall show colorfastness to laundering equal to or better than the guide sample when tested as specified in V-F-106. When a guide sample is not available, the tape shall show "good" colorfastness when tested as specified in V-F-106.

3.3.8 Combination label. Each pair of slacks shall have a combination identification, size, and instruction label conforming to type VI, classes 1, 2 and 3 of DDD-L-20. The slacks are intended to be dry cleaned and the labels shall show fastness to dry cleaning. The inscription shall be as follows:

SLACKS, WOMEN'S
SIZE: 14R (Example)
STOCK NO.: 8410-00-000-0000 (Example)
CONTRACT NO.: DLA-100-C-0000 (Example)
NAME OF CONTRACTOR
DRY CLEAN ONLY

The lengths (Short, Regular and Long) may be abbreviated as S, R or L.

3.4 Design. The slacks shall be the Marine Corps design shown on Figures 1 and 2 having a two piece waistband with button closure and outlet at seat seam, inner hanging watch pocket on right front, front fly with slide fastener and straight legs with unhemmed overedged bottoms. The class 5 slacks shall have an ornamental stripe sewn to each outseam. The class 6 slacks shall be lined.

3.5 Patterns. Standard patterns to be used to cut working patterns will be furnished by the Government (see 6.3). The patterns allow 1/2 inch seam allowance for all seams, except as otherwise indicated herein. The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way.

3.5.1 Pattern parts. The component parts of the slacks shall be cut from materials as specified herein in accordance with the pattern parts indicated below:

Pattern Nomenclature

Item	Basic Material	No. of Cut Parts
1.	Front	2
2.	Back	2
3.	Left Waistband	1
4.	Right Waistband	1
5.	Left Fly	1
6.	Right Fly	1

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:34Z
Check the source to verify that this is the current version before use.

	Lining (class 6 only)	
7.	Watch Pocket	2
8.	Front (use item 1)	2
9.	Back (use item 2)	2
	Interlining	1
10.	Left Fly	1
11.	Left Waistband	1
12.	Right Waistband	1

3.6 Construction. Te slacks shall be manufactured in accordance with operation requirements as specified in Table I. The contractor is not required to follow the exact sequence of operations as listed in Table I, but all operations specified shall be used to manufacture the slacks.

3.6.1 Stitches, seams, and stitching. Stitch, seam and stitching types specified shall conform to FED-STD-751. Whenever two or more methods for seam or stitching types are given for the same part of the operation, any one of them may be used. Where stitch 401 is used, the looper (underthread) shall be on the inside of the slacks. The minimum and maximum number of stitches per inch shall be as specified in Table I.

3.6.1.1 Thread breaks and ends of seams. Ends of all seams and stitchings when not caught in other seams or stitchings shall be backtacked not less than 1/4 inch. The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. Thread breaks (all stitch types) shall be secured by stitching back of break not less than 1/2 inch. Skipped stitches or thread breaks may be repaired by using 301 stitch type.

3.6.2 Buttonhole. The buttonhole shall be eyelet end, taper bar type. The finished cut length of buttonhole shall be 5/8 inch.

3.6.3 Pressing. Pressing as required in Table I shall be accomplished with a heated pressing iron or machine.

3.6.4 Shade marking. The component parts shall be marked to insure a uniform shade and size throughout the slacks. Any method of shade marking may be used except:

a. Corrosive metal fastening devices.
b. Sew-on shade tickets.
c. Adhesive type tickets, which leave traces of paper or adhesive on material after removal of tickets.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:34Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

IO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
1.	Cutting. a. Cut the slacks in strict accordance with patterns furnished, which shall show size, placement of component parts, directional lines for cutting, marks (for finished length of darts) and notches for proper assembly of parts. b. All component parts of the basic material shall be cut from one piece of material except fly facings, which may be cut from ends. Parts cut from ends shall approximate the shade of the main assembly. c. Place fronts and backs so that the directional line is in the warp direction. The directional line may vary from the warp direction by not more than 1 inch on fronts and backs. Measurement shall be taken from the top and bottom of the directional line on the pattern to the selvage edge of the fabric. The difference between the two measurements shall not exceed the tolerance specified. d. Cut the waistbands and left fly interlining in accordance with the patterns. e. Cut the ornamental stripes in the warp direction. Cut the stripes 3 inches wide. f. Cut the front and back lining parts for class 6 slacks from one piece of nylon lining material.					
2.	Shade marking. a. Mark or ticket all component parts of slacks except parts cut from ends, to insure a correct size and uniform shade throughout the slacks (or uniform).					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:34Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
2.	Shade marking. (cont'd)					
	b. The use of corrosive metal fastening devices or sewn-on tickets for shade marking is prohibited.					
	c. The use of ink pad numbering machine, rubber stamp, or pencil is acceptable provided the numbers do not show on the outside of the slacks and whenever possible, numbers shall be covered by the seam allowance.					
3.	Replacement of defective components					
	During the spreading, cutting and manufacturing process, components having material defects or damages that are classified as defects in MIL-STD-656 shall be removed from production and replaced with nondefective and properly matched components.					
4.	Make ornamental stripes (Class 5 only).					
	Finished appearance. The ornamental stripes shall be basted without distortions and the finished stripe shall be uniformly 1-1/2 inches wide for type 5 slacks only.					
	a. Fold the raw edges of the stripes so that they abut each other at the center back and baste along the folded edges.	101		4-6	(white)	
5.	Make darts (basic material).					
	The darts shall be tapered on the inside without twists or puckers. Thread ends at lower end of darts shall not be trimmed closer than 1/2 inch in length. End of dart need not be backtacked except when automatic dart machine is used.					
	a. Fold and stitch back darts as indicated by notches and marks on	301	OSf-1	10-14	50/3	50/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:34Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

O	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
5.	Make darts (basic material). (cont'd)					
	the pattern and press toward center back. Stitch across top of dart 1/8 inch from raw edge.					
	b. Fold and stitch front darts as indicated by notches and marks on the pattern and press toward the center front. Stitch across the top of dart 1/8 inch from raw edge.	301	OSf-1	10-14	50/3	50/3
6.	Make darts (lining - class 6).					
	The darts shall be tapered on the inside without twists or puckers. Thread ends at lower end of darts shall not be trimmed closer than 1/2 inch in length. End of dart need not be backtacked except when automatic dart machine is used.					
	a. Fold and stitch back darts as indicated by notches and marks on the pattern and press toward center back. Stitch across top of dart 1/8 inch from raw edge.	301	OSf-1	10-14	50/3	50/3
	b. Fold and stitch front darts as indicated by notches and marks on the pattern and press toward the center front. Stitch across top of dart 1/8 inch from raw edge.	301	OSf-1	10-14	50/3	50/3
7.	Join lining to slacks (class 6).					
	Finished appearance. The front and back lining parts shall be joined to the front and back of the slacks without twists, puckers, pleats or distortion.					
	a. Position front and front lining back to back with edges even and notches matching. Seam together 1/8 inch from all edges.	301	SSa-1	10-14	50/3	50/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:34Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
7.	Join lining to slacks (class 6). (cont'd)					
	b. Position back and back lining back to back with edges even and notches matching. Seam together 1/8 inch from all edges.	301	OSf-1	10-14	50/3	50/3
8.	Overedge stitching.					
	a. Overedge stitch the raw edges of outseams and inseams of front and back parts and bottom edge of each leg.	503 or 504	EFd-1	6-10	70/2	70/2
	b. Overedge stitch the raw edges of center front seam, and seat seam.	503 or 504	EFd-1	6-10	70/2	70/2
	c. Fold fly piece in half lengthwise and overedge stitch side and bottom raw edges together.	503 or 504	EFd-1	6-10	70/2	70/2
	d. Position the interlining on the left fly facing and overedge stitch the back edge of interlining and facing together.	503 or 504	EFd-1	6-10	70/2	70/2
9.	Make watch pocket and attach label					
	a. The watch pocket shall be made of two plies of basic material and shall finish not less than 3 inches long.					
	b. Hem the top of one ply of pocket in accordance with the notches, with the raw edge turned under and caught in the stitching 1/16 inch from bottom folded edge of hem. The hem shall finish 1/2 ± 1/8 inch wide.	301	SSa-1	10-14	50/3	50/3
	c. Position label on the center of watch pocket, facing the wearer. Stitch the label to the pocket 1/16 to 1/8 inch from the raw edges of label.	301	SSa-1	10-14	50/3	50/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:34Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
9.	Make watch pocket and attach label. (cont'd)					
	d. Position both plies of watch pocket face up and with sides and bottom edges even. Join both plies together 3/8 inch from raw edges.	301	SSa-1	10-14	50/3	50/3
	e. Overedge stitch the raw edges of side and bottom of pocket.	503 or 504	EFd-1	6-10	70	70/2
	- or -					
	f. The watch pocket may be joined by seaming and overedge stitching the raw edges together in one operation.	516 or 517	SSa-2	10-14	70	70/2
10.	Attach watch pocket.					
	a. Position the watch pocket on the inside of the right front, with the right edge of watch pocket 1 inch from the side seam and with upper raw edges even.					
	b. Stitch pocket and front together 1/4 inch from the upper raw edge. The pocket opening shall face the wearer.	301	SSa-1	10-14	50	50/3
11.	Make waistband.					
	Finished appearance. The two piece waistband is constructed with left and right parts. Each part consists of 1 ply of basic material and 1 ply of interlining. The left waistband has a pointed front end and the right waistband has a square end. The center back of waistbands have finished square ends.					
	a. Overedge stitch the inside raw edge of left and right waistbands, and interlinings.	503 or 504	EFd-1	6-10	70/2	70/2
	b. Fold the left waistband in half lengthwise, face to face, with ends even and notches matching. Join	301	SSe-2(a)	10-14	50/3	50/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:34Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPI
11.	Make waistband. (cont'd)					
	the plies together at the pointed end with a 1/4 inch seam, starting at the notches, forming the pointed end and up to the folded edge. Finish the square end of left waistband with a 1/4 inch seam, turning up 1/4 inch of raw edge and seaming across the width of the waistband and through all plies to close the end.					
	c. Fold the right waistband in half lengthwise face to face with ends even. Finish each square end with a 1/4 inch seam, turning up 1/4 inch of raw edge and seaming across the width of the waistband and through all plies to close the end.	301	SSe-2(a)	10-14	50/3	50/
	d. Trim the excess material at each end to 1/8 inch from the seams. Turn the right and left waistbands, forcing out the corners and point completely. Edgestitch 1/16 inch from the seamed edges at the pointed and squared ends.	301	SSe-2(a)	10-14	50/3	50/
	e. Continue to edgestitch along the length of the waistband 1/16 inch from the upper folded edge.	301	OSf-1	10-14	50/3	50/
	f. The edgestitching may be performed continuously with the top stitching on the outside of the waistband in operation 19a.					
12.	Join outseams.					
	Finished appearance. Outseams shall be carefully joined with notches matching and without twists, pucker or pleats. The seam shall start an finish evenly.					
	a. Join the outseams with a 1/2 inch seam, matching the notches as indicated by the marks on the patterns.	301 or 401	SSa-1	10-14	50/3 50/3	70/ 70

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:34Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

)	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
12.	Join outseams. (cont'd)					
	b. Press seam open and flat.					
13.	Attach ornamental stripes (class 5 only).					
	Finished appearance. The ornamentation shall be set on the slacks from the top edge of waist to the bottom edge of legs, with the top end to finish in the waistband seam. The ornamentation shall be securely and uniformly stitched, properly positioned and shall finish without distortion.					
	a. Position the ornamental stripes along the outside seam at the right and left side with the stripe centered over seam line. Stitch each side of the stripe 1/4 inch from the folded edge.	301	SSat-2	10-14	A (silk	A
14.	Join inseams.					
	a. Match notches at front and back of inseam and join with a 1/2 inch seam from notch to bottom.	301 or 401	SSa-1	10-14	50/3 50/3	50/3 50/3
	b. Press inseam open and flat.					
15.	Make left fly.					
	Finished appearance. The left fly shall finish smooth and flat without twists, puckering or distortion. The overedge stitching shall be securely caught in the fabric.					
	a. Position the slide fastener on the left fly facing and left fly interlining with bottom end of chain 1/4 inch above the fly notch and top edges even. The front edge of chain shall be 1/2 to 5/8 inch from front edge of finished fly. Stitch slide fastener tape to the fly through the interlining with a double row of stitches 3/16 to 1/4 inch gage.	301	LSbj-2	12-16	50/3	50/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:34Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
16.	Make right fly.					
	Finished appearance. The right fly shall finish without bulkiness, twists, puckers or pleats.					
	a. Position the slide fastener on the fly with the slide fastener tape 1/2 inch from the overedged seam and the top edges even. Stitch the slide fastener to the fly 1/2 inch from the back edge of fly.	301	LSbj-2	12-16	50/3	50/3
17.	Join left and right fly to front.					
	Finished appearance. The seam joining the fly assemblies to the front shall be without pleats, puckers, twists or other distortions.					
	a. Position the left fly assembly on the outside of left front, face to face, with notches matching. Join left fly assembly to front with a 1/2 inch seam.	301	SSa-1	12-16	50/3	50/3
	b. Turn joining seam onto fly assembly and stitch 1/16 inch from seamed edge, starting at top raw edge of fly to the notch.	301	LSb-1	12-16	50/3	50/3
	c. Turn left fly to the inside with joining seam 1/16 to 1/8 inch back of folded edge. Press front edge without damage to the fastener, forcing out the seams to the edge.					
	d. Stitch left fly to left front, starting at the top and continue with a curve to the bottom notch. The stitching shall be 1 1/4 inches from the front edge of the fly.	301	SSa-1	12-16	50/3	50/3
	e. Position right fly assembly on right front with overedged edges and top raw edges even. Join right fly to front with 1/2 inch seam.	301	SSa-1	12-16	50/3	50/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:34Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
17.	Join left and right fly to front. (cont'd)					
	f. Press right and left fly flat with heated pressing iron and with the seam toward the side seam.					
	g. Edge stitch 1/16 inch from the front seamed edge, through the slide fastener tape and the placket.	301	LSq-2(b)	12-16	50/3	50/3
18.	Join waistband to slacks.					
	Finished appearance. The waistband shall be joined without twists, puickers, pleats or distortions. The back square ends of the waistband shall be even with the seat seams.					
	a. Position the left waistband on the left front, face to face, with the notch and finished left fly opening matching. Join together with a 1/4 inch seam.	301	SSa-1	12-16	50/3	50/3
	b. Position the right waistband on the outside of slacks, face to face, with square end and folded edge of placket even. Join together with a 1/4 inch seam.					
	Note: Class 5 slacks. The top of the ornamental stripe shall be caught in the seam.					
19.	Topstitch waistband.					
	Finished appearance. The waistband shall be sewn on smoothly and evenly and shall have a flat appearance throughout, without gathers, puckers, pleats or other distortions either in the waistband, front part or back part, and shall be even in width along the entire length. The waistband shall be 1-3/8 ± 1/8 inches wide.					
	a. Topstitch the waistband to the slacks 1/16 inch from the lower folded edge, catching the overedge	301	BSr-2 (a)	10-14	50/3	50/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:34Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
19	Topstitch waistband. (cont'd) stitched portion of waistband in the stitching, and with the stitching extending the entire length of the waistband.					
20	Join crotch and seat seam. Finished appearance. The crotch and seat seams shall be joined with stitch tension of sufficient elasticity to meet strain encountered in sitting and stooping. The waist shall be measured before joining crotch and seat seam to assure correct waist size. In the finished slacks, the inseams shall meet and the right and left waistband joining seams shall be aligned; the base of the left fly shall cover the right fly on the outside. a. Measure waist to proper size before joining crotch, seat and waist seam. b. Join crotch and seat seams from the base of the fly to the notch with a 1/2 inch seam, tapering from the notch through waistband to accomplish the measured size. c. Spread open crotch and seat seams and press smooth and flat with a heated pressing machine. d. The inseam at the crotch shall not stagger more than 1/4 inch. e. Blindstitch each end of the center back waistband to the inside waistband the width of the waistband.	401	SSa-1	8-10 (each needle)	AA Polyester	AA Polyeste
21	Bartack fly. Finished appearance. The bartacks shall be properly positioned and correctly placed to reinforce the points of strain.	101 or hand	EF1-1	8-10	50/3	50/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:34Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
21.	Bartack fly. (cont'd)					
	a. Bartack the bottom end of the fly horizontally through all plies at the juncture of the crotch seam and fly (see figure 2).	Bartack		21-28 per bartack	0	0
	b. Bartack on the inside front edge of right fly to back of left fly with a horizontal bartack, with bartack 1 inch from bottom folded point of right fly.	Bartack		21-28 per bartack	0	0
	c. Bartacks shall be 3/8 to 1/2 inch long and shall be stitched through all plies of material at the point of bartacking.	Bartack		21-28 per bartack	0	0
22.	Make buttonhole.					
	Finished appearance. The buttonhole shall be clean cut, well made and correctly positioned. The stitching shall be securely caught in the basic material. The buttonhole shall be well worked over gimp to fit a 27-line button. The purling of the buttonhole shall be on the outside of the waistband.					
	a. Make 3/4-inch-long horizontal, eyelet-end, taper-bar type buttonhole through the center of the pointed end of waistband with the inside, purled edge of the eyelet 1/2 to 5/8 inch from the finished ends to waistband.	Buttonhole	44-50 per Buttonhole including tack		0	0
23.	Clean slacks.					
	a. All ends of stitching shall be trimmed and the loose threads removed from slacks. Pull and remove any basting threads.					
	b. Any spots, stains and shade tickets or markings shall be removed without injury to the material.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:34Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
24.	Sew on button.					
	a. Close the slide fastener and mark or gage the outside ends of waistband with the location for sewing on the button to correspond with the eyelet of buttonhole.					
	b. The button shall be positioned to engage with the eyelet end of buttonhole so that on the finished slacks, the ends of the waistband lie smooth and flat without twisting, bulging, or other distortions.					
	c. Securely sew a 27-line button at the mark. The thread ends of hand sewn buttons shall be securely tacked. The button on the outside of waistband shall be sewn through all plies of waistband.	101 or Hand		14-16 per button 4 double per button not including shank wrapping	20/4 20/4 10/4	20/4
25.	Press slacks.					
	a. The tops shall be pressed smooth.					
	b. The legs shall be pressed smooth and creased in the center with the seams matching at the bottom and in the crotch.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:34Z
Check the source to verify that this is the current version before use.

3.7 Finished measurement. Finished measurements of slacks shall be as listed in Table II.

TABLE II. FINISHED MEASUREMENTS 1/

Size	A Waist	B Hips	C Length Inseam Short	C Length Inseam Regular	C Length Inseam Long	D Knee	E Bottom
4	22-1/2	34	32	34		18-3/8	18-3/8
6	23-1/2	35	32	34	36	18-1/2	18-1/2
8	24-1/2	36	32	34	36	18-5/8	18-5/8
10	25-1/2	37	32	34	36	18-3/4	18-3/4
12	27	38-1/2	32	34	36	18-7/8	18-7/8
14	28-1/2	40	32	34	36	19	19
16	30	41-1/2	32	34	36	19-1/8	19-1/8
18	32	43-1/2	32	34	36	19-1/4	19-1/4
20	34	45-1/2	32	34	36	19-3/8	19-3/8
22	36	47-1/2	32	34	36	19-1/2	19-1/2
Tolerance	± 1/2	± 1/2	± 1/2	± 1/2	± 1/2	± 1/2	± 1/2

A. Waist. Twice the measurement taken in center of waistband from folded edge to folded edge.

B. Hips. Twice the measurement taken from folded edge to folded edge 7 inches from bottom of waistband.

C. Inseam. Length measurement taken along inseam from crotch seam to unfinished bottom of legs.

D. Knee. Twice the measurement taken from folded edge to folded edge across the width of slack leg at a point up from unfinished bottom of leg as follows: Short - 19-1/2 (±1/4) inches; Regular - 20-1/2 (±1/4) inches; Long - 21-1/2 (±1/4) inches.

E. Bottom. Twice the measurement taken from folded edge to folded edge across unfinished bottom of leg.

1/ All measurements and tolerances are expressed in inches.

3.8 Workmanship. The finished slacks shall conform to the quality and grade of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable point value or defect limit.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disap-

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:34Z
Check the source to verify that this is the current version before use.

proved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to the prescribed requirements.

4.1.1 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.4). .
2. Quality conformance inspection (see 4.5).

4.3 Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with the test conditions specified in MIL-STD-656.

4.4 First article inspection. When first article is required, inspection shall be made of a completely fabricated pair of slacks for all provisions in this specification.

4.5 Quality conformance inspection. Inspection shall be performed in accordance with MIL-STD-656.

4.5.1 Testing of components. Testing of components shall be in accordance with the applicable subsidiary specifications and standards to the extent applicable, except that this specification shall govern in the event of conflict. The method of testing shall be as specified in FED-STD-191, wherever applicable. Testing shall be performed on components listed in Table III for characteristics noted. A certificate of compliance will be acceptable for the plastic coil slide fastener requirements of 3.3.7.2. In addition, the requirements that all components of the slide fastener have been furnished by one supplier shall be accepted on a certification of compliance (see 3.3.7.1). Further, the contractor shall furnish a certificate of compliance for the nylon lining material as required by 3.3.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:34Z
Check the source to verify that this is the current version before use.

TABLE III. TEST METHODS

Components	Characteristics	Req. para	Test method	Determination per sample unit	Results reported as:
Lining	Material identification	3.3.2	1530	1	Pass or fail
	Weight-oz/sq. yd.	3.3.2	5041	5	Pass or fail
	Breaking strength-lbs: - warp - filling	3.3.2	5100	5	Avg. of the 5 det in each direction to the nearest 1.0 lb.
	Tearing strength - lbs: - warp - filling	3.3.2	5134	5	Avg. of the 5 det in each direction to the nearest 1.0 lb.
	Yarns per inch (min.) - warp - filling	3.3.2	5050	5	Avg. of the 5 det in each direction.
	Shrinkage	3.3.2	See 1/	1	Pass or fail
	Weave	3.3.2	Visual	1	Pass of fail
	Acidity (pH)	3.3.2	2811	5	Avg. of the 5 det

1/ Determination of shrinkage. Shrinkage shall be determined in accordance with Method 5558 except that the specimen shall be 22 inches by 22 inches without slits, soaked for 1 hour, and if an extractor is not available, the excess water shall be removed by wrapping the specimen in a towel or similar material and squeezed by hand. Wringing by hand or passing the specimen between squeeze rollers is prohibited. The extracted specimen shall be dried by pressing at a temperature not to exceed 275 degrees.

4.5.2 In process inspection. Inspection shall be performed during the manufacturing of the end item to ascertain that the operations are performed as specified herein. The Government reserves the right to determine the acceptability of construction methods not performed in accordance with specified requirements for operations or subassemblies.

4.5.3 End item examination. Samplings and examination of the end item shall be performed for dress (D) slacks in accordance with the provisions of MIL-STD-656.

4.5.3.1 Finished measurement examination. The provisions for the finished measurement examination of the finished slacks shall be as specified in MIL-STD-656 and as outlined in 3.7.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:34Z
Check the source to verify that this is the current version before use.

4.5.4 Examination of packaging requirements. The examination for compliance with packaging, packing and marking requirements shall be as specified in MIL-STD-656.

5. PACKAGING

5.1 Packaging. Packaging shall be level A or commercial (see 6.2).

5.1.1 Level A. Each pair of slacks shall be neatly folded so that the length dimension is approximately 23 inches. Each pair of folded slacks shall be inserted in a snug-fitting flat clear polyethylene film bag of 0.00125 inch thickness (+ 20 percent tolerance). The bag may be fabricated from polyethylene film tubing or sheeting. The polyethylene bag shall be formed with heat sealed seams that are straight, continuous and parallel to each other and the formed edge of the bag. The final closure of the bag shall be heat sealed with the seam made as close as possible to the open end. A 1/4 inch diameter hole shall be made at one corner of the polyethylene bag to allow excess air to escape. As an alternate, the polyethylene bag may be of the tuck-in or reverse flap type, in which a heat seal closure and corner vent hole are not required.

5.1.2 Commercial. Slacks shall be packaged to afford adequate protection against physical damage during shipment from the supplier to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing. Packing shall be level A, B or commercial (see 6.2).

5.2.1 Level A. Thirty (30) pairs of slacks of one class, size, and length only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container, assembled, closed and reinforced conforming to type CF, class weather-resistant, variety SW, Grade V3c, size 2A, of MIL-B-17757. The fiberboard for the liner shall conform to type CF, class weather-resistant, variety DW, grade V15c of MIL-B-17757. Level A folded slacks shall be packed flat, alternated end for end, within a shipping container. Each container shall have the contents completely covered on top and bottom with a sheet of commercial grade kraft paper. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.2 Level B.

5.2.2.1 Method 1. Thirty (30) pairs of slacks of one class, size, and length only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container, assembled, closed and reinforced conforming to type CF, class domestic, variety SW, grade 275, size 2A of MIL-B-17757. The fiberboard for the liner shall conform to type CF, variety SW, grade 200 of MIL-B-17757. Level A folded slacks shall be packed flat, alternated end for end, within a shipping container. Each container shall have the contents completely covered on top and bottom with a sheet of commercial grade kraft paper. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:34Z
Check the source to verify that this is the current version before use.

5.2.2.2 Method 2. When specified (see 6.2), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with MIL-B-17757 and closed in accordance with the appendix of the box specification.

5.2.3 Commercial. Slacks of one class, size, and length, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rates for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with the U. S. Postal Service Manual, Uniform Freight Classification Rule or National Motor Freight Classification Rules, as applicable.

5.3 Marking. In addition to any special marking required by the contract or purchase order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

5.3.1 Polyethylene bagged packages. Polyethylene bagged packages shall have the following information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification. The bag or label shall indicate the following information.

STOCK NUMBER
NOMENCLATURE
SIZE AND LENGTH

5.3.2 Mixed sizes. Each shipping container packed with mixed sizes shall have a 5 X 4 inch white paper label securely attached to the end and side directly under the printing or stenciling. The words "MIXED SIZES" shall be plainly stamped or printed thereon and under these words shall be legibly stamped or printed the correct quantity and sizes contained therein.

5.4 Palletization. When specified (see 6.2), slacks packed as specified in 5.2 shall be palletized in accordance with load type I of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L. Pallet patterns shall be in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the pallet patterns specified in MIL-STD-147, the pallet pattern used shall first be approved by the contracting officer.

6. NOTES

6.1 Intended use. The slacks are intended for wear by female personnel of the Marine Corps.

6.2 Ordering data.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:34Z
Check the source to verify that this is the current version before use.

6.2.1 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number and date of this specification.
b. Classes, sizes and lengths required (see 1.2).
c. Whether first article is required (see 3.2).
d. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
e. When level B method 2 packing is required (see 5.2.2.2).
f. When palletization is required (see 5.4).

6.2.2 Data requirements. When this specification is used in an acquisition which incorporate a DD Form 1423, Contract Data Requirements List (CDRL) the data requirements identified below shall be developed as specified by an approved Data Item Description (DD Form 1664) and delivered in accordance with the approved CDRL incorporated into the contract. When the provisions of DAR 7-104.9 (n) (2) are invoked and the DD Form 1423 is not used, the data specified below shall be delivered by the contractor in accordance with the contract or purchase order requirements. Deliverable data required by this specification is cited in the following paragraphs.

	Paragraph No.	Data Requirements	Applicable DID No.
a.	4.	Inspection System Program Plan	DI-R-4803
b.	4.4	First Article Inspection Procedures	DI-T-4901
c.	4.4	First Article Inspection Reports	DI-T-4902
d.	4.5	Production/Acceptance Inspection Procedures	DI-T-4903
e.	4.5	Production Inspection Report	DI-T-4904

(Data item descriptions related to this specification, and identified in section 6 will be approved and listed as such in DOD 5000.19L., Vol. II, AMSDL. Copies of data item descriptions required by the contractors in connection with specific acquisition functions should be obtained from the Naval Publications and Forms Center or as directed by the contracting officer.)

6.3 Guide sample. For information regarding the availability of the guide sample, address inquiry to the procuring activity issuing the invitation for bids.

6.4 First article. Examinations, tests and approval shall be as specified by the contracting officer.

6.5 Figures. Figures 1 and 2 show general design of the slacks and are furnished for information only. In the event of conflict between these figures and the text of this specification, the text of this specification shall govern.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:34Z
Check the source to verify that this is the current version before use.

6.6 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Preparing Activity
Navy - MC
Project No 8410-N606

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:34Z
Check the source to verify that this is the current version before use.

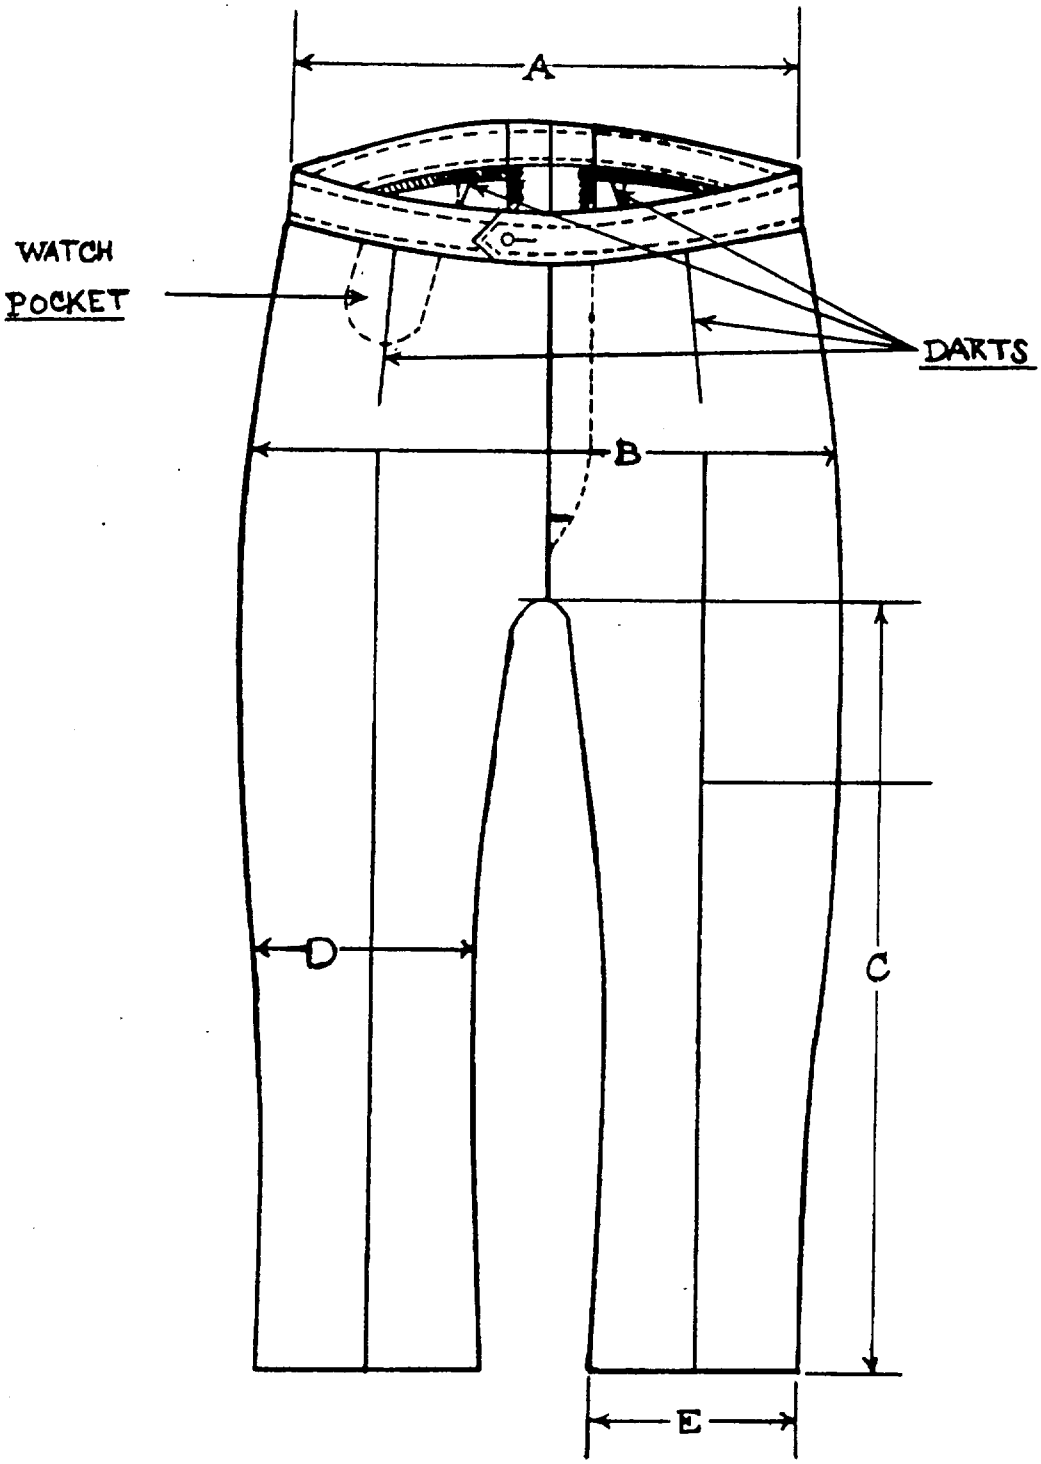
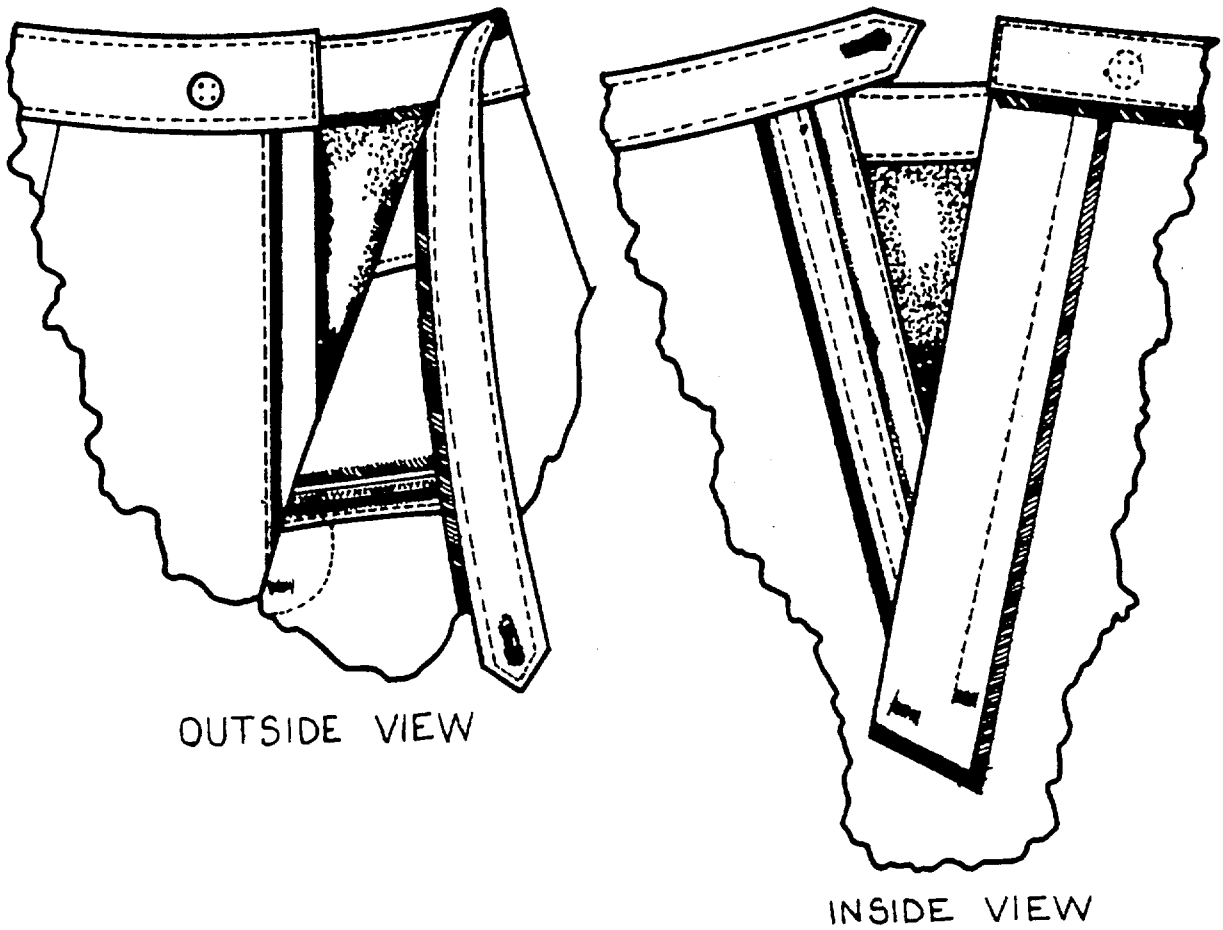


FIG. 1 SLACKS, WOMAN'S

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:34Z
Check the source to verify that this is the current version before use.



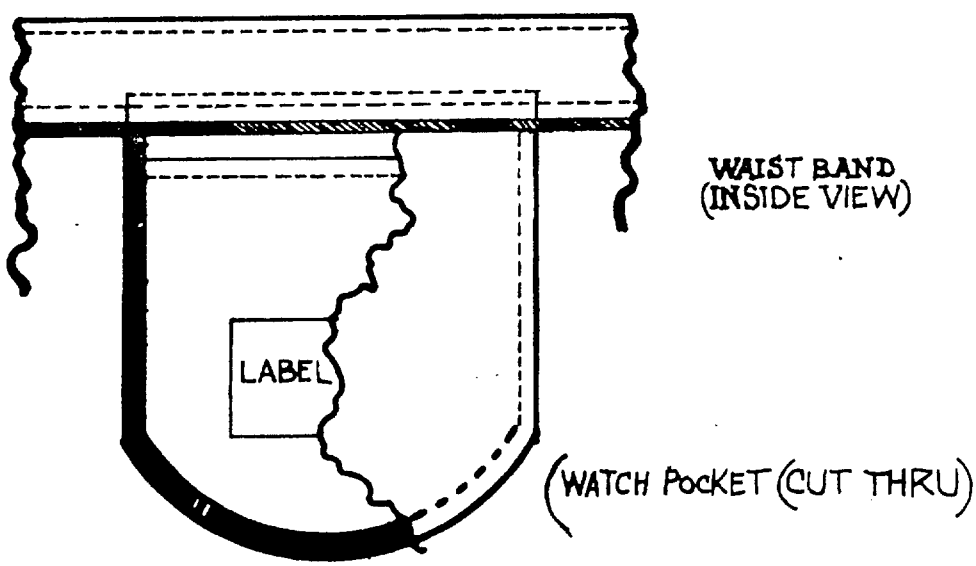


FIG. 2 SLACKS, WOMAN'S

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:34Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:34Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-S-29364C(MC)	SLACKS, WOMEN'S

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:34Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use i submitting comments and suggestions for improvements. All users of military standardization documents are invited to provid suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, an mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, w too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTA
NECESSA
IF MAILE
IN THE
UNITED ST

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commandant of the Marine Corps
Headquarters, U.S. Marine Corps (Code LMA-1)
Washington, D. C. 20380

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:34Z
Check the source to verify that this is the current version before use.