INCH-POUND
MIL-S-29368D
06 June 1994
SUPERSEDING
MIL-S-29368C
2 June 1988

MILITARY SPECIFICATION

SHIRTS, WOMEN'S: LONG AND SHORT SLEEVES

This specification is approved for use by the U. S. Marine Corps, Department of the Navy, and is available for use by all departments and agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for women's polyester/wool and polyester/cotton shirts with long and/or short sleeves.

1.2 Classification. The shirts shall be in the following types, classes and sizes, as specified (see 6.2):

Type I - Short Sleeve

Class 1 - Polyester/Wool, Tropical, Khaki Shade 2122
Class 2 - Polyester/Cotton, Poplin, White Shade 3013
Class 3 - Polyester/Wool, Tropical, Khaki Shade M-1 (Optional)

Type II - Long Sleeve

Class 1 - Polyester/Wool, Tropical, Khaki Shade 2122
Class 2 - Polyester/Wool, Tropical, Khaki Shade M-1 (Optional)

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Defense Personnel Support Center, Clothing and Textiles Directorate, Attn: DPSC-FSSD, 2800 South 20th Street, Philadelphia, PA 19101-8419, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8410

DISTRIBUTION STATEMENT A. *Approved for public release; distribution is unlimited.*

Source: https://assist.dla.mil -- Downloaded: 20260-20T22:36Z
Check the source to verify that this is the current version before use.

Schedule of Sizes

Short	Regular	Long
X0	X0	X0
2	2	2
4	4	4
6	6	6
8	8	8
10	10	10
12	12	12
14	14	14
16	16	16
18	18	18

2. APPLICABLE DOCUMENTS

2.1 Government documents

2.1.1 Specifications and standards. The following specifications and standards form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

A-A-50135	-Cloth, Interlining, Polyester
A-A-50199	-Thread, Polyester Core, Cotton or Polyester Covered
A-A-52094	-Thread, Cotton
V-B-871	-Button, Sewing Hole and Button, Staple (Plastic)
NN-P-71	-Pallet, Material Handling, Wood, Stringer Construction, 2 Way and 4 Way (Partial)
DDD-L-20	-Label, for Clothing, Equipage and Tentage (General Use)

MILITARY

MIL-P-15011	-Pallet, Material Handling, Wood, Post Construction, 4 Way Entry
MIL-B-17757	-Box, Shipping, Fiberboard (Modular Size)
MIL-C-21115	-Cloth, Tropical, Wool, Polyester/Wool
MIL-C-21881	-Cloth, Poplin, Polyester and Cotton
MIL-C-29404	-Cloth, Tropical, Polyester/Wool
MIL-C-44296	-Cloth, Fusibles

STANDARDS

FEDERAL

FED-STD-191	-Textile Test Methods
FED-STD-751	-Stitch, Seam and Stitching

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:36Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-STD-105 -Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 -Marking for Shipment and Storage
MIL-STD-147 -Palletized Unit Load
MIL-STD-984 -Provisions for Size Labeling of Women's Uniform Clothing

(Unless otherwise indicated, copies of Federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.1.2 Other Government publications. The following other Government publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

Department of Defense (DoD) Standard Color Card for Sewing Threads
Department of Defense (DoD) Standard Shades for Buttons

(Application for copies should be addressed to the Color Association of the United States, Inc., 200 Lexington Avenue, New York, NY 10016.)

(Copies of specifications, standards and publications required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Non-Government publications. The following document forms a part of this specification to the extent specified herein. Unless otherwise specified, the issues of documents which are DOD adopted shall be those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in DODISS shall be the issues of the documents cited in the solicitation (see 6.2).

AMERICAN SOCIETY OF TESTING AND MATERIALS

ASTM D 3951 - Standard Practice for Commercial Packaging

(Application for copies should be addressed to American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein (except for associated detail specifications, specification sheets or MS standards), the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Standard samples. Standard samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variation from this specification may appear in the standard sample in which case the specification shall govern.

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:36Z
Check the source to verify that this is the current version before use.

3.2 First article. When specified (see 6.2), the contractor shall furnish sample shirts for first article inspection and approval.

3.3 Materials

3.3.1 Basic material. The basic material for the separate types and classes of shirts shall be as follows:

3.3.1.1 Type I, class 1 and type II, class 1. The basic material for type I, class 1 and type II, class 1 shirts shall be 6.5 to 7.0 ounce polyester/ wool, khaki shade 2122, conforming to type I, of MIL-C-29404.

3.3.1.2 Type I, class 2. The basic material for type I, class 2 shirts shall be 4.5 ounce poplin, polyester/cotton, white shade 3013, conforming to type II, class 1 of MIL-C-21881.

3.3.1.3 Type 1, class 3 and type II, class 2. The basic material for type I, class 3 and type II, class 2 shall be 8.5 to 9.5 ounce cloth, tropical, polyester/wool, khaki shade M-1 conforming to type III, class 1 of MIL-C-21115.

3.3.2 Interlining. The material used for interlining the front, collar stand, and collar leafs of type I and II shirts and the cuffs of type II shirts shall be a polyester fiber cloth conforming to A-A-50135. As an alternate, fusible cloth conforming to type V, class 2, style B of MIL-C-44296 may be used.

3.3.3 Thread. The thread shall be cotton-covered polyester, ticket No 70, 2 ply conforming to A-A-50199. As an option, thread conforming to type I, ticket No. 40, 3 ply of A-A-52094 may be used for the buttonholes. The thread used for all stitching shall be in shade khaki P-1, cable No. 66019 for type I, classes 1 and 3 and type II, classes 1 and 2 shirts and shade white AH cable No. 66050 for type I, class 2 shirts. (See DOD Standard Color Card of Official Standardized Shades for Sewing Thread.)

3.3.4 Buttons. The buttons for type I and II shirts shall be type II pearlescent, class K, style 25, size 19 line, conforming to V-B-871 and in the following colors. (See DOD Standard Shades for Buttons.)

Type I, classes 1 and 3, and type II, classes 1 and 2, Shade Tan AJ, Cable No. 62028
Type I, class 2, Shade White BA, Cable No. 62031

3.3.5 Elastic. The elastic for the collar closure loop shall be polyester, 1/8 to 3/16 inch wide, and the color shall match the shirt color.

3.3.6 Labels

3.3.6.1 Combination label. A combination identification and instruction label conforming to type VI, classes 1 and 3 of DDD-L-20 may be used. The fastness to laundering requirements of DDD-L-20 shall apply. The content and format shall be as follows:

Nomenclature: SHIRT, WOMEN'S POLY/WOOL
CONTRACT NO.:
NAME OF CONTRACTOR:
WOOL PRODUCTS ACT INFORMATION
DRY CLEAN OR LAUNDER BY HAND
CAUTION: BLEACH, FABRIC SOFTENER, STARCH AND/OR HOT WATER (EXCEEDING 100°F) WILL HARM THE FABRIC OF THE SHIRT. Do not bleach, use starch or fabric softener. Do not squeeze or wring out. Place dripping shirt on hanger. Press when dry or nearly dry on wrong side with steam iron set on a low heat.

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:36Z
Check the source to verify that this is the current version before use.

In lieu of the printed cloth label, the required identification information may be marked on the shirt by heat transfer (decalcomania), direct printing or stamping. The markings shall conform to type III or type IV, class 1 of DDD-L-20.

3.3.6.2 Size label. The size label shall conform to type VI, Class 2 of DDD-L-20. The inscription on the size label shall conform to MIL-STD-984: Table II, Body Dimensions for Marine Corps; Table III, Height Ranges; and Figure 1. Examples of labels are as follows:

Stock Number:	5410-00-000-0000(Example)
Bust Circ	35"
Hip Circ	37 1/2"
Height	63-1/2 to 67-1/2" (R) (Size Code 8)

3.3.6.3 Label/tag. Each item shall be individually bar-coded with the type VIII, class 17 label/tag of DDD-L-20. This label/tag shall be located so that it is completely visible on the item when it is folded and/or packaged as specified and shall cause no damage to the item.

3.4 Design. The shirts shall be the U. S. Marine Corps design shown on Figures 1 through 5, six button front, semiformfitting having princess lines, ornamental sleeve cuffs (type I, classes 1, 2, and 3), convertible collars, and vest type front and elastic loop for closing the collar. The type II, classes 1 and 2 shirt shall be the same body design except with long sleeves and cuffs to button. Top button at collar shall close with 1/8 inch elastic loop and hidden button.

3.5 Patterns. Standard patterns will be furnished to the contractor by the Government. The standard patterns shall not be altered in any way and shall be used only as a guide for cutting the contractor's working patterns. The standard patterns provide 1/4 inch seam allowance for seams except as other wise specified in Table I. Standard patterns show size, seam allowances, directional lines for cutting and are marked or notched for proper placement and assembly of the component parts. Also, minor modifications are permitted when necessary when using automatic equipment. These modifications shall not alter the dimensional, serviceability or appearance requirements cited in the specification.

3.5.1 Pattern parts. The shirts shall be cut from the material specified herein in accordance with the number of pattern parts indicated below:

Item	Pattern Nomenclature Material : Basic	No. of Cut parts
1.	Front	2
2.	Side fronts	2
3.	Center back	1
4.	Side back	2
5.	Sleeve (type I, classes 1 and 2 and 3)	2
6.	Sleeve (type II, classes 1 and 2)	2
7.	Collar	2
8.	Collar stand	2
9.	Cuffs (type II, classes 1 and 2)	4
10.	Sleeve binding (type II, classes 1 and 2)	2
	Material : Interlining	
11.	Front	2
12.	Collar	1
13.	Collar stand	1
14.	Cuffs (type II, classes 1 and 2)	2
	Marker	
15.	Front Buttonhole	

Source: https://assist.dla.mil -- Downloaded: 20261O-20T22:36Z
Check the source to verify that this is the currentversion before use.

3.6 Construction. The shirts shall be manufactured in accordance with the operations and stitch, seam and stitching types specified in Table I. The contractor is not required to follow the exact sequence of operations as listed in Table I, but all operations shall be used to manufacture the shirts. When the alternate fusible interlining is used (see 3.3.2), stitching of interlinings in operations 4, 5, and 12 are not required.

3.6.1 Stitches, seams, and stitchings. The stitch, seam, and stitching types specified in Table I shall conform to FED-STD-751. Whenever two or more stitch or seam types are specified for the same operation, any one of them may be used. The number of stitches per inch as specified in Table I indicates the minimum and maximum number permitted. All overedge stitching shall be done on a serging machine with a knife attachment properly set to trim the raveled edge without cutting the material. When a 517 stitch is used for the overedge stitch, it must be used throughout the shirt where given as an option.

3.6.1.1 Ends of seams and stitching. Ends of seams and stitching (stitch type 301), except the ends of a continuous line of stitching when not caught in another seam or stitching, shall be backtacked not less than 1/4 inch. The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. Thread breaks (all stitch types) shall be secured by stitching back of the break not less than 1/2 inch.

3.6.2 Shade marking. The component parts of the shirt, except parts cut from ends, shall be marked to ensure a uniform shade and size throughout the garment. Any method of shade marking may be used except:

(a) Corrosive metal fastening devices.
(b) Sew-on tickets.
(c) Adhesive type tickets which show discoloration and leave an adhesive mass which adheres to the material upon removal of the ticket.
(d) Any marking medium which would tend to leave a permanent mark.

NOTE: The use of ink pad numbering machine, rubber stamp or pencil is allowed, provided the numbering does not show on the outside of the garment and, wherever possible, is covered by the seam allowance.

3.6.3 Pressing. All pressing operations specified in Table I shall be accomplished with a heated pressing iron or pressing machine set at medium (low) temperature (285°F maximum).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:36Z
Check the source to verify that this is the current version before use.

TABLE I. - MANUFACTURING REQUIREMENTS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH PER INCH	THREAD NDL BOB LPR
1.	Cutting. a. Cut the shirt in strict accordance with patterns furnished by the Government. b. Cut all materials in the direction indicated by directional lines on the pattern. The straight of the material shall indicate the warp direction. c. Cut the component parts for the shirt from one piece of basic material, except the under collar, under ply collar stand and under-ply of cuffs may be cut from ends, but when cut from ends, the parts shall harmonize with the shirt. The bias binding for the armhole cuff opening may be strip cut and placed on rolls. The binding shall be cut of sufficient width (1-5/8 inch) to finish 3/8 to 1/2 inch wide. d. Cut the 1/8 inch wide elastic 2-3/4 inches long for neck closure loop.				
2	Replacement of damaged parts. a. Replace at time of cutting any parts of the shirt containing holes or serious weakening defects such as smashes, multiple floats, loose or weakening slubs, etc., expected to develop into holes, shade bars and dye streaks or unsightly slubs, etc. b. Replace any parts damaged during the manufacturing process by needle chews which may develop into a hole, scissor or knife cuts, tears, holes, mends or burns in the material.				
3.	Shade marking. a. Mark or ticket all component parts (see 3.6.2) cut from one piece of basic material, except those parts cut from ends, to insure uniform shade and size throughout the shirt. Parts cut from ends shall be identified for size.				
4	Make collar. Finished appearance. The completed collar shall finish smooth and flat without distortion. Edges shall be uniformly even. The seams shall finish at the edges of the collar. The points and seamed edges shall be neatly and completely forced out. The points shall be uniform in length. a. The collar and collar stand each shall be made of two plies of basic material and one ply of interlining. b. Seam interlining and top collar together 1/8 inch from each edge. Trim excess interlining along edges, where necessary.	301	SSa-1 (each edge)	10-14	70 70

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:36Z
Check the source to verify that this is the current version before use.

TABLE I. - MANUFACTURING REQUIREMENTS (contd.)

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH PER INCH	THREAD NDL	THREAD BOB LPR
4.	Make collar. (contd.)					
	c. Seam interlining and top collar stand 1/8 inch from top and lower edge. Trim excess interlining along edges, where necessary.	301	SSa-1	10-14	70	70
	d. Position undercollar stand on outside of undercollar with notches matching and join together at the lower edge with a 1/4 inch seam.	301	LSq-2 (a)	10-14	70	70
	e. Turn undercollar stand and stitch 1/16 inch from raised edge.	301	LSq-2 (b)	10-14	70	70
	f. Position top collar stand on outside of top collar with notches matching and join together at lower edge with a 1/4 inch seam.	301	LSq-2 (a)	10-14	70	70
	g. Turn top collar stand and stitch 1/16 inch from raised edge.	301	LSq-2 (b)	10-14	70	70
	h. Position undercollar and top collar face to face with top notches matching and edges even and seam together along top and side edges with 1/4 inch seam.	301	SSe-2 (a)	10-14	70	70
	i. Trim points and turn collar working out the points completely and working seam line to edge.					
	j. Edgestitch the upper and side edges of the collar uniformly 1/4 inch from seamed edges.	301	SSe-2 (b)	10-14	70	70
	k. Press collar smooth and flat with heated pressing iron or pressing machine.					
	- or -					
	l. Seam the three plies together 1/4 inch from top and side edges, with the interlining on top and all edges even.	301	SSe-1 (a)	10-14	70	70
	m. The interlining may be stitched to the underply of collar 1/8 inch from outer edges before joining to the top ply of collar.	301	SSe-2 (b)	10-14	70	70
	n. Trim points and turn collar on a heated collar point turning and pressing machine, working out the points completely and working seam line to edge.					
	o. Edgestitch the upper and side edges of the collar uniformly 1/4 inch from seamed edges.	301	SSq-2 (a)	10-14	70	70
	p. Press collar smooth and flat with heated pressing iron or pressing machine.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:36Z
Check the source to verify that this is the current version before use.

TABLE I. - MANUFACTURING REQUIREMENTS (contd.)

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH PER INCH	THREAD NDL	THREAD BOB LPR
4.	Make collar. (contd.)					
	- or -					
	q. The collar leaf may be basted along the seamed edge.					
	r. Position the raw edge of collar between the top and under-collar stand with interlining as indicated by notches on pattern and stitch from end to end along top edge of collar stand, 3/16 to 1/4 inch from edge.	301	SSq-2 (a)	10-14	70	70
	- or -					
	s. The collarstand interlining may be stitched to the undercollar stand 1/8 inch from the raw edges before joining to collar.	301	SSa-1	10-14	70	70
	t. Turn top and undercollar stand to finish position and raise stitch 1/16 inch from turned edge.	301	SSq-2 (b)	10-14	70	70
	u. Press collar smooth and flat with heated pressing iron or pressing machine.					
5.	Attach interlining to front facing.					
	a. Position the left and right front facing on their respective front interlinings with edges even and notches matching. Stitch the two plies together at the gorge, top and back edge and front bottom angled corner 1/8 inch from raw edge.	301	SSa-1	10-14	70	70
	b. Overedge stitch the shoulder and back edge of facing, catching the interlining in the stitching.	502 or 503	EFd-1	10-14	70	70
6.	Assemble front and front side panels.					
	Finished appearance. The fronts and side front panels shall be properly positioned and finished without pleats, puckers, or gathers.					
	a. Position front and side front panels together with notches matching, evenly distributing the fullness in the bust area, with a 1/4 inch seam allowance.	301 or 401	SSa-1	10-14	70	70
	b. Overedge stitch raw edges of front and front panel seams together.	503 or 504	EFd-1	10-14	70	70
	- or -					
	c. The front and side front panel may be joined in one operation by seaming and over edge stitching the raw edges together.	515 or 516 or 517 or 518	SSa-2	10-14	70	70

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:36Z
Check the source to verify that this is the current version before use.

TABLE I. - MANUFACTURING REQUIREMENTS (contd.)

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH PER INCH	THREAD NDL	THREAD BOB LPR
6.	Assemble front and front side panels. (contd.) d. Press the front and panel joining seams smooth and flat with a heated pressing iron or pressing machine. The seams shall be pressed toward the center front.					
7.	Assemble back. a. Position the left and right side back to center back with edges even and notches matching. Stitch together with 1/4 inch seam.	301 or 401	SSa-1	10-14	70	70
	b. Overedge stitch the raw edges of the back and side back seams together.	503 or 504	EFd-1	10-14	70	70
	- or -					
	c. The left and right side body may be joined to the center back by seaming and overedge stitching the raw edges together in one operation.	515 or 516 or 517 or 518	SSa-2	10-14	70	70
	d. Press the right and left back seams smooth and flat with a heated pressing iron or pressing machine. The back seams shall be pressed toward the center back.					
8.	Seam shoulders. a. Join back to fronts at the shoulder with 1/4 inch seam.	301 or 401	SSa-1	10-14	70	70
	b. Overedge stitch the raw edges of the shoulder seams together.	504	EFd-1	10-14	70	70
	- or -					
	c. The raw edges of the back and front seams at the shoulder may be joined by seaming and overedge stitching in one operation.	515 or 516 or 517 or 518	SSa-1	10-14	70	70
9.	Mark lower front corners. a. Turn facing to the front at the notch on the bottom of the shirt with the raw edges of the bottom and angle even and stitch across the angle and bottom with 1/4 inch seam. The seam at the bottom edge shall extend the width of the facing and be in line with the bottom turn-up mark.	301	SSA-1	10-14	70	70

Source: https://assist.dla.mil -- Downloaded: 20261O-20T22:36Z
Check the source to verify that this is the current version before use.

TABLE I. - MANUFACTURING REQUIREMENTS (contd.)

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH PER INCH	THREAD NDL	THREAD BOB LPR
10.	Set collar with size label.					
	a. Position collar between facing and front with the lower end of collar in line with the lapel notch and with raw edge of collar and gorge even. Stitch all plies together with 1/4 inch seam along the gorge from the lapel notch up to approximately 1-inch in back of the joining seam line of collar and collarstand.	301	SSa-1	10-14	70	70
	b. Notch all plies at the end of stitching line and continue to stitch the lower (neck) edge of the under collarstand to front and back part from gorge seam to gorge seam. When used, the cloth size label shall be centered on the back part and caught in seam joining collar to shirt.	301	SSa-1	10-14	70	70
	c. Turn facing to the inside of fronts, working out the points and seamed edges and lapping back edge of facing on front end of bottom turnup.					
	d. Stitch the shoulder edge of facing to the shoulder seam allowance 3/16 inch from edge.	301	SSa-1	10-14	70	70
	e. Turn under lower edge of collar stand from gorge seam, lapping the folded edge on facing and fronts at the shoulder and on the back. Stitch through all plies 1/16 inch from the folded edge, centering the cloth label on back neck, catching the top of label in the stitching.	301	BSg-2 (b) or BSj-2 (b)	10-14	70	70
	f. Fold the elastic in half, forming a loop. Position the loop on the lower edge of the underside of the collar 1/2 inch from the right end, with the ends of the loop even with the raw edge of collar. Stitch loop to collar 3/16 inch from raw edge. The finished loop shall measure 1 (± 1/8) inch.	301	SSa-1	10-14	70	70
	g. In the finished garment, the ends of the collar shall be 3 (±1/8) inches long when measured from junction point of collar and lapel.					
11.	Make ornamental sleeve cuff (type I shirt). Finished appearance. The cuffs shall finish smooth and flat without distortion and shall be uniform in shape and size. The edgestitching shall be of uniform gage.					
	a. Turn under (to the right side) the lower raw edge of the sleeve 1/2 inch, forming the finished curved and pointed edge in accordance with the shape of the pattern. Press smooth and flat with a heated pressing iron or pressing machine, creasing the edge.					

Source: https://assist.dla.mil -- Downloaded: 20261O-20T22:36Z
Check the source to verify that this is the currentversion before use.

TABLE I. - MANUFACTURING REQUIREMENTS (contd.)

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH PER INCH	THREAD NDL	THREAD BOB LPR
11.	Make ornamental sleeve cuff (type I shirt). (contd.) b. Fold cuff back to the right side against body of the sleeve at the folding notches, with the pointed end of the cuff face up and stitch the cuff through all plies, 1/4 inch from the upper folded edge, catching the turned under portion in the stitching.	301	SSa-1	10-14	70	70
12.	Make cuffs (type II shirt). Finished appearance. The cuffs shall finish smooth and flat without distortion and shall be uniform in shape and size. The edgestitching shall be of uniform gage. The cuffs shall have rounded lower corners. The buttonholes shall be clean cut, well made and correctly positioned, and the stitching shall be securely caught in the fabric with the purling on the outside.					
	a. The cuffs shall be made of two plies of basic material and one ply of interlining.					
	b. Position the interlining on the inside of the top ply of the cuff with the side and bottom edges even and stitch together 1/8 inch from raw edge.	301	SSa-1	10-14	70	70
	c. Fold the top raw edge of the cuff over the top edge of the interlining and stitch with a single row of stitching 1/4 inch from folded edge, catching the interlining in the stitching.	301	EFa-1	10-14	70	70
	d. Stitch the top and under ply of the cuff and interlining together along the bottom and side edges with a 1/4 inch seam.	301 or 401	SSe-2 (a)	10-14	70	70
	e. Turn the cuff completely and edgestitch uniformly 1/4 inch from the seamed edge. The edgestitching shall finish 1/2 inch from the top edge of finished cuff. The edge stitching may taper to edge of cuffs at ends of stitching and need not be backstitched.	301	SSe-2 (b)	10-14	70	70
	f. Make a horizontal 5/8 inch long straight type buttonhole in center of each cuff (1/4 inch off center tolerance) with the end of the buttonhole 1/2 (± 1/8) inch from the edge.	Button hole		42-46 per button hole including tack	70/2 or 40/6	
13.	Set sleeve and overedge stitch. Finished appearance. The sleeves shall be set without distortion.					
	a. Join sleeves to shirt around the entire armhole with a 1/4 inch seam, matching the notches.	301 or 401	SSa-1	10-14	70	70

Source: https://assist.dla.mil -- Downloaded: 20261O-20T22:36Z
Check the source to verify that this is the currentversion before use.

TABLE I. - MANUFACTURING REQUIREMENTS (contd.)

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH PER INCH	THREAD NDL	THREAD BOB LPR
13.	Set sleeve and overedge stitch. (contd.) b. Overedge stitch the raw edges of the sleeve and armhole together.	504	EFd-1	10-14	70	70
	- or -					
	c. The sleeves may be joined to the shirt by seaming and overedge stitching the raw edges together in one operation.	515 or 516 or 517 or 518	SSa-2	10-14	70	70
14.	Close sleeves and sides. a. Join fronts and back at the sides and close the sleeve underarm with a 1/4 inch seam, with the armhole seam flat against the sleeve.	301 or 401	SSa-1	10-14	70	70
	b. Overedge stitch the raw edges of the side and sleeve seam allowance.	504	EFd-1	10-14	70	70
	- or -					
	c. The raw edges of the sleeve and side seam allowance may be joined by seaming and overedge stitching in one operation.	515 or 516 or 517 or 518	SSa-1	10-14	70	70
	d. Turn Type I sleeve seam allowance toward the back and tack or bartack 1/8 inch from lower edge of finished sleeve. Tack or bartack shall be not more than 3/8 inch in length.	301 or Bartack		10-14 28 per bartack	70	70
15.	Bind sleeve opening (type II shirt). a. Bind the raw edges of the sleeve at the sleeve opening with a strip of basic material, with the raw edges of the binding turned under and caught in the stitching 1/16 inch from the inner folded edges. The binding shall finish 1/4 to 3/8 inch wide on inside and outside of the sleeve.	301	BSc-1	10-14	70	70
	b. Turn binding to inside of sleeve and bartack diagonally through top of binding only. An automatic tack may be used. **NOTE:** The words "top of" in operation 15b. apply to the short sleeve shirt only.	Bartack		28 per bartack	70	70
16.	Join cuffs to sleeve (type II shirt). Finished appearance. The finished cuffs shall be uniform in width without raw edges, distortions, twists, or puckers. On the finished shirt, the cuffs shall be 2-1/2 (±1/8) inches wide.					

Source: https://assist.dla.mil -- Downloaded: 20260-20T22:36Z
Check the source to verify that this is the current version before use.

TABLE I. - MANUFACTURING REQUIREMENTS (contd.)

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH PER INCH	THREAD NDL	THREAD BOB LPR
	a. Position the underply of the cuff on the lower inside end of the sleeve with edges even. Join sleeve and cuff together with 1/4 inch seam, turning the sleeve closing seam toward the back and catching the sleeve seam in the stitching. The bound edge of the sleeve opening shall be turned to the inside at the buttonhole end of cuff and caught in the stitching.	301 or 401	LSg-2 (a)	10-14	70	70
	b. Turn cuff on the outside with the hemmed edge lapped on the outside of the sleeve and stitch the top ply of the cuff to the sleeve, 1/16 inch from the finished edge.	301	LSb-1	10-14	70	70
	-or-					
	The cuff may be set to the sleeve and closed in one operation.	301	LSg-1	10-14	70	70
17.	Overedge and blind stitch bottom of shirt. Finished appearance. The finished bottom edge of the shirt shall be uniformly over edged then blind stitched without puckers or gathers. The bottom turnup shall be uniform in width.					
	a. Overedge stitch the raw edges of the bottom edge of the shirt with the side seams turned toward the back.	503 or 504	EFd-1	10-14	70	70
	b. Mark shirt 1-1/4 inches from the serged edge for bottom turnup.					
	c. Press the bottom turnup smooth and flat, maintaining a uniform 1-1/4 inch turnup, with a heated pressing iron or a pressing machine.					
	d. Blind stitch the overedged bottom edge to the body of the shirt, catching the facings in the stitching.	103 or 106	FFe-1 (b)	6-8	100	100
18.	Make buttonholes. Finished appearance. The buttonholes shall be clean-cut, well made and correctly positioned. The stitching shall be securely caught in the fabric.					
	a. Mark the right front in accordance with buttonhole marker for the location of five vertical lower button holes 3/4 (± 1/16) inch from the front edge.					
	b. Make a 5/8 inch long straight type buttonhole, tacked at each end, at each mark on the front.	Button hole		62-66 per button-hole including tacks at each end	70/2 or 40/6	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:36Z
Check the source to verify that this is the current version before use.

TABLE I. - MANUFACTURING REQUIREMENTS (contd.)

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH PER INCH	THREAD NDL	THREAD BOB LPR
	c. The buttonholes shall be made to fit 19-line sewing hole buttons. The purling of the buttonholes shall be on the outside of the shirt.					
19.	Mark for buttons. Finished appearance. The location of the buttons shall be marked so that in the finished shirt, each button shall engage its corresponding buttonhole or loop when the shirt is buttoned and shall provide a smooth closure with the ends of the collar at the neck meeting without overlapping or spreading.					
	a. Mark the left front for the location of five 19-line sewing hole buttons thru the center of the buttonhole 3/4 (± 1/16) inch from the front edge.					
	b. Mark the top left front panel (under the collar) below the gorge seamline, for one 19-line button to properly engage the closure loop.					
20.	Sew on buttons. Finished appearance. The buttons shall be securely sewn to the shirt with the ends of the stitching securely tacked. The buttons shall be properly aligned with the buttonholes to secure a smooth and complete closure without bulging or misalignment.					
	a. Sew a 19-line sewing hole button at each mark on the left front. The buttons shall be sewn through the front, felt reinforcement disk and facing except the top button shall be sewn through the front and interlining and shall not go through the facing at the top mark. NOTE: As an alternate, self fabric disk may be used.	101 or Hand		22 per button	70	70
	TYPE II ONLY					
	b. Sew one 19-line sewing hole button to the back end of the cuff to properly engage buttonhole. The center of the cuff button shall be 3/8 inch from back end of cuff.	101 or Hand		22 per button	70	70
21.	Cleaning. a. All ends of stitching shall be trimmed, and the loose ends removed from the shirt.					
	b. All spots, stains, and shade tickets or markings shall be removed without injury to the material.					

Source: https://assist.dla.mil -- Downloaded: 20261O-20T22:36Z
Check the source to verify that this is the current version before use.

TABLE I. - MANUFACTURING REQUIREMENTS (contd.)

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH PER INCH	THREAD NDL BOB LPR
22.	Pressing. Finished appearance. Pressing shall be done on a heated pressing iron or pressing machine (see 3.6.3) of a type suitable to obtain the desired appearance in accordance with good manufacturing practice. a. Button and finish pressing the entire shirt, removing all wrinkles. b. The center back of the collar shall be creased along the seamline of the collar and collar stand.				
23.	Label. a. Identification/instruction label(s) shall be positioned so that in the finished shirt the label shall be midway between the front edge of shirt and back edge of facing. The bottom edge of label shall be toward the back edge of facing and the lower end of label shall be approximately 3 inches from finished bottom edge of shirt. (The label shall not be visible from outside of shirt.) b. The size label shall be sewn in at the center back at the bottom of the top collarstand of the collar.				

3.7 Finished measurements. The finished shirts shall conform to the measurements shown in Table II. Shirts shall be measured buttoned and lying smooth and flat.

Source: https://assist.dla.mil -- Downloaded: 20261O-20T22:36Z
Check the source to verify that this is the currentversion before use.

Table II. Finished measurements (in inches)

Size	X0	2	4	6	8	10	12	14	16	18	Tolerance
Half bust 1/	17-1/4	17-3/4	18-1/4	18-3/4	19-1/2	20-1/4	21	22	23	24	± 3/8
Back length (s) 2/	20-1/8	20-1/4	20-3/8	20-1/2	20-5/8	20-3/4	20-7/8	21	21-1/8	21-1/4	± 1/2
Back length (r)	21-3/8	21-1/2	21-5/8	21-3/4	21-7/8	22	22-1/8	22-1/4	22-3/8	22-1/2	± 1/2
Back length (l)	22-7/8	23	23-1/8	23-1/4	23-3/8	23-1/2	23-5/8	23-3/4	23-7/8	24	± 1/2
Collar length 3/	12-1/2	12-3/4	13	13-1/4	13-1/2	13-3/4	14	14-1/4	14-1/2	14-3/4	- 1/8
Type I Short Sleeve											
Sleeve length (s) 4/	4-1/2	4-1/2	4-1/2	4-1/2	4-1/2	4-1/2	4-1/2	4-1/2	4-1/2	4-1/2	± 1/2
Sleeve length (r)	5	5	5	5	5	5	5	5	5	5	± 1/2
Sleeve length (l)	5-1/2	5-1/2	5-1/2	5-1/2	5-1/2	5-1/2	5-1/2	5-1/2	5-1/2	5-1/2	± 1/2
Type II Long Sleeve											
Sleeve length (s) 4/	18-1/4	18-1/4	18-1/4	18-1/4	18-1/4	18-1/4	18-1/4	18-1/4	18-1/4	18-1/4	± 1/4
Sleeve length (r)	19-1/4	19-1/4	19-1/4	19-1/4	19-1/4	19-1/4	19-1/4	19-1/4	19-1/4	19-1/4	± 1/4
Sleeve length (l)	20-1/4	20-1/4	20-1/4	20-1/4	20-1/4	20-1/4	20-1/4	20-1/4	20-1/4	20-1/4	± 1/4

1/ Bust measurement taken, with shirt buttoned, across front of shirt from folded edge to folded edge at pit of armhole.
2/ Back length measurement taken from lower edge of collarstand to bottom edge of shirt.
3/ Collar length measurement taken along inside from collar end to collar end at the gorge.
4/ Sleeve length measurement taken along underarm seam, from the base of armhole seamline to the bottom edge of cuff.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:36Z
Check the source to verify that this is the current version before use.

3.8 Workmanship. The finished shirt shall conform to the quality of the product established by this specification. The occurrence of defects shall not exceed the contractor's own quality assurance standards and the quality assurance standards defined by the technical data in the bid package.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of section 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.4)
2. Quality conformance inspection (see 4.5)

4.3 Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with the test conditions specified in MIL-STD-105.

4.4 First article inspection. When first article is required, inspection shall be made of a completely fabricated shirt for all provisions of this specification.

4.5 Quality conformance inspection.

4.5.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards, unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase documents. The method of testing specified in FED-STD-191, wherever applicable shall be followed.

4.5.2 End item sampling examination. As a final step in the contractor's production control plan, before formation of the lot, each shirt shall be buttoned and examined on an inspection table. After formation of the lot, the shirts shall be examined for the defects listed in 4.5.2.2 through 4.5.2.3. Acceptable quality levels shall be as indicated in the contract or purchase order.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:36Z
Check the source to verify that this is the current version before use.

4.5.2 General defects. General defects shall be classified as follows:

EXAMINE	DEFECTS	CLASSIFICATION MAJOR	MINOR A	MINOR B
Pressing	a. Omitted		201	
	b. Burned or scorched.	101		
	c. Gloss, wrinkles or creases.			238
	d. Edge bulky (not pressed solidly).			239
	e. Sleeve center creased.			240
	f. One or more darts or seams not pressed in the direction specified.			241
	g. Cuff not pressed evenly.			242
Material defects and damages	a. Hole, cut, tear, needle chew, burn, mend, darn, patch, multiple float, loose or unsightly slub or shade bar:			
	(1) On outside.	102		
	(2) On inside.		202	
	b. Permanent crease in cloth (when caught in stitching)	103		
Shaded parts	a. Outside part except collar stand shaded.	104		
	b. Topcollar stand, or undercollar stand, badly shaded.			243
Cleanness	a. Spot or stain clearly noticeable.			
	(1) On outside.	105		
	(2) On inside.			244
	b. One or more marking tickets not removed.			245
	c. Any marking clearly visible outside.	106		
	d. Thread ends not trimmed, or loose threads not removed.			246
	e. Visible basting thread not removed.			247
Component and assembly	a. Any component part or required operation omitted or added (unless otherwise classified herein).	107		
	b. Any operation not performed as specified (unless otherwise classified herein).			248
Cutting	a. Any component part not cut in conformance with directional lines indicated on patterns or not cut in accordance with specification requirements.	108		
Seam and Stitchings	a. Accuracy of seaming and stitching.			
	(1) Seam or part twisted, puckered or pleated.	109		
	(2) Part of material caught in unrelated operation or stitching:			
	-Caught in or up to, and including, 1/4 inch of stitching.		203	
	-Caught in or more than 1/4 inch of stitching	110		
	(3) Stitching overlapping end of thread break less than 1/2 inch.			249
	(4) End of stitching when not caught in other seams or stitching back tacked less than 1/4 inch.			250
	(5) Ends of a continuous line of stitching over lapped less than 1/2 inch on all continuous stitching.			251
	(6) Raw edge more than 1/4 inch long.			252

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:36Z
Check the source to verify that this is the currentversion before use.

EXAMINE	DEFECTS	CLASSIFICATION MAJOR	MINOR A	MINOR B
Seam and Stitchings (contd.)	b. Gage of stitching and seam allowances:			
	(1) Irregular, i.e., unevenly gaged or corresponding stitchings not uniformly gaged (to be scored only when condition exists along major portion of seam.		204	
	(2) Width not as specified or not within range of gage specified or varies more than 1/16 inch when no range is specified.			253
	c. Stitches broken or missing (except buttonholes):			
	(1) All stitching except overedging:			
	- up to 1/4 inch inclusive.			254
	- more than 1/4 but less than 1/2 inch inclusive.		205	
	- more than 1/2 inch.	111		
	(2) On overedging:			
	- 1 inch or more.			255
	d. Skipped stitches or runoff stitches:			
	- more than 1/4 inch but less than 1/2 inch long.			256
	- more than 1/2 inch long		206	
	e. Seam and stitch type:			
	- seam type or stitch type not as specified.		207	
	f. Stitches per inch (to be scored only when condition exists on major portion of seam):			
	- less than minimum or more than maximum specified.			257
	g. Stitch tension (except buttonholes):			
	(1) Loose tension resulting in a loose seam.	112		
	(2) Loose tension (exposed loops of top or bottom threads) more than 1/2 inch in length.			258
	(3) Tight tension (stitches break when strain is applied in the direction of the seam or stitching).		208	
	h. Blind stitching on bottom turn-up shows on outside, affecting appearance.		209	

4.5.2.3 Detailed defects applicable to specific parts. Defects applicable to specific parts shall be classified as follows:

EXAMINE	DEFECTS	CLASSIFICATION MAJOR	MINOR A	MINOR B
Buttonholes	a. One or more omitted or added.	113		
	b. The center cut opening shall be 3/4 inch in from front edge ± 1/16.		210	
	c. One or more slanted.		211	
	d. One or more of the five lower buttonholes positioned horizontally.	114		
	e. The space between each of the five lower buttonholes unequal by more than 1/4 inch.			259
	f. Stitches not securely caught in fabric (stitches pull away from fabric).	115		

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:36Z
Check the source to verify that this is the current version before use.

EXAMINE Buttonholes	DEFECTS	CLASSIFICATION MAJOR	MINOR A	MINOR B
Buttonholes	g. Two or more uncut warp yarns in buttonhole (not caught in overcast stitching).		212	
	h. One or more broken or more than two continuous skipped stitches in one or more buttonholes.		213	
	i. Loose stitch tension.			260
	j. Ragged edge in one or more.		214	261
	k. Not specified type or uncut.			262
	l. Tacking omitted on end.		215	
	m. Buttonhole positioning from top to bottom different from buttonhole marker (each size must be checked).	116		
Buttons	a. One or more buttons missing, broken or malformed.		216	
	b. Not specified size, type or color.			263
	c. Hand sewn button tacked off with less than two stitches.		217	
	d. Front buttons not sewn through facing or insecurely sewn.		218	
	e. Neckline (top) button sewn through facing or insecurely sewn.		219	
	f. Stitches not locked at end of cycle (tug at loose end of thread to determine if it will ravel).		220	
	g. Buttons not aligned with buttonholes.			
Labels	a. Size label:			
	- omitted, incorrect, illegible, not completely on top collar stand.	117		
	- horizontally off center by more than 1/4 inch or vertically off center by more an 1/8 inch.			264
	- when stitched, the top of label not completely caught in seam.		221	
	b. Instruction label (or combination label, if applicable):			
	- omitted, incorrect, or illegible.		222	
	- not positioned on lower left facing.		223	
	- bottom of label positioned less than 1/4 inch from back edge of facing.			265
	- right side of label less than 2-1/2 inches or more than 3-1/2 inches from finished shirt bottom.			266
	c. Bar code label/tag			
	- omitted or not readable by scanner		224	
	- human readable interpretation (HRI) omitted or illegible		225	
	- not visible on folded, packaged item		226	
	- causes damage to the item	118		
Collar and Lapel	a. Not uniform in size or shape - any point varying:			
	(1) more than 3/8 inch with corresponding point on matching part.	119		
	(2) 1/4 inch up to and including 3/8 inch with corresponding point on matching part.		227	
	b. Collar point uneven in length by:			
	(1) 1/8 inch up to and including 1/4 inch.			267
	(2) More than 1/4 inch up to and including 3/8 inch.		228	
	(3) More than 3/8 inch.	120		

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:36Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECTS	CLASSIFICATION MAJOR	MINOR A	MINOR B
Collar and Lapel (contd.)	c. Twisted, not smooth, too full, short or tight causing collar to turn out.	121 122		
	d. Collar point not properly turned out.			
	e. Under collar exposed beyond edge of top collar for a distance of more than 1/2 inch.	123	229	
	f. Stitching joining top collar interlining visible on out side of collar.			
	g. Top end of either facing not securely caught at shoulder seam.		230	
	h. Ends of collar overlapping or more than 3/16 inch apart when shirt is buttoned.		231	
	i. Either facing does not lie flat on front in the area between second button and shoulder seam allowance.			268
	j. Edge of collar not forced out, i.e., having a fold of:			269
	(1) 1/16 inch up to and including 1/8 inch in depth.		232	
	(2) More than 1/8 inch in depth.			
	k. Collar Elastic loop.	124		
	(1) Missing.	125		
	(2) Misplaced, i.e., not inserted in gorge seam line.			
	(3) Distance from right end of collar more than 5/8 inch or less than 3/8 inch.		233	
	(4) Loop opening more than 1-3/8 inch or less than 1-1/8 inch.		234	
Sleeves	a. Sleeve setting seam at underarm staggered more than 1/4 inch (measured from center of seam to center of seam).			270
	b. Sleeve setting stitching irregular.			271
	c. Width of cuff less than 2-1/4 inches or more than 2-5/8 inches from wide (type II shirt).			272
	d. Cuff twisted.		235	
	e. Cuff not uniform in width.		236	
	f. Bottom edge of cuff at underarm seam, uneven by 1/16 inch or more.		237	
Seams	a. Side seams not turned toward back of shirt at hem or bottom of sleeve or sleeve setting seam not turned toward sleeve.			273

4.5.2.4 Size measurements. Any measurement deviating from the normal dimensions and tolerances specified in 3.7 shall be scored as a defect. Sleeves unequal in length by more than 1/4 inch shall be scored as a measurement defect.

4.5.3 Examination of packaging. An examination shall be made to determine that the packaging, packing and marking comply with the Section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be closed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery.

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:36Z
Check the source to verify that this is the current version before use.

Examination	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size and location, sequence or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components, such as: Incomplete closure of container flaps, loose strapping, inadequate stapling, improper taping, open and noncontinuous heat sealed seams and closure of polyethylene bag. Incorrectly fabricated bag. omission of vent hole in polyethylene bag. Bulged or distorted container.
Content	Number of shirts per shipping container is more or less than required. 1/
	Size shown on one or more items not as specified on shipping container. 2/

1/ One shipping container in the sample shall be examined.
2/ For this defect, one package shall be examined from each shipping container in the sample.

4.4.4 Palletization examination. An examination shall be made to determine that the palletization complies with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully packaged.

Examine	Defect
Finished dimension requirements.	Length, width or height exceeds specified maximum requirement.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial as specified(see 6.2).

5.1.1 Level A. Each shirt shall be fully buttoned and neatly folded. The folded shirt shall measure approximately 15 inches in length and 11 inches in width. Each shirt so folded shall be inserted in an individual polyethylene bag measuring approximately 15 inches in length and 11 inches in width. The bag shall be fabricated from 0.0015 inch thick film. All seams and closures of the bag shall be effected by heat sealing (see 5.3.1). A 1/4 inch diameter hole to allow excess air to escape shall be made in one corner of the bag. Prior to or during the heat-sealing operation, excess air shall be expelled to the extent necessary to insure the required multiples of packaged unites will fit into the shipping containers. As alternate, the final closure of the bag may be accomplished by a tuck or reverse flap. If the final closure is a tuck or reverse flap, the 1/4 inch diameter hole will not be required.

5.1.2 Commercial. Shirts shall be preserved in accordance with ASTM-D 3951.

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:36Z
Check the source to verify that this is the current version before use.

5.2 Packing. Packing shall be level A or commercial as specified (see 6.2).

5.2.1 Level A. Twenty (20) shirts, of one type, class and size only, packaged as specified in 5.1.1, shall be packed in a fiberboard shipping container with liner conforming to class weather resistant, grade V2s, size 1A of MIL-B-17757. Each container shall be assembled, closed, and reinforced as specified in the applicable appendix. The fiberboard used for fabricating the liner shall be grade V3c. Towards the end of the contract, or when there is less than the required amount per container of the same size, mixed sizes of the same class may be packed within the same shipping container (see 5.3.2).

5.2.3. Commercial. Shirts preserved as specified in 5.1 shall be packaged in accordance with ASTM-D 3951.

5.3 Marking. In addition to any special marking required by the contract or order, unit packs, intermediate or exterior containers, and palletized unit loads shall be marked in accordance with MIL-STD-129.

5.3.1 Polyethylene bagged packages. Polyethylene bagged packages shall have the required information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification. The bag or label shall indicate the following information:

Shirt, Women's, (Size Code 12)
Bust Circ 35"
Hip Circ 37-1/2"
Height 63-1/2" to 67-1/2" (R)
Stock No. 8410-00-000-0000 (Example)
Name of Contractor:

5.4 Palletization. When specified (see 6.2), item, packed as specified in 5.2, shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with the bonding means C, K and L, or O or P. Pallet patterns shall be in accordance with the appendix of MIL-STD-147. The pallet shall be 4-way, type IV; type V, class 1, size 2; or type VIII, fabricated from wood groups I, II, III or IV, Grade A of NN-P-71, or 4-way, Style 1, Size A, type I, class 1 fabricated from groups specified of MIL-P-15011. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall first be approved by the contracting officer.

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:36Z
Check the source to verify that this is the current version before use.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The shirts described herein are intended for wear by female personnel of the U.S. Marine Corps.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.
b. Issue of DODISS to be cited in the solicitation, and if required, the specified issue of individual documents referenced (see 2.1.1 and 2.2).
c. Size and length Type, Class required (see 1.2).
d. When first article inspection is required (see 3.2 and 4.3) the item will be tested and should be a first article sample. The contracting officer should include specific instructions in acquisition of documents regarding arrangement for examinations, quantity, and testing and approval.
e. Selection of applicable levels of preservation and packing (see 5.1 and 5.2).
f. When palletization is required (see 5.4).
g. When all packaging data is to be found in MIL-STD-2073-1 and MIL-STD-2073-2 (Note: on 5.5 in spec).

6.3 Guide sample and shade samples. For information regarding availability of guide samples and standard shades specified, address inquiry to the acquiring activity issuing the invitation for bids.

6.4 First article. First article examination, test and approval shall be as specified by the contracting officer (see 3.2).

6.5 Subject term (keyword) listing

Long
Shirts
Short
Sleeves
Women's

6.6 Figures. Figures 1 through 5 show general design of the shirt and are furnished for information purposes only. In the event of conflict between these figures and the text of this specification, the text of this specification shall govern.

6.7 Recycled materials. The use of recycled materials is encouraged when practicable as long as the material meets the requirements of this specification.

6.8 Marginal notations. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Custodian:
Navy - MC

Preparing Activity:
DLA-CT

Project No.
8410-0844

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:36Z
Check the source to verify that this is the current version before use.


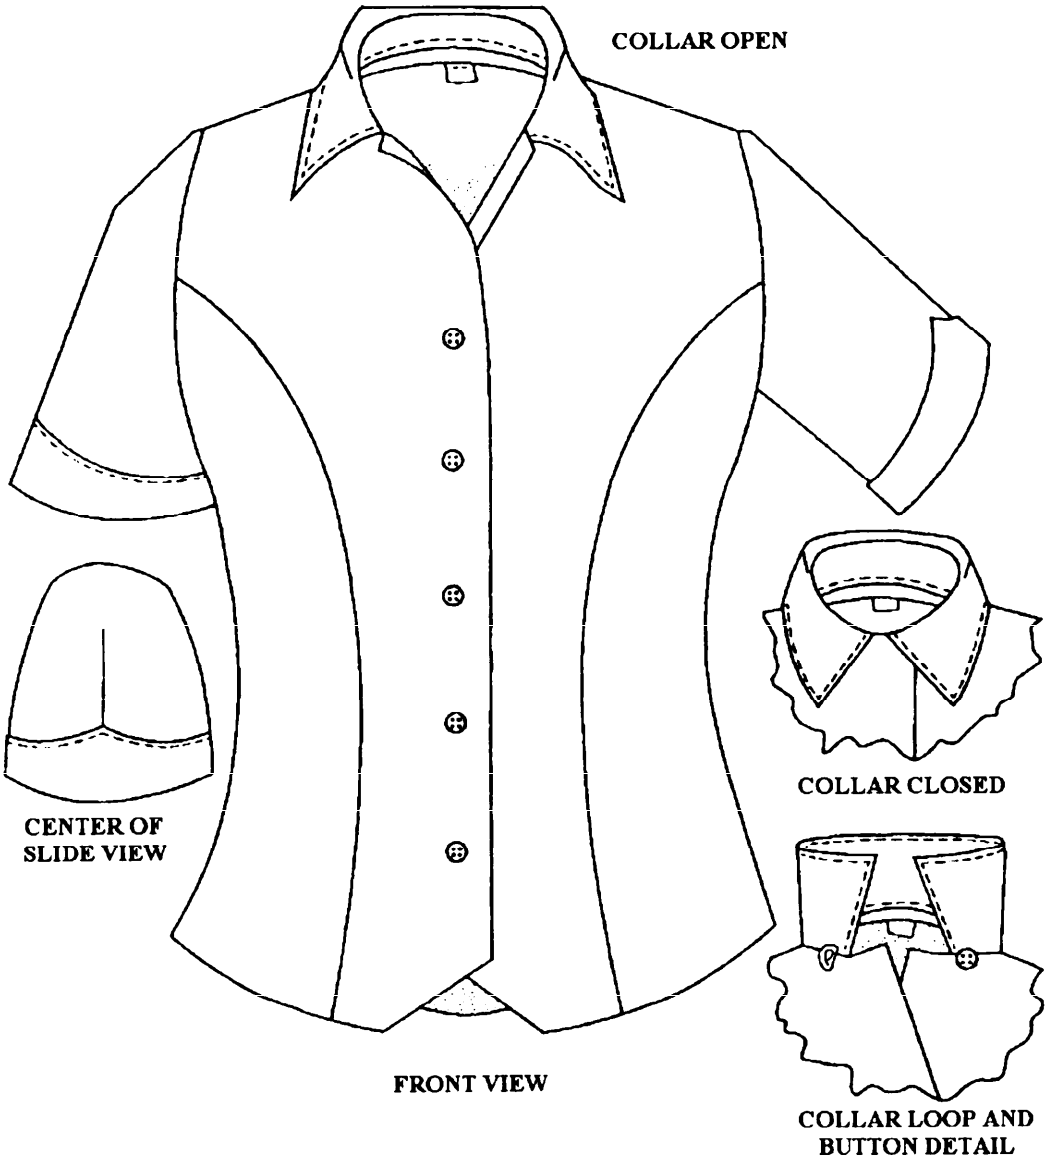


FIGURE 1
SHIRT, WOMEN'S, SHORT SLEEVE, TYPE I


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:36Z
Check the source to verify that this is the current version before use.

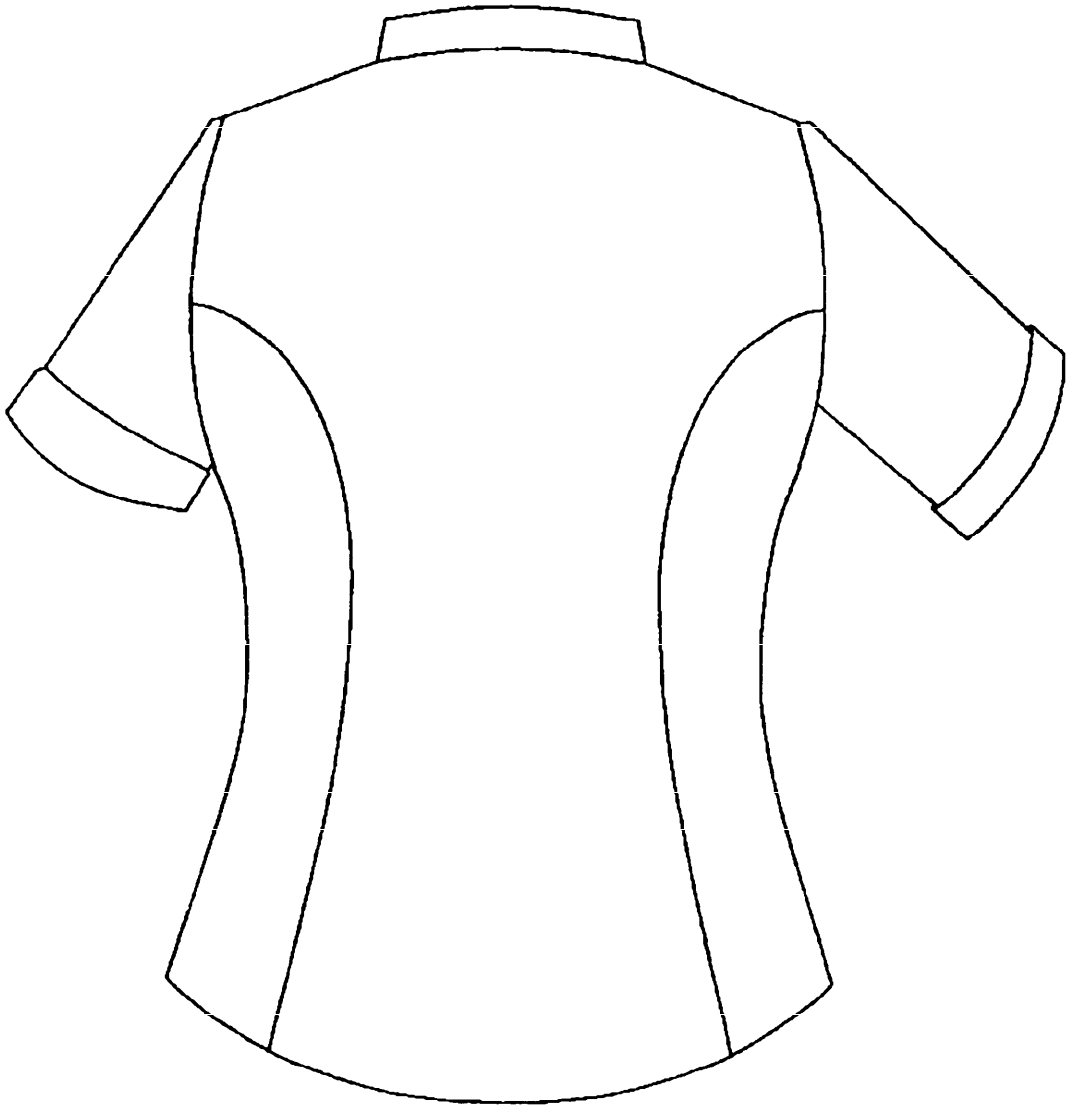

BACK VIEW

FIGURE 2
SHIRT, WOMEN'S, SHORT SLEEVE, TYPE I


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:36Z
Check the source to verify that this is the current version before use.

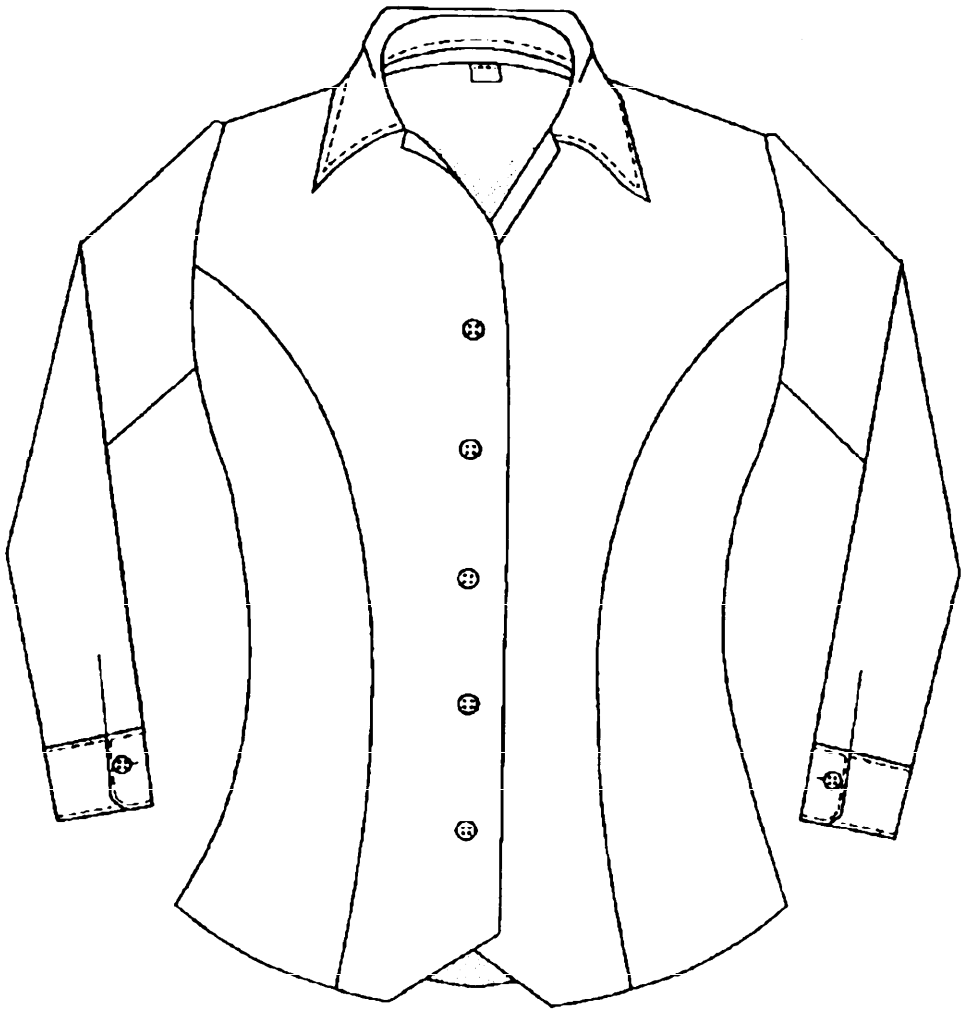

FRONT VIEW

FIGURE 3
SHIRT, WOMEN'S, LONG SLEEVE, TYPE II


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:36Z
Check the source to verify that this is the current version before use.

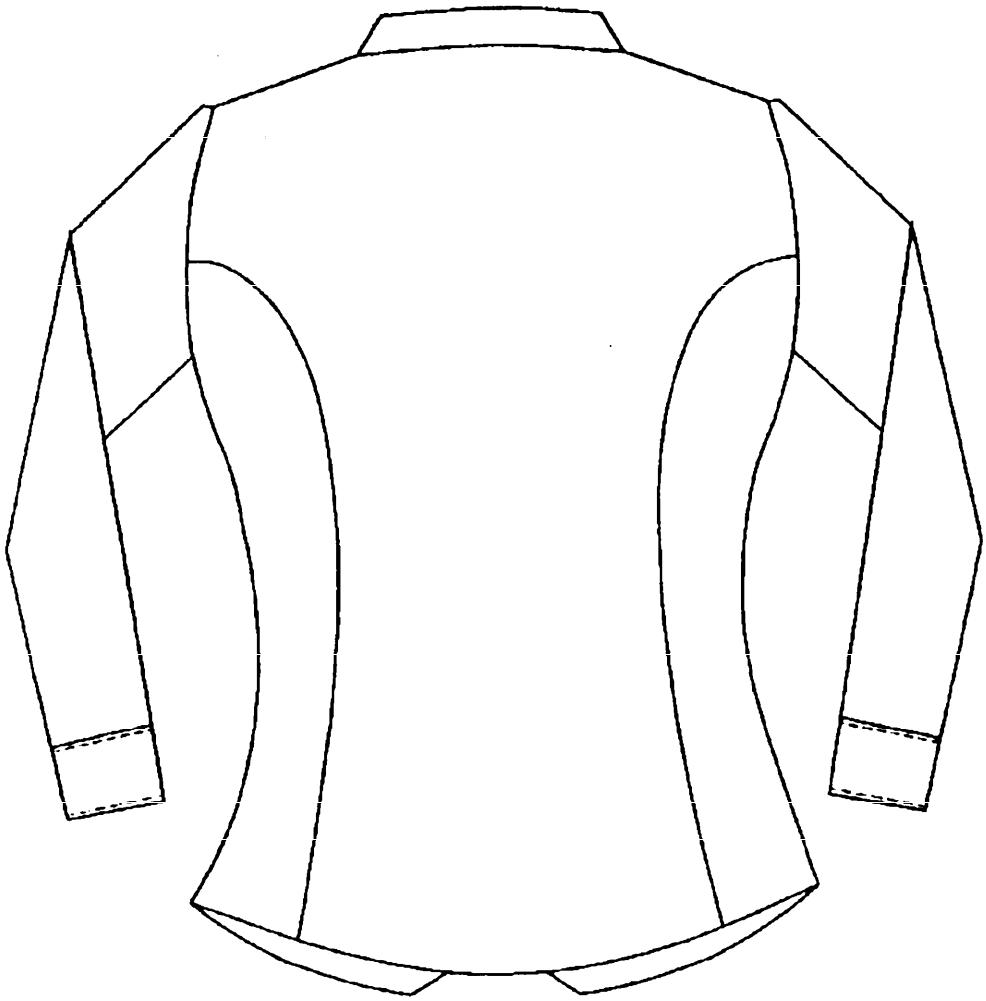

BACK VIEW

FIGURE 4
SHIRT, WOMEN'S, LONG SLEEVE, TYPE II

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:36Z
Check the source to verify that this is the current version before use.

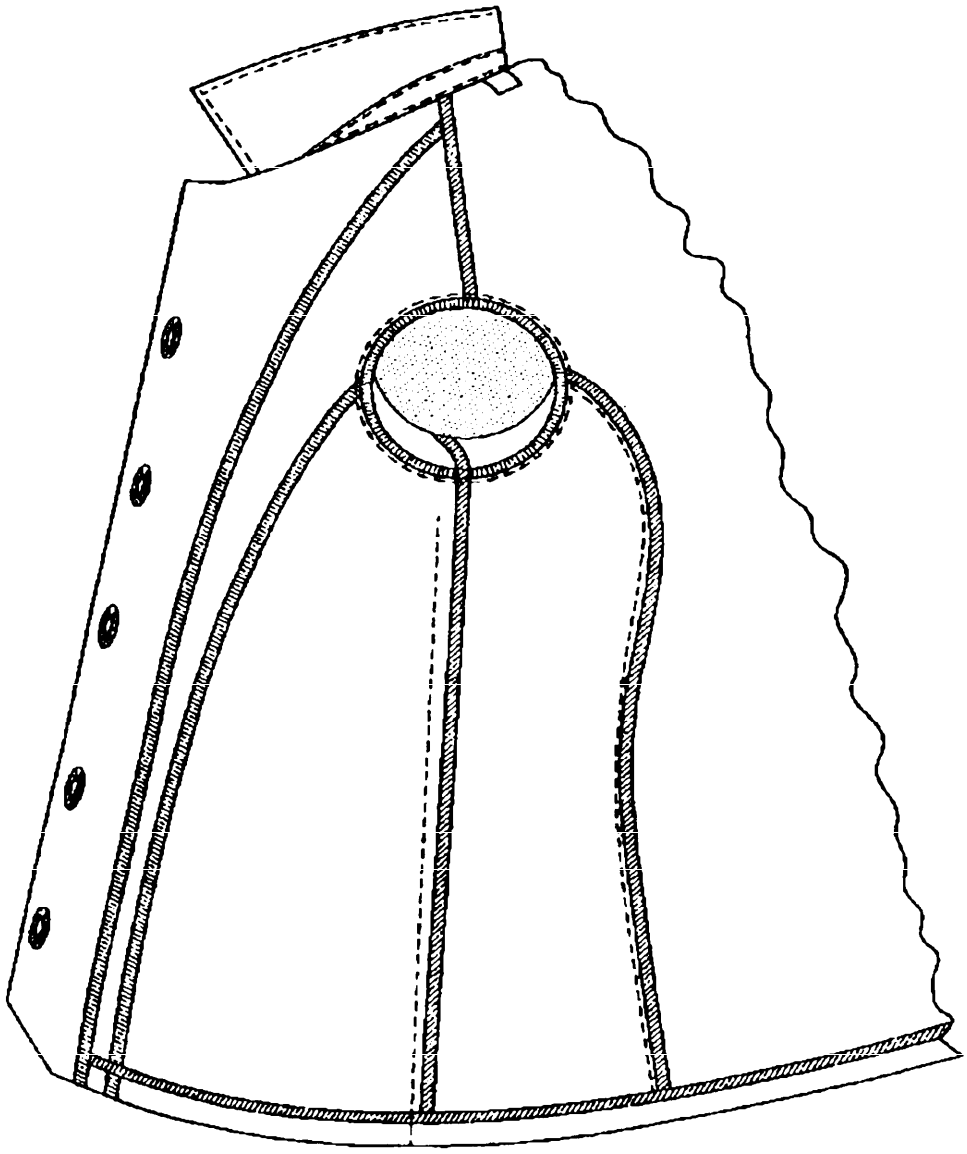

INSIDE SIDE VIEW

FIGURE 5
SHIRT, WOMEN'S, TYPE I AND II

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:36Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-S-29368D	94-06-07

3. DOCUMENT TITLE
SHIRTS, WOMEN'S: LONG AND SHORT SLEEVE

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)	
DEFENSE PERSONNEL SUPPORT CENTER ATTN: DPSC-FQSD	(1) Commercial (215)-737-8105	(2) AUTOVON 444-8105
c. ADDRESS (Include Zip Code) 2800 S. 20TH STREET PHILADELPHIA, PA 19101-8419	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

DD Form 1426, OCT 89 *Previous editions are obsolete* 198-290

Source: https://assist.dla.mil -- Downloaded: 20260-20T22:36Z
Check the source to verify that this is the current version before use.