MIL-S-29376A(MC)
01 June 1988
SUPERSEDING
MIL-S-29376(MC)
15 January 1979

MILITARY SPECIFICATION

SKIRT: WOMAN'S MATERNITY

This specification is approved for use by U. S. Marine Corps, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers requirements for a green polyester wool maternity skirt.

1.2 Classification. The skirt shall be of one type in the following sizes as specified (see 6.2).

Schedule of Sizes

Extra Small	(4-6)
Small	(8-10)
Medium	(12-14)
Large	(16-18)

2. APPLICABLE DOCUMENTS

2.1 Government documents

2.1.1 Specifications and standards. The following specifications and standards form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation (see 2.4).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to the Commanding General, Marine Corps Research, Development and Acquisition Command (PSI-G) Washington, D. C. 20380, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC NA PSC 8410

Distribution Statement A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:38Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

V-T-276	- Thread, Cotton
NN-P-71	- Pallet Material Handling, Wood, Stringer Construction, 2 Way and 4 Way (Partial)
DDD-L-20	- Label, for Clothing, Equipage, and Tentage (General Use)

MILITARY

MIL-T-5237	- Tape, Textile; Webbing, Textile; Rayon
MIL-P-15011	- Pallet, Material Handling, Wood, Post Construction 4 Way Entry
MIL-B-17757	- Box, Shipping, Fiberboard (Modular Sizes)
MIL-C-29374	- Cloth, Serge: Polyester/Wool
MIL-C-43247	- Cloth, Knitted, Nylon, Tubular, Stretch Type
MIL-C-43548	- Thread, Polyester, Cotton Covered and Rayon Covered

STANDARDS

FEDERAL

FED-STD-751	- Stitches, Seams, and Stitchings

MILITARY

MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-147	- Palletized Unit Loads
MIL-STD-1609	- Provisions for Evaluating Quality of Women's Skirts.

Copies of specifications and standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.1.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted shall be those listed in the issue of the DoDISS specified in the solicitation. Unless otherwise specified, the issues of document not listed in the DoDISS shall be in the issue of the nongovernment documents which is current on the date of the solicitation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:38Z
Check the source to verify that this is the current version before use.

LAWS AND REGULATIONS

U. S. Postal Service Manual

(Application for copies of the manual may be obtained from the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402.)

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Association, Inc., Tariff Order Section, 1616 P. Street, N. W., Washington, D. C. 20026.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification Rules

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606.)

Department of Defense (DoD) Standard Shades for Buttons 1966

Department of Defense (DoD) Standard Color Card of Official Standardized Shades for Sewing Threads, 1968

(Application for copies should be addressed to the Color Association of the United States, Inc., 200 Madison Avenue, New York, New York 10016.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein (except for associated detail specifications, specification sheets or MS standards), the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

2.4 Source of documents

2.4.1 Government specifications and standards. Copies of the referenced federal and military specifications and standards are available from the Department of Defense Single Stock Point, Commanding Officer, Naval Publications and Forms Center, 5801 Tabor Avenue, Philadelphia, PA 19120. For specific acquisition functions, these documents should be obtained from the contracting activity or as directed by the contracting activity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:38Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Standard samples. Standard samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variation from the specification may appear in the sample, in which case the specification shall govern.

3.2 First article. Unless otherwise specified (see 6.2), before production is commenced, the first article, consisting of the number of finished skirts specified by the procuring activity (see 6.2), shall be submitted, or made available to the contracting officer or his authorized representative for approval. The approval of the first article authorizes the commencement of production, but does not relieve the contractor of responsibility for compliance with all provisions of this specification. The first article shall be manufactured by the contractor in the same facilities to be used for the manufacture of the production items.

3.3 Materials

3.3.1 Basic material. The basic material shall be cloth, serge, polyester/wool, Green Shade 2243 (see 6.3), conforming to MIL-C-29374.

3.3.2 Knitted cloth. The knitted nylon cloth for the front stretch panel shall conform to class 1 of MIL-C-43247. The color shall be Green Shade 2245.

3.3.3 Elastic waistband stabilizer. The elastic waistband stabilizer shall be Ban-Rol XL 90 or equal and shall be 1 ± 1/16 inch in width. Prior to the use of an "or equal" item, the contractor shall submit the items with supporting data to the contracting officer for approval by the Marine Corps Logistics Base (Code 855), Albany, Georgia 31704.

3.3.4 Finishing tape. The tape for finishing the bottom of the skirt shall be tape, textile, rayon conforming to type I of MIL-T-5237. The color of the tape shall closely match Dark Olive Drab, Shade T-1, Cable No. 66023 of DoD Standard Color Card of Official Standardized Shades for Sewing Threads 1968.

3.3.5 Thread. Cotton thread shall conform to V-T-276 as follows:

Operation	Type	Ticket No.	Ply
Seams, stitching	IA3	50	3
Overedging	IA3	70	2

As an alternate to the cotton thread, a polyester, cotton-covered thread conforming to MIL-T-43548, ticket No. 50, 3 ply or ticket No. 70, 2 ply may be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:38Z
Check the source to verify that this is the current version before use.

3.3.5.1 Color. The color of the thread shall be olive drab, shade T-1, Cable No. 66203 of DoD Standard Color Card of Official Standardized Shades for Sewing Threads 1968.

3.3.6 Labels

3.3.6.1 Combination label. Each skirt shall have a combination identification, size, and instruction conforming to type VI, class 14 of DDD-L-20. The fastness to laundering requirements of DDD-L-20 shall apply. The inscription shall be as follows:

SKIRT, WOMEN'S MATERNITY
FIBER CONTENT: Polyester (80%) and Wool (20%) (Example)
SIZE: Small (Example)
STOCK NO.: 8410-00-000-0000 (Example)
CONTRACT NO.: DOT-CG-00000-0 (Example)
NAME OF CONTRACTOR
MACHINE WASH: WARM. LINE OR TUMBLE DRY. IF TOUCH-UP DESIRED, USE COOL IRON. WASH DARKS SEPARATELY. DO NOT BLEACH.

3.4 Design. The skirt shall be the U. S. Marine Corps design shown in Figure 1 having a three piece skirt and a full elastic waistband, which has a one piece front with a knitted nylon cloth stretch panel inserted across the upper front and a two piece back with waist darts. The skirt shall be unhemmed.

3.5 Patterns. Standard patterns will be furnished to the contractor by the Government (see 6.3). The standard patterns shall not be altered in any way and shall be used only as a guide for cutting the contractor's working pattern. The contractor's working patterns shall be identical to the standard patterns. Standard patterns show size, seam allowances, directional lines for cutting, and are marked or notched for proper placement and assembly of the component parts. The patterns provide an allowance of 3 inches for hemming the bottom of skirt and 5/8-inch seam allowance for all seams.

3.5.1 Pattern parts. The skirts shall be cut from the materials specified herein in accordance with the pattern parts indicated below:

Item	Pattern Nomenclature	No. of cut parts
	Material: Basic	
1.	Lower Front	1
2.	Back	2
	Material: Knitted Cloth	
3.	Upper Front Panel	1

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:38Z
Check the source to verify that this is the current version before use.

3.6 Construction. The skirts shall be manufactured in accordance with operation requirements as specified in Table I. The contractor is not required to follow the exact sequence of operations as listed in Table I, but all operations specified shall be used to manufacture the skirts. Stitch, seam, and stitching types specified shall conform to FED-STD-751. The minimum and maximum number of stitches per inch shall be as specified in Table I. Ends of all seams and stitchings when not caught in other seams or stitchings shall be backtacked not less than 1/4-inch. The ends of a continuous line of stitching shall be overlapped not less than 1/2-inch. Thread breaks (all stitch types) shall be secured by stitching back of break not less than 1/2-inch. Skipped stitches or thread breaks may be repaired by using 301 stitch type.

3.6.1 Pressing. Pressing as required in Table I shall be accomplished with a heated pressing iron or machine set at a suitable temperature for synthetics.

3.6.2 Shade marking. The component parts shall be marked to insure a uniform shade and size throughout the skirts. Any method of shade marking may be used except:

(a) Corrosive metal fastening devices.
(b) Sewn-on shade tickets.
(c) Adhesive type tickets, which leave traces of paper or adhesive on material after removal of tickets.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
1.	Cutting. a. Cut skirt in strict accordance with patterns furnished by the Government. b. Cut all materials in the direction indicated by directional lines on pattern. The directional line shall be placed in the warp direction of the cloth unless otherwise indicated on the pattern. c. Cut all parts of the skirt, except the upper front panel, out of the same piece of basic material. d. The upper front panel shall be cut from knitted stretch material in accordance with patterns furnished.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:38Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
1.	Cutting. (continued) e. Cut elastic waistband stabilizer in lengths as shown below for individual sizes. Size — Length (inches) Extra — 25 Small — 26 Medium — 27 Large — 28 f. Cut hem tapes not less than 65 inches long (see operation 11).					
2.	Replacement of damaged parts. a. Replace at time of cutting any part of the skirt containing holes or seriously weakening defects such as smashes, multiple floats, loose weakening slubs, etc., expected to develop into holes, shade bars and dye streaks or unsightly slubs, etc. b. Replace any part damaged during manufacturing process by needle chews which may develop into a hole, scissor or knife cuts, tears, holes, mends or burns in the material.					
3.	Shade marking. Mark, ticket or bundle all component parts (see 3.6.3) cut from one piece of basic material to insure uniform shade and size throughout the skirt.					
4.	Make front. Finished appearance. The front parts shall be joined without gathers, puckers or pleats.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:38Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
4.	Make front. (continued)					
	a. Join the knitted stretch panel to lower front panel with a 5/8 inch seam allowance. The ends of the seam shall start and finish evenly at the seam line.	301 or 401	SSa-1	10-14	50 50	50 70
	b. Overedge stitch the raw edges of the seams together.	503 or 504	EPd-1	10-14	70	70
	c. Turn finish seam down and topstitch on the basic fabric 1/4 inch from joining seams.	301 or 401	LSbm-4	10-14	50 50	50 70
	d. As an option to oper. 4(a) and (b) the front knitted stretch panel and lower front panel may be joined in one continuous operation.	515 516 517 518 519	SSa-2	10-14	50 50	50 70
5.	Make back.					
	Finished appearance. The back parts shall be joined without gathers, puckers or pleats.					
	a. Position the back panels face to face with edges even and join at the center with a 5/8 inch seam. The ends of the seam shall finish evenly.	301 or 401	SSa-1	10-14	50	50
	b. Spread open center back seam and press smooth and flat with a heated iron or pressing machine.					
6.	Make back darts.					
	Finished appearance. The darts shall be tapered on the inside without twists or puckers. Thread ends at lower end of darts shall not be trimmed closer than 1/2 inch in length. End of darts need not be bartacked.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:38Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL.	BOB/ LPR
6.	Make back darts. (continued)					
	a. Fold and stitch back waist darts in accordance with marks and notches as indicated on the pattern. The lower ends of the waist darts shall be tapered.	301 or 401	OSf-1	10-14	50 50	50 70
	b. Press the darts smooth and flat with a heated pressing iron, with the inside folded edge of darts toward the center back seam.					
7.	Join front and back parts.					
	a. Join the front and back parts of skirt at the side seams with a 5/8 inch seam. The ends of the seam shall finish evenly.	301	SSa-1	10-14	50	50
	b. Spread open side seams and press smooth and flat with a heated iron or pressing machine.					
	c. Overedge stitch the raw edges of the top, sides and bottom of the front and back panels.	503 or 504	EFd-1	10-14	70	70
8.	Make waistband and insert labels.					
	Finished appearance. The waistband shall finish 1-1/4 ± 1/8 inches wide and shall be uniform in width. The label shall be positioned on the center of back caught in the waistband seam. The stitching shall not be through the label printing.					
	a. Overlap the ends of the elastic waistband stabilizer 1 inch, and join the ends of the stabilizer with a single row of stitching forming a box stitch.	301	LSa-1	10-14	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:38Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL.	BOB/ LPR
8.	Make waistband and insert labels. (continued)					
	b. Fold the top edge of the skirt to the inside, forming a 1-1/4-inch hem and enclosing the elastic waistband stabilizer (8a). Stitch the hem with a single row of stitching 1/8 to 3/16 inch from the edge forming a tunnel for the stabilizer. The combination label shall be caught in the stitching.	301 or 401	EFa-1	10-14	50 50	50 70
	c. Place a single row of stitching at the upper back seam catching the stabilizer in the stitching.	301 or 401	SSa-1	10-14	50 50	50 70
9.	Clean skirt.					
	a. All ends of stitching shall be trimmed and the loose threads removed from the skirt.					
	b. Any spots, stains and shade tickets or markings shall be removed without injury to the material.					
10.	Press skirt.					
	The entire skirt shall be pressed smooth with heated pressing iron or pressing machine. Press marks and gloss shall be removed.					
11.	Prepare for packing.					
	a. Examine skirt.					
	b. An envelope containing the tape for the skirt hem shall be attached to the skirt.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:38Z
Check the source to verify that this is the current version before use.

3.7 Finished measurements. The finished skirts shall conform to the measurements shown in Table II. All measurements and tolerance the expressed in inches.

Table II. Finished measurements

Size	A Waist Relaxed	B Waist Stretched	C Hips	D Length
Extra Small	24	29	39	29-1/2
Small	25	31	41	30
Medium	26	34	44	30-1/2
Large	27	37-1/2	47-1/2	31
Tolerance	± 1/2	± 1/2	± 1/2	± 1/2

NOTE: All measurements shall be taken with skirt smooth and flat. A, B, C and D refer to Figure 1.

(A-B) Waist. Twice the measurement taken in center of waistband from folded edge to folded edge.

(C) Hips. Twice the measurement taken on the skirt 7 inches down from top edge of waistband from folded edge to folded edge.

(D) Length. Measurement taken at center back from top edge of waistband to bottom edge of unhemmed skirt.

3.8 Workmanship. The finished skirts shall conform to the quality and grade of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable point value or defect limit.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to the prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of section 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspec-

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:38Z
Check the source to verify that this is the current version before use.

tion system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.4)
2. Quality conformance inspection (see 4.5)

4.3 Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with the test conditions specified in MIL-STD-1609.

4.4 First article inspections. When first article is required, inspection shall be made of a completely fabricated skirt for all provisions of this specification.

4.5 Quality conformance inspection. Inspection shall be performed in accordance with MIL-STD-1609.

4.5.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase documents. A certificate of compliance will be acceptable for the elastic waistband stabilizer requirements of 3.3.3.

4.5.2 End item examination. Samplings and examination of the end item shall be performed for dress (D) skirts in accordance with the provisions of MIL-STD-1609.

4.5.3 Dimensional examination. The dimensional examination provisions for the finished skirts shall be as listed in 3.7 and as specified in MIL-STD-1609.

4.5.4 Examination of packaging requirements. The examination for compliance with packaging, packing and marking requirements shall be as specified in MIL-STD-1609.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:38Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging. Packaging shall be level A or commercial (see 6.2).

5.1.1 Level A. Fold skirt in half lengthwise. Skirts shall then be folded in half in the width, with bottom edge even with top edge, to form a length of approximately 15 inches. Each of the folded skirts shall be inserted in an individual polyethylene bag measuring approximately 15 inches in length and 15 inches in width. The bag shall be fabricated from 0.0015 inch thick film. All seams and closures of the bag shall be effected by heat sealing. A 1/4 inch diameter hole shall be made at one corner of the bag to allow excess air to escape. Prior to or during the heat-sealing operation, excess air shall be expelled to the extent necessary to insure the required multiples of packaged units will fit into the intermediate containers. As an alternative, the final closure of the bag may be accomplished by a tuck or reverse flap. If the final closure is a tuck or reverse flap, the 1/4 inch diameter hole will not be required.

5.1.2 Commercial. Skirts shall be packaged to afford adequate protection against physical damage during shipment from the supplier to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing. Packing shall be level A or commercial (6.2).

5.2.1 Level A. Thirty (30) skirts of one size only, packaged as specified in 5.1.1, shall be packed in a fiberboard shipping container assembled, closed and reinforced conforming to type CF, class weather-resistant, variety SW, grade V3c, size 2A of MIL-B-17757. The fiberboard for the box liner shall conform to type CF, class weather-resistant, variety DW, grade V15c, of MIL-B-17757. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper.

5.2.2 Commercial. Skirts, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rates for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with the U. S. Postal Service Manual, Uniform Freight Classification Rule or National Motor Freight Classification Rules, as applicable.

5.3 Marking. In addition to any special marking required by the contract or purchase order, interior package and shipping containers shall be marked in accordance with MIL-STD-129. Polyethylene bagged

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:38Z
Check the source to verify that this is the current version before use.

packages shall have the following information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification:

NOMENCLATURE
SIZE
STOCK NUMBER
CONTRACT NO
CONTRACTOR

5.4 Palletization. When specified (see 6.2), skirts packed as specified in 5.2 shall be palletized on a 4-way entry pallet in accordance with load type 1A of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means C, K and L or O or P. Pallet pattern shall be in accordance with the appendix of MIL-STD-147. The pallet shall be 4-way, Type I, Class 1, Style 1, Size A, Wood Group I, II, III or IV of MIL-P-15011, or, 4-way, Type IV, V or VIII, Class 1, Style A, Size 2, Wood Group I, II, III or IV, Grade A of NN-P-71. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall be approved by the contracting officer.

6. NOTES

6.1 Intended use. The skirts covered by this specification are intended for wear by female personnel of the U. S. Marine Corps.

6.2 Ordering data

6.2.1 Acquisition requirements. Acquisition documents should specify the following:

(a) Title, number and date of this specification.
(b) Size required (see 1.2).
(c) Whether first article is required (see 3.2).
(d) Number of skirts in first article (see 3.2).
(e) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(f) When palletization is required (see 5.4).

6.2.2 Data requirements. When this specification is used in an acquisition and data are required to be delivered, the data requirements identified below shall be developed as specified by an approved Data Item Description (DD Form 1664) and delivered in accordance with the approved Contract Data Requirements List (CDRL), incorporated into the contract. When the provisions of DoD FAR Supplement, Part

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:38Z
Check the source to verify that this is the current version before use.

27, Sub-Part 27.410-6 (DD Form 1423) are invoked and the DD Form 1423 is not used, the data specified below shall be delivered by the contractor in accordance with the contract or purchase order requirements. Deliverable data required by this specification are cited in the following paragraphs.

Paragraph No.	Data requirements	Applicable DID No.	Options
(a) 4.	Inspection System Program Plan	DI-R-4803	- -
(b) 4.4	First Article Inspection Procedures	DI-T-4901	- -
(c) 4.4	First Article Inspection Report	DI-T-4902	- -
(d) 4.5	Production/Acceptance Inspection Procedures	DI-T-4903	- -
(e) 4.5	Production Inspection Report	DI-T-4904	- -

(Data item description related to this specification, and identified in section 6 will be approved and listed as such in DoD 5000.19L., Vol. II, AMSDL. Copies of data item descriptions required by the contractors in connection with specific acquisition functions should be obtained from the Naval Publications and Forms Center or as directed by the contracting officer.)

6.3 Standard sample and pattern. For information regarding the availability of standard sample and patterns, address inquiry to the acquiring activity issuing the invitation for bids.

6.4 First article. Examination, tests and approval shall be as specified by the contracting officer (see 3.2).

6.5 Subject term (keyword) listing

Skirt
Woman's
Maternity


6.6 Figures. Figures are furnished for information purposes only. In the event of conflict between the figures and the text of this specification, the text of this specification shall govern.


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:38Z
Check the source to verify that this is the current version before use.


6.7 Marginal notations. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Preparing Activity
NAVY-MC
Project No. 8410-N690

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:38Z
Check the source to verify that this is the current version before use.

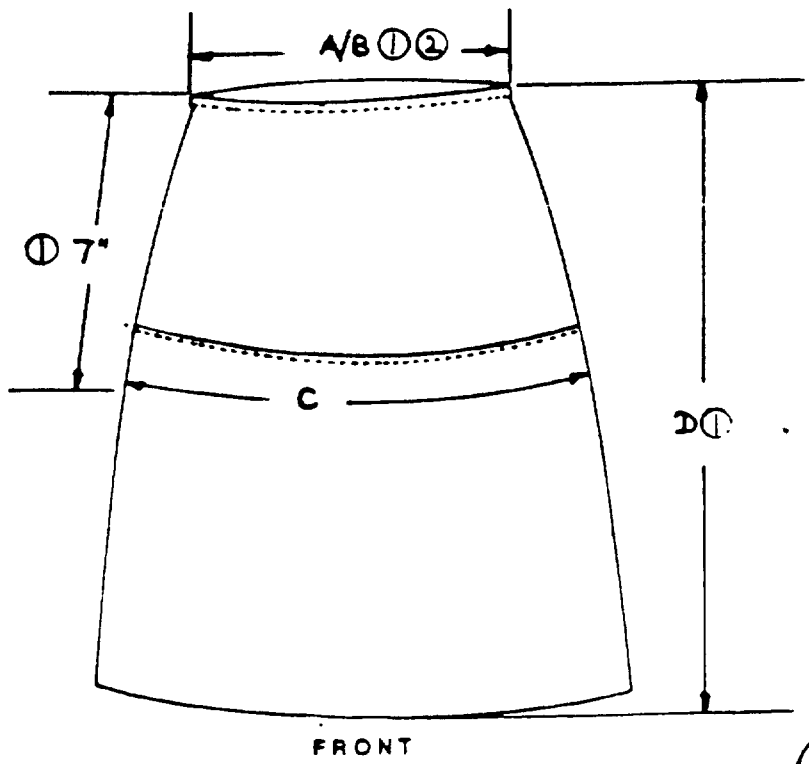

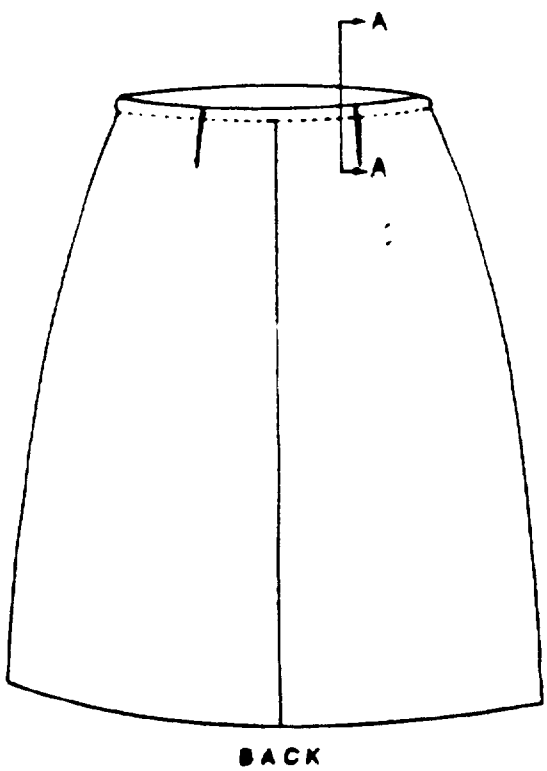



WAISTBAND SECTION A-A

NOTES ① SEE TABLE II

② DIM. A-RELAXED
DIM. B-STRETCHED

FIGURE 1.-SKIRT, WOMEN'S MATERNITY

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:38Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:38Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commanding General
Marine Corps Research, Development
and Acquisition Command (PSI-G)
Washington, D.C. 20380-0001

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:38Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-S-29376A(MC)	SKIRT: WOMAN'S MATERNITY

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording

c. Reason/Rationale for Recommendation

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	7b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
7c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:38Z
Check the source to verify that this is the current version before use.