MIL-T-29375A(MC)
02 June 1988
SUPERSEDING
MIL-T-29375(MC)
15 January 1979

MILITARY SPECIFICATION

TUNIC: WOMAN'S MATERNITY

This specification is approved for use by U. S. Marine Corps, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers requirements for a green polyester wool maternity tunic.

1.2 Classification. The tunic shall be of one type in the following sizes as specified (see 6.2):

Schedule of Sizes

Extra Small	(4-6)
Small	(8-10)
Medium	(12-14)
Large	(16-18)

2. APPLICABLE DOCUMENTS

2.1 Government documents

2.1.1 Specifications and standards. The following specifications and standards form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation (see 2.4).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to the Commanding General, Marine Corps Research, Development and Acquisition Command (Code PSI-G), Washington, D.C. 20380-0001, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC NA PSC 8410

Distribution Statement A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 20261O-20T22:38Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

V-B-871	- Buttons, Sewing Hole, and Button Staple (Plastic)
V-F-106	- Fasteners, Slide, Interlocking
V-T-276	- Thread, Cotton
NN-P-71	- Pallet Material Handling, Wood, Stringer Construction, 2 Way and 4 Way (Partial)
DDD-L-20	- Label, for Clothing, Equipage, and Tentage (General Use)

MILITARY

MIL-P-15011	- Pallet, Material Handling, Wood, Post Construction 4 Way Entry
MIL-B-17757	- Box, Shipping, Fiberboard (Modular Sizes)
MIL-C-29374	- Cloth, Serge: Polyester/Wool
MIL-C-29365	- Cloth, Nonwoven: Interlining, Fusible, Nylon and Polyester, Polyamid
MIL-C-43548	- Thread, Polyester Core: Cotton-, Rayon-, or Polyester-covered

STANDARDS

FEDERAL

FED-STD-191	- Textile Test Methods
FED-STD-751	- Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-147	- Palletized Unit Loads

2.1.2 Other Government documents and publications. The following document(s) form a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitations.

LAWS AND REGULATIONS

U. S. Postal Service Manual

(Application for copies of the manual may be obtained from the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted shall be

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:38Z
Check the source to verify that this is the current version before use.

those listed in the issue of the DoDISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS shall be the issue of the nongovernment documents which is current on the date of the solicitation.

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification Rules

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606.)

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Association, Inc., Tariff Order Section, 1616 P. Street, N. W., Washington, D. C. 20026.)

Department of Defense (DoD) Standard Shades for Buttons 1966

Quartermaster Standard Shades of Slide Fastener Tapes, 1959

Department of Defense (DoD) Standard Color Card of Official Standardized Shades for Sewing Threads, 1968

(Application for copies should be addressed to the Color Association of the United States, Inc., 200 Madison Avenue, New York, New York 10016.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein (except for associated detail specifications, specification sheets or MS standards), the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

2.4 Source of documents

2.4.1 Government specifications and standards. Copies of the referenced federal and military specifications and standards are available from the Department of Defense Single Stock Point, Commanding Officer, Naval Publications and Forms Center, 5801 Tabor Avenue, Philadelphia, PA 19120. For specific acquisition functions, these documents should be obtained from the contracting activity or as directed by the contracting activity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:38Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Standard samples. Standard samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variation from the specification may appear in the sample, in which case the specification shall govern.

3.2 First article. Unless otherwise specified (see 6.2), before production is commenced, the first article, consisting of the number of finished skirts specified by the procuring activity (see 6.2), shall be submitted, or made available to the contracting officer or his authorized representative for approval. The approval of the first article authorizes the commencement of production, but does not relieve the contractor of responsibility for compliance with all provisions of this specification. The first article shall be manufactured by the contractor in the same facilities to be used for the manufacture of the production items.

3.3 Materials

3.3.1 Basic material. The basic material shall be cloth, serge, polyester/wool, Green Shade 2243 (see 6.3), conforming to MIL-C-29374.

3.3.2 Interlining. The interlining for the front neck/armhole and back neck/armhole facings shall be cloth, nonwoven, interlining, fusible nylon and polyester polyamid conforming to class 3 of MIL-C-29365.

3.3.3 Buttons. The buttons for the waist adjustment tabs shall conform to type II, class D, style 20 or 21, size 30 line of V-B-871. The stay button shall conform to type II, class D, style 15, size 18 line of V-B-871. The buttons shall have a glossy finish, Green Shade AF Cable No. 62017 (See DoD Standard Shades for Buttons, 1966).

3.3.4 Slide fasteners. The slide fasteners shall conform to either 3.3.4.1 or 3.3.4.2.

3.3.4.1 Slide fasteners, metal. The slide fasteners shall conform to type I, style 3, short tab pull, cam lock size LS (commercial No. 4), of V-F-106, except that the salt spray test shall not be required. All the components of the slide fastener shall be brass and from the same supplier (see 4.5.1). The tape shall be cotton or synthetic or a combination. The length of the slide fastener shall be 20 inches for all sizes.

3.3.4.2 Plastic coil slide fasteners. The slide fastener shall be manufactured of polyester or nylon consisting of an automatic or cam lock and shall be equal to commercial size No. 2. The tape shall be a blend of nylon and cotton or polyester and cotton or polyester, and shall have a minimum width (one side) of 7/16 +1/8 inch. The length of the slide fastener shall be 20 inches for all sizes.

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:38Z
Check the source to verify that this is the current version before use.

3.3.4.3 Color of tape. The color of the slide fastener tape shall be Green Shade, AF Cable No. 66531. (See Quartermaster Standard Shades of Slide Fastener Tapes, 1959).

3.3.4.4 Colorfastness. The dyed slide fastener tape shall show colorfastness to laundering equal to or better than the standard sample when tested as specified in V-F-106. When no standard sample is available, the tape shall show "good" colorfastness when tested as specified in V-F-106.

3.3.5 Thread. Cotton thread shall be used conforming to V-T-276 as follows:

Operation	Type	Ticket No.	Ply
Buttonholes	IC3	0	3
Seams, stitching	IA3	50	3
Overedging	IA3	70	2
Buttons	IB3	16, 20	4

As an alternate to the cotton thread, a polyester, cotton-covered thread conforming to MIL-T-43548, ticket No. 50, 3 ply or ticket No. 70, 2 ply may be used.

3.3.5.1 Color. The color of the thread shall be Olive Drab, Shade T-1, Cable No. 66203 of DoD Standard Color Card of Official Standardized Shades for Sewing Threads 1968.

3.3.6 Labels

3.3.6.1 Combination label. Each tunic shall have a combination identification, size, instruction and personal label conforming to type VI, classes 10 and 14 of DDD-L-20. The fastness to laundering requirements of DDD-L-20 shall apply. The inscription shall be as follows:

TUNIC, WOMEN'S MATERNITY
FIBER CONTENT: Polyester (80%) and Wool (20%) (Example)
SIZE: Small (Example)
STOCK NO.: 8415-00-000-0000 (Example)
CONTRACT NO.: DOT-CG-00000-0 (Example)
NAME OF CONTRACTOR
MACHINE WASH: WARM. LINE OR TUMBLE DRY. IF TOUCH-UP DESIRED, USE COOL IRON. WASH DARKS SEPARATELY. DO NOT BLEACH.

3.3.6.2 Size label. The label for the tunic shall conform to type VI, class 2 of DDD-L-20 and shall bear the following inscriptions:

Size: Small(Example)

3.4 Design. The tunic shall be the U. S. Marine Corps design shown in Figure 1, hip length, sleeveless, without collar, with pleat insert, two back waist adjustment tabs and back center slide fastener closure.

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:38Z
Check the source to verify that this is the current version before use.

3.5 Patterns. Standard patterns will be furnished to the contractor by the Government (see 6.3). The standard patterns shall not be altered in any way and shall be used only as a guide for cutting the contractor's working pattern. The contractor's working patterns shall be identical to the standard patterns. Standard patterns show size, seam allowances, directional lines for cutting, and are marked or notched for proper placement and assembly of the component parts. The patterns provide an allowance of 1-1/2 inches for hemming the bottom of tunic, 5/8-inch seam allowance for joining the side seam and 3/8-inch seam allowance for all other seams, except as otherwise listed in Table I.

3.5.1 Pattern parts. The tunic shall be cut from the materials specified herein in accordance with the pattern parts indicated below:

Item	Pattern Nomenclature	No. of cut parts
	Material: Basic	
1.	Front	2
2.	Back	2
3.	Waist Adjustment Tabs	2
4.	Front, Pleat Facing	1
5.	Front Neck and Armhole Facing	1
6.	Back Neck and Armhole Facing	2
	Material: Fusible interlining	
7.	Front Neck and Armhole Interlining	1
8.	Back Neck and Armhole Interlining	2
9.	Waist Adjustment Tabs Interlining	2
	Marker	
10.	Ornamental Front Marker	

3.6 Construction. The tunics shall be manufactured in accordance with operation requirements as specified in Table I. The contractor is not required to follow the exact sequence of operations as listed in Table I, but all operations specified shall be used to manufacture the tunics. Stitch, seam, and stitching types specified shall conform to FED-STD-751. The minimum and maximum number of stitches per inch shall be as specified in Table I. Ends of all seams and stitchings when not caught in other seams or stitchings shall be backtacked not less than 1/4-inch. The ends of a continuous line of stitching shall be overlapped not less than 1/2-inch. Thread breaks (all stitch types) shall be secured by stitching back of break not less than 1/2-inch. Skipped stitches or thread breaks may be repaired by using 301 stitch type.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:38Z
Check the source to verify that this is the current version before use.

3.6.1 Pressing. Pressing as required in Table I shall be accomplished with a heated pressing iron or machine set at a suitable temperature for synthetics.

3.6.2 Shade marking. The component parts shall be marked to insure a uniform shade and size throughout the tunics. Any method of shade marking may be used except:

(a) Corrosive metal fastening devices.
(b) Sewn-on shade tickets.
(c) Adhesive type tickets, which leave traces of paper or adhesive on material after removal of tickets.

3.6.3 Fusing. The fusible interlining cloth shall be fused to the basic material in accordance with the fusible manufacture's instructions for product and basic fabric used.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
1.	Cutting.					
	a. Cut tunic in strict accordance with patterns furnished by the Government.					
	b. Cut all materials in the direction indicated by directional lines on pattern. The directional line shall be placed in the warp direction of the cloth unless otherwise indicated on the pattern.					
	c. Cut all parts of the tunic out of the same piece of basic material.					
	d. Cut all interlining parts from fusible cloth, in accordance with the patterns.					
2.	Replacement of damaged parts.					
	a. Replace at time of cutting any part of the tunic containing holes or seriously weakening defects such as smashes, multiple floats, loose weaken-					

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:38Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
2.	Replacement of damaged parts. (continued)					
	ing slubs, etc., expected to develop into holes, shade bars and dye streaks or unsightly slubs, etc.					
	b. Replace any part damaged during manufacturing process by needle chews which may develop into a hole, scissor or knife cuts, tears, holes, mends or burns in the material.					
3.	Shade marking.					
	Mark, ticket or bundle all components parts (see 3.6.3) cut from one piece of basic material to insure uniform shade and size throughout the tunic.					
4.	Make waist adjustment tabs.					
	Finished appearance. The waist adjustment tabs shall finish flat and smooth without twists and puckers. The stitching shall be uniform in width.					
	a. The tabs shall be made from one ply of basic material and one ply of fusible interlining.					
	b. Position the fusible interlining material on the under side of the basic material. Fuse the fusible interlining to the basic material of the tabs as specified in 3.6.4.					
	c. Fold each tab in half, so that the basic material is face to face. Join all plies	301 or 401	SSa-1	10-14	50 50	50 70

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:38Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
4.	Make waist adjustment tabs. (continued)					
	along the side edges and the pointed end with a 1/4-inch seam.					
	d. Trim, turn, force out the edges and the pointed end, and baste.	Hand or Machine				
	e. Top stitch the sides and pointed end 1/4 inch from the edge.	301 or 401	SSe-2(b)	10-14	50 50	50 70
	f. Press tab smooth and flat.					
5.	Make buttonholes in tabs.					
	Finished appearance. The buttonholes shall be clean cut, well made and correctly positioned. The buttonholes shall be well worked over gimp to fit a 30 line button. The stitching shall be securely caught in the fabric with the purling on the facing side of the tabs.					
	a. Mark the location for the buttonholes in accordance with the marks on the pattern.					
	b. Make a horizontal eyelet-end taper bar type buttonhole, to fit a 30 line button, centered in each tab. The front end of the finished buttonhole shall be 3/4 inch from the pointed end of the tab, well worked over gimp, with the gimp pulled through to the underside.	Buttonhole		70 per buttonhole including bar	0	0
6.	Attach waist adjustment tabs.					
	Position open end of tabs on each side front, between notches, with the purling of the buttonholes against the front and stitch 1/4 inch from edge.	301	SSa-1	10-14	50	50

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:38Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
7.	Make back shoulder darts. Finished appearance. The darts shall be tapered on the inside without twists or puckers. Thread ends at lower end or darts shall not be trimmed closer than 1/2 inch in length. end of darts need not be bartacked.					
	a. Fold and stitch back shoulder darts in accordance with marks and notches as indicated on the pattern. The lower ends of the darts shall be tapered to a flat point.	301 or 401	OSf-1	10-14	50 50	50 70
	b. Press the darts smooth and flat with a heated pressing iron, with inside folded edge of darts toward the center back closure.					
	c. Overedge stitch the center back raw edges of the back.	503 or 504	EFd-1	10-14	70	70
8.	Make bust darts. Finished appearance. The bust darts shall be neatly formed and tapered to a flat point. The point shall be securely tacked or backstitched.					
	a. Fold the bust darts on the fronts, below the armholes, in accordance with the notches on the pattern. Stitch the entire length of the darts, tapering to a point at the front end and securely backtacking the pointed end. The darts shall finish on the inside with the folded edge toward the bottom of the tunic.	301 or 401	OSf-1	10-14	50 50	50 70

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:38Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
8.	Make bust darts. (continued)					
	b. Press the bust darts smooth and flat toward the bottom of the tunic on the inside with a heated pressing iron or pressing machine.					
9.	Make front.					
	Finish appearance. The front parts shall be joined without gathers, puckers or pleats.					
	a. Position fronts face to face in accordance with the notches on the pattern. Stitch the fronts together from the inner top notch at the neck edge for a length of 3-1/2 ± 1/16 inches down the center front seam line.	301	SSa-1	10-14	50	50
	b. Position the front pleat facing on the right and left front respectively, with bottom, top and side edges even and notches matching.					
	c. Join right and left of front pleat facing, respectively, to the right and left fronts, 3/8 inch from raw edge.	301 or 401	SSa-1	10-14	50 50	50 70
	d. Overedge stitch the raw edges of the seam allowances together.	503	EFd-1	10-14	70	70
	e. As an option to oper. 9 (c) and (d) the fronts and front pleat facing may be joined in one continuous operation.	515 or 516 or 517 or 518 or 519	SSa-2	10-14	50 50	50 70
	f. Fold the front from the bottom notches to meet the end of the seamline at the top, and press smooth and flat with					

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:38Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
9.	Make front. (continued)					
	a heated pressing iron or pressing machine, forming a pleat and with the seamed edges turned toward the sides.					
	g. Mark the upper center front with ornamental front marker. The notch on the marker shall match the neck-line with the pointed end toward the bottom and in line with the seamline of center front.					
	h. Stitch along the marker through all plies.	301	OSq-3(c)	10-14	50	50
		or 401			50	70
10.	Join fronts to back at shoulders.					
	a. Join fronts to back at the shoulder with 3/8 inch seam.	301	SSa-1	10-14	50	50
		or 401			50	70
	b. Spread open shoulder seam and press smooth and flat with a heated pressing iron or pressing machine.					
11.	Make and join facing.					
	Finished appearance. The completed neck line and armhole shall finish smooth and flat without distortion. Edges shall be uniformly even. The top stitching shall be of uniform gage. The label shall be positioned on the left neck and armhole facing.					
	a. Position the fusible interlining material on the under side of the three parts of the facing. Fuse the fusible interlining to the basic material of the facing parts as specified in 3.6.4.					

Source: https://assist.dla.mil -- Downloaded: 20261010-20T22:38Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
11.	Make and join facing. (continued)					
	b. Overedge stitch the raw edges of the sides and bottom of the three parts of the facing.	503 or 504	EFd-1	6-8	70 70	70 70
	c. The size label shall be attached to the lower right back facing 1 inch from the slide fastener. The label may be caught in the overedge stitch or sewn separately across the top end of the label.	301 or 503 or 504	SSa-1 EFa-1 EFd-1	10-14 6-8 6-8		
	d. Join shoulder seam of facings with a 3/8 inch seam.	301 or 401	SSa-1	10-14	50 50	50 70
	e. Spread open shoulder seams of facing and press smooth and flat with heated pressing iron or pressing machine.					
	f. Sew the combination label on all four sides to the left neck and armhole facing. On the finished tunic, the label shall be positioned 1 inch from the slide fastener tape and centered on facing.	301	LSbj-1	10-14	50	50
12.	Join front and back facing to front and back neck opening and armhole.					
	Finished appearance. The joining seams of the entire neckline and armhole facings to the respective corresponding parts shall be notched before turning to attain the smooth appearance after topstitching. The armhole and neckline facings shall not be puckered, twisted or distorted in the finished garment.					

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:38Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
12	Join front and back facing to front and back neck opening and armhole. (continued)					
	a. Position the front and back facing on the outside of front and back with the upper raw edges even and shoulder seams matching.					
	b. Join facings to front and back along the neck opening with 3/8-inch seam. The line of stitching shall be from folded notch to folded notch at the back.	301 or 401	SSa-1	10-14	50 50	50 70
	c. Join facing to armhole, matching shoulder seam with a 3/8 inch seam.	301 or 401	Ssa-1	10-14	50 50	50 70
	d. Pull each back through their respective shoulder. Turn the facing to the inside, forcing out the seams.					
13	Close sides and armhole facing.					
	a. Join back and front and armhole facing at the side with 5/8 inch seam.	301 or 401	SSa-1	10-14	50 50	50 70
	b. Spread open side seams and press smooth and flat with a heated pressing iron or pressing machine.					
	c. Top-stitch on the neck opening and armholes 1/4 inch from joining seam.	301 or 401	SSe-2(b)	10-14	50 50	50 70
	d. Securely tack or bartack the seam allowance of facing to the seam allowance of the side seam.	Bar-tack		28 per bar-tack	50	50

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:38Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
14.	Make back closure. Finished appearance. The back parts shall be joined without gathers, puckers or pleats. The slide fastener enclosure shall be smooth and flat. The stops at the top of the fastener shall not be more than 1/4 inch below the neckline of the finished tunic. The welts on the back tunic shall completely cover the slide fastener when slide fastener is closed. The stitching shall not interfere with the operation of the slider and the welts shall be uniform in width.					
	a. Stitch the backs together from bottom raw edge of slide fastener notch, face to face, with a 5/8 inch seam. The ends of the seam shall finish evenly.	301	SSa-1	10-14	50	50
	b. Spread open center back seam and press smooth and flat with a heated iron or pressing machine.					
15.	Join slide fastener to facing and back. a. Fold the back edge of the left and right back neck facing in accordance with notches.					
	b. Position the folded edges of facing, on each side of slide fastener 1/8 to 3/16 inch from the slide fastener chain with the upper edge of facing and fastener even. Stitch facing and fastener 1/16 to 1/8 inch from folded edge.	301	LSah-1	10-14	70	70

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:38Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
15.	Join slide fastener to facing and back. (continued)					
	c. Fold neck opening back over the slide fastener and facing at the folded notch and seam through all plies, 3/8 inch from the upper raw edge of back and front neck opening, from folded notch to folded notch.	301	LSah-1	10-14	70	70
	d. Stitch the slide fastener from the upper left side of back to bottom across the bottom and up to the right side of back opening, forming a 1/4 inch wide welt on each side of the slide fastener.	301	SSak-1	10-14	50	50
16.	Hem bottom.					
	Finished appearance. The finished bottom edge of the tunic shall be uniformly overedged and blindstitched without puckers or gathers. The bottom turnup shall be uniform in width.					
	a. Overedge stitch the raw edge of the bottom of the tunic.	503 or 504	EFd-1	10-14	70 70	70 70
	b. Mark tunic 1-1/2 inches from the bottom edge for bottom turnup.					
	c. Turn the bottom edge of the tunic on the inside, and stitch the upper edge of the turnup with blindstitchings.	314	EFa-1	6-8	50	50
	d. Press the bottom turnup smooth and flat with a heated pressing iron or pressing machine.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:38Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
17.	Mark and sew on buttons. Finished appearance. In accordance with marks on the pattern, the buttons shall be securely sewn to the tunic with the ends of the stitching securely tacked. The buttons shall be properly aligned with the buttonholes to secure a smooth and complete closure without bulging or misalignment. The buttons and waist adjustment tabs shall be positioned in accordance with the pattern marks and notches to ensure horizontal alignment across the back and the tabs shall finish smooth and flat when buttoned to the first button from the side seam. a. Mark or gage the location on the back for sewing two 30-line buttons on each side to properly engage the waist adjustment tabs. b. Sew two buttons on each side of the tunic. The first button shall correspond with the buttonholes in the adjustment tab. The center of the second button shall be 1-1/2 inches from the center of the first button. Each button shall be reinforced by an 18-line stay button on the inside of the tunic and then shank wrapped. NOTE: The stay buttons shall be directly under the 30-line buttons and shall be sewn so that the sewing thread on the stay buttons will be through the back, or the stay buttons and the 30-line button may be sewn together.	301 or 101 or Hand		14-16 20-22 4-6 stitches per button	20 20	20 20

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:38Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
18.	Clean tunic. a. All ends of stitching shall be trimmed and the loose threads removed from the tunic. b. Any spots, stains and shade tickets or markings shall be removed without injury to the material.					
19.	Press tunic. The entire tunic shall be pressed smooth with heated pressing iron or pressing machine. Press marks and gloss shall be removed.					

3.7 Finished measurements. The finished tunic shall conform to the measurements shown in Table II. All measurements and tolerances are expressed in inches.

Table II. Finished measurements

Size	A Half Bust	B Back Length
Extra Small	17-1/2	25-1/2
Small	18-1/2	26
Medium	20	26-1/2
Large	21-3/4	27
Tolerance	± 1/2	± 1/2

NOTE: All measurements shall be taken with tunic smooth and flat. A and B refers to Figure 1.

A. Bust. Measurement taken with tunic back closure closed, across front of tunic from folded edge to folded edge at pit of armhole.

B. Back Length. Measurement taken from top of neck line to bottom edge of tunic.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:38Z
Check the source to verify that this is the current version before use.

3.8 Workmanship. The finished tunic shall conform to the quality and grade of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable point value or defect limit.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to the prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of section 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.2.1 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.4)
2. Quality conformance inspection (see 4.5)

4.3 Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with the test conditions specified in MIL-STD-105.

4.4 First article inspections. When first article is required, inspection shall be made of a completely fabricated skirt for all provisions of this specification.

4.5 Quality conformance inspection

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:38Z
Check the source to verify that this is the current version before use.

4.5.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase documents. Whenever applicable, test shall be conducted in accordance with methods prescribed in FED-STD-191. A certificate of compliance will be accepted for the plastic coil slide fastener requirements of 3.3.4.2. In addition, the requirements that all components of the slide fastener have been furnished by one supplier shall be accepted on a certificate of compliance (see 3.3.4).

4.5.2 End item sampling examination. As a final step in the contractors production control plan, before formation of the lot, each tunic shall be closed and examined on an inspection table. After formation of the lot, the tunic shall be examined for the defects listed in 4.5.2.2 through 4.5.2.4. AQL's shall be as indicated in 4.5.2.1 except that if one or more of the major defects found in the sample is an asterisk (*) defect, it shall be cause for rejection of the lot as listed in Table III. The sample unit shall be one tunic.

Table III. Sampling Provisions for Asterisk (*) Defects

Lot size	Sample Size	Maximum acceptance number for selected defects
Up thru 90	20	0
91 thru 150	32	0
151 thru 280	50	0
281 thru 500	80	0
501 thru 1200	125	1
1201 thru 3200	200	1
3201 thru 10,000	315	2
10,001 thru 35,000	500	3
35,001 and over	800	5

4.5.2.1 Inspection levels and AQL's. The inspection levels and AQL's expressed in defects per hundred units (DHU) shall be as follows:

	AQL	Inspection level
For defects listed in 4.5.2.2 and 4.5.2.3 (general and detailed defects):		III
Major	1.5	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:38Z
Check the source to verify that this is the current version before use.

	AQL	Inspection level
Major and Minor A (combined)	6.5	
Total (Major, Minor A and Minor B combined)	15.0	
For defects listed in 4.5.2.4 (size measurements):		S-3
One class	4.0	

4.5.2.2 General defects. General defects shall be classified as follows:

EXAMINE	DEFECT	CLASSIFICATION		
		MAJOR	MINOR	
			A	B
PRESSING	a. Omitted		X	
	b. Burned or scorched.	X		
	c. Gloss, wrinkles or creases.			X
	d. Edge bulky (not pressed solidly).			X
	e. One or more darts or seams not pressed in the direction specified.			X
MATERIAL DEFECTS AND DAMAGES	a. Hole, cut, tear, needle chew, burn, mend, darn, patch, multiple float, loose or unsightly slub or shade bar:			
	1. On outside.	(*)		
	2. On inside.		X	
	b. Permanent crease in cloth (when caught in stitching).	X		
SHADE PARTS	a. Outside part shaded.	X		
CLEANNESS	a. Spot or stain clearly noticeable			
	- On outside.	X		
	- On inside.			X
	b. One or more marking tickets not removed.			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:38Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT	CLASSIFICATION		
		MAJOR	MINOR	
			A	B
CLEANNESS (cont'd)	c. Any marking clearly visible on outside.	X		
	d. Thread ends not trimmed, or loose threads not removed.			X
	e. Visible basting thread not removed.			X
COMPONENT AND ASSEMBLY	a. Any component part or required operation omitted or added (unless otherwise classified herein).	X		
	b. Any operation not performed as specified (unless otherwise classified herein).			X
CUTTING	a. Any component part not cut in conformance with directional lines indicated on patterns or not cut in accordance with specification requirements.	X		
SEAM AND STITCHING	a. Accuracy of seaming and stitching.			
	1. Seam or part twisted, puckered or pleated.	X		
	2. Part of material caught in unrelated operation or stitching:			
	-Caught in up to, and including, 1/4 inch of stitching.		X	
	-Caught in more than 1/4 inch of stitching.	X		
	3. Stitching overlapping end of thread break less than 1/2 inch.			X
	4. End of stitching when not caught in other seams or stitching backtacked less than 1/4 inch.			X
	5. Ends of a continuous line of stitching overlapped less than 1/2 inch on all continuous stitching.			X
	6. Raw edge more than 1/4 inch long.			X

Source: https://assist.dla.mil -- Downloaded: 20260-20T22:38Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT	CLASSIFICATION		
		MAJOR	MINOR	
			A	B
SEAMS AND STITCHING (cont'd)	b. Gage of stitching and seam allowances:			
	1. Irregular, i.e., unevenly gaged or corresponding stitchings not uniformly gaged (to be scored only when condition exist along major portion of seam).		X	
	2. Width not as specified or not within range of gage specified or varies more than 1/16 inch when no range is specified.			X
	c. Stitches broken or missing (except buttonholes):			
	1. All stitching except overedging:			
	- up to 1/4			X
	-more than 1/4 to 1/2 inch inclusive		X	
	-more than 1/2 inch	X		
	2. On overedging:			
	- 1 inch or more			X
	d. Skipped stitches or runoff stitches:			
	- 1/4 inch up to 1/2 inch long			X
	- more than 1/2 inch		X	
	e. Seam and stitch type not as specified.		X	
	f. Stitches per inch (to be scored only when condition exits on major portion of seam) less than minimum or more than maximum specified.			X
	g. Stitch tension (except buttonholes):			
	1. Loose tension resulting in a loose seam.	X		
	2. Loose tension (exposed loops of top or bottom threads) more than 1/2 inch in length.			X

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:38Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT	CLASSIFICATION		
		MAJOR	MINOR	
			A	B
SEAMS AND STITCHING (cont'd)	3. Tight tension (stitches break when strain is applied in the direction of the seam or stitching).		X	
BUTTONHOLES	a. One or more omitted or added.	X		
	b. Not corresponding to size of button, too small, not permitting button to enter buttonhole or too large, 3/8 inch or more longer than the diameter of button (measured at inside edge of purling).		X	
	c. One or more slanted.	X		
	d. One or more of the two buttonholes positioned vertically.	X		
	e. Stitches not securely caught in fabric (stitches pull away from fabric).	X		
	f. One or more broken or more than two continuous skipped stitches in one or more buttonholes.		X	
	g. Loose stitch tension.			X
	h. Ragged edge in one or more.			X
	i. Not specified type or uncut.			X
BUTTONS	a. One or more buttons missing, broken or malformed.	X		
	b. Not specified size, type or color.		X	
	c. Hand sewn button tacked off with less than two stitches.			X
	d. Buttons not securely sewn.		X	
	e. Stitches not locked at end of cycle (tug at loose ends of thread to determine if it will ravel).		X	
FUSIBLE INTERLINING	a. Bubbling or delamination.	X		
	b. Strike through of adhesive.		X	
	c. Peeling.	X		
LABEL	a. Label missing or size marking omitted, incorrect, or illegible.	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:38Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT	CLASSIFICATION		
		MAJOR	MINOR	
			A	B
LABEL (cont'd)	b. Information (except size) missing, incorrect, or illegible.			X
	c. Label not stitched on four sides to neck and armhole facing.			X
	d. Left edge of label positioned less than 3/4 inch from back edge of facing (closure edge).			X
	e. Size label less than 1/2 inch or more than 1-1/2 inches from slide fastener.			X
DARTS	a. Bust front or back darts not uniform in length by more than 1/2 inch.		X	
	b. Any dart tapered less than 3/4 inch or more than 1 inch beyond pattern marks.			X
	c. Thread ends less than 1/2 inch or more than 3/4 inch long.			X

4.5.2.3 Detailed defects applicable to specific parts. Defects applicable to specific parts shall be classified as follows:

ADJUSTMENT TAB	a. Upper side of adjustment tab twisted, affecting appearance.		X	
	b. Adjustment tab poorly shaped, affecting appearance.		X	
	c. Adjustment tab misplaced so that adjustment tab will not lie flat when buttoned, causing bulge or twist on adjustment tab.	*		
	d. Adjustment tabs and buttons not in horizontal alignment across the back by:			
	-more than 1/4 inch but less than 1/2 inch.			X
	-more than 1/2 inch.	X		
	e. Buttonhole more than 1/8 inch but not more than 1/4 inch off center with width of adjustment tab.			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:38Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT	CLASSIFICATION		
		MAJOR	MINOR	
			A	B
ADJUSTMENT TAB (cont'd)	f. Buttonhole more than 1/4 inch off center with width of adjustment tab.		X	
	g. Finish buttonhole with purling on reverse side.	X		
BOTTOM HEM	a. Tunic puckered, twisted, or pleated by stitching forming bottom hem.		X	
	b. Width of finished bottom hem less than 1-1/4 inches or more than 1-5/8 inches.			X
FACING	a. Front and back neck and armhole facings twisted, not affecting smoothness on outside surface of tunic.			X
	b. Facings tight at joining to neck seam, causing puckers or pleats on front, back or armholes.		X	
SIDE SEAMS, FRONTS AND BACK CLOSURE	a. Back overlapping front at side seams.			X
	b. Length of closed backs uneven at neck 1/4 inch or more.		X	
	c. Slide fastener tape set on too loosely or too tightly, causing excessive bulging on opening, affecting appearance open or closed.		X	
	d. Slide fastener not specified type, size, or style or any part of assembly omitted, bent or broken.	X		
	e. Slide fastener exposed more than 1/16 inch or gapping more than 1/16 inch when closed.		X	
	f. Tunic part stitched too close to metal chain not permitting slider to pass.	X		
	g. Top end of slide fastener chain more than 1/2 inch from finished edge of neckline.	X		

Source: https://assist.dla.mil -- Downloaded: 20261O-20T22:38Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT	CLASSIFICATION		
		MAJOR	MINOR	
			A	B
SIDE SEAMS, FRONTS AND BACK CLOSURE (cont'd)	h. Top end of slide fastener chain less than 1/4 inch from finish edge of neck line.		X	

4.5.2.4 Examination of finished measurements. Any finished measurements deviating from the finished measurements specified in 3.7 shall be scored as a defect.

4.5.3 Examination of preparation for delivery. Shipping containers fully prepared for delivery shall be examined for the defects listed below to determine conformance to packaging, packing, and marking requirements. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. The lot size shall be the number of containers in the inspection lot. The inspection level shall be S-2 of MIL-STD-105. The AQL shall be 2.5 DHU.

Examine	Defect
Markings (exterior and interior)	Omitted, incorrect, illegible, or improper size, location, sequence, or method of application.
Materials	Any component missing.
	Any component not as specified or damaged, affecting appearance.
Workmanship	Inadequate application of component such as incomplete closure of case liners or container flaps, loose strapping, or inadequate stapling.
	Bulging or distortion of containers.
	Open and noncontinuous heat-seal seams and closure of polyethylene bag.
Content	Number of intermediate packages per container more or less than required. 1/
	Size shown on one or more tunics not as specified on container. 1/

1/ One package from each container in the sample shall be examined for this defect.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:38Z
Check the source to verify that this is the current version before use.

4.5.4 Examination of Palletization. An examination shall be made to determine that the palletization complies with Section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully prepared for delivery. The lot size shall be the number of palletized unit loads in the end item inspection lot. The inspection level shall be S-1 and the AQL shall be 6.5 defects per hundred units.

Examine	Defect
Finished dimension	Length, width or height exceeds specified maximum requirement.
Palletization	Not as specified.
	Container pattern not as specified.
	Interlocking of loads not as specified.
	Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted; incorrect; illegible; of improper size, location, or method of application.

5. PACKAGING

5.1 Packaging. Packaging shall be level A or commercial (see 6.2).

5.1.1 Level A. Fold tunic neatly. The folded tunic shall measure approximately 12 inches in length and 10 inches in width. Each of the folded tunics shall be inserted in an individual polyethylene bag measuring approximately 15 inches in width. The bag shall be fabricated from 0.0015 inch thick film. All seams and closures of the bag shall be effected by heat sealing. A 1/4 inch diameter hole shall be made at one corner of the bag to allow excess air to escape. Prior to or during the heat-sealing operation, excess air shall be expelled to the extent necessary to insure the required multiples of packaged units will fit into the intermediate containers. As an alternative, the final closure of the bag may be accomplished by a tuck or reverse flap. If the final closure is a tuck or reverse flap, the 1/4 inch diameter hole will not be required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:38Z
Check the source to verify that this is the current version before use.

5.1.2 Commercial. Tunic shall be packaged to afford adequate protection against physical damage during shipment from the supplier to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing. Packing shall be level A or commercial (6.2).

5.2.1 Level A. Thirty (30) tunics of one size only, packaged as specified in 5.1.1, shall be packed in a fiberboard shipping container assembled, closed and reinforced conforming to type CF, class weather-resistant, variety SW, grade V3c, size 2A of MIL-B-17757. The fiberboard for the box liner shall conform to type CF, class weather-resistant, variety DW, grade V15c, of MIL-B-17757. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper.

5.2.2 Commercial. Tunics, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rates for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with the U. S. Postal Service Manual, Uniform Freight Classification Rule or National Motor Freight Classification Rules, as applicable.

5.3 Marking. In addition to any special marking required by the contract or purchase order, interior package and shipping containers shall be marked in accordance with MIL-STD-129. Polyethylene bagged packages shall have the following information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification:

NOMENCLATURE
SIZE
STOCK NUMBER
CONTRACT NO
CONTRACTOR

5.4 Palletization. When specified (see 6.2), tunics packed as specified in 5.2 shall be palletized on a 4-way entry pallet in accordance with load type 1A of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means C, K and L or O or P. Pallet pattern shall be in accordance with the appendix of MIL-STD-147. The pallet shall be 4-way, Type I, Class 1, Style 1, Size A, Wood Group I, II, III or IV of MIL-P-15011, or, 4-way, Type IV, V or VIII, Class 1, Style A, Size 2, Wood Group I, II, III or IV, Grade A of NN-P-71. Interlocking of loads shall be effected by reversing the pattern of each course. If

Source: https://assist.dla.mil -- Downloaded: 20261O-20T22:38Z
Check the source to verify that this is the current version before use.

the container is of a size which does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall be approved by the contracting officer.

6. NOTES

6.1 Intended use. The tunics covered by this specification are intended for wear by female personnel of the U. S. Marine Corps.

6.2 Ordering data

6.2.1 Acquisition requirements. Acquisition documents should specify the following:

(a) Title, number and date of this specification.
(b) Size required (see 1.2).
(c) Whether first article is required (see 3.2).
(d) Number of skirts in first article (see 3.2).
(e) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(f) When palletization is required (see 5.4).

6.2.2 Data requirements. When this specification is used in an acquisition and data are required to be delivered, the data requirements identified below shall be developed as specified by an approved Data Item Description (DD Form 1664) and delivered in accordance with the approved Contract Data Requirements List (CDRL), incorporated into the contract. When the provisions of DoD FAR Supplement, Part 27, Sub-Part 27.410-6 (DD Form 1423) are invoked and the DD Form 1423 is not used, the data specified below shall be delivered by the contractor in accordance with the contract or purchase order requirements. Deliverable data required by this specification are cited in the following paragraphs.

Paragraph No.	Data requirements	Applicable DID No.	Options
(a) 4.	Inspection System Program Plan	DI-R-4803	- -
(b) 4.4	First Article Inspection Procedures	DI-T-4901	- -
(c) 4.4	First Article Inspection Report	DI-T-4902	- -
(d) 4.5	Production/Acceptance Inspection Procedures	DI-T-4903	- -
(e) 4.5	Production Inspection Report	DI-T-4904	- -

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:38Z
Check the source to verify that this is the current version before use.

(Data item description related to this specification, and identified in section 6 will be approved and listed as such in DoD 5000.19L., Vol. II, AMSDL. Copies of data item descriptions required by the contractors in connection with specific acquisition functions should be obtained from the Naval Publications and Forms Center or as directed by the contracting officer.)

6.3 Standard sample and pattern. For information regarding the availability of standard sample and patterns, address inquiry to the procuring activity issuing the invitation for bids.

6.4 First article. Examinations, tests and approval shall be as specified by the contracting officer (see 3.2).

6.5 Subject term (keyword) listing

Maternity
Tunic
Woman's

6.6 Figures. Figures are furnished for information purposes only. In the event of conflict between the figures and the text of this specification, the text of this specification shall govern.

6.7 Marginal notations. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Preparing Activity
Navy-MC
Project No. 8410-N680

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:38Z
Check the source to verify that this is the current version before use.

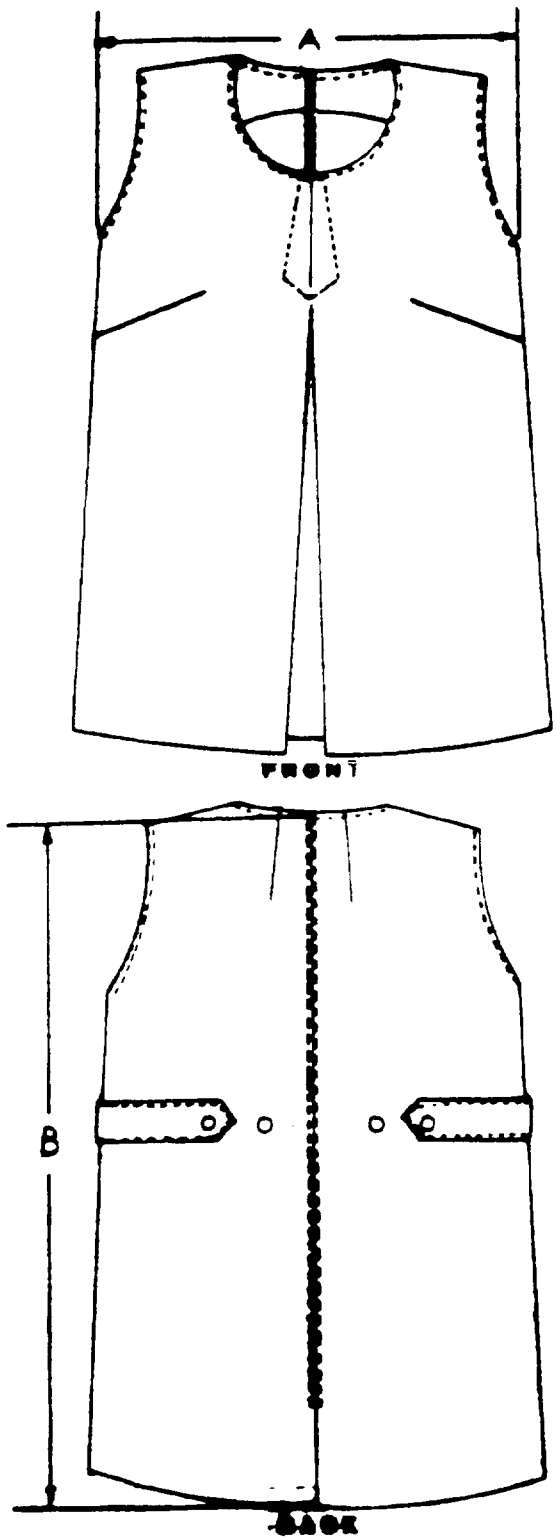


FIGURE 1. - TUNIC, WOMEN'S MATERNITY

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:38Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDING GENERAL
MARINE CORPS RESEARCH, DEVELOPMENT
AND ACQUISITION COMMAND (PSI-6)
WASHINGTON, D.C. 20380-0001

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:38Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-T-29375A(MC)	TUNIC: WOMAN'S MATERNITY

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)* _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 20261O-20T22:38Z
Check the source to verify that this is the current version before use.