[METRIC]
A-A-59533A
July 19, 2006
SUPERSEDING
A-A-59533
January 14, 2000

COMMERCIAL ITEM DESCRIPTION

FUSEHOLDER, BLOCK, 5 AMPERE (A), 125 VOLTS (V) AC/DC, SURFACE MOUNT (SM), GENERAL REQUIREMENTS FOR.

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

1. SCOPE. This commercial item description (CID) covers the general requirements for a surface mount, fuseholder block. Fuseholder blocks covered by this CID are intended for commercial/industrial applications.

2. CLASSIFICATION/PART OR IDENTIFICATION NUMBER (PIN). This CID uses a classification system which is included in the PIN as shown in the following example (see 7.1).

AA59533	-	001
CID number		Dash number

3. SALIENT CHARACTERISTICS.

3.1 Interface and physical dimensions. Fuseholder blocks supplied to this CID shall be as specified herein (see figure 1).

3.2 Ampere rating. The ampere rating shall be 5 A maximum.

3.3 Voltage rating. The voltage rating shall be 125V ac/dc.

3.4 Ambient temperature maximum. The ambient temperature shall be -40°C (-40°F) to +85°C (185°F).


3.5 Vibration resistance. Fuseholder blocks shall meet vibration requirements in accordance with IEC 60068-2-6, Test Tc. (10-500 Hz (1,000 Hz) amplitude, 0.75mm resp. acceleration 100 m/s^2 (10g)).

3.6 Shock resistance. Fuseholder blocks shall meet the shock requirements in accordance with IEC 60068-2-27.

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any data which may improve this document should be sent to: Defense Supply Center, Columbus, ATTN: DSCC-VAT, P.O. Box 3990, Columbus, OH 43218-3990, or mailto:CircuitProtect@dscc.dla.mil. Since contact information can change you may want to verify the currency of the address information using the ASSIST Online database at http://assist.daps.dla.mil.

AMSC N/A FSC 5920

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:17Z
Check the source to verify that this is the current version before use.

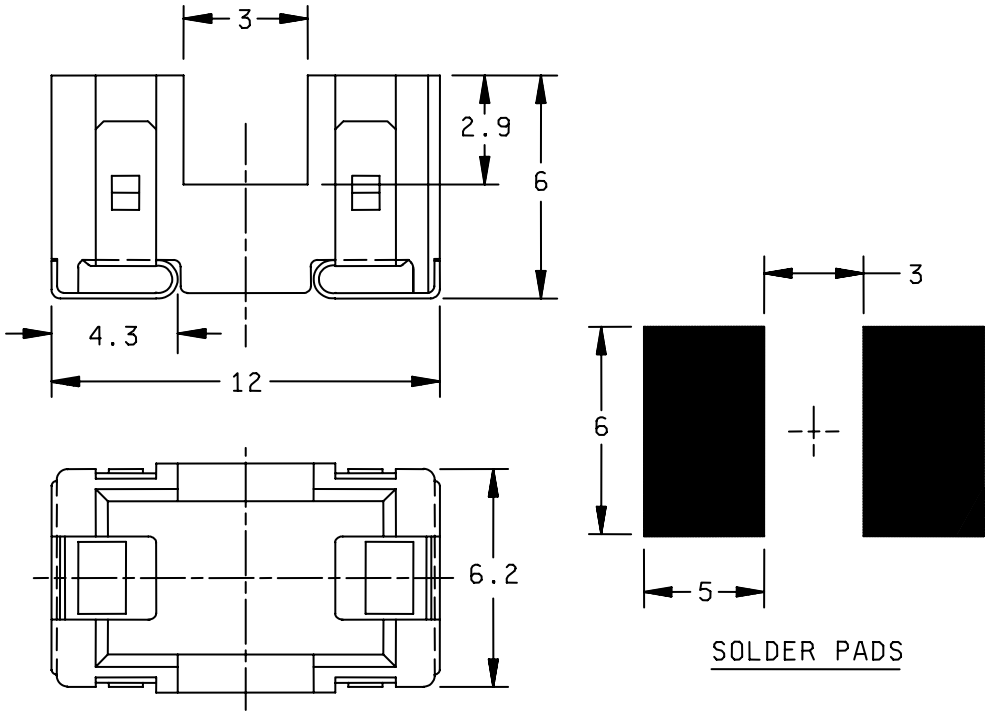

mm	Inches	mm	Inches
2.9	.114	5.2	.205
3.0	.118	6.0	.236
4.3	.169	12.0	.472
5.0	.197		

NOTES:

1. Dimensions are in millimeters.
2. Tolerance is ± 0.13 mm (.005 inch), unless otherwise specified.
3. The US Government preferred system of measurement is the metric SI system. However, this item was originally designed using inch-pound units of measurement. In the event of conflict between the metric and inch-pound units, the inch-pound units shall take precedence.

FIGURE 1. Configuration and dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:17Z
Check the source to verify that this is the current version before use.

3.7 Power dissipation. 1.186 watts at 136.4°C (277.52 °F); 0.724 watts at 94°C (201.2 °F); .0.532 watts at 75.9°C (168.62 °F).

3.8 Materials.

3.8.1 Housing material. This fuseholder block shall be temperature resistance thermoplastic with a UL 94VO flammability rating as a minimum.

3.8.2 Terminal plating. Terminals shall be tin-plated copper alloy. Use of pure tin plating is prohibited as a finial finish and as an undercoat. Use of tin-lead (Sn-Pb) finishes are acceptable provided that the minimum lead content is 3 percent.

3.9 Compatible fuse. Fuses A-A-59532/1 and A-A-59532/3 rated at 5 amperes or less are compatible and may be used with this fuseholder block.

3.10 Marking. Fuseholder blocks supplied to this CID shall be marked with the manufacturer's (MFR's) standard commercial PIN. (NOTE: The part number marked on the unit pack shall be the CID PIN.)

3.11 Recycled, recovered, or environmentally preferable materials. Recycled, recovered, or environmentally preferable materials should be used to the maximum extent possible provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs.

3.12 Workmanship. Fuseholder blocks shall be processed in such a manner as to be uniform in quality and shall be free from other defects that will affect life, serviceability, or appearance

4. REGULATORY REQUIREMENTS. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with 23.403 of the Federal Acquisition Regulation (FAR).

5. PRODUCT CONFORMANCE PROVISIONS.

5.1 Product conformance. The products provided shall meet the salient characteristics of this CID, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial market. The Government reserves the right to require proof of such conformance.

5.2 Market acceptance. The following market acceptance criteria are necessary to document the quality of the product to be provided under this CID:

a. The company producing the item must have been producing a product meeting the requirements of this CID for at least 6 months.

b. The company must have sold 1,000 units meeting this CID in the commercial marketplace over the past 6 months.

6. PACKAGING. Preservation, packing, and marking shall be as specified in the contract or order. In addition, this fuseholder block may be supplied individually, in a quantity of 750 or 1,500 on a 30.4 mm (1.197 inches) wide tape reel in accordance with IEC 60286-3.

7. NOTES.

7.1 PIN. The PIN should be used for Government purposes to buy commercial products to this CID. See section 2 for PIN format example.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:17Z
Check the source to verify that this is the current version before use.

7.2 Environmentally preferable materials. Environmentally preferable materials should be used to the maximum extent possible to meet the requirements of this specification. Table I lists the Environmental Protection Agency's (EPA) top seventeen hazardous materials targeted for major usage reduction. Use of these materials should be minimized or eliminated unless needed to meet the requirements specified herein (see section 3).

TABLE I. EPA top seventeen hazardous materials.

Benzene	Dichloromethane	Tetrachloroethylene
Cadmium and Compounds	Lead and Compounds	Toluene
Carbon Tetrachloride	Mercury and Compounds	1,1,1 - Trichoroethane
Chloroform	Methyl Ethyl Ketone	Trichloroethylene
Chromium and Compounds	Methyl Isobutyl Ketone	Xylenes
Cyanide and Compounds	Nickel and Compounds	

7.3 Commercial and Government Entity (CAGE) code. For ordering purposes, inventory control, and submission of this fuseholder block to DSCC under the Military Parts control Advisory Group (MPCAG) evaluation program, CAGE code 58536 should be used.

7.4 Source of documents.

Commercial Item Description

A-A-59532/1 - Fuse, Inclosed Link, Surface Mount (SM), 63 Volts (V) AC/DC, Quick Acting.

A-A-59532/3 - Fuse, Inclosed Link, Surface Mount (SM), 125 Volts (V) AC/DC, Quick Acting, High Breaking Capacity.

(Copies of these documents are available online at http://assist.daps.dla.mil/quicksearch/ or http://assist.daps.dla.mil or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

FEDERAL REGULATIONS

FAR - Federal Acquisition Regulations (FAR).

(Copies of this document is available online at http://www.acquisition.gov/comp/far/index.html or from the U.S. Government Printing Office, 732 North Capital Street, NW, Washington D.C. 20401-0001.)

Other Publications

INTERNATIONAL ELECTROTECHNICAL COMMISSION (IEC)

IEC 60068-2-6 - Environmental Testing – Part 2: Tests – Test Fc: Vibration (Sinusoidal).

IEC 60068-2-27 - Environmental Testing. Part 2: Tests – Test Ea and Guidance: Shock.

IEC 60286-3 - Packaging of Components for Automatic Handling – Part 3: Packaging of Leadless Components on Continuous Tapes.

(Copies of these documents are available online at http://www.iec.ch/ or from the International Electrotechnical Commission, 3 Rue De Varembe', PO Box 131, CH-1211 Geneve 20, Switzerland.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:17Z
Check the source to verify that this is the current version before use.

UNDERWRITERS LABORATORIES, INCORPORATED (UL)

UL 94 - Test for Flammability of Plastic Materials for Parts in Devices and Appliances, Standard For.

(Copies of this document is available online at http://www.ul.com/ or from the Underwriters Laboratories, Incorporated, 333 Pfingsten Road, Northbrook, IL 60062-2096.)

(Industry association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

7.5 Ordering data. The contract or order should specify the following:

a. CID document number, revision, and CID PIN.

b. Quality assurance provisions.

c. Packaging requirements.

7.6 Commercial products. As part of the market analysis and research effort, this CID was coordinated with the following manufacturers of commercial products. At the time of CID preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

MFR's CAGE	MFR's name and address
61935	Schurter, Incorporated 477 Aviation Boulevard Santa Rosa, CA 95403-1069 Phone number (707) 636-3000 Facsimile number (707) 636-3033 E-mail: mailto:info@schurterinc.com Uniform Resource Locator (URL): http://www.schurter.com

7.7 Part number (P/N) supersession data. This CID PIN supersedes the following MFR's P/N's as shown. This information is being provided to assist in reducing proliferation in the Government inventory system.

TABLE II. P/N supersession data.

CID dash number (see table I)	Vendor commercial P/N 1/	
	MFR's CAGE	MFR's P/N 1/
AA59533-001	61935	0031.7701.11

1/ The manufacturer's P/N shall not be used for procurement to the requirements of this CID. At the time of preparation of this CID, the aforementioned commercial products were reviewed and could be replaced by the CID P/N shown. For actual part marking requirements see 3.10.

7.8 Government users. To acquire information on obtaining this fuseholder block from the Government inventory system, contact Defense Supply Center, Columbus, ATTN: DSCC-CSB, Post Office Box 3990, Columbus, OH 43218-3990, or telephone (614) 692-7435.

7.9 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:17Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians:
Navy - EC
DLA - CC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FSS

Preparing activity:

DLA-CC

Project 5920-2006-007

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:17Z
Check the source to verify that this is the current version before use.