[INCH-POUND]
A-A-59542/2A
March 15, 2006
SUPERSEDING
A-A-59542/2
February 17, 2000

COMMERCIAL ITEM DESCRIPTION
SPECIFICATION SHEET

CIRCUIT BREAKER, AUTOMOTIVE BLADE TYPE, MINIATURE, AUTOMATIC OR MODIFIED RESET, 7.5 AMPERES (A) TO 30A

The General Services Administration has authorized the use of this commercial item description (CID) for all federal agencies.

This CID covers the general requirements for miniature, automotive blade type, circuit breakers designed to protect wiring harnesses in 12 volt dc automotive systems. The complete requirements for procuring the circuit breakers described herein shall consist of this document and the issue in effect of CID A-A-59542.

CLASSIFICATION/PART OR IDENTIFICATION NUMBER (PIN). This CID uses a classification system which is included in the Part Identification Number (PIN) as shown in the following example (see NOTES).

AA59542/02	-	01		1
CID number		Dash number (see table I)		Reset type (1) Automatic reset, type I (see 3.4) (2) Modified reset, type II (see 3.5)

SALIENT CHARACTERISTICS.

Interface and physical dimensions. Circuit breakers supplied to this CID shall be as specified herein, and shall meet the requirements of Society of Automotive Engineers (SAE) J553 for circuit breakers (see figure 1).

Ampere rating. The ampere rating shall be as specified in table I.

Voltage rating. The voltage rating shall be 12 V dc.

Automatic reset. Automatic reset type circuit breakers are identified by the number 1 and shall meet the requirements of SAE-J553 for type I, automatic reset circuit breakers. Automatic reset circuit breakers are cycling or continuously self-resetting units which are opened by overcurrent.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:17Z
Check the source to verify that this is the current version before use.

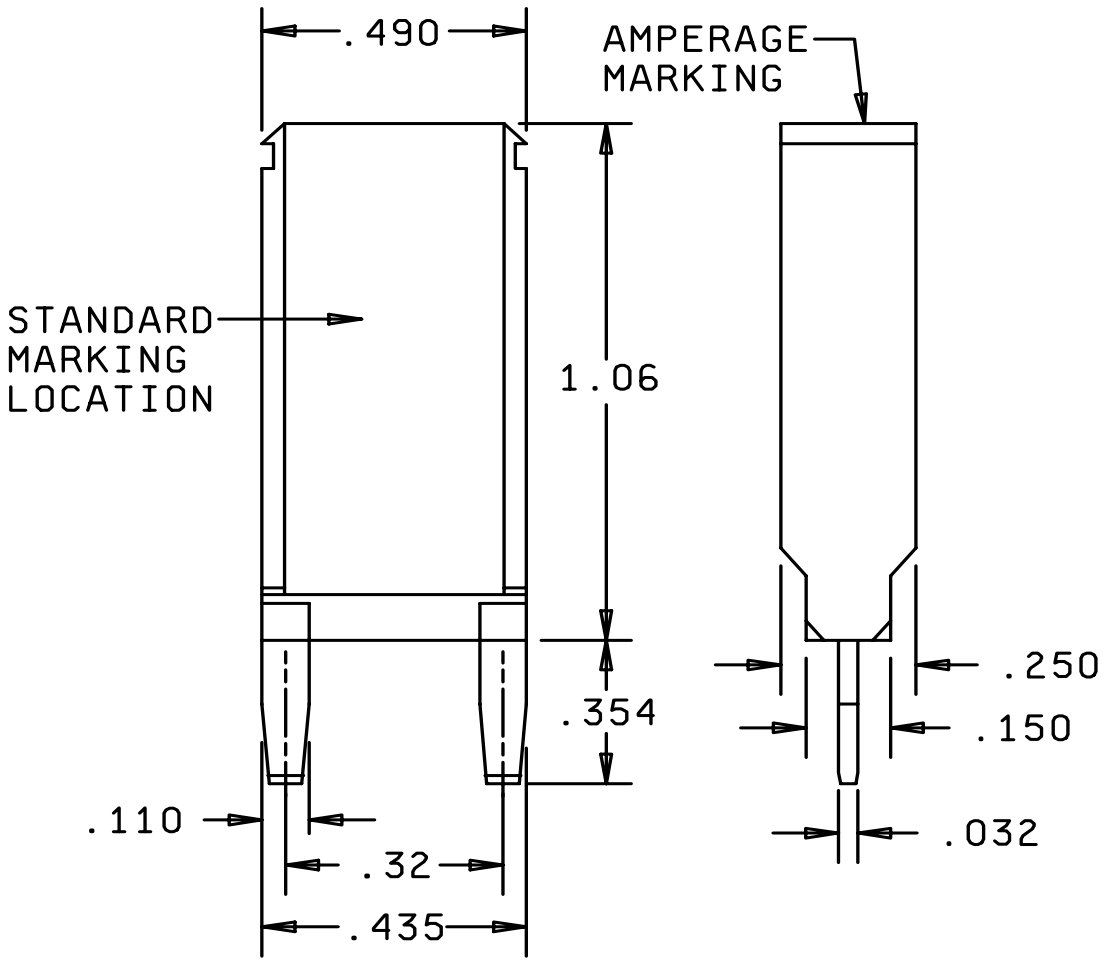

Inches	mm	Inches	mm
.032	.81	.354	8.99
.110	2.79	.435	11.05
.150	3.81	.490	12.45
.250	6.35	1.06	26.92
.32	8.13		

NOTES:

1. Dimensions are in inches.
2. Tolerance is ± .005 inch (0.13 mm), unless otherwise specified.

Figure 1. Configuration and dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:17Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics.

AA59542/02-	Ampere rating
01	7.5
02	10
03	15
04	20
05	25
06	30

Modified reset. Modified reset circuit breakers are identified by the number 2 and shall meet the requirements of SAE-J553 for type II, modified reset circuit breakers. Modified reset circuit breakers are units which are opened by overcurrents and remain open as long as the power is on or until the load is removed. A number of cycles may occur prior to achieving the steady-state open condition.

Operating temperature. -40°F (-40°C) to 185°F (85°C).

Storage temperature. -40°F (-40°C) to 260°F (125°C).

NOTES.

PIN. The PIN should be used for Government purposes to buy commercial products to this CID. See section 2 for PIN format example.

Source of documents.

Other Publications

Non Government Publications

SOCIETY OF AUTOMOTIVE ENGINEERS (SAE)

SAE-J553 - Circuit Breaker, Surface Vehicle Standard.

(Application for copies of this document is available online at http://www.sae.org/ or from the Society of Automotive Engineers, 400 Commonwealth Drive, Warrendale, PA 15096-0001.)

(Industry association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

Commercial products. As part of the market analysis and research effort, this CID was coordinated with the following manufacturers of commercial products. At the time of CID preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

MFR's CAGE	MFR's name and address
11873	Cooper Bussmann Automotive Products 175 Hansen Court Wood Dale, IL 60191-1112 Phone number (630) 422-2400 Facsimile number (630) 422-2500 E-mail: mailto:info@bussauto.com Uniform Resource Locator (URL): http://www.bussauto.com

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:17Z
Check the source to verify that this is the current version before use.

Part number (P/N) supersession data. These CID PINs supersede the following MFR's P/N's as shown. This information is being provided to assist in reducing proliferation in the Government inventory system.

TABLE II. P/N supersession data.

CID dash number (see table I)	Vendor commercial P/N 1/	
AA59542/02-	MFR's CAGE	MFR's P/N 1/
011	11873	21175-00
021	11873	21110-00
031	11873	21115-00
041	11873	21120-00
051	11873	21125-00
061	11873	21130-00
012	11873	21275-00
022	11873	21210-00
032	11873	21215-00
042	11873	21220-00
052	11873	21225-00
062	11873	21230-00

1/ The manufacturer's P/N shall not be used for procurement to the requirements of this CID. At the time of preparation of this CID, the aforementioned commercial products were reviewed and could be replaced by the CID P/N shown. For actual part marking requirements see the marking paragraph.

MILITARY INTERESTS:

Custodians:
Navy - EC
DLA - CC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FSS

Preparing activity:

DLA-CC

Project 5925-2006-012

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:17Z
Check the source to verify that this is the current version before use.