INCH-POUND

MIL-I-12718F
AMENDMENT 4
13 November 2003
SUPERSEDING
MIL-I-12718F
INT. AMENDMENT 3 (IH)
17 July 1992

DETAIL SPECIFICATION

INSIGNIA, DISTINGUISHING, ARMY AND AIR FORCE, WOVEN

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The replacement or addition pages listed below are attached at the end of this document. When the new pages have been entered into the document, insert this amendment as the cover sheet to the specification:

Pages 4 and 4A
Page 5A
Pages 13 through 16

PAGE 1

Title: Change to "INSIGNIA, DISTINGUISHING, ARMY, AIR FORCE, MARINE CORPS, AND NAVY, WOVEN AND EMBROIDERED"

1.2 Delete the following:

Line 6: Size 1 - Large
Line 7: Size 2 - Small
Line 9: Size 1 - Large
Line 10: Size 1 - Small
Line 12: Size 2 - Large
Line 13: Size 2 - Small

Change the following:

From "Type I - US Army" to "Type I - US Army Woodland Subdued"
From "Type IA - US Army Desert Uniform" to "Type IA - U S Army Desert Subdued"
From "Type IIA - US Air Force - Subdued" to "Type II - US Air Force Woodland Subdued"
From "Type IIB - US Air Force - Desert Uniform" to "Type IIB - US Air Force Desert Subdued"

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:14Z
Check the source to verify that this is the current version before use.

Add the following:

"Type III - US Marine Corps Woodland Camouflage MARPAT
Type IIIA - US Marine Corps Desert Camouflage MARPAT
Type IV - US Navy Woodland Subdued
Type IVA - US Navy Desert Subdued"

PAGE 2

2.1.1 Under "SPECIFICATIONS," add the following:

"MILITARY

A-A-50199 THREAD, POLYESTER CORE, COTTON- OR POLYESTER-COVERED"

2.1.2

Delete the following TIOH Drawings:

A-1-322 US Air Force Distinguishing Insignia, Large
A-1-678 US Air Force Distinguishing Insignia, Small

Add the following TIOH Drawings:

A-1-790 US Air Force Distinguishing Insignia
A-1-792 US Marines Distinguishing Insignia
A-1-797 US Navy Distinguishing Insignia

Add the following after the list of drawings:

"US MARINE CORPS DOCUMENT

MCCUU - UNIFORM, COMBAT/UTILITY, CAMOUFLAGE PATTERN, MARINE CORPS"

Change the last paragraph (in parentheses) to:

"Copies of the drawings and document listed above should be obtained from the procuring activity or as directed by the contracting officer.)

PAGE 3

2.2 Delete in its entirety and substitute:

"2.2 Non-government publications. The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issue of the documents are those cited in the solicitation or contract.

DEPARTMENT OF DEFENSE STANDARD SHADES FOR HERALDIC YARNS FOR EMBROIDERY AND RIBBONS, 1993 EDITION

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:14Z
Check the source to verify that this is the current version before use.

(Application for copies should be addressed to Ira Green, Inc., 177 Georgia Avenue, Providence, RI 02905, telephone 800-663-7487.)"

ASTM - D3951 - PACKAGING, COMMERICAL

(This standard is available from ASTM International, 100 Barr Harbor Drive, P.O. Box C700, West Conshohocken, PA 19428-2959.)

3.3.1 Delete in its entirety and substitute:

"3.3.1 Woven ribbon for Types I, IA, II, IIA, IV, and IVA insignia.

3.3.1.1 Delete in its entirety and substitute:

"3.3.1.1 Yarn. All yarns for the woven ribbons, both warp and filling, shall be heat-set. Yarn shall be a multi-filament semi-dull polyester (polyethylene glycol terephthalate). The denier of the yarn shall be determined as it is received from the yarn producer and prior to adding twist, heat-set, and finish. The yarn for the warp, including ground letters and selvage, shall be 150 denier; the yarn for the filling shall be 70 denier."

PAGE 4

Delete page 4 in its entirety. Substitute replacement page 4.

PAGE 5

3.4.1 Change "Table II" to "Table I."

TABLE I. **Physical requirements**.

TYPES	FRONT SIDE GROUND	REVERSE SIDE ENDS FOR LETTERS	PICKS PER INCH
I, IA, II, IIA, IV, & IVA	208 *	184	72

* Total ground ends to include 12 ends of selvage on each end.

3.4.2 Add the following after "Weave."

"The weave for Types 1, IA, II, IIA, IV, and IVA insignia shall be a 3 up and 1 down warp face twill. The warp shall be arranged end-and-end by color. The selvage shall be a 3 and 1 corkscrew weave."

3.4.2.1 and 3.4.2.2 Delete in their entirety.

Add new paragraph 3.4.3:

"3.4.3 Alternate construction for Types I, IA, II, IIA, IV, and IVA only. As an alternate method of construction, the insignia may be woven on an Air Jet Broad Loom. If the alternate method is used for Type I, IA, II, or IIA, a simulated selvage on each side shall consist of 7 ends, and the insignia shall be cut with a hot wire or blade on each side. The following requirements are applicable to all sizes:

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:14Z
Check the source to verify that this is the current version before use.

Warps: 100 denier.
Filling: 150 denier.
Picks per inch: 275 (including front and reverse).

Number of ends: 144 ends.

Length:
Type I, and IA: 5-1/2 inches + 1/4 inch - 0 inch
Type II, IIA and IIB: 6-1/4 inches + 1/4 inch - 0 inch
Type IV and IVA: 7 inches + 1/4 inch - 0 inch

3.5 Change paragraph number to "3.4.4."

3.5.1 and 3.5.1.1 Delete in their entirety and substitute:

"3.4.5 Cutting. Types I, IA, II, and IIA insignia shall be completely cut at right angles to the required length with a blade hot enough to obtain fused ends. The ends shall be sufficiently sealed to insure no break appears in the fused area when tested as specified in 4.4.1. Types IV and IVA insignia shall be completely cut at right angles to the required length."

PAGE 5A

Add new page 5A after page 5 and before page 6.

PAGE 6

4.3.1 Change "Table III" (in two locations in text) to "Table II."

PAGE 7

4.3.1 Delete table in its entirety and substitute the following:

TABLE II. **Component testing.**

CHARACTERISTIC	REQUIREMENT PARAGRAPH	TEST METHOD	# DETERM PER UNIT OF PRODUCT	RESULTS REPORTED AS
Types I, IA, II, IIA, IV, & IVA				
Material identification	3.3.1.1	1600*	---	pass or fail
Denier	3.3.1.1	4021*	----	----
Color	3.3.1.2	visual	1	pass or fail
Labile sulfur	3.3.1.2	2020	1	pass or fail
Types III & IIIA				
Material identification	3.3.2.2.1	2530*	----	pass or fail
Color	3.3.2.2.2	visual	1	pass or fail

* Unless otherwise specified, a contractor's certification of compliance may be accepted as evidence of conformance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:14Z
Check the source to verify that this is the current version before use.

4.3.2.1 Replace "Table IV" (in only one location) in text with "Table III." Delete title of table and substitute:

"TABLE III. **Classification of defects."**

4.3.2.2 Replace "Table V" (in only one location) in text with "Table IV." Delete title of table and substitute:

"TABLE IV. **Classification of dimensional defects."**

PAGE 9

4.3.3 Replace "Table VI (or vi)" (in three locations) in text with "Table V." Delete title of table and substitute:

"TABLE V. **Testing of end item.**"

Delete column 2 of table and substitute:

3.4.2
Table I
Table I
3.4.2
Table I
3.3.1.3
3.3.1.3
3.3.1.3
3.3.1.3
3.4.4

PAGE 11

Add the following parenthetical note immediately below 6. NOTES:

"(This section contains information of a general or explanatory nature which may be helpful but which is not necessary.)"

6.1 Change "United States Army or United States Air Force, as applicable" to "U.S. Army, Air Force, Marine Corps, or Navy, as applicable."

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:14Z
Check the source to verify that this is the current version before use.

PAGE 12

6.5 Delete in its entirety. Substitute the following as 6.5:

"6.5 Madeira USA, Ltd. The address for Madeira USA, Ltd. is 30 Bayside Court, Laconia, NH 03246. Telephone number is 800-225-3001.

Add 6.6 as follows:

6.6 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

PAGE 13

Replace Figure 1, page 13, with Figure 1 attached, TIOH Drawing No. A-1-241 revised 28 March 1990.

PAGES 14

Replace Figure 2 with Figure 2 attached, TIOH Drawing No. A-1-790, dated 13 May 1991.

PAGE 15

Replace Figure 3 with Figure 3 attached, TIOH Drawing No. A-1-792, dated 13 November, 2003.

PAGE 16

Add Figure 4 attached, TIOH Drawing No. A-1-797, revised 1 October, 1997.

Custodians:
Army-IH
Air Force - 11
Navy - NU

Preparing Activity:
Army - IH

Review Activities:
Navy - MC
DLA - CT

(Project No. 8455-0127/001)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:14Z
Check the source to verify that this is the current version before use.

3.3.1.2 Color. Yarn shall be dyed to match colors specified on the individual drawings for each service (see Figures 1, 2, and 4). Yarn may be solution dyed or yarn dyed with a dispersed dye. When ribbons contain two or more colors of yarn, each color may be all solution dyed or all yarn dyed, but not mixed in the same color. The use of dyes and compounds containing elementary sulfuric acid is prohibited. The dyestuff shall be chosen and applied so that the dyed and finished yarn shall contain no more labile sulfur than shown by the standard sample tested as specified in 4.3. When a standard sample is not available, the dyed and finished ribbon shall show no more than a slight trace of labile sulfur as defined in the test method, when tested as specified in 4.3.

3.3.1.3 Colorfastness. When tested as specified in 4.3.3, the colorfastness of the finished insignia for wet-dry cleaning, bleaching, laundering, and light shall be equal to, or better than, the colorfastness of the guide sample. When no guide sample is furnished, the colorfastness to wet-dry cleaning, bleaching, laundering, and light shall be good.

3.3.1.4 Matching. The color shall match the approved standard shade (from the DOD Standard Shades for Heraldic Yarns for Embroidery and Ribbons, 1993 Edition; see 2.2) under natural (North Sky) daylight or artificial daylight having a color temperature of 7500° ± 500° Kelvin. The color shall also be a good approximation to the standard shade under incandescent lamplight at 2800° ± 100° Kelvin.

3.3.2 Embroidered insignia. As an optional method of manufacture, letters may be embroidered on tape or base fabric.

3.3.2.1 Types I, IA, II, IIA, IV, and IVA. Figures 1, 2, and 4 provide information for embroidery on tape.

3.3.2.2. Types III and IIIA. Figure 3 provides information for embroidery on base fabric.

3.3.2.2.1 Base fabric. The base fabric for the insignia shall be a mid-weight nylon/cotton twill cloth conforming as follows to MCCUU (see 2.1.2):

TYPE INSIGNIA	TYPE FABRIC FROM MCCUU
III	Type I, Class 4
IIIA	Type II, Class 3

3.3.2.2.2 Embroidery thread.

a. The needle thread shall be either a cotton wrap, polycore, Type I, Ticket 50, 2-ply, conforming to A-A-50199 or a 100% polyester filament equal to Madeira USA Ltd.'s (see 6.5) polyneon no. 40. The bobbin thread shall be either a cotton wrap, polycore Type I, Ticket 50, 2-ply conforming to A-A-50199 or a 100% nylon Type I, Class A, 210 denier (70, 3-ply) conforming to V-T-295.

b. For Type III insignia, the color of the needle thread shall conform to Black Cable No. 67138 (see the DOD Standard Shades For Heraldic Yarns For Embroidery and Ribbons, 1993 Edition referenced in 2.2) if cotton wrap polycore thread is used or shall be equal to Madeira Black color No. 1800 if Madeira USA's polyneon no. 40 thread is used. For Type IIIA insignia, the color of the needle thread shall conform to Brown Cable No. 67136 if cotton wrap polycore thread is used or shall be equal to Madeira Brown color No. 1957 if Madeira USA's polyneon no. 40 thread

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:14Z
Check the source to verify that this is the current version before use.

is used. The color of the bobbin thread shall match the needle thread if cotton wrap polycore is used for the bobbin thread. If nylon bobbin thread is used, the color shall be black.

3.4 Construction of Types I, IA, II, IIA, IV, and IVA. These insignia shall be fabricated in accordance with the details and dimensions shown on Figures 1, 2, and 4, as applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:14Z
Check the source to verify that this is the current version before use.

3.5 Construction of Types III and IIIA. These insignia shall be fabricated in accordance with the details and dimensions shown on Figure 3.

3.5.1 Base fabric tape. The length of cloth for the tapes shall be cut in the filling direction, i.e., from selvage to selvage. The cut width of the tape shall be 2 inches ± 1/8 inch. Top and bottom edges of the tape cloth shall be folded under 1/2 inch toward the center back. A 1 inch wide strip of washable fusible interlining shall be centered and fused to the underside of the cut tape. The finished width of the tape prior to embroidery shall be 1 inch + 1/16 inch - 0.)

3.5.2 Embroidery. The distinguishing service identifier, "U.S. MARINES," shall be embroidered using 3/4 inch + 1/64 inch - 0 high military block letters in Meistergram font style #8 with modifications to thicken the cross bars on the letters. All lettering shall be in upper case only, and there shall be a space before "MARINES." The minimum stitch density shall be constant 88 + 5%.

3.5.3 Cutting. Insignia shall be completely cut at right angles to the required length.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:14Z
Check the source to verify that this is the current version before use.

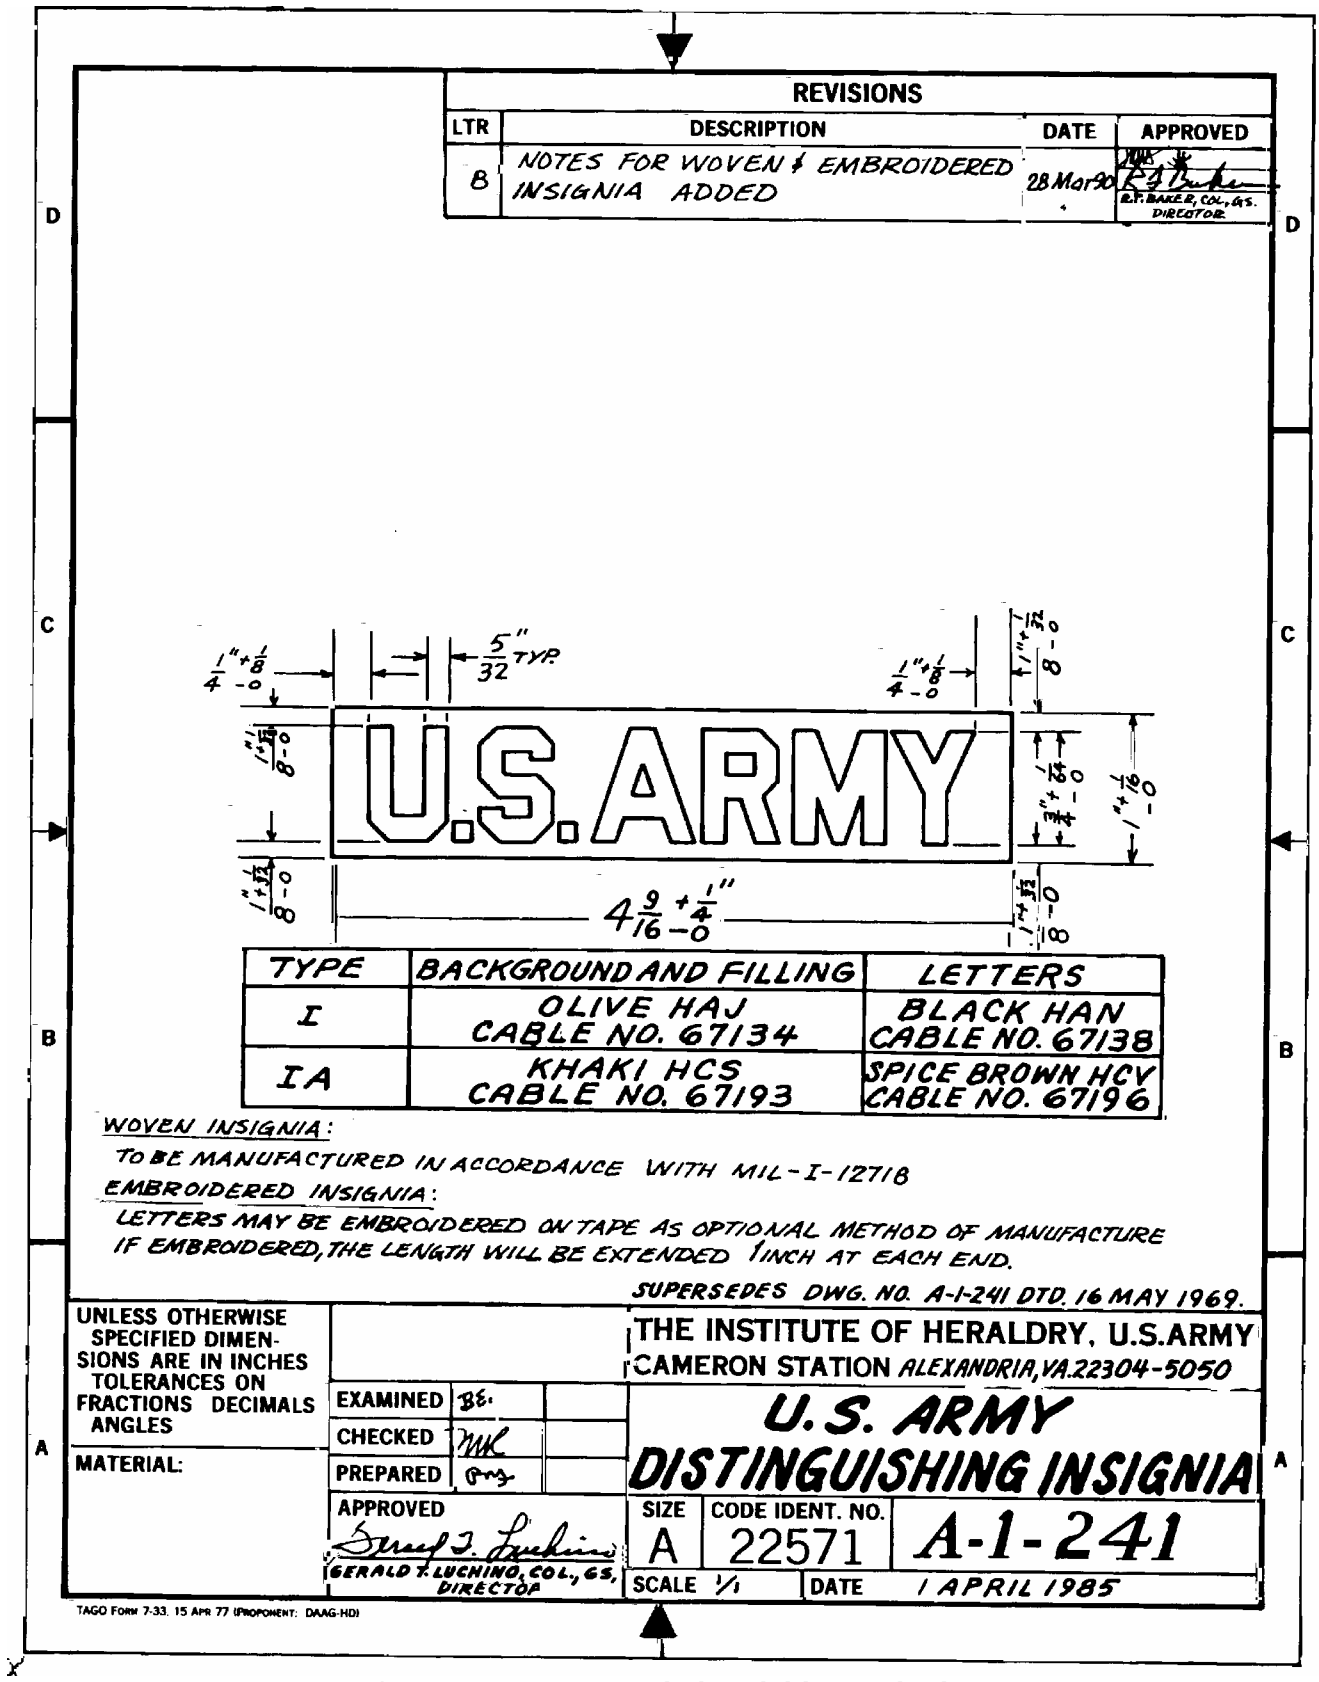


Figure 1. **U.S. Army Distinguishing Insignia**

Supersedes p. 13 of MIL-I-12718F

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:14Z
Check the source to verify that this is the current version before use.

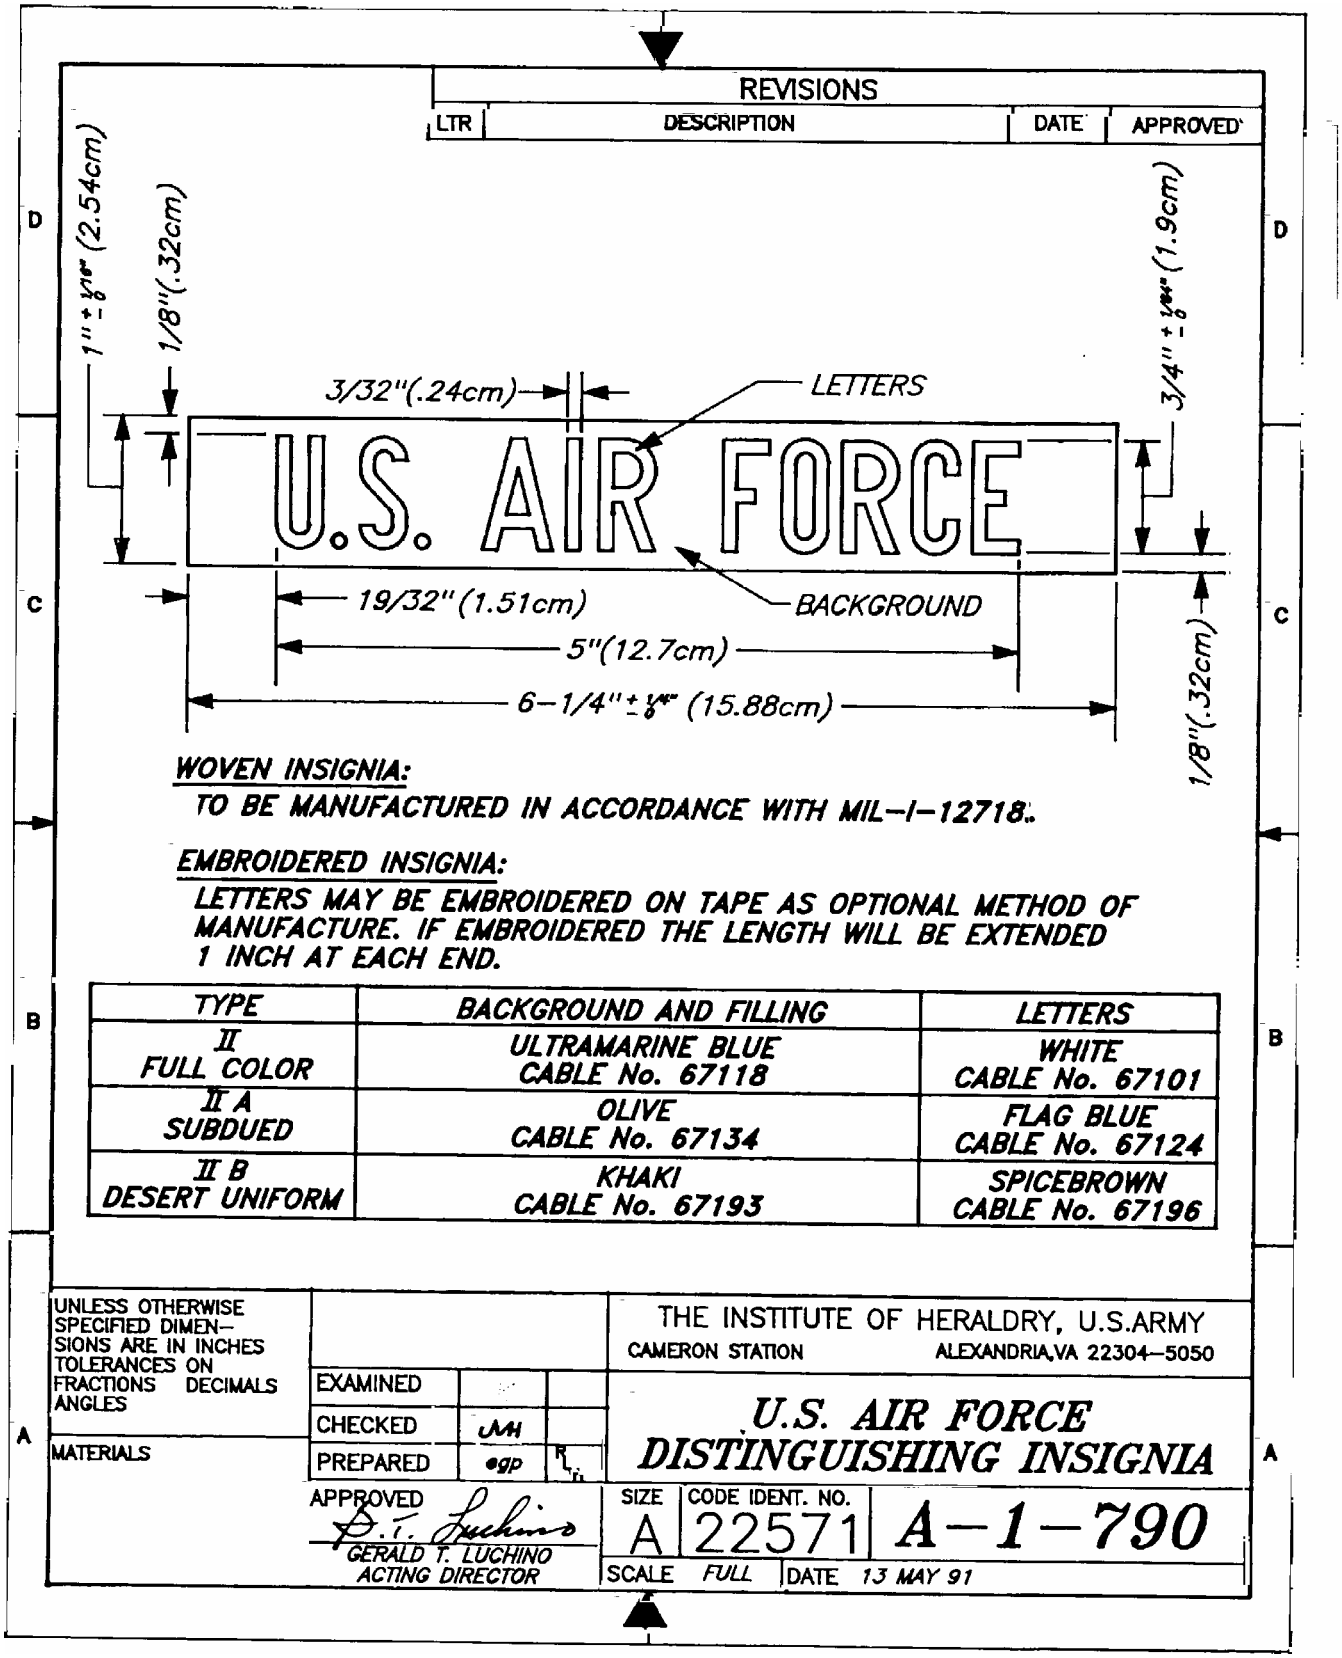


Figure 2. **U.S. Air Force Distinguishing Insignia**

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:14Z
Check the source to verify that this is the current version before use.

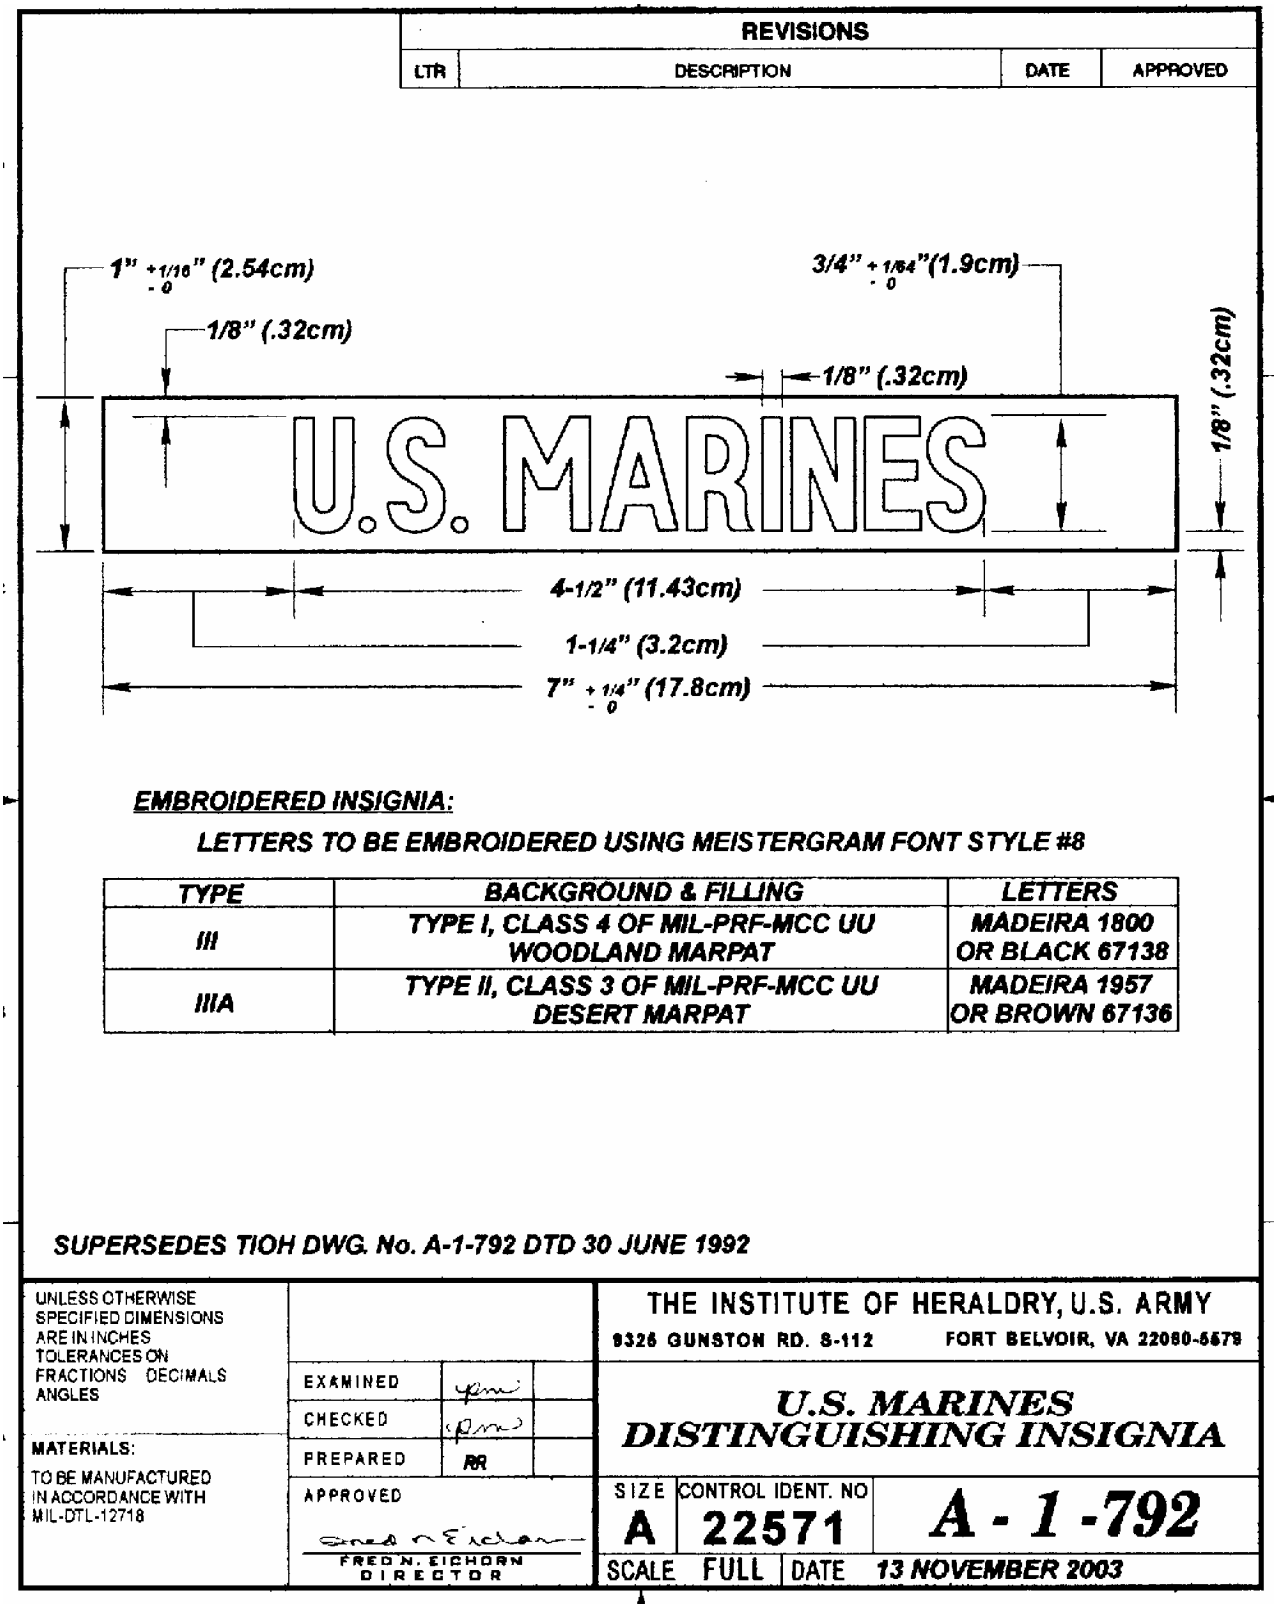


Figure 3. **U.S. Marines Distinguishing Insignia**

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:14Z
Check the source to verify that this is the current version before use.

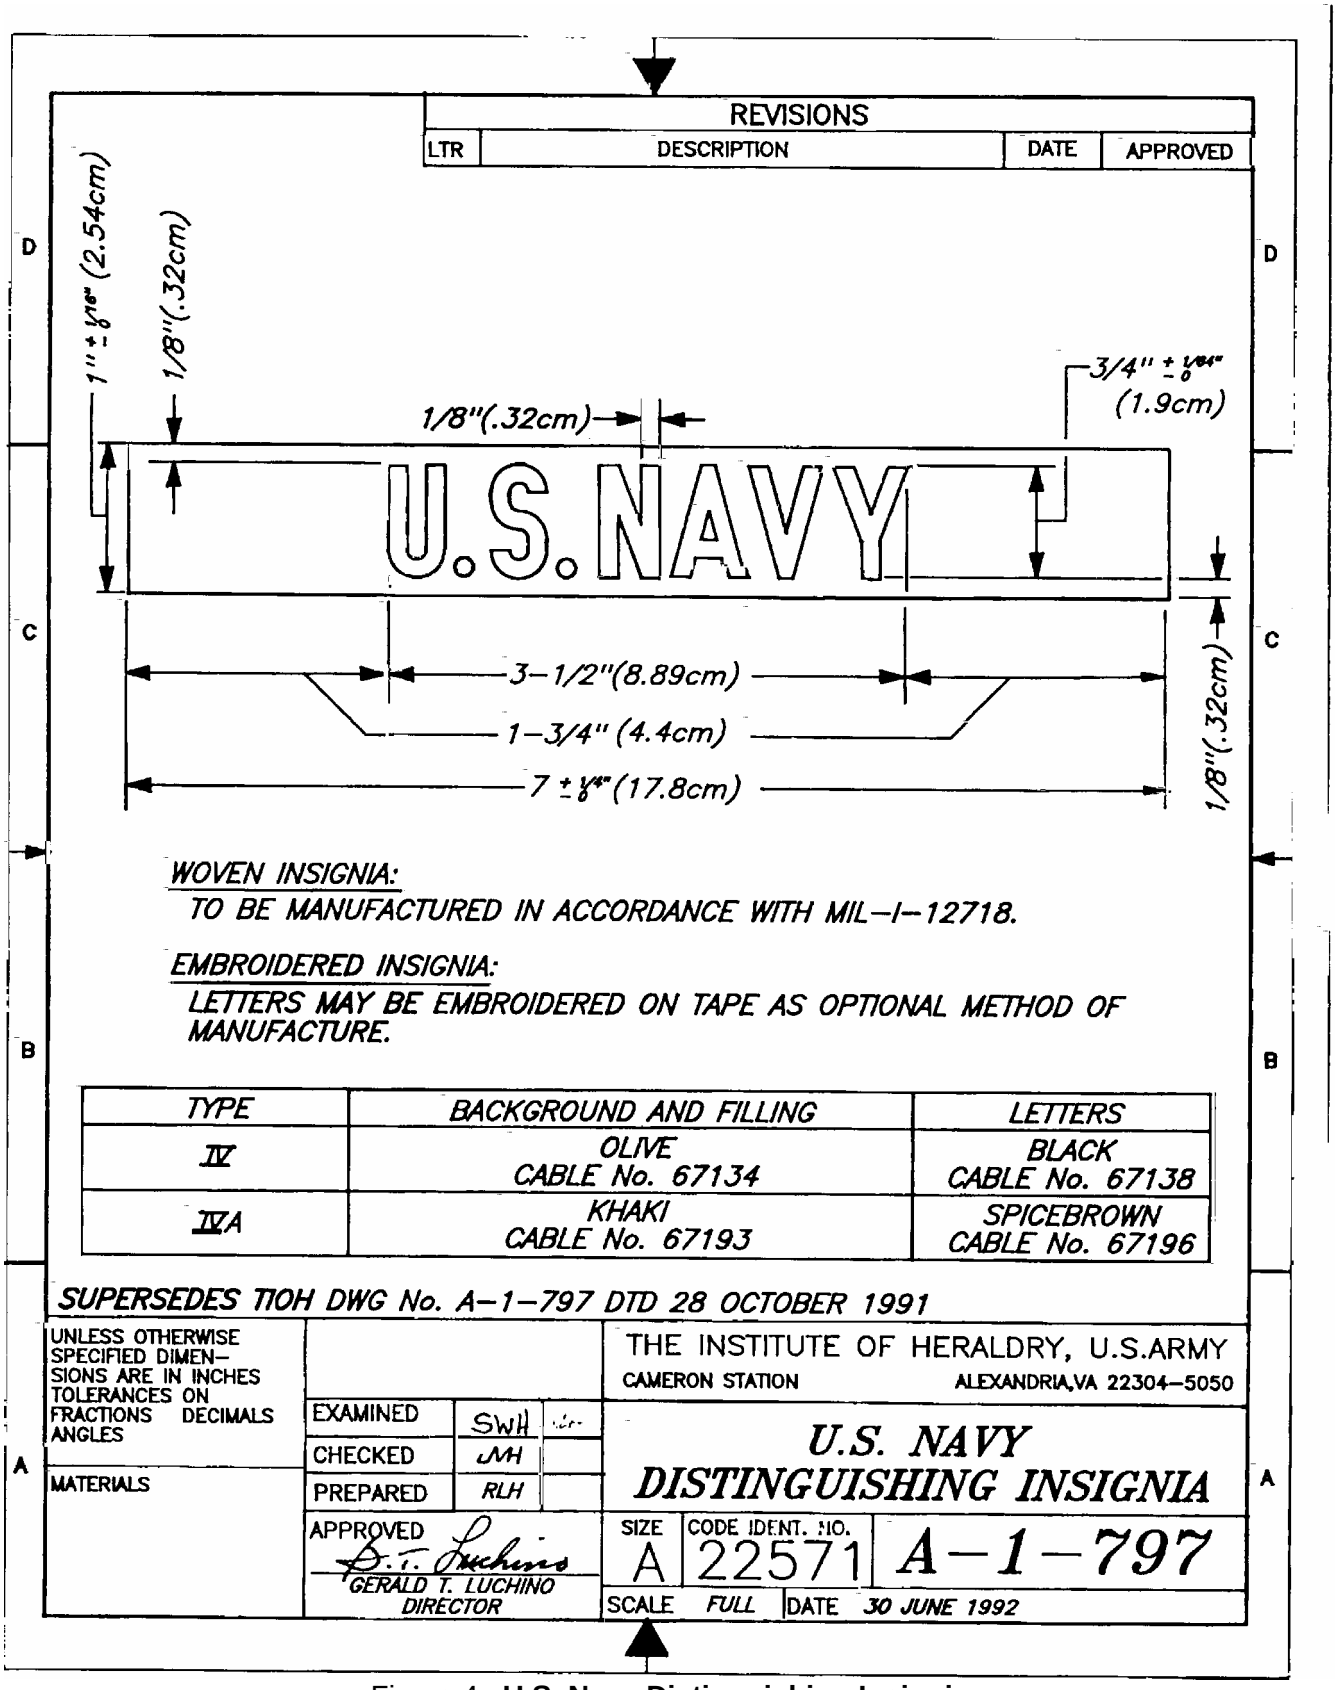


Figure 4. **U.S. Navy Distinguishing Insignia**

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:14Z
Check the source to verify that this is the current version before use.