INCH-POUND

MIL-I-18496F(NU)
21 November 1989
SUPERSEDING
MIL-I-18496E(NU)
23 June 1982

MILITARY SPECIFICATION

INSIGNIA, EMBROIDERED (WOMEN)

This specification is approved for use by the Navy Clothing and Textile Research Facility, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for Schiffli machine embroidered and metallic embroidered insignia worn by enlisted women of the Navy and Marine Corps.

1.2 Classification. Embroidered insignia shall be of the following types and classes (see 6.2).

Type I - Badge, Rating

Class 1 - Chief Petty Officer
Class 2 - Petty Officer - First Class
Class 5 - Senior Chief Petty Officer
Class 6 - Master Chief Petty Officer

Type II - Specialty Mark and Striker Mark (see Table IV)
Type IV - Group Rate Mark
Type V - Stripe, Service
Type VIII - Insignia, Grade

2. APPLICABLE DOCUMENTS

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA 01760-2490 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:37Z
Check the source to verify that this is the current version before use.

* 2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

V-T-276	- Thread, Cotton
PPP-B-676	- Boxes, Set-up

MILITARY

MIL-C-823	- Cloth, Serge, Wool, Wool and Nylon, Polyester and Wool
MIL-C-10176	- Cloth, Gabardine, Wool, Polyester and Wool
MIL-L-17507	- Lace, Ornamental
MIL-E-17568	- Embroidery Materials, Metallic and Synthetic Metallic
MIL-B-17757	- Box, Shipping, Fiberboard (Modular Sizes)
MIL-C-21115	- Cloth, Tropical, Wool, Polyester/Wool
MIL-C-21881	- Cloth, Poplin, Polyester and Cotton
MIL-C-24910	- Cloth, Tropical: Polyester and Wool
MIL-C-29127	- Cloth, Twill, Polyester/Cotton (Crease-Resistant Finish)
MIL-C-87052	- Cloth, Twill, Polyester, White

STANDARDS

FEDERAL

FED-STD-191	- Textile Test Methods
FED-STD-751	- Stitches, Seams and Stitchings

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Naval Publications and Forms Center, (ATTN: NPODS), 5801 Tabor Avenue, Philadelphia, PA 19120-5099.)

* 2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:37Z
Check the source to verify that this is the current version before use.

DRAWINGS

(Stitch enlargement drawing numbers are as indicated in Table IV. Figures 1 through 16 are illustrations of Navy Clothing and Textile Research Facility stitch enlargement drawings, and are attached for information only.)

LAWS AND REGULATIONS

U.S. POSTAL SERVICE MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402-0001.)

* 2.2 Non-Government publications. The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Applications for copies should be addressed to the American Trucking Association, ATTN: Traffic Department, 1616 P Street, N.W., Washington, DC 20036-1404).

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Applications for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606-5808.)

THE COLOR ASSOCIATION OF THE UNITED STATES

Standard Shades for Heraldic Yarns for Embroidery and Ribbons

(Applications for copies should be addressed to the Color Association of the United States, 343 Lexington Ave., New York, NY 10016-0927.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

* 2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:37Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample in which case this specification shall govern.

* 3.2 First article. When specified, (see 6.2), a sample shall be subjected to first article inspection in accordance with 4.3.

3.3 Material.

3.3.1 Cloth, Poplin, Polyester and Cotton. The cloth shall conform to type II, class 2, of MIL-C-21881. The color shall be White 3013.

3.3.2 Cloth, Twill, Polyester, White. The twill cloth shall conform to the requirements of MIL-C-87052. The color shall be White 3006.

3.3.3 Cloth, Tropical, Wool, Polyester/Wool. The cloth, tropical shall conform to the requirements of type III, class 3, of MIL-C-21115. The color shall be Blue 3346 for Navy and Green 2241 for Marine Corps.

* 3.3.4 Cloth, Tropical, Polyester and Wool. The cloth shall conform to the requirements of MIL-C-24910. The color shall be Blue 3346.

3.3.5 Cloth, Wool, Serge. The serge cloth shall conform to the requirements of type I, class 5, of MIL-C-823. The color shall match Green 2234 (MC).

* 3.3.6 Cloth, Twill, Polyester/Cotton (Crease-resistant Finish). The twill cloth shall conform to the requirements of class 1 of MIL-C-29127. The color shall be Khaki 2101 (MC).

* 3.3.7 Cloth, Gabardine, Wool, Polyester and Wool. The gabardine cloth shall conform to the requirements of type II, class 12 of MIL-C-10176. The color shall be Green 2212 (MC).

3.3.8 Embroidery material, metallic and synthetic metallic. The metallic and synthetic metallic embroidery materials shall conform to the requirements for type I, II, or III of MIL-E-17568.

* 3.3.9 Lace, ornamental. The lace shall conform to the requirements for type II, class 2, 3, 4, or 5, style A, 1/4 inch in width of MIL-L-17507. The color shall be Gold 3903.

3.3.10 Buckram. The cotton buckram shall be natural or bleached white, plain weave and shall conform to the following requirements when tested as specified in 4.4.1.

Type A - - - 50 (±3) ends and 50 (±3) picks per inch. The weight shall be 4.8 (±1.0) ounces per square yard.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:37Z
Check the source to verify that this is the current version before use.

Type B - - - 20 (±2) ends and 15 (±2) picks per inch. The weight shall be 6.75 (±1.00) ounces per square yard.

* 3.3.10.1 Buckram backing. Type A buckram shall be used to reinforce the gold lace chevrons, gold lace service stripes, and metallic embroidered grade insignia produced on the prescribed background fabrics. Types A and B buckrams shall be used to reinforce the metallic embroidery materials used for the eagle, specialty mark, and grade insignia of the rating badge. One layer of type B bleached buckram is required as reinforcement when the white twill cloth conforming to MIL-C-87052 is used.

3.3.11 Schiffli - embroidery yarns.

* 3.3.11.1 Rayon yarn. The rayon yarn shall be bright, continuous filament, regenerated cellulose type, 75/3 (± 5) denier Schiffli yarn. The rayon yarn for the eagle tongue for Petty Officer 3rd Class and above shall be bright, continuous filament, regenerated cellulose type, 100/2 (± 5) denier or 75/3 (± 5) denier Schiffli yarn. Testing shall be as specified in 4.4.1.

* 3.3.11.1.1 Colors. Cable numbers for the colored yarns shall be as follows (see 2.2 and 6.2). The use of sulphur dyes is prohibited.

Bluebird	- Cable No. 67117
Emerald	- Cable No. 67128
Golden Yellow	- Cable No. 67104
Dark Blue	- Cable No. 67126
Scarlet	- Cable No. 67111
White	- Cable No. 67101

* 3.3.11.1.1.1. Colorfastness. The yarn shall show fastness to light, laundering, wet-dry cleaning, bleaching and dry and wet heat (hot pressing), equal to or better than the standard sample when tested as specified in 4.4.4. As a limit of acceptability or when no standard sample is available, the yarn shall show good fastness to light, laundering, wet-dry cleaning, bleaching and dry and wet heat (hot pressing) when tested as specified in 4.4.4.

* 3.3.11.1.2 Matching. The dyed yarns shall match the available standard shade sample when viewed under filtered tungsten lamps that approximate artificial daylight, having a correlated color temperature of 7500° (± 200°) K with illumination of 100 (± 20) foot candles and shall be a good match to the standard shade sample under incandescent lamplight at 2300° (± 200°) K.

3.3.11.2 Bobbin thread. The thread used in Schiffli embroidery shall either be a good commercial grade of two-ply (minimum) undyed cotton thread or continuous filament undyed (white) nylon thread.

* 3.3.12 Thread, cotton. The white or colored thread for cover stitching and hemming shall conform to the requirements of V-T-276 and shall be as specified in Table I. Unless otherwise specified, the color of the thread shall match the color of the fabric used as the background cloth.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:37Z
Check the source to verify that this is the current version before use.

Table I - Threads

Type	Ply	Ticket Number
1A1	3	40
1C1	3	00
1C2	3	00

* 3.3.12.1 Colorfastness. The thread shall show fastness to dry and wet heat (hot pressing), equal to or better than the standard sample when tested as specified in 4.4.1. As a limit of acceptability or when no standard sample is available, the yarn shall show good fastness to dry and wet heat (hot pressing) when tested as specified in 4.4.1.

3.3.12.2 Stitches, seams, and stitchings. Stitches, seams, and stitchings shall conform to FED-STD-751. Stitch type 301 used for hemming shall be 1/8 (± 1/32) inch from the edge. Stitch type 304 used for cover stitching shall be 1/8 (± 1/32) inch wide. The threads and number of stitches used for various stitch types, shall be as indicated in Table II.

Table II - Stitch types, threads, and number of stitches

Operation	Stitch Type	Thread		Number of Stitches
		Needle	Lower	
Sewing	301	003/3	00/3	12-14 per inch
Coverstitch	304	003/3	00/3	45-48 per inch
Metallic embroidery	Hand	40/3 1/	-	-

1/ Thread used to sew the metallic embroidery material on rating badges.

3.3.13 Form, fiberboard. When used, the form used for hand embroidered, synthetic metallic insignia, shall be a commercial grade fiberboard 0.035 (± 0.005) inch thick and shall be free of sulphur. The face side of the board shall be of a color to approximately match the color of the embroidery yarn used.

3.3.14 Stiffener. Hand embroidered insignia may be treated on the reverse side with a stiffener, if required, to facilitate processing or to prevent raveling of the yarn. The finish shall not affect the color of the face of the insignia or the background fabric while in storage.

3.4 Description. The insignia specified in this specification shall be either machine embroidered on Schiffli-type embroidery machines in accordance with the applicable government stitch enlargements (see 3.5.2.1), or hand-embroidered with metallic or synthetic, if required, to facilitate processing or to prevent raveling of the yarn. The finish shall not affect the color of the face of the insignia or the background fabric while in storage.

3.4 Description. The insignia specified in this specification shall be

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:37Z
Check the source to verify that this is the current version before use.

either machine embroidered on Schiffli-type embroidery machines in accordance with the applicable government stitch enlargements (see 3.5.2.1.), or hand-embroidered with metallic or synthetic metallic embroidery materials in accordance with the applicable guide or reference sample (see 3.5.2.2).

3.4.1 Schiffli construction.

3.4.1.1 Ground and overlay stitches. The ground and overlay stitches shall be executed in accordance with the applicable stitch enlargement (see 3.5.2.1), and shall completely cover the prescribed background-design area in a closely, densely, and tightly drawn manner to produce a clear sharp execution of the design with none of the background cloth or underlay stitches visible.

3.4.1.1.1 Rating badge (chevron) Group Rate Mark (bar) and Service stripe. Stitch execution shall be of the ground embroidery type. The number of visible rows shall be as indicated in the applicable stitch enlargement (see 3.5.3).

3.4.1.2 Underlay stitches. Underlay stitches, where required, shall be inserted in the direction and manner most suitable for proper design execution and shall not be less than the number indicated on the applicable stitch enlargement. The raised areas of the design where underlay is required, shall be equal to the sample (see 3.1) in fullness and depth.

3.4.1.3 Stiele stitches. When required, Stiele border stitches shall be executed in accordance with the applicable stitch enlargement (see 3.5.2.1) and shall be tightly drawn and well executed to produce a clear, sharp border and shall completely cover the background embroidery and cloth.

3.4.1.3.1 Rating badge (chevron) and Group-Rate mark (bar). Each chevron and bar shall be finished with a 1/16 inch Stiele border stitch.

3.4.1.3.2 Service stripe. Each service stripe shall be finished with a 1/16 inch Stiele border stitch.

3.4.2 Metallic embroidery construction.

3.4.2.1 Metallic or synthetic metallic embroidery materials (Rating badge-eagle, specialty mark, grade insignia). The insignia shall be produced using materials in accordance with 3.3.8, 3.3.10.1 and Table III. When required, the fiberboard form specified in 3.3.13 may be used to raise the design of hand embroidered insignia and the design may be treated on the reverse side as specified in 3.3.14.

3.4.2.2 Gold lace (Rating badge chevrons and Service stripes). Insignia utilizing gold lace shall be produced by combining the background cloth with type A buckram (see 3.3.10). The gold lace shall be superimposed in the prescribed manner (see 3.1) and stitched along the sides with thread of color to match the gold lace and using stitch type 301. The ends of the gold lace shall fit into splits cut into the background cloth and coverstitched, using stitch type 304, continuously on the slits and between the bars or chevrons, with black thread.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:37Z
Check the source to verify that this is the current version before use.

3.4.3 Hemmed edges. Unless otherwise specified, all insignia shall be finished with a turn under of background material of sufficient size on all sides using stitch type 301, stitching type EFa-1. Thread used for hemming shall be of a color to match the background cloth so as not to show through to the face side of the insignia.

3.4.4 Spacing. All insignia covered by this specification shall be centered on the background.

3.4.5 Orientation of designs on fabrics. The height dimension of the insignia shall be embroidered in the length (warp) direction on the face side of the fabric. The direction of twill lines shall be as shown in Figure 15.

3.5 Color combination and design.

3.5.1 Color combination. The color combination of insignia shall be in accordance with Table III as indicated by the color combination code letter (see 6.2).

3.5.2 Design.

3.5.2.1 Schiffli embroidered insignia. Stitch enlargements shall be furnished by the Government, to the contractor for use in preparing the necessary punchings. The stitch enlargements shall not be altered in any way. All punchings shall be approved by the Government for conformity to requirements for minimum number of stitches as specified for the applicable insignia in Table IV, prior to start of production.

* 3.5.2.2 Hand embroidered insignia. The design of the insignia, hand-embroidered with metallic or synthetic metallic embroidery materials, or gold lace insignia, shall be in accordance with the guide or reference sample and shall not be altered in any way.

Table III - Color and material for design

Color Combination Code Letter	Back Ground Base Cloth	Type of Design						
		Eagle	Rating Badge Specialty Mark	Chevrons	Striker Mark	Group Rate Bars	Service Stripe	Grade Insignia
A-1	Blue Twill	Silver 1/	Silver 1/	Gold Lace or Syn	N/A	N/A	None	Silver1/
A-2	Blue Twill	Silver 1/	Silver 1/	Scarlet	N/A	N/A	None	Silver1/
A-3	Blue	White	White	Scarlet	White	White	Scarlet	White
A-4	Blue Twill	N/A	N/A	N/A	N/A	N/A	Lace or Schiffli	N/A
A-5	Blue Twill	N/A	N/A	N/A	N/A	Scarlet	N/A	N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:37Z
Check the source to verify that this is the current version before use.

Table III - Color and material for design (cont'd)

Color Combination Code Letter	Back Ground Base Cloth	Type of Design: Eagle	Rating Badge Specialty Mark	Chevrons	Striker Mark	Group Rate Bars	Service Stripe	Grade Insignia
A-6	Blue Twill	N/A	N/A	N/A	N/A	Emerald	N/A	N/A
A-7	Blue Twill	N/A	N/A	N/A	N/A	Blue-bird	N/A	N/A
AA	Blue Tropical Blue	Silver1/	Silver1/	Gold Lace	N/A	N/A	Gold Lace	Silver
BB	Tropical White	Silver Dark	Silver Dark	Scarlet Dark	N/A Dark	N/A Dark	Scarlet	N/A Dark
D-1	Poplin White	Blue	Blue	Blue	Blue	Blue	None	Blue
D-2	Poplin White	N/A	N/A	N/A	N/A	Scarlet	None	N/A
D-3	Poplin White	N/A	N/A	N/A	N/A	Emerald	None	N/A
D-4	Poplin Green	N/A Dark	N/A Dark	N/A Dark	N/A Dark	Blue bird Dark	None Dark	N/A
G	Serge Blue	Blue Dark	Blue	Blue Dark	Blue	Blue	Blue	N/A
M	Broadcloth Khaki	Blue Dark	None Dark	Blue Dark	N/A Dark	N/A Dark	N/A Dark	N/A
T	Twill Khaki	Blue Dark	Blue Dark	Blue Dark	Blue Dark	Blue Dark	Blue Dark	N/A
U	Tropical	Blue	Blue	Blue	Blue	Blue	Blue	N/A
V-1	White Twill	Dark Blue	Dark Blue	Dark Blue	Dark Blue	Dark Blue	None	Dark Blue
V-2	White Twill	N/A	N/A	N/A	N/A	Scarlet	None	N/A
V-3	White Twill	N/A	N/A	N/A	N/A	Emerald	None	N/A
V-4	White Twill	N/A	N/A	N/A	N/A	Blue bird	None	N/A

1/ Metallic (bullion) or synthetic metallic embroidery.

* 3.5.3 Stitch requirements (Schiffli embroidered). The stitch requirements and dimensions for the various types of embroidered insignia shall be as specified in Table IV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:37Z
Check the source to verify that this is the current version before use.

Table IV - Stitch Requirements

Type and Class	Minimum No. of Stitches	Design and Dimensions	Finished Sizes (inches)	Stitch Enlargement Drawing No.
Type I, class 1 - Chief Petty Officer	4806 1/	see Figure 1	3 X 4-1/2	16-1-854 (metallic) or 16-1-855
Type I, class 2 - Petty Officer, First Class	4076 1/	see Figure 2	3 X 4-1/2	16-1-856
Type I, class 5 - Senior Chief Petty Officer	5006 1/ 2/	see Figure 3	3 X 5-9/16	16-1-854 (metallic) or 16-1-855
Type I, class 6 - Master Chief Petty Officer	5206 1/ 2/	see Figure 3	3 X 5-9/16	16-1-854 (metallic) or 16-1-855
Type II, Specialty Mark Striker Mark: 3/ 4/				
Aerographer's Mate	590	see Figure 4	2-1/4X1-1/2	16-1-344
Air Controlman	605	see Figure 4	2-1/4X1-1/2	16-1-345
Aviation Boatswain's Mate	725	see Figure 4	2-1/4X1-1/2	16-1-477
Aviation Electrician's Mate	570	see Figure 4	2-1/4X1-1/2	16-1-346
Aviation Electronics Technician	400	see Figure 4	2-1/4X1-1/2	16-1-347
Aviation Antisubmarine Warfare Technician	636	see Figure 4	2-1/4X1-1/2	16-1-279
Aviation Antisubmarine Warfare Operator	716	see Figure 4	2-1/4X1-1/2	16-1-570
Aviation Fire Control Technician	835	see Figure 5	2-1/4X1-1/2	16-1-277
Aviation Storekeeper	620	see Figure 5	2-1/4X1-1/2	16-1-350
Aviation Maintenance Administration Man	740	see Figure 5	2-1/4X1-1/2	16-1-349

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:37Z
Check the source to verify that this is the current version before use.

Table IV - Stitch Requirements (cont'd)

Type and Class	Minimum No. of Stitches	Design and Dimensions	Finished Sizes (inches)	Stitch Enlargement Drawing No.
Aviation Machinist's Mate	515	see Figure 5	2-1/4X1-1/2	16-1-348
Aviation Ordnanceman	859	see Figure 5	2-1/4X1-1/2	16-1-484
Aviation Support Equipment Technician	569	see Figure 5	2-1/4X1-1/2	16-1-467
Aviation Structural Mechanic	510	see Figure 5	2-1/4X1-1/2	16-1-351
Aircrew Survival Equipmentman	670	see Figure 4	2-1/4X1-1/2	16-1-373
Boatswain's Mate	468	see Figure 6	1-1/2X1-1/2	16-1-457
Boilermaker	688	see Figure 6	1-1/2X1-1/2	16-1-486
Boiler Technician	549	see Figure 6	1-1/2X1-1/2	16-1-445
Builder	568	see Figure 6	1-1/2X1-1/2	16-1-479
Cryptologic Technician	185	see Figure 6	1-1/2X1-1/2	16-1-353
Construction Electrician's Mate	317	see Figure 6	1-1/2X1-1/2	16-1-480
Construction Mechanic	528	see Figure 6	1-1/2X1-1/2	16-1-481
Data Processing Technician	335	see Figure 6	1-1/2X1-1/2	16-1-418
*Damage Controlman	254	see Figure 6	1-1/2X1-1/2	16-1-862
Data Systems Technician	298	see Figure 7	1-1/2X1-1/2	16-1-60
Dental Technician	490	see Figure 7	1-1/2X1-1/2	16-1-354
Disbursing Clerk	285	see Figure 7	1-1/2X1-1/2	16-1-355
Electronics Technician	185	see Figure 7	1-1/2X1-1/2	16-1-356
Electrician's Mate	1104	see Figure 7	1-1/2X1-1/2	16-1-456
Electronic Warfare Technician	306	see Figure 7	1-1/2X1-1/2	16-1-504
Engineering Aid	326	see Figure 7	1-1/2X1-1/2	16-1-469

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:37Z
Check the source to verify that this is the current version before use.

Table IV - Stitch Requirements (cont'd)

Type and Class	Minimum No. of Stitches	Design and Dimensions	Finished Sizes (inches)	Stitch Enlargement Drawing No.
Engineman	526	see Figure 7	1-1/2X1-1/2	16-1-458
Equipment Operator	536	see Figure 7	1-1/2X1-1/2	16-1-446
Fire Controlman	740	see Figure 7	1-7/16X5/8	16-1-626
Fire Control Techician	331	see Figure 7	1-1/2X1-1/2	16-1-494
Gas Turbine Systems Technician	363	see Figure 8	1-1/2X1-1/2	16-1-464
Gunners Mate	320	see Figure 8	1-1/2X1-1/2	16-1-505
Hospital Corpsman	455	see Figure 8	1-1/2X1-1/2	16-1-357
Hull Maintenance Technician	272	see Figure 8	1-1/2X1-1/2	16-1-489
I.C. Electrician	820	see Figure 8	2-1/4X1-1/2	16-1-470
Illustrator Draftsman	260	see Figure 8	1-1/2X1-1/2	16-1-417
Instrumentman	212	see Figure 8	1-1/2X1-1/2	16-1-563
Intelligence Specialist	232	see Figure 8	1-1/2X1-1/2	16-1-496
Journalist	245	see Figure 8	1-1/2X1-1/2	16-1-359
Legalman	384	see Figure 9	1-1/2X1-1/2	16-1-416
Lithographer	220	see Figure 9	1-1/2X1-1/2	16-1-360
Machinist's Mate	654	see Figure 9	1-1/2X1-1/2	16-1-468
Machinery Repairman	489	see Figure 9	1-1/2X1-1/2	16-1-487
Master-At-Arms	405	see Figure 9	1-1/2X1-1/2	16-1-465
Mess Management Specialist	460	see Figure 9	1-1/2X1-1/2	16-1-483
Mineman	446	see Figure 9	1-1/2X1-1/2	16-1-491
Missile Technician	298	see Figure 9	1-1/2X1-1/2	16-1-571
Molder	493	see Figure 9	1-1/2X1-1/2	16-1-562
Musician	351	see Figure 10	1-1/2X1-1/2	16-1-379

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:37Z
Check the source to verify that this is the current version before use.

Table IV - Stitch Requirements (cont'd)

Type and Class	Minimum No. of Stitches	Design and Dimensions	Finished Sizes (inches)	Stitch Enlargement Drawing No.
Navy Counselor	395	see Figure 10	1-1/2X1-1/2	16-1-463
Ocean Systems Technician	493	see Figure 10	1-1/2X1-1/2	16-1-278
Operations Specialist	245	see Figure 10	1-1/2X1-1/2	16-1-471
Opticalman	635	see Figure 10	1-1/2X1-1/2	16-1-572
Patternmaker	444	See Figure 10	2-1/4X1-1/2	16-1-503
Personnelman	375	see Figure 10	1-1/2X1-1/2	16-1-362
Photographer's Mate	230	see Figure 10	1-1/2X1-1/2	16-1-363
Photographic Intelligenceman	722	see Figure 10	1-1/2X1-1/2	16-1-478
Postal Clerk	481	see Figure 11	1-1/2X1-1/2	16-1-364
Quartermaster	453	see Figure 11	1-1/2X1-1/2	16-1-455
Radioman	440	see Figure 11	1-1/2X1-1/2	16-1-365
Religious Program Specialist	589	see Figure 11	1-1/2X1-1/2	16-1-577
Ship's Serviceman	170	see Figure 11	1-1/2X1-1/2	16-1-366
Signalman	447	see Figure 11	1-1/2X1-1/2	16-1-459
Sonar Technician	461	see Figure 11	2-1/4X1-1/2	16-1-506
Steel Worker	423	see Figure 11	1-1/2X1-1/2	16-1-485
Storekeeper	310	see Figure 11	1-1/2X1-1/2	16-1-367
Torpedoman's Mate	555	see Figure 12	2-1/4X1-1/2	16-1-490
Tradevman	485	see Figure 12	1-1/2X1-1/2	16-1-368
Utilitiesman	374	see Figure 12	1-1/2X1-1/2	16-1-488
Weapons Technician	439	see Figure 12	1-1/2X1-1/2	16-1-853
Yeoman	165	see Figure 12	1 1/2X1 1/2	16-1-369

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:37Z
Check the source to verify that this is the current version before use.

Table IV - Stitch Requirements (cont'd)

Type and Class	Minimum No. of Stitches	Design and Dimensions	Finished Sizes (inches)	Stitch Enlargement Drawing No.
Type IV - Group Rate Mark				
Two Stripes (class 2)	1000	see Figure 13	2 7/32X2-9/32	16-1-42
Three Stripes (class 3)	1500	see Figure 13	2 7/32X2-25/32	16-1-42
Type V - Stripe, Service				
One Stripe	1317	see Figure 14	6 X 3/4	16-1-628
Two Stripes	2634	see Figure 14	6 X 1-1/4	16-1-628
Three Stripes	3951	see Figure 14	6 X 1-3/4	16-1-628
Four Stripes	5268	see Figure 14	6 X 2-1/4	16-1-628
Five Stripes	6585	see Figure 14	6 X 2-3/4	16-1-628
Six Stripes	7902	see Figure 14	6 X 3-1/4	16-1-628
Seven Stripes	9219	see Figure 14	6 X 3-3/4	16-1-628
Type VIII - Insignia, Grade	200	see Figure 16	1-1/16X1-1/16	16-1-370

1/ Exclusive of number of stitches for the Specialty mark.

2/ Minimum number of stitches includes stitches for one or two stars as applicable for Type VIII.

3/ Classified as "Specialty mark" when used with Type I Rating Badges.

4/ The striker mark for female personnel shall be of the dimensions specified in MIL-I-15864 Insignia, Embroidered, Men's and Women's for Type II insignia.

3.6 Insignia.

3.6.1 Badge, rating.

* 3.6.1.1 Construction (Schiffli embroidered), Type I, classes 1 and 2. The Type I, classes 1 and 2 rating badge shall be embroidered in accordance with the applicable stitch enlargement (Table IV), 3.4.1 and dimensions specified in Figures 1a, 2a, and 3.

3.6.1.1.1 Type I, class 5 (Senior Chief Petty Officer). The rating badge shall consist of the class 1 rating badge to which one (1) star (Type VIII), shall be placed in accordance with measurements specified in Figure 3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:37Z
Check the source to verify that this is the current version before use.

3.6.1.1.2 Type I, class 6 (Master Chief Petty Officer). The rating badge shall consist of the class 1 rating badge to which two (2) stars shall be placed in accordance with measurements specified in Figure 3.

* 3.6.1.2 Construction (hand-embroidered) Type I, classes 1, 2, 5 and 6. The Type I, classes 1, 2, 5 and 6 rating badges shall be embroidered in accordance with the guide sample, 3.4.2 and measurements specified in Figures 1a, 2a and 3.

3.6.2 Type II - Specialty Mark or Striker Mark. The specialty mark shall be centered on the rating badge between the upper chevron and the eagle's talons. Striker marks shall be centered on the specified background cloth (see Table III) and shall be embroidered according to design, dimensions and stitch enlargement drawing numbers specified in Table IV. The minimum stitch requirements for specialty mark and striker mark shall be embroidered in accordance with the applicable stitch enlargement (see 3.5.3) and shall conform to the requirements specified in Table IV.

3.6.2.1 Construction (hand-embroidered specialty mark). The insignia shall be produced in accordance with 3.4.2 and dimensions specified in the appropriate figures.

3.6.3 Type IV, Group Rate Mark. The insignia shall consist of one, two or three stripes, as applicable, centered on the prescribed background cloth. The stripe(s) shall be embroidered in accordance with the applicable stitch enlargement (Table IV), 3.4.1 and dimensions specified in Figure 13.

* 3.6.4 Type V, Stripe, service. The insignia shall be embroidered in accordance with the applicable stitch enlargement (Table IV), 3.4.1 and for dimensions specified in Figure 14a.

3.6.5 Type VIII, Insignia, Grade.

3.6.5.1 Schiffli embroidered. The insignia shall be embroidered in accordance with the applicable stitch enlargement (Table IV), 3.4.1 and dimensions specified in Figure 16.

3.6.5.2 Hand-embroidered. The insignia shall be hand embroidered in accordance with the guide sample, 3.4.2 and dimensions specified in Figure 16.

3.7 Tolerance. The tolerances listed in Table V shall be applicable to the finished item.

Table V - Tolerances

	Tolerance(inch)
Specified dimension up to 1 inch	± 1/32
Speicfied dimension from 1 to 1 15/16	± 1/16
Specified dimension from 2 to 2 15/16	± 3/32
Specified dimension from 3 to 3 15/16	± 1/8
Specified dimension from 4 to 4 15/16	± 5/32
Specified dimension from 5 to 5 15/16	± 3/16
Specified dimension from 6 to 6 15/16	± 7/32
Specified dimension from 7 to 7 15/16	± 1/4
Degrees	± 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:37Z
Check the source to verify that this is the current version before use.

3.8 Workmanship. The finished insignia shall conform to the quality of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or order, the contractor may use his own or any other facilities suitable for performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformanmce to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

4.3 First article inspection. The first article, submitted in accordance with 3.2, shall be inspected as specified in 4.4.2 and 4.4.2.2 for compliance with design, construction, workmanship and dimensional requirements.

4.3.1 Approval of punchings. Before production is commenced, punchings for the applicable insignia shall be inspected and approved by the Government for conformance to the requirements for minimum number of stitches specified in Table IV.

4.4 Quality conformance inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected and tested in accordance with all

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:37Z
Check the source to verify that this is the current version before use.

the requirements of referenced specifications, drawings and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document. In addition, components and materials listed in Table VI shall be tested for the characteristics shown following methods specified in FED-STD-191, wherever applicable. A Certificate of Compliance will be acceptable for the requirements of 3.3.11.2 and 3.3.13. All test reports shall contain the individual values utilized in expressing the final result. The lot shall be unacceptable if the lot average or one or more sample units fail to meet the requirement specified. The sample unit and sample size shall be as follows:

Component	Unit of Product Inspection Lot	Unit of Product Sample
Buckram	1 linear yard	1 linear yard
Embroidery yarn	pound	1 cone or spool, or sufficient number of bobbins to total a minimum of 360 yards
Thread (all types and sizes)	pound	1 cone or spool, or sufficient number of bobbins to total a minimum of 360 yards (when threads are purchased on cones, spools and on bobbins, each shall be tested.)

The sample size for each component shall be as follows:

Lot Size (Units)	Sample Size
800 or less	2
801 up to and including 22,000	3
22,001 and over	5

Table VI - Component Testing

Component	Characteristics	Requirement Paragraph	Test Method	No. of Determinations Per Unit of Product	Results Reported As
Buckram (Types A and B)	Mat'l. Ident.1/	3.3.10	1200	1	Pass or Fail
	Yarn count				
	Ends	3.3.10	5050	5	Pass or Fail
	Picks	3.3.10	5050	5	Pass or Fail
	Weight	3.3.10	5041	5	Nearest 0.1oz
Embroidery yarn	Material ident 1/	3.3.11.1 & 3.3.11.2	1500 or 1520	1	Pass or Fail
	Denier 1/	3.3.11.1	4021	1	Pass or Fail
	Ply	3.3.11.1	Visual	1	Pass or Fail
	Presence of sulfur 1/	3.3.11.1.1	2020	1	Pass or Fail

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:37Z
Check the source to verify that this is the current version before use.

Table VI - Component Testing (cont'd)

Component	Characteristics	Requirement Paragraph	Test Method	No. of Determinations Per Unit of Product	Results Reported As
Thread, cotton	Color	3.3.12.1	Visual	1	Pass or Fail
	Colorfastness to Dry heat (hot pressing)	3.3.12.1	5640	1	Pass or Fail
	Wet heat (hot pressing)	3.3.12.1	5640	1	Pass or Fail

1/ Unless otherwise specified, a certificate of compliance shall be submitted and will be acceptable for the stated requirements.

4.4.2 Examination of the end item. The defects found during the examination of the end item shall be classified in accordance with 4.4.2.1 and 4.4.2.2. The sample unit shall be one finished insignia. When insignia are furnished in pairs, selection shall be by pairs. The inspection levels and acceptable quality levels shall be as specified in 4.4.2.3. The lot size shall be expressed in terms of the sample unit.

4.4.2.1 Visual examination. The finished insignia shall be examined for defects in design, material, construction and workmanship and classified in accordance with the defects listed in Table VII.

Table VII - Classification of Defects

Examine	Defects
Material	Other than specified. Color or shade other than specified. Hole, float, slub, knot, broken pick or end, spot or stain (i.e., background cloth).
Design	Any deviation from applicable stitch enlargement drawing, illustration, or reference sample. Wrong color or wrong color arrangement. Not centered in the prescribed background. Height not embroidered in the length direction of the background fabric.
Construction	Stitching incomplete. Embroidered on wrong side of background cloth. Broken or skipped stitches. Shift, affecting appearance. Incomplete coverage. Density not in accordance with reference sample. Bobbin threads visible, affecting appearance. Bunched or tangled threads and yarns.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:37Z
Check the source to verify that this is the current version before use.

Table VII - Classification of Defects (cont'd)

Construction	Loose or tight tension affecting appearance. Puckering exceeding reference sample (i.e., Specialty Mark or rating badge). Stitches out of alignment affecting appearance. Open or poorly formed points, (i.e., gold lace rating badge). Unevenly spaced, (i.e., gold lace rating badge and gold lace service stripes). Buckram omitted, incomplete, or extending beyond insignia, (i.e., metallic embroidered ad gold lace insignia).
Finish	Stitches per inch not within specified range. Irregular or unevenly gauged stitching. Ends not fitted into slits cut in background cloth, (i.e., gold lace rating badge and service stripes). Points not mitered, (i.e., gold lace chevrons on rating badge). Edges not finished as required. Wrong stitch type. Wrong seam type. Color of thread used for hemming not as specified. Run off. Color of face of insignia affected by stiffener coating. Cutting guide stitching shows through to the face side of the background cloth, affecting appearance.
Workmanship	Spot or stain. Two or more thread ends longer than 1/16 inch. Misshapen or distorted.

4.4.2.2 Dimensional examination. The finished insignia shall be examined for defects in dimension. Any measurement deviating from dimensions specified Table IV and Figures 1a, 2a through 16, or tolerances specified in 3.7, shall be scored a defect.

4.4.2.3 Inspection levels and acceptable quality levels. The inspection levels and acceptable quality levels (AQL's), expressed in defects per hundred units, for visual and dimensional examinations shall be as follows:

	Inspection Level	AQL
For defects applicable to 4.4.2.1	II	4.0
For defects applicable to 4.4.2.2	S-3	6.5

4.4.3 Examination of packaging requirements. An examination shall be made to determine that packaging, packing and marking comply with the Section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be closed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the acceptable quality level (AQL)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:37Z
Check the source to verify that this is the current version before use.

shall be 2.5 defects per hundred units.

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence or method of application.
Materials	Any component missing, not as specified or damaged, affecting serviceability.
Workmanship	Inadequate application of components, such as incomplete closure of container flaps, loose strapping, inadequate stapling; bulging or distortion of containers.
Content	Number of items per container is more or less than specified; wrong type, class or style per set-up box; number of set-up boxes per shipping container more or less than specified.

* 4.4.4 Testing of the end item. The end item shall be tested as specified in Table VIII. The lot size shall be expressed in units of one insignia of each type or class. The unit of product for tests shall be six insignia. The lot shall be unacceptable if one or more sample units fail to meet the requirements referenced in Table VIII. The sample size shall be as follows:

Lot Size (each)	Sample Size
800 or less	2
801 up to and including 22,000	3
22,001 and over	5

Table VIII - End Item Tests

Characteristic	Requirement Paragraph	Test Method	No. Per Unit of Product	Determinations Results Reported as
Base cloth verification	3.3.1 thru 3.3.7	Visual	1	Pass or Fail
Embroidery yarn				
Colorfastness to: 1/				
Bleaching	3.3.11.1.1.1	5600	1	Pass or Fail
Dry heat (hot pressing)	3.3.11.1.1.1	5640	1	Pass or Fail
Wet heat (hot pressing)	3.3.11.1.1.1	5640	1	Pass or Fail
Light	3.3.11.1.1.1	5660	1	Pass or Fail
Laundering	3.3.11.1.1.1	5614	1	Pass or Fail
Wet-dry cleaning	3.3.11.1.1.1	5622	1	Pass or Fail
Shade match:				
Embroidery yarn	3.3.11.1.1.1	Visual	One of each color	Pass or Fail

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:37Z
Check the source to verify that this is the current version before use.

1/ Test reports will be furnished for each color on the initial lot. A certificate of compliance will be accepted for each color for each subsequent lot on the same contract, provided the manufacturer certifies that the dyer or dye formulation has not been changed.

5. PACKAGING.

5.1 Preservation-Packaging. Preservation-packaging shall be level A or C (see 6.2).

5.1.1 Level A.

5.1.1.1 Quantity per set-up box.

5.1.1.1.1 Type I - Badge, Rating - Classes 1, 2, 5 and 6. Each rating badge shall be individually packaged in a properly fitted flat style polyethylene bag conforming to the requirements specified in 5.1.1.2. The bag opening shall be across the face-width. The open end of the bag shall be folded over. Forty (40) rating badges of one class and rate only shall be packaged in a set-up box that conforms to the requirements specified in 5.1.1.3.

5.1.1.1.2 Type II - Striker Mark. Ten (10) marks, of one kind only, shall be packaged in a properly fitted flat style polyethylene bag conforming to the requirements specified in 5.1.1.2. The bag opening shall be across the face-width. The open-end of the bag shall be folded over. One hundred and twenty (120) marks (12 bags of 10 each), of one kind only shall be packaged in a set-up box that conforms to the requirements specified in 5.1.1.3.

5.1.1.1.4 Type V - Stripe, Service.

240 each (1 stripe per unit)
150 each (2 stripes per unit)
90 each (3 stripes per unit)
60 each (4 or 5 stripes per unit)
30 each (6 or 7 stripes per unit)

The above quantities of service stripes, of one kind only, shall be packaged in a set-up box that conforms to the requirements specified in 5.1.1.3. Thirty (30) items of one kind only, shall be tied at each end by elastic band, twine or cotton tape to form a bundle.

5.1.1.1.5 Type VIII - Insignia, Grade. The insignia shall be packaged in accordance with standard industry practice.

5.1.1.2 Bags, polyethylene. The polyethylene bags shall be fabricated from clean polyethylene film 0.0010 inch thick (± 20% tolerance). The polyethylene bags shall be formed with heat-sealed seams that are straight, continuous and parallel to each other and the formed edges of the bag.

5.1.1.3 Boxes set-up. Insignia of one type or class only, shall be placed in a two-piece, full telescope style, paperboard set-up box conforming to type I, variety 1, class A, style 4 of PPP-B-676. The outside dimensions of the set-up box shall be 7 1/8 inches in depth. The outside dimensions of the

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:37Z
Check the source to verify that this is the current version before use.

set-up box for Type V Service Stripes shall be 11 1/2 inches in length, 5 5/8 inches in width, and 2 3/8 inches in depth. Unless otherwise specified, the interior of set-up boxes for items containing wool shall be sprinkled with not less than 1/4 ounce of flaked napthalene.

NOTE: The naphthalene flake requirement is not applicable when Government furnished material with wool or part wool content has been mothproof treated.

5.1.2 Level C. Insignia shall be packaged to afford adequate protection against damage during shipment from the supply source to the first receiving activity. The contractor's standard practice may be used when it meets this requirement.

5.2 Packing. Packing shall be level A, B or C (see 6.2).

* 5.2.1 Level A. Fifteen (15) set-up boxes of one type, class or kind of insignia or six (6) set-up boxes of service stripes, of one kind only, packaged as specified in 5.1.1, shall be packed in a shipping container conforming to type CF class weather-resistant variety DW, grade V15c, size 1 of MIL-B-17757. Each shipping container shall be closed, waterproofed and reinforced in accordance with the appendix of the box specification.

* 5.2.2 Level B. Fifteen (15) set-up boxes of one type, class and kind of insignia or six (6) set-up boxes of service stripes, of one kind only, packaged as specified in 5.1.1, shall be packed in a fiberboard shipping container assembled, closed and reinforced conforming to type CF, class domestic, variety DW, grade 200 size 1 of MIL-B-17757. Shipping containers shall be closed in accordance with the appendix of the box specification.

5.2.3 Level C. Item, packaged as specified in 5.1.1 shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking. In addition to any special marking required by the contract or order, intermediate packages and shipping containers shall be marked in accordance with MIL-STD-129.

* 6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

* 6.1 Intended use. The embroidered insignia are intended to designate rate and specialty for enlisted women of the Navy and Navy enlisted women attached to Marine Corps units.

* 6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number and date of this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:37Z
Check the source to verify that this is the current version before use.

b. Issue of DODISS to be cited in the solocitation and if required, the specific issue of individual documents referenced.
c. Type, class, and color combination required (see 1.2 and 3.5.1).
d. When First Article inspection is required (see 3.2), the item will be tested and should be a first article sample. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, quantity and testing and approval.
e. Cable number for yarn (see 3.3.11.1.1).
f. Levels of packaging and packing required (see 5.1 and 5.2).

6.3 Samples. For access to sample of the end item and shade sample, address the procuring activity issuing the invitation for bids.

6.4 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only the the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

* 6.5 Subject term (key word) listing.
Badge, rating
Insignia, Embroidered
Insignia, Grade
Insignia, sleeve
Mark, rate, group
Mark, specialty and striker
Personnel, enlisted


Custodian:
Navy - NU

Preparing Actitity:
Navy - NU

Review Activity:
DLA-CT
Navy - MC

Project No. 8455-N364


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:37Z
Check the source to verify that this is the current version before use.

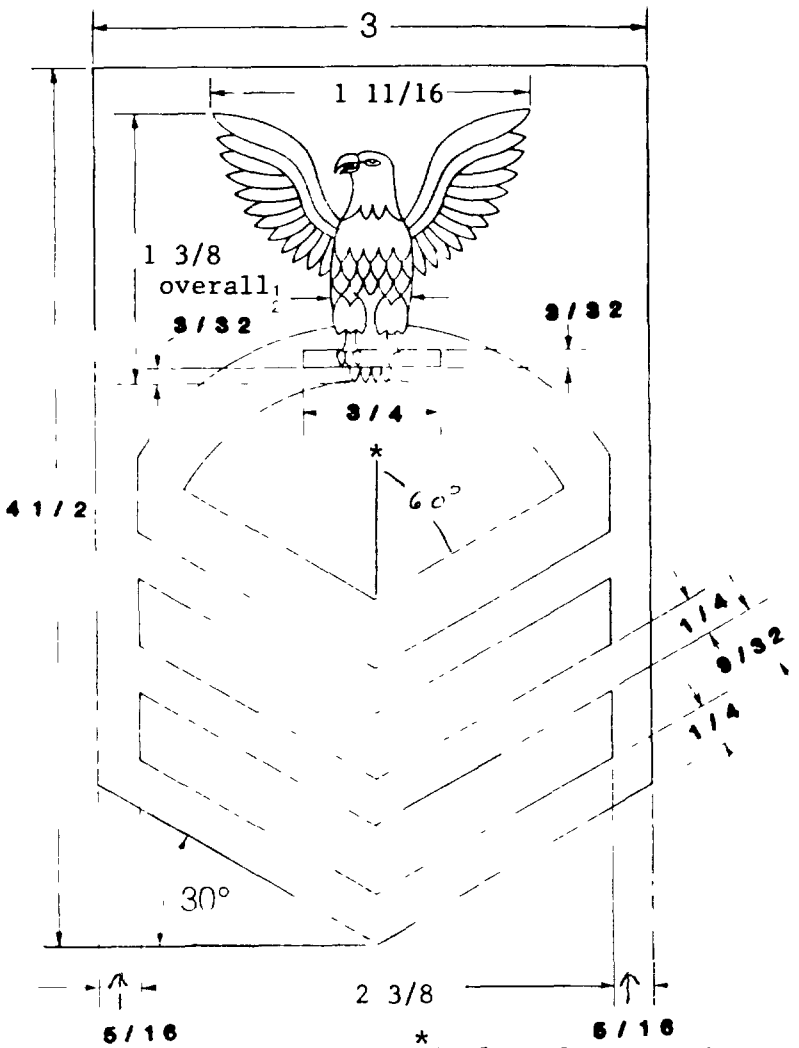

NOTE: ILLUSTRATION IS FOR DIMENSIONS ONLY. FOR CORRECT DESIGN AND PROPER STITCH EXECUTION REFER TO THE APPLICABLE STITCH ENLARGEMENT. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES.

Figure 1 - Type I Class 1 Chief Petty Officer Rating Badge

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:37Z
Check the source to verify that this is the current version before use.

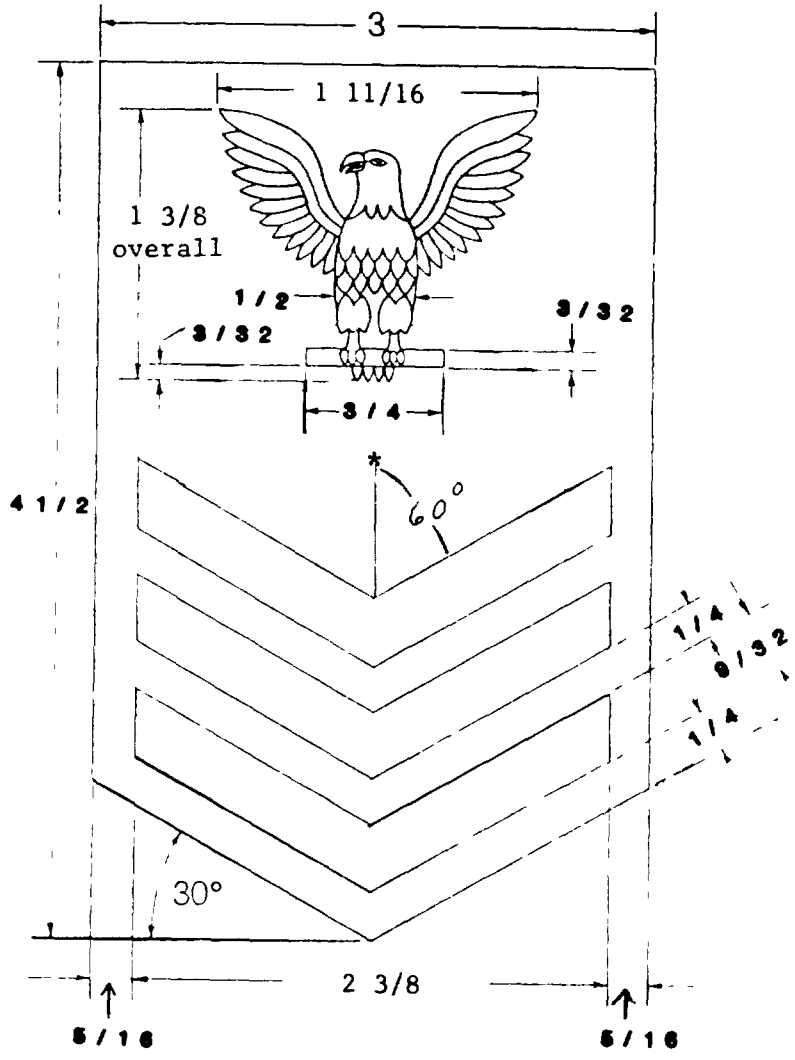


*Applicable Specialty Mark - Optically Centered


NOTE: ILLUSTRATION IS FOR DIMENSIONS ONLY. FOR CORRECT DESIGN AND PROPER STITCH EXECUTION REFER TO THE APPLICABLE STITCH ENLARGEMENT. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES.

Figure 2 - Type I Class 2 Chief Petty Officer First Class Rating Badge

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:37Z
Check the source to verify that this is the current version before use.

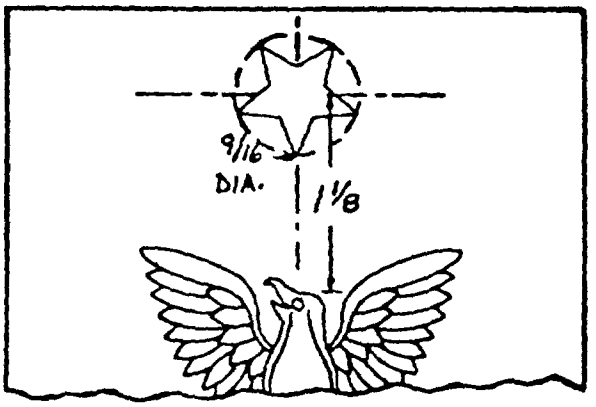

TYPE 1, CLASS 5 SENIOR CHIEF PETTY OFFICER

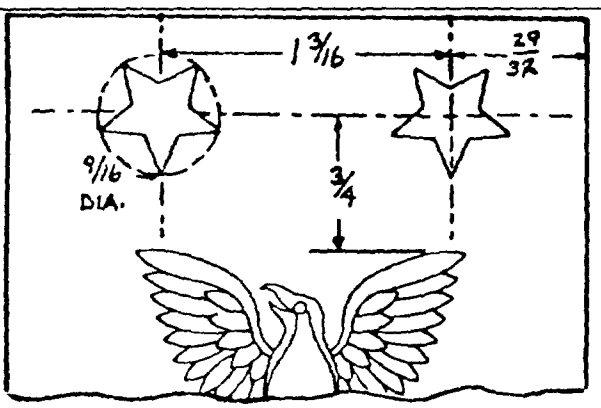


TYPE 1, CLASS 6 MASTER CHIEF PETTY OFFICER

NOTE: ILLUSTRATION IS FOR DIMENSIONS ONLY. FOR CORRECT DESIGN AND PROPER STITCH EXECUTION REFER TO THE APPLICABLE STITCH ENLARGEMENT. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES.

Figure 3 - Type I Class 5 Senior Chief Petty Officer Rating Badge and Type I Class 6 Master Chief Petty Officer Rating Badge


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:37Z
Check the source to verify that this is the current version before use.

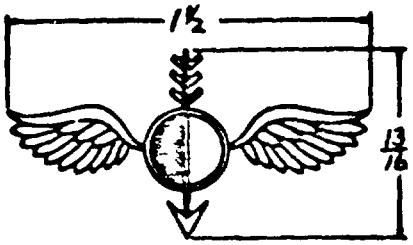


AEROGRAPHER'S MATE (AG)




AIR CONTROLMAN (AC)

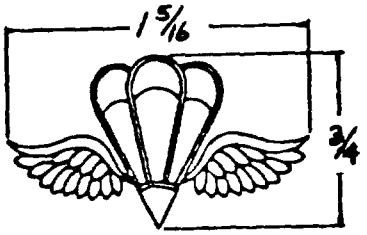

AIRCREW SURVIVAL EQUIPMENTMAN (PR)

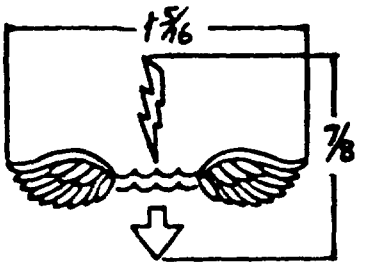


AVIATION ANTISUBMARINE WARFARE TECHNICIAN (AX)

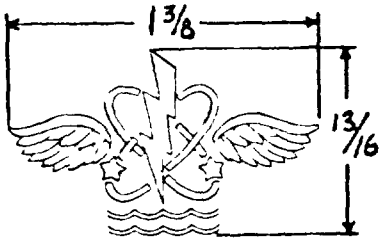


AVIATION ANTISUBMARINE WARFARE OPERATOR (AW)



AVIATION BOATSWAIN'S MATE (AB)

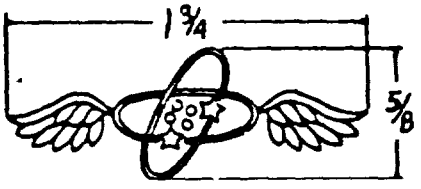

AVIATION ELECTRONIC'S TECHNICIAN (AT)




AVIATION ELECTRICIAN'S MATE (AE)


NOTE: ILLUSTRATION IS FOR DIMENSIONS ONLY. FOR CORRECT DESIGN AND PROPER STITCH EXECUTION REFER TO THE APPLICABLE STITCH ENLARGEMENT. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES.

Figure 4 - Type II - Specialty Mark


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:37Z
Check the source to verify that this is the current version before use.

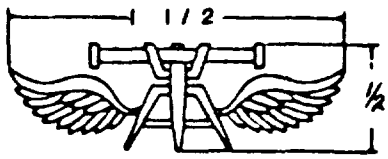


AVIATION FIRE CONTROL TECHNICIAN (AQ)




AVIATION MAINTENANCE ADMINISTRATIONMAN (AZ)




AVIATION MACHINIST'S MATE (AD)

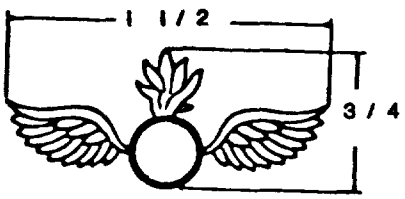


AVIATION ORDNANCEMAN (AO)

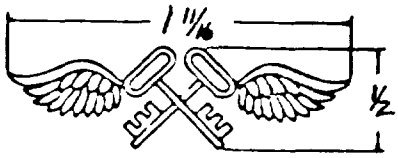

AVIATION STOREKEEPER (AK)



AVIATION STRUCTURAL MECHANIC (AM)

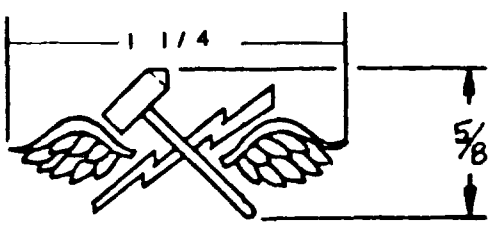


AVIATION SUPPORT EQUIPMENT TECHNICIAN (AS)


NOTE: ILLUSTRATION IS FOR DIMENSIONS ONLY. FOR CORRECT DESIGN AND PROPER STITCH EXECUTION REFER TO THE APPLICABLE STITCH ENLARGEMENT. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES.

Figure 5 - Type II - Specialty Mark


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:37Z
Check the source to verify that this is the current version before use.




BOATSWAIN'S MATE (BM)




BOILERMAKER (BR)




BOILER TECHNICIAN (BT)




BUILDER (BU)




CONSTRUCTION ELECTRICIAN (CE)




CONSTRUCTION MECHANIC (CM)



CRYPTOLOGIC TECHNICIAN (CT)



DATA PROCESSING TECH (DP)

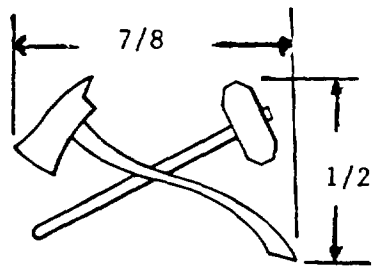


DAMAGE CONTROLMAN (DC)


NOTE: ILLUSTRATION IS FOR DIMENSIONS ONLY. FOR CORRECT DESIGN AND PROPER STITCH EXECUTION REFER TO THE APPLICABLE STITCH ENLARGEMENT. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES.

Figure 6 - Type II - Specialty Mark


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:37Z
Check the source to verify that this is the current version before use.




DATA SYSTEMS
TECHNICIAN (DS)




DENTAL TECHNICIAL (DT)




DISBURSING CLERK (DK)




ELECTRICIAN'S MATE (EM)




ELECTRONICS
TECHNICIAN (ET)




ELECTRONIC WARFARE TECH (EW)




ENGINEERING
AID (EA)




ENGINEMAN (EN)



EQUIPMENT
OPERATOR (EO)

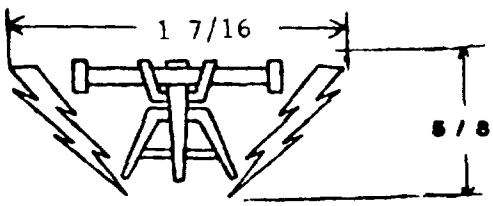

FIRE CONTROLMAN (FC)




FIRE CONTROL
TECHNICIAN (FT)


NOTE: ILLUSTRATION IS FOR DIMENSIONS ONLY. FOR CORRECT DESIGN AND PROPER STITCH EXECUTION REFER TO THE APPLICABLE STITCH ENLARGEMENT. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES.

Figure 7 - Type II - Specialty Mark


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:37Z
Check the source to verify that this is the current version before use.




Gas Turbine
Systems Technician (GS)




GUNNER'S MATE
(GM)




HOSPITAL CORPSMAN (HM)




HULL MAINTENANCE TECH (HT)




I.C. Electrician (I.C.)




ILLUSTRATOR
DRAFTSMAN (DM)



INSTRUMENTMAN (IM)



INTELLIGENCE SPECIALIST (IS)




JOURNALIST (JO)


NOTE: ILLUSTRATION IS FOR DIMENSIONS ONLY. FOR CORRECT DESIGN AND PROPER STITCH EXECUTION REFER TO THE APPLICABLE STITCH ENLARGEMENT. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES.

Figure 8 - Type II - Specialty Mark


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:37Z
Check the source to verify that this is the current version before use.




LEGALMAN (LN)




LITHOGRAPHER (LI)




MACHINERY REPAIRMAN (MR)




MACHINIST'S MATE (MM)




Master-At-Arms (MA)




MESS MANAGEMENT SPECIALIST (MS)



MINEMAN (MN)



MISSILE TECHNICIAN (MT)



MOLDER (ML)


NOTE: ILLUSTRATION IS FOR DIMENSIONS ONLY. FOR CORRECT DESIGN AND PROPER STITCH EXECUTION REFER TO THE APPLICABLE STITCH ENLARGEMENT. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES.

Figure 9 - Type II - Specialty Mark


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:37Z
Check the source to verify that this is the current version before use.




MUSICIAN (MU)




Navy Counselor (NC)




OCEAN SYSTEMS TECHNICIAN (OT)




OPERATION SPECIALIST (OS)




OPTICALMAN (OM)




PATTERNMAKER (PM)



PERSONNELMAN (PN)



PHOTOGRAPHER'S MATE (PH)

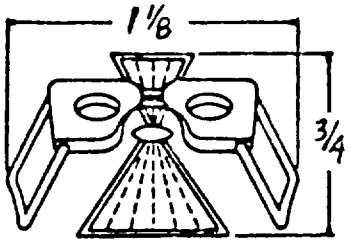


PHOTOGRAPHIC INTELLIGENCEMAN (PT)


NOTE: ILLUSTRATION IS FOR DIMENSIONS ONLY. FOR CORRECT DESIGN AND PROPER STITCH EXECUTION REFER TO THE APPLICABLE STITCH ENLARGEMENT. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES.

Figure 10 - Type II - Specialty Mark


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:37Z
Check the source to verify that this is the current version before use.




POSTAL CLERK (PC)




QUARTERMASTER (QM)

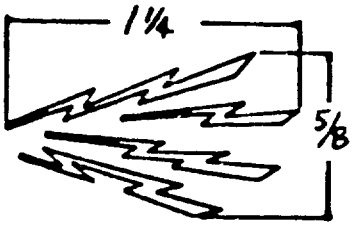


RADIOMAN (RM)




RELIGIOUS PROGRAM SPECIALIST (RP)




SIGNALMAN (SM)

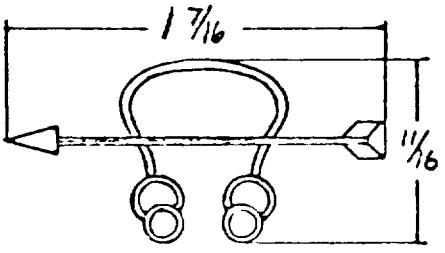


SONAR TECHNICIAN (ST)



STOREKEEPER (SK)



STEEL WORKER (SW)




SHIP'S SERVICEMAN (SH)


NOTE: ILLUSTRATION IS FOR DIMENSIONS ONLY. FOR CORRECT DESIGN AND PROPER STITCH EXECUTION REFER TO THE APPLICABLE STITCH ENLARGEMENT. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES.

Figure 11 - Type II - Specialty Mark


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:37Z
Check the source to verify that this is the current version before use.

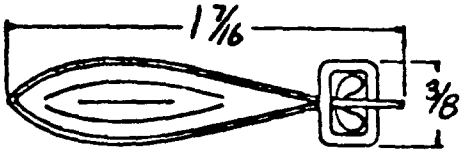


TORPEDOMAN'S MATE (TM)




TRADEVMAN (TD)



UTILITIESMAN
(UT)

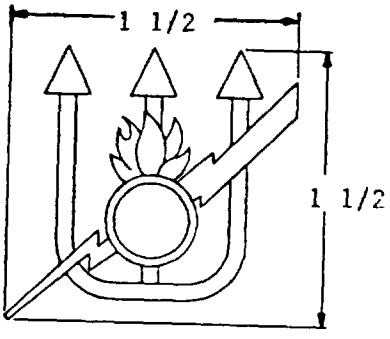

WEAPONS TECHNICIAN (WT)




YEOMAN (YN)

NOTE: ILLUSTRATION IS FOR DIMENSIONS ONLY. FOR CORRECT DESIGN AND PROPER STITCH EXECUTION REFER TO THE APPLICABLE STITCH ENLARGEMENT. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES.

Figure 12 - Type II - Specialty Mark

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:37Z
Check the source to verify that this is the current version before use.

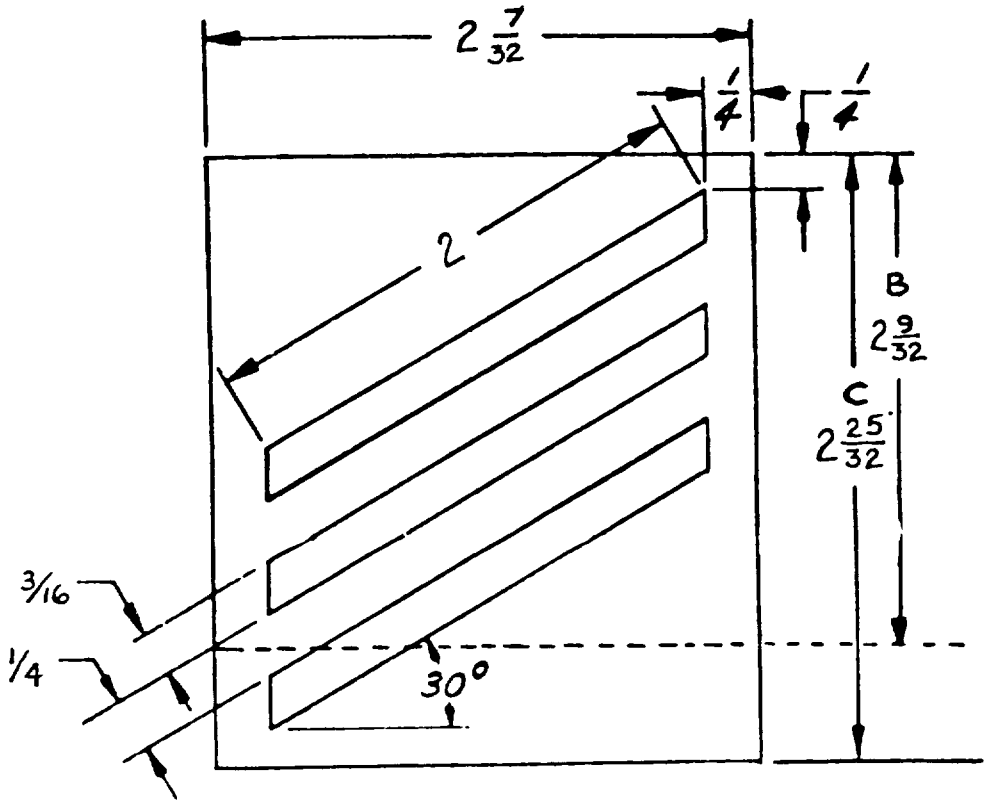


B - Class 2 - Two Stripes

C - Class 3 - Three Stripes

NOTE: ILLUSTRATION IS FOR DIMENSIONS ONLY. FOR CORRECT DESIGN AND PROPER STITCH EXECUTION REFER TO THE APPLICABLE STITCH ENLARGEMENT. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES.

Figure 13 - Type IV - Group Rate Mark

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:37Z
Check the source to verify that this is the current version before use.

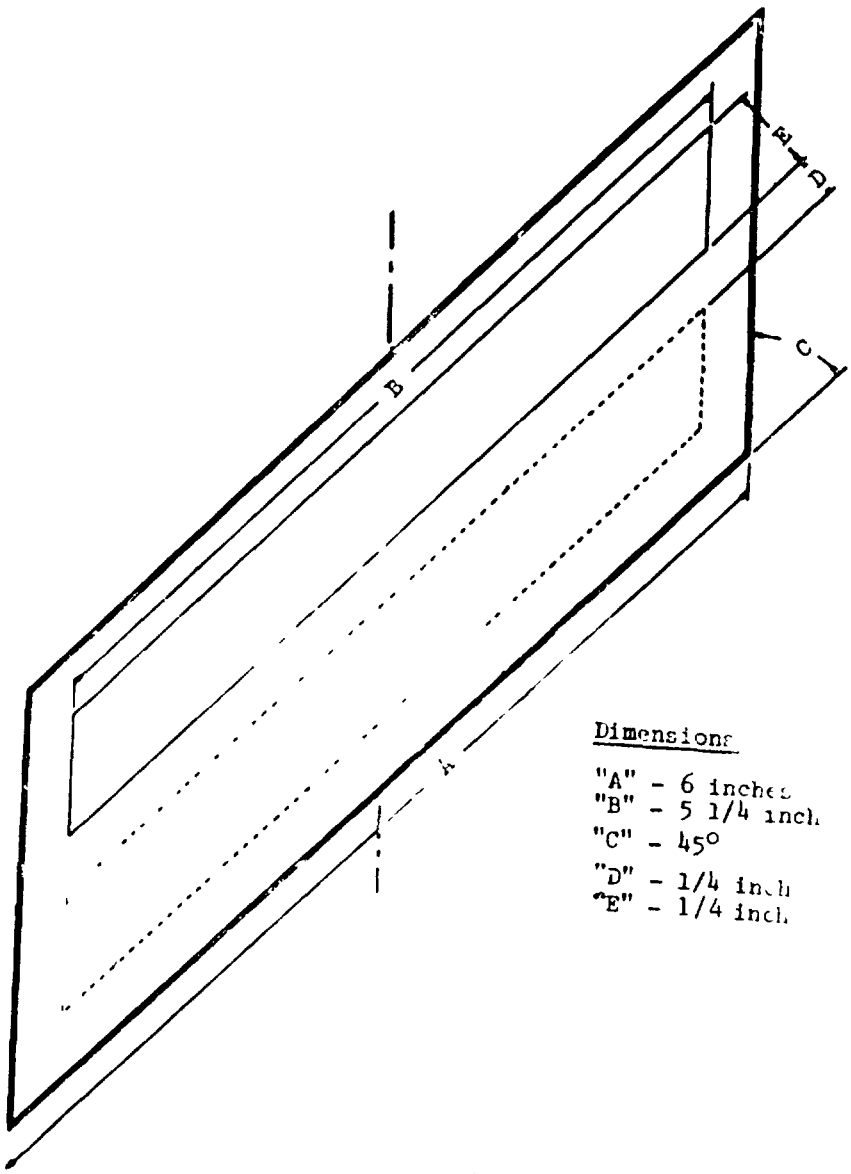


Service Stripe - One or more


NOTE: ILLUSTRATION IS FOR DIMENSIONS ONLY. FOR CORRECT DESIGN AND PROPER STITCH EXECUTION REFER TO THE APPLICABLE STITCH ENLARGEMENT. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES.

Figure 14 - Type V - Stripe, Service


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:37Z
Check the source to verify that this is the current version before use.

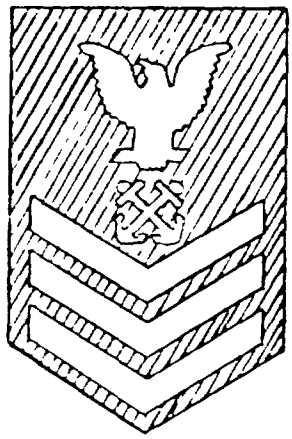

RATING BADGE



GROUP RATE MARK




STRIKER MARK

*** Applicable Specialty Mark - Optically centered**

NOTE: RATING BADGES, GROUP RATE MARKS AND STRIKER MARKS EMBROIDERED ON TWILL FABRICS SHALL FINISH WITH THE TWILL LINE IN THE DIRECTION INDICATED ABOVE ON THE FACE OF THE FABRIC. FIGURES ARE FOR ILLUSTRATION PURPOSES ONLY.

Figure 15 - Rating Badges, Group Rate Marks and Striker Marks

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:37Z
Check the source to verify that this is the current version before use.

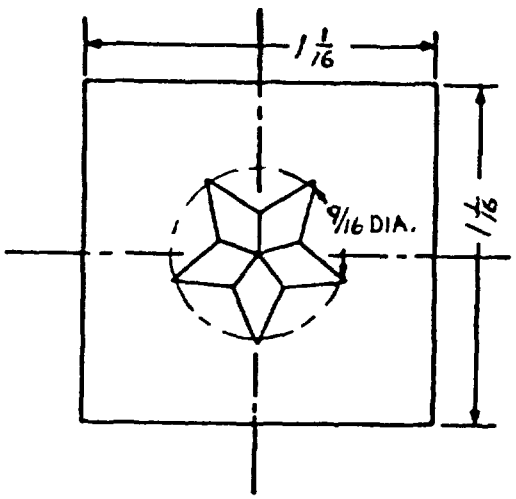

INSIGNIA, GRADE, SENIOR

NOTE: ILLUSTRATION IS FOR DIMENSIONS ONLY. FOR CORRECT DESIGN AND PROPER STITCH EXECUTION REFER TO THE APPLICABLE STITCH ENLARGEMENT. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES.

Figure 16 - Type VIII - Insignia, Grade, Senior

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:37Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2 DOCUMENT TITLE
MIL-I-18496F(NU)	INSIGNIA, EMBROIDERED (WOMEN)

3a. NAME OF SUBMITTING ORGANIZATION	4 TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)* _____

5 PROBLEM AREAS

a. Paragraph Number and Wording

b. Recommended Wording

c. Reason/Rationale for Recommendation

6 REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:37Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS. In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Navy Clothing and Textile Research Facility
21 Strathmore Road, Code 50
Natick, MA 01760-2490

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:37Z
Check the source to verify that this is the current version before use.