V

MILITARY STANDARD

MIL-STD-1323-306
(NAVY)

30 NOVEMBER 1982

UNIT LOAD
FOR UNDERWAY REPLENISHMENT
ROCKET MOTOR GBU-16/B (SKIPPER)
IN CONTAINER CNU-248/E


UNIT LOAD DATA DODIC/NALC . . . . . TBD

NUMBER OF MOTORS PER CONTAINER	1
NUMBER OF CONTAINERS PER UNIT LOAD	4
NUMBER OF MOTORS PER UNIT LOAD	4
GROSS WEIGHT OF ONE CONTAINER	330 LBS.
WEIGHT OF WOOD BATTENS	6 LBS.
WEIGHT OF STRAPPING	6 LBS.
GROSS WEIGHT OF UNIT LOAD	1330 LBS. △
CUBE	58 CU. FT.

△ DO NOT USE FOR SHIPPING WEIGHT

DO NOT STACK MORE THAN
4 UNIT LOADS HIGH IN STORAGE


HAZARD CLASSIFICATION
DOT . . . . . CLASS B
C.G. . . . . CLASS II B

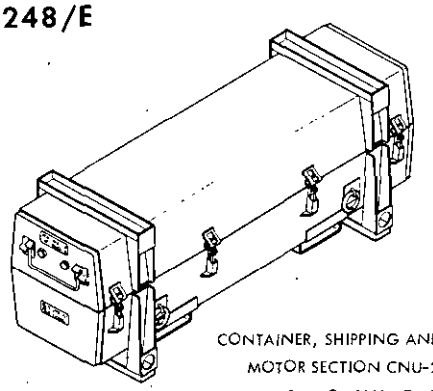

CONTAINER, SHIPPING AND STORAGE
MOTOR SECTION CNU-248/E
DWG. NO. 18894-744072

CONTAINER DIMENSIONS

LENGTH	60
WIDTH	18 1/2
HEIGHT (OVERALL)	23 1/8
(STACKING)	22 1/8

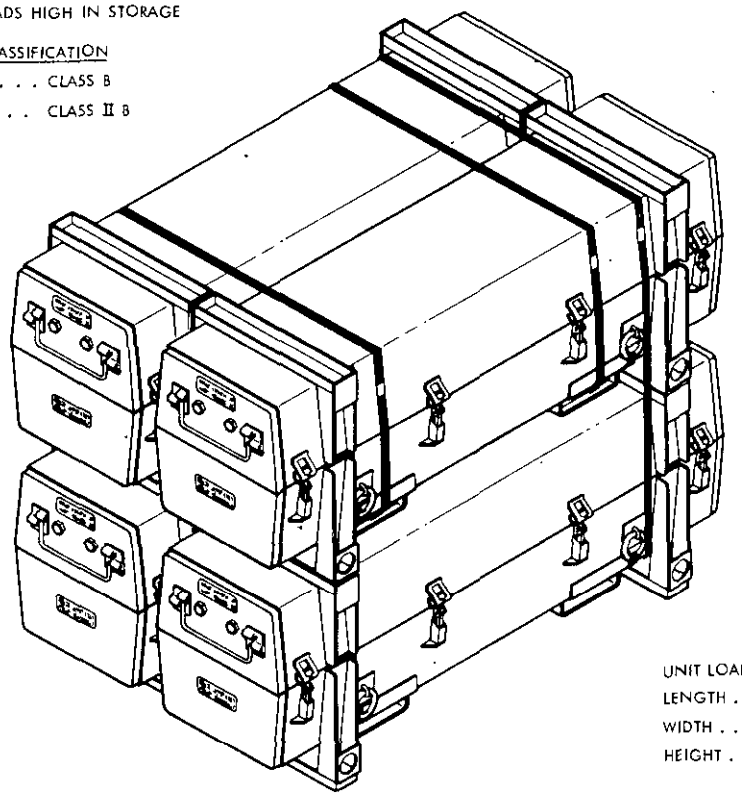

UNIT LOAD DIMENSIONS

LENGTH	60
WIDTH	37
HEIGHT	45 1/4

NOTES:
1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFRENCE TO ASSOCIATED TRUCKLOADING, CONTAINERLOADING AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS, MIL-HDBK-236 (NAVY).

FSC 8140

THIS UNIT LOAD IS AUTHORIZED AND RELEASED FOR SHIPPING, HANDLING, STORAGE AND TRANSFER-AT-SEA. IT MAY ALSO BE USED FOR DOMESTIC SHIPMENT IN COMPLIANCE WITH DOT REGULATIONS.

M.S. Gray NWHC 11/24/82
SIGNATURE TECHNICAL DIRECTION AGENT (TDA) DATE

J.E. Kelly 11/29/82
SIGNATURE AIR SYSCOM BY DIRECTION DATE

REQUIREMENTS FOR CONSTRUCTION OF THIS UNIT LOAD SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF MIL-STD-1323 (NAVY)

ORIGINATOR Charles McBride 11/29/82
DATE


NAVAL WEAPONS HANDLING CENTER
WPNSTA EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:59Z
Check the source to verify that this is the current version before use.

UNITIZING PROCEDURE


1. LOOP STRAP, ITEM 4, THROUGH LIFTING EYES OF EACH CONTAINER, ITEM 1, SO THAT EYES ARE IN DOWN POSITION. TENSION AND DOUBLE NOTCH SEAL, ITEM 5.
2. STACK TWO CONTAINEPS, THEN PLACE TWO STACKS SIDE BY SIDE, SO THAT MOISTURE INDICATORS ARE ON SAME ENDS.
3. THREAD STRAP, ITEM 3, THROUGH FORK POCKETS.
4. PLACE 2 X 8 X 31 BATTEN, ITEM 6, ON TOP OF STRAPPING, ITEM 3, TENSION AND DOUBLE NOTCH SEAL.
5. PUT STRAP, ITEM 3, AROUND TOP LAYER OF CONTAINERS, TENSION AND DOUBLE NOTCH SEAL.
6. PUT UNIT LOAD STRAP, ITEM 2, AROUND UNIT LOAD, TENSION AND DOUBLE NOTCH SEAL.

MARKING: THE UNIT LOAD SHALL BE MARKED IN ACCORDANCE WITH MIL-STD-1323 (NAVY)

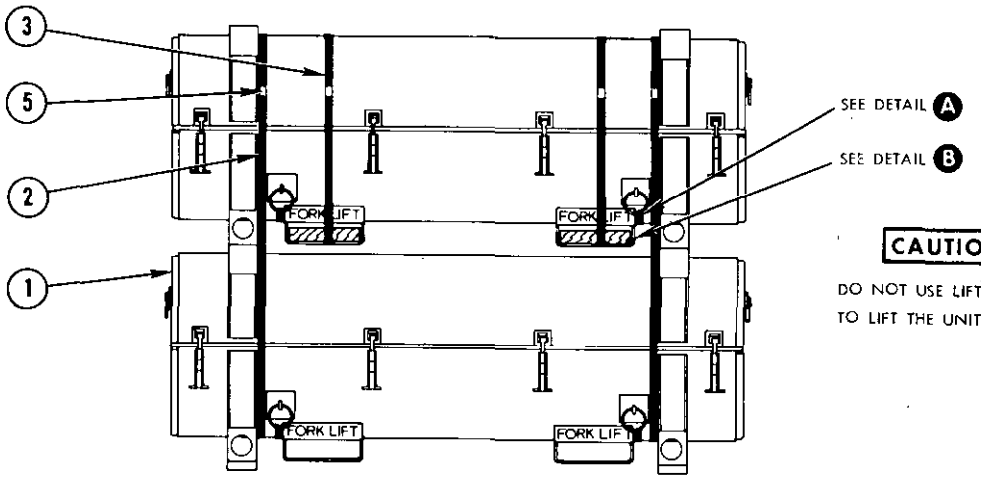


CAUTION

DO NOT USE LIFTING EYES TO LIFT THE UNITIZED LOAD.

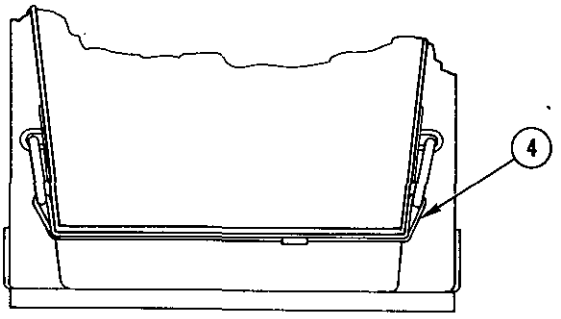

DETAIL A
(ROTATED 90° FOR CLARITY)

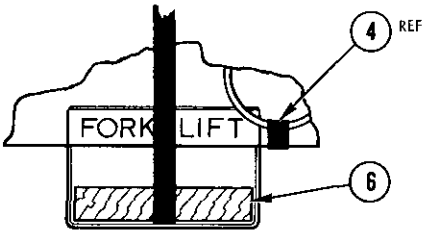

DETAIL B

DE-UNITIZING PROCEDURE

1. CUT AND REMOVE STRAPPING.
2. REMOVE BATTENS.
3. REMOVE CONTAINERS.

NOTE: 1. ALL MATERIALS SHALL BE AS SPECIFIED IN MIL-STD-1323.
2. COLD ROLLED, HEAT TREATED, .031 STRAPPING MAY BE SUBSTITUTED.

REQ'D	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
2	6	BATTEN	SEE NOTE 1	2 X 8 X 31
12	5	SEAL	SEE NOTE 1	3/4
8	4	STRAPPING (LOOP FOR LIFT EYES)	SEE NOTES 1 & 2	3/4 X .035 X 4 FT 6
2	3	STRAPPING (BATTEN RETAINING)	SEE NOTES 1 & 2	3/4 X .035 X 10 FT
2	2	STRAPPING (UNIT LOAD)	SEE NOTES 1 & 2	3/4 X .035 X 13 FT 6
4	1	CONTAINER	18894-744072	60 X 18 1/2 X 23 1/8

LIST OF MATERIALS

REVIEW ACTIVITY:
NAVY-OS, AS

PREPARING ACTIVITY:
NAVY-OS
(PROJECT NO. 8140-N582)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:59Z
Check the source to verify that this is the current version before use.