MILITARY STANDARD

MIL-STD-1323-307
(NAVY)

28 APRIL 1983

UNIT LOAD
FOR UNDERWAY REPLENISHMENT

COMPUTER CONTROL GROUP;
MAU-169A/B, F/LASER GUIDED BOMBS
IN CONTAINER, CNU-317/E

UNIT LOAD DATA DODIC/NALC NO. FW92


NUMBER OF CONTROL GROUPS PER CONTAINER 1
NUMBER OF CONTAINERS PER UNIT LOAD 9
GROSS WEIGHT OF ONE CONTAINER . . . . . 99 LBS.
WEIGHT OF STEEL STRAPPING . . . . . 10 LBS.
WEIGHT OF PALLET . . . . . 94 LBS.
WEIGHT OF UNIT LOAD . . . . . 995 LBS. △
CUBE . . . . . 50.1 CU. FT.

△DO NOT USE FOR SHIPPING WEIGHT

DO NOT STACK MORE THAN
4 UNIT LOADS HIGH IN STORAGE

HAZARD CLASSIFICATION


NONE

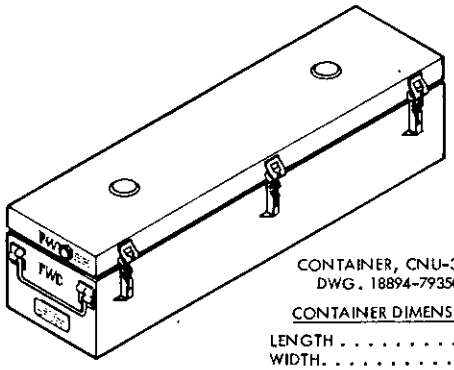

CONTAINER, CNU-317/E
DWG. 18894-793500

CONTAINER DIMENSIONS

LENGTH	49 1/2
WIDTH	14 1/8
HEIGHT (OVERALL)	12 1/2
HEIGHT (STACKING)	12 1/8

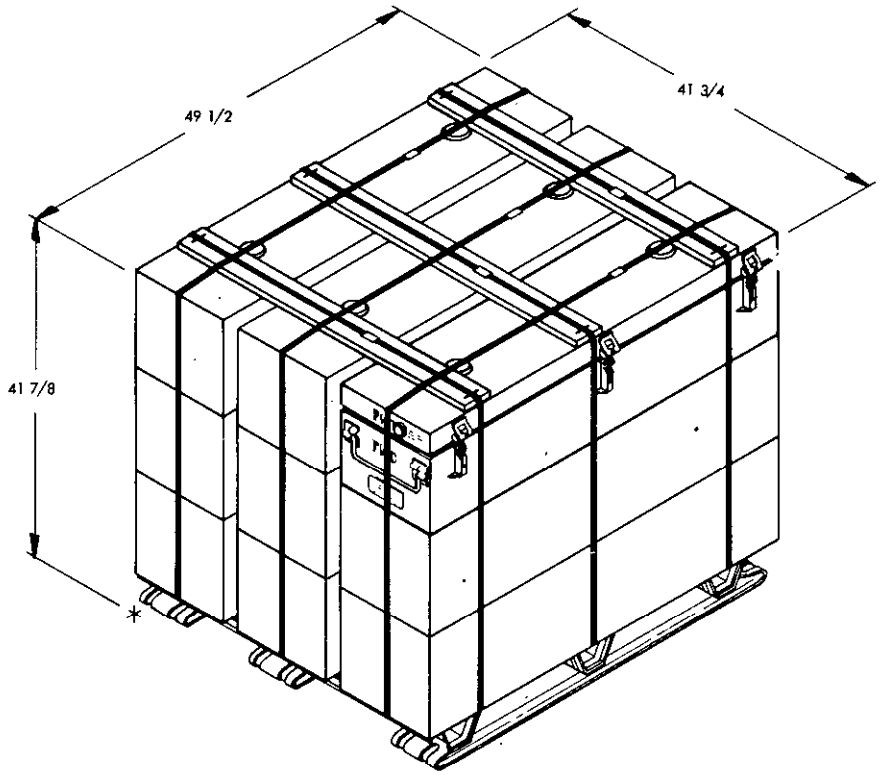

NOTES:

1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED TRUCKLOADING, CONTAINERLOADING AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS, MIL-HDBK-236 (NAVY).

FSC 8140

THIS UNIT LOAD IS AUTHORIZED AND RELEASED FOR SHIPPING, HANDLING, STORAGE AND TRANSFER-AT-SEA. IT MAY ALSO BE USED FOR DOMESTIC SHIPMENT IN COMPLIANCE WITH DOT REGULATIONS.

TECHNICAL DIRECTION AGENT (TDA) — DATE 4/28/83

AIRSYSCOM BY DIRECTION — DATE 4/28/83

REQUIREMENTS FOR CONSTRUCTION OF THIS UNIT LOAD SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF MIL-STD-1323 (NAVY)

ORIGINATOR — DATE 4/28/83

NAVAL WEAPONS HANDLING CENTER
WPNSTA EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23123:582
Check the source to verify that this is the current version before use.

PALLETIZING PROCEDURE

(a) THREAD THE LONGITUDINAL END STRAPPING, ITEM 2, BETWEEN THE DECK WIRES OF THE PALLET, ITEM 1. AS SHOWN IN DETAIL A. THE MIDDLE STRAP IS THREADED AT THE CENTER OF THE PALLET DECK.


(b) POSITION THE CONTAINERS ON THE PALLET WITH EQUAL OVERHANG ON BOTH SIDES AND ENDS.

(c) LOCATE THE TWO OUTBOARD BATTENS ADJACENT TO THE OUTBOARD EDGES OF THE STACKING BLISTERS. LOCATE THE CENTER BATTEN SO THAT THE MIDDLE STRAP AVOIDS THE CENTER LATCHES.

(d) POSITION THE LATERAL STRAPPING, ITEM 3, UNDER THE PALLET DECK, ITEM 1, AROUND THE UNIT LOAD, OVER THE TOP BATTENS, AS SHOWN, TENSION AND DOUBLE NOTCH SEAL.


(e) POSITION STRAPPING, ITEM 2, AROUND THE UNIT LOAD AND OVER THE TOP BATTENS, TENSION AND DOUBLE NOTCH SEAL, ITEM 4.

MARKING: THE UNIT LOAD SHALL BE MARKED IN ACCORDANCE WITH MIL-STD-1323.

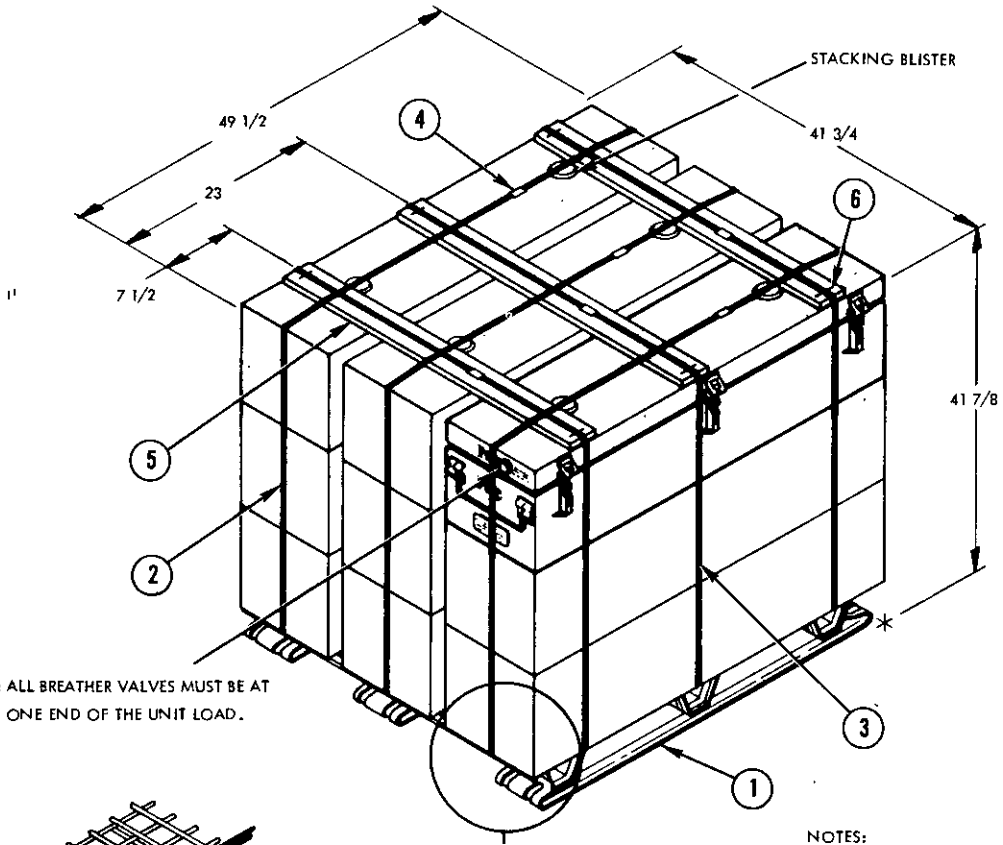

NOTE: ALL BREATHER VALVES MUST BE AT ONE END OF THE UNIT LOAD.

SEE DETAIL A

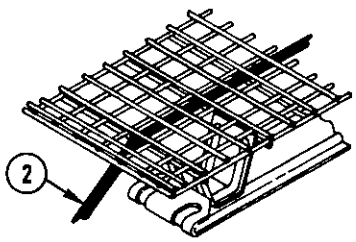

DETAIL A

THREAD STRAPPING BETWEEN THE 4th AND 5th WIRE.

NOTES:

1. ALL MATERIALS SHALL BE AS SPECIFIED IN MIL-STD-1323.
2. COLD ROLLED, HEAT TREATED, .031 STRAPPING MAY BE SUBSTITUTED.
3. DO NOT USE TYPE I STRAPPING WITH POWER TOOLS.

REQ'D	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
6	6	STAPLES	SEE NOTE 1	3/4
3	5	TOP BATTENS	SEE NOTE 1	1 X 4 X 40
6	4	SEAL	SEE NOTES 1, 2 & 3	3/4
3	3	STRAPPING, LATERAL	SEE NOTES 1, 2 & 3	3/4 X .035 X 15 FT
3	2	STRAPPING, LONGITUDINAL	SEE NOTES 1, 2 & 3	3/4 X .035 X 16 FT
1	1	PALLET, MK 3 MOD 0	STEEL	40 X 48 X 4 3/4

LIST OF MATERIALS

DEPALLETIZING PROCEDURE

(a) CUT AND REMOVE STRAPPING.

(b) REMOVE TOP BATTENS.

(c) REMOVE CONTAINERS.

REVIEW ACTIVITY:
NAVY-OS, AS

PREPARING ACTIVITY:
NAVY-OS
(PROJECT NO. 8140-N589)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:58Z
Check the source to verify that this is the current version before use.