MILITARY STANDARD

MIL-STD-1323-339 (NAVY)
7 JUNE 1989


UNIT LOAD
FOR UNDERWAY REPLENISHMENT
2.75" ROCKET MOTOR, MK 66 MOD 2
IN CONTAINER, MK 706 MOD 0

UNIT LOAD DATA

DODIC/NALC..... J147
NUMBER OF ROCKET MOTORS PER CONTAINER..... 4
NUMBER OF CONTAINERS PER UNIT LOAD..... 20
GROSS WEIGHT OF ONE CONTAINER..... 75 LBS
WEIGHT OF PALLET..... 90 LBS
WEIGHT OF DUNNAGE..... 40 LBS
WEIGHT OF STRAPPING..... 10 LBS
GROSS WEIGHT OF UNIT LOAD..... 1640 LBS △
CUBE..... 42 CU FT


△ DO NOT USE FOR SHIPPING WEIGHT

DO NOT STACK MORE THAN 3 UNIT LOADS HIGH IN STORAGE.

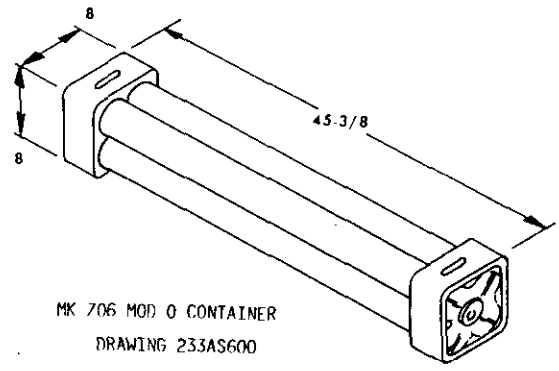

MK 706 MOD 0 CONTAINER
DRAWING 233AS600

DODIC/NALC	ITEM	HAZARD CLASS	
		DOT	CG
J147	MK 66 MOD 2	CLASS B	II-B

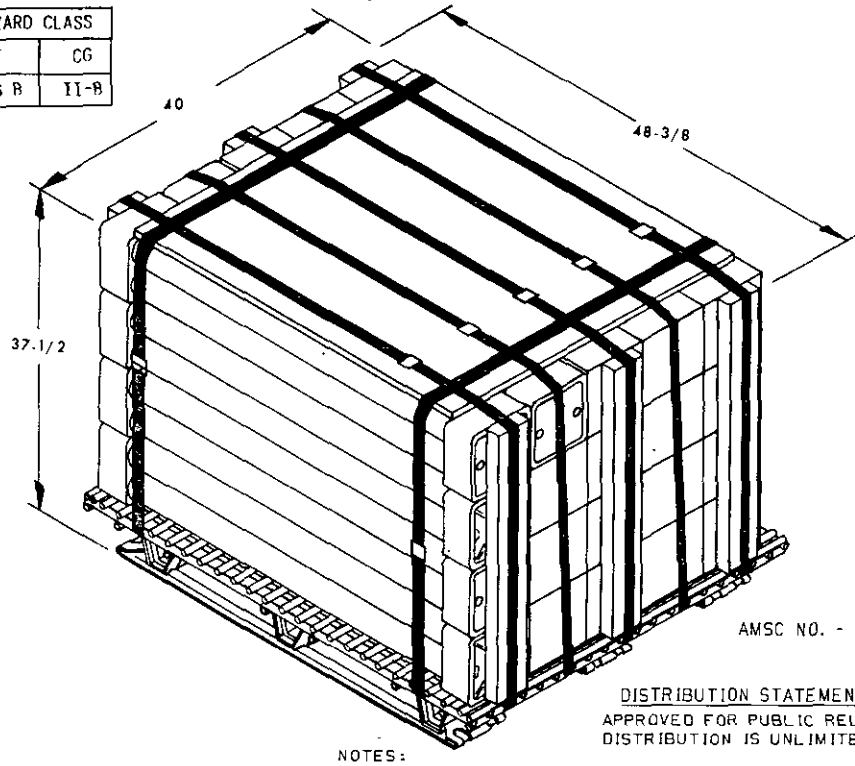

AMSC NO. - N/A

DISTRIBUTION STATEMENT A
APPROVED FOR PUBLIC RELEASE: DISTRIBUTION IS UNLIMITED.

NOTES:
1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED TRUCKLOADING, CONTAINERLOADING AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS, MIL-HDBK-236 (NAVY).

REV LTR	REVISION DESCRIPTION	DATE	TDA	SYSCOM
			APPROVAL	

FSC 8140

THIS UNIT LOAD IS AUTHORIZED AND RELEASED FOR SHIPPING, HANDLING, STORAGE AND TRANSFER-AT-SEA. IT MAY ALSO BE USED FOR DOMESTIC SHIPMENT IN COMPLIANCE WITH DOT REGULATIONS.

SIGNATURE, TDA, WPNSTA EARLE — DATE 6-7-89

SIGNATURE — BY DIRECTION — DATE 6-7-89

REQUIREMENTS FOR CONSTRUCTION OF THIS UNIT LOAD SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF MIL-STD-1323 (NAVY).

ORIGINATOR — DATE 6/7/89


WPNSTA EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:59Z
Check the source to verify that this is the current version before use.

PALLETIZING PROCEDURE

1. THREAD 3/4 INCH STRAPPING, ITEM 2, BETWEEN THE 3RD AND 4TH, 7TH AND 8TH, 11TH AND 12TH, 15TH AND 16TH, AND 19TH AND 20TH DECK WIRES OF PALLET, ITEM 1.
2. PLACE 4 LAYERS OF FIVE - MK 706 MOD 0 CONTAINERS ON PALLET WITH THE CONTAINER COVER ENDS ALTERNATING WITH EACH LAYER.
3. PLACE PLYWOOD, ITEM 3, ON TOP OF LOAD. POSITION STRAPPING, ITEM 2, AROUND UNIT LOAD AND OVER BATTENS, ITEM 7. TENSION AND DOUBLE NOTCH SEAL, ITEM 5.
4. PLACE 1-1/4 INCH STRAPPING, ITEM 4, UNDER PALLET WINGS NEXT TO LEG, BRING OVER LOAD AND PLYWOOD. TENSION AND DOUBLE NOTCH SEAL, ITEM 6.

MARKING: IN ADDITION TO ANY SPECIAL MARKING REQUIRED BY CONTRACT OR ORDER, THE UNIT LOAD SHALL BE MARKED IN ACCORDANCE WITH MIL-STD-129.

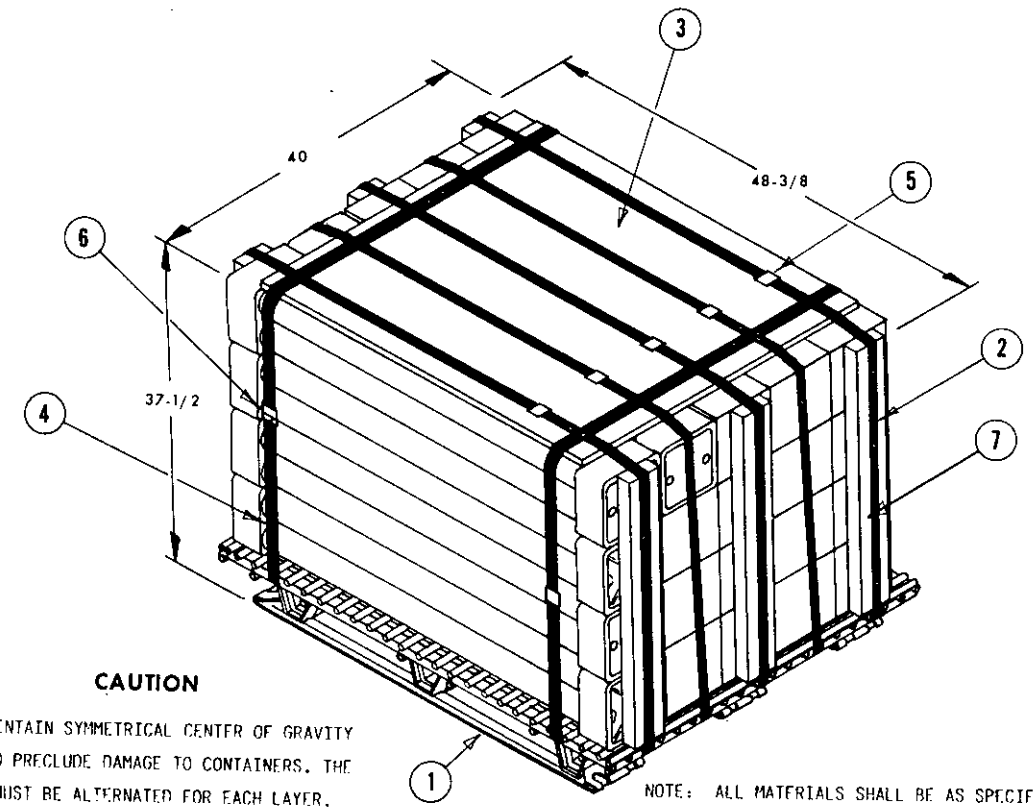

CAUTION

TO MAINTAIN SYMMETRICAL CENTER OF GRAVITY AND TO PRECLUDE DAMAGE TO CONTAINERS, THE ENDS MUST BE ALTERNATED FOR EACH LAYER.

NOTE: ALL MATERIALS SHALL BE AS SPECIFIED IN MIL-STD-1322.

DEPALLETIZING PROCEDURE

1. CUT AND REMOVE STRAPPING, ITEMS 2 AND 4.
2. REMOVE PLYWOOD, ITEM 3.
3. REMOVE CONTAINERS.

REQ'D	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
6	7	BATTENS	SEE NOTE 1	2 X 4 X 31-3/4
2	6	SEAL	SEE NOTE 1	1-1/4
5	5	SEAL	SEE NOTE 1	3/4
2	4	STRAPPING	SEE NOTE 1	1-1/4 X .035 X 13 FT 6
1	3	PLYWOOD		3/4 X 40 X 40-3/4
5	2	STRAPPING	SEE NOTE 1	3/4 X .035 X 15 FT 6
1	1	PALLET, MK 3 MOD 0	564200	40 X 48 X 4-3/4

LIST OF MATERIALS

REVIEW ACTIVITY:
NAVY-OS

PREPARING ACTIVITY:
NAVY-OS
PROJECT NO. 8140-N745)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:59Z
Check the source to verify that this is the current version before use.

☆U.S. GOVERNMENT PRINTING OFFICE 1989: - 604-033/13840